

Amtrak
Mechanical Department
Rolling Stock Equipment

SPECIFICATION

For

Single-Level Fleet Replacement

SPECIFICATION No. 1139

Issue Date: 7/11/2025
Revision No. 0

Approved By:

George Hull 7/11/2025 VP/Chief Mechanical Officer

Daniel P. Byrnes 7/11/2025 AVP/DCMO Fleet Programs

Michael L. Kraft 7/11/2025 Director, Long Distance Fleet

Michael L. Kraft 7/11/2025 Originator & Creation Date

Specification for Single Level Fleet Replacement

Specification Change Sheet

Revision	Date	Section(s)	Description	Approver
0	7/11/2025	-	-	M.L. Kraft

Table of Contents

1. Scope
2. References and Glossary
3. Project Management & Reviews
4. Reliability, Availability and Maintainability
5. Quality Assurance
6. Carbody
7. Trucks
8. Couplers and Draft Gear
9. Brakes
10. HVAC System
11. Interiors
12. Door Systems
13. Lighting System
14. Communication System
15. Electrical System
16. Food Service
17. Water and Waste System
18. Emergency Equipment
19. Materials and Workmanship
20. Test Requirements
21. Tools, Consumables and Spare Parts
22. Shipping Preparation
23. Training and Documentation
24. Diagnostics and Test Equipment
25. Safety
26. Digital Technology
27. Software and Microprocessor-Based Systems
28. Cybersecurity
29. Accessibility
30. High Capacity Coach Cars
31. Sleeper, Diner, and Bag Dorm Cars
32. Cab Car and Train Controls

Amtrak Single Level Fleet Replacement

Technical Specification

1. Scope

Revision 0

Table Of Contents

1.1	Overview	1-2
1.2	Regulations	1-2
1.3	Concept and Definition	1-3
1.4	Accessibility Requirements	1-4
1.5	Restroom and Bathroom Constraints	1-4
1.6	Car Types and Car Capacities	1-4
1.7	Car Configurations	1-5
1.8	Duty Cycle	1-8
1.9	Dimensions, Clearances and Track Geometry	1-8
1.10	Catenary Wire	1-10
1.11	Passenger Station Platforms	1-10
1.12	Environment	1-11
1.13	Standard Keys	1-11
1.14	Documentation Requirements	1-11

Table of Figures

Figure 1-1: Target Revenue Capacities	1-5

1.1 Overview

- a). The purpose of this Technical Specification is to define the performance and technical requirements for a fleet of new single level rail cars for use across Amtrak's network.
- b). The Cars shall be delivered in accordance with Exhibit V.
 - i). Cars shall be arranged to optimize both revenue and non-revenue capacities in accordance with the target capacities presented in this Chapter.
 - (1) In the optimization process, the Contractor shall strive to propose a car arrangement that maximizes revenue potential for Amtrak while simultaneously offering flexibility to efficiently develop the design and manufacturing processes.
- c). Cars shall be modular in design to the best extent possible in order to be optimized for Amtrak's evolving needs over the life of the equipment while being interoperable with Amtrak's legacy fleets.
- d). The Cars shall be used in locomotive hauled service and shall be compatible with Amtrak's current fleet of locomotives.
 - i). Cars may be operated with multiple locomotives at one end of the consist or locomotives at either end.
 - ii). Cars are primarily targeted for service with Amtrak's legacy fleet of Cars and locomotives.
 - (1) Cars must be interoperable with Amtrak's legacy fleet of Cars and locomotives.
- e). The Cars shall allow Amtrak to operate throughout the United States of America and portions of Canada/Mexico. The Single Level Fleet shall operate in both low and high platform territories.
- f). Technical characteristics and performance parameters for these Cars are described herein, as are the design review, inspection, testing and documentation requirements for producing and supporting these Cars.
- g). Accessibility and Universal Design for people with disabilities is a priority to Amtrak, Amtrak requires that the Cars meet or exceed the requirements of the American with Disabilities Act (ADA) revision 2010 while incorporating elements of RVAAC to the best extent possible. Amtrak considers Universal Design as a norm.
- h). All design review, inspection, qualification and testing required by this contract shall be performed specifically for this contract. Reports from previous contracts or procurements will not be accepted unless otherwise reviewed and approved by Amtrak.

1.2 Regulations

- a). The Cars must be fully compliant with all applicable United States Federal and Transport Canada regulations for safety, operations, design, accessibility, testing

and materials standards.

- b). The Cars shall be designed and constructed in accordance with Federal Railroad Administration and APTA design standards, to minimize passenger and train crew potential injuries in the event of collision.
- c). In addition, numerous industry standards, such as the APTA standards, are applicable as determined by Amtrak and referenced in this Specification.
- d). A complete listing of all regulations, standards, recommended practices and specifications that are referenced in this document can be found in Chapter 2.
- e). The list of referenced documentation in Chapter 2 is not to be interpreted as a comprehensive and exhaustive list of all regulations and standards to which the Contractor must adhere to in the design and manufacture of the Cars.
- f). The Contractor shall be solely responsible for complying with all standards, recommended practices and regulations that apply to the design and production of these Cars.

1.3 Concept and Definition

- a). As defined in this Specification, all cars shall be configured with standard H Type couplers, air brake hoses, and passenger car head end power on both ends.
- b). To allow for operation with existing rolling stock equipment, cars shall be designed with Power/Communications/locomotive MU control electrical trainlines and air connections to allow the Cars to have interoperability with existing Amtrak rolling stock.
 - i). Reliability is key to Amtrak, and the inter-car connections shall be robust and future-proof.
- c). The Contractor shall comply with regulatory requirements and meet the performance requirements that are outlined in this Specification.
- d). The Cars must be designed and constructed to be suitable for unrestricted service in all service areas governed by Amtrak's Clearance Diagram, Single Level D-05-1355 Rev E.
- e). The Cars shall be designed, tested and qualified for bi-directional operation at a maximum speed of 125 mph and 5" cant deficiency.
- f). The Cars must also comply with all applicable sections of 49 CFR published by the Federal Railroad Administration (FRA) in effect at the time of Notice to Proceed.
 - i). Capacity requirements will be further defined within this Specification, including this Chapter.
- g). The Cars shall be designed with adequate storage for cafe equipment, tools, and other necessary on-board equipment as required for the intended service and/or as specifically required by this specification.
- h). Details for the accommodations to be incorporated within the cars are presented in

Chapter 11.

1.4 Accessibility Requirements

- a). An accessible path is required to navigate from the side loading door entry vestibule to the accessible seating location(s) in all car types as well as from the end of one car to the adjacent end of the next car.
- b). The Café/Lounge Car shall be designed to be end-to-end accessible.
- c). Seating shall be modular to allow for the addition of a second accessible location at the same end of the car. All accessible amenities shall be included for both locations such as a reading light and a workstation table.
- d). As designed for the Intercity Trainset (Airo) fleet, Amtrak prefers to provide six (6) RVAAC accessible seating locations with proximity to the Café/Lounge Car with two (2) being provided in each adjacent car to the Café/Lounge and two (2) being provided in the Café/Lounge car. As this fleet will be manufactured as single cars, the provision for the requirement for 1.4.c shall be included in all cars. A conceptual diagram shall be provided in Exhibit F for reference.
- e). As an option, the Contractor shall provide provisions for up to four (4) RVAAC accessible seating locations in each car type which shall be modular in design which includes any restraints, adjustable height tables, call systems, outlets, reading lights and any associated wall panels.

1.5 Restroom and Bathroom Constraints

- a). In coach cars with at least one accessible location, an accessible restroom must be provided in addition to the standard restroom.

1.6 Car Types and Car Capacities

- a). Amtrak intends to have a Standard Coach car, a High Capacity Coach car and a Café/Lounge car that will operate with existing Amtrak equipment. The carshell design shall have the ability for modularity for additional options as described in Chapters 31 and 32 as well as the possibility for re-configuration of any car to meet Amtrak's operational requirements in the future.
- b). The Contractor shall optimize revenue and non-revenue capacities, minimize the number of unique Car types, and comply with accessibility requirements of the CFR.
- c). The target capacities are outlined for each car type in the base order in Figure 1-1.

Figure 1-1: Target Revenue Capacities

Car Type	Standard Coach	Cafe/Lounge	High Capacity Coach
Seating Configuration	2 x 2	2 x 1 with tables	2 x 2
Coach Seats	60	N/A	76
Coach Seats with tables & 32" aisle	N/A	Minimum 25	N/A
Standard Restroom	1	N/A	1
Accessible Restroom w/ 60" turning circle	1	1	1
RVAAC Accessible seating location*	1*	2	1*
Number of doors per car side	1	1	2
Seat Width	Minimum 22"	Minimum 20"	Minimum 20"
Seat Pitch	42"	78-81" between face-to-face seat backs. 24" – 32" between seat cushions of facing seats. 28" – 32" wide tables.	37"
Overhead Luggage Storage	Yes	Yes	Yes

*Standard Coach and High Capacity Coach cars shall allow for the replacement of seats with a second accessible location at the same end of car.

1.7 Car Configurations

- a). All pneumatic trainlines, Head End Power (HEP) trainline, communications/door control trainline and push-pull trainline functionality shall be provided when coupled to other legacy Amtrak cars and locomotives.
- i). All cars shall be fully compatible for unlimited duration movement when locomotive pulled or pushed, or when coupled to conventional freight cars as in a freight train.
- b). The Cars shall be designed and arranged for walkable access between all cars while the consist is in motion.
- c). Designs shall be modular to the extent practical, to minimize the amount of additional design required to adapt cars to future service class/type needs.
 - i). Carshell structures and attachment points of interior fixtures shall be designed to permit any service type defined in this Specification to be converted to any other service type defined in this Specification without requiring modifications to the carbody.
 - ii). The vehicle design shall provide Amtrak with flexibility to configure the vehicle arrangement to suit the applicable service route, including the ability to

CONFIDENTIAL — DO NOT DISTRIBUTE

- replace modules to adapt furnishings such as: luggage tower, bicycle storage, food service equipment, coach seating assemblies, business seating assemblies, accessible seating assemblies, and tables.
- iii). All outlets with USB ports must adhere to the latest industry standards approved by Amtrak six (6) months prior to the shipment of the first car. These USB ports should be capable of charging phones, tablets, computers, and other personal electronic devices. The outlet design should be maintenance-friendly to facilitate easy replacement as technology evolves.
 - d). The carbody and all its structural elements, including trucks and running gear, shall have a minimum design life of 40-years and 10 million miles of operation at full seated passenger load.
 - i). The design and selection of materials shall prevent corrosion damage, including the effects of extreme weather conditions, during the 40-year design life.
 - e). Safety, reliability and maintainability shall be primary performance goals for the Cars and shall be incorporated into the design and design review process.
 - i). Use of specialized tools, hardware, or equipment shall be minimized.
 - ii). Any specialized tools, hardware or equipment needed for maintenance shall be included as a special tool deliverable with the first cars.
 - iii). Ease of access for inspection, maintenance and repairs shall be a major design consideration. The cars should be designed to allow inspections to be performed without requiring the car to be positioned over a pit with the ability to inspect the cars with scanning technology via cameras and other means that may be possible in the future.
 - iv). To ensure a car can complete its entire journey without needing to be set out enroute, system redundancies and debris-strike-hardening shall be implemented in all aspects of the car's design. Diagnostic systems shall be incorporated to allow remote monitoring of critical systems like HVAC, waste/water, and brakes. These systems shall be designed with the intention that proactive analysis will determine failure points that would limit the risk of setting out the equipment
 - v). All entrance areas shall be weather resistant to the extent that no water or snow intrusion can accumulate in those areas and must be properly mitigated when the side loading doors are open. This includes any door pockets or areas that might be exposed with alighting passengers.
 - vi). All designs shall be capable of operating with wayside scanning for visual analysis to determine wear conditions and/or running gear component failures.
 - f). Components used on this equipment shall be identical and interchangeable across the entire production run.
 - i). Components shall not be drilled or sized to fit.

- ii). Components shall not be paired or married to a parent assembly without the specific review and approval by Amtrak.
- g). In addition to the overall concept described above, the design and construction of the Cars shall also address the following:
 - i). The Standard Coach and Café/Lounge cars shall have one side loading door on each side of the car on one end of the car.
 - ii). The High Capacity Coach car shall have two side loading doors on each side of the car with one being located on either end of the car.
 - iii). Where components have been specified by manufacturer and part number in this Specification, the Contractor may propose alternate manufacturers' components, for review and approval by Amtrak.
 - (1) Proposed alternative components must be functionally interchangeable with components called out herein.
 - (2) For safety critical items, introduction of alternative components will only be considered if such components have an established performance record in intercity passenger service, and/or have undergone an appropriate qualification program that demonstrates an acceptable level of safety, serviceability and reliability for passenger cars. This documentation shall be submitted to Amtrak for review and approval.
 - (3) Acceptance of proposed alternative components shall be solely at the discretion of Amtrak.
 - iv). Design reviews shall be employed to assess all proposed designs for compliance with specification requirements including safety, maintainability, ergonomics, functionality, and passenger comfort.
 - (1) Specific requirements for the design review process are described in Chapter 3.
 - v). Design reviews shall be supported by virtual and physical mock-ups. The mock-ups will allow Amtrak and its representatives to review the configuration and layout of the proposed design, to experience the workability, comfort, access and functionality and to fine-tune the design for maximum benefit.
 - (1) Specific requirements for the provision of mock-ups are provided in Chapter 3.
 - vi). Passenger Experience
 - (1) The Contractor shall focus on design aspects including but not limited to aesthetics, customer experience, functional design, usability, interaction, ergonomics and comfort reviews which align with the vision and requirements provided in Exhibit F.
 - (2) In the course of the design process, the Contractor shall have the following design authority and constraints:

- (a) The Contractor shall comply with the design of the accommodations to ensure that they meet the required functionality and capacity.
 - (b) Throughout the Design Review process, the Contractor shall provide details with regard to color material and finish (CMF) to ensure the final accepted product design successfully delivers against Amtrak's brand palette, brand DNA and the unique experience and spaces on our cars.
 - (c) At the start of Preliminary Design Review, Amtrak will provide the Contractor with its conceptual vision for the exterior livery of the cars. The Contractor should expect to work collaboratively with Amtrak throughout the design review process to arrive at a final livery design during Final Design Review.
 - (d) The Contractor shall be responsible for working collaboratively with Amtrak throughout the Design Review Process to successfully implement Amtrak's overall vision.
- vii). Materials and workmanship shall meet the requirements of Chapter 19, and all equipment shall be designed to operate in the environmental conditions specified in Amtrak Specification 963.
- viii). As detailed in this chapter, the Contractor shall develop proposals, renderings, and a comprehensive package for color palettes, storyboards, layout arrangements, interior materials, and exterior graphics for approval or modification by Amtrak.
 - (1) The features, components, layouts, graphics and customization of the cars shall be selected by Amtrak during design reviews.
- ix). Amtrak shall provide unit numbers, reporting marks, and naming no less than 12 months after notice to proceed.

1.8 Duty Cycle

- a). Cars shall be designed for continuous operation for up to 48 hours and 1200 miles per day.

1.9 Dimensions, Clearances and Track Geometry

- a). Carbody dimensions and weights
 - i). The cars shall be designed and built to conform to the following overall AW0 weight limitations:
 - (1) A static axle load of no more than 38,500 lbs.
 - (2) Track dynamic (P2) forces per axle shall be limited to 68,000 lbs., calculated using the formula and parameters defined in Chapter 7.
 - (3) The Cars shall be weighed at the Contractor's facility, and shall have weight distribution and balance as follows:

- (a) End-to-end balance of cars within 5% (both at full supplies and no supplies).
 - (b) Lateral balance (side to side) of all cars within 5% (both at full supplies and no supplies).
- b). Length
 - i). Cars may be configured in consists up to 1,530 ft in length.
 - ii). All car functions shall operate per the standards of this specification within this train length range, except as noted below, including but not limited to trainline, communications, power, and carbody strength.
 - iii). Trainline functions may operate at reduced levels (tolerance to be approved by Amtrak) at consist lengths greater than 1,530 ft (due to trainline voltage drop).
 - iv). The brake system shall be designed for normal operation at all consist lengths up to 1,530 ft in total length, excluding any locomotive(s).
- c). Clearances
 - i). The Cars shall fully conform to Amtrak's Clearance Diagram, Single level D-05-1355 Rev E under all operating conditions.
 - ii). The Clearance Drawing is based upon the assumption that a car is nominally 85 ft long with truck center spacings of 59.5 ft.
 - iii). No carbody-mounted appliances shall extend beyond the clearance envelope.
- d). Track Geometry
 - i). The Cars shall be designed, tested and certified for revenue operation at all speeds up to 125 mph and 5" cant deficiency.
 - ii). The Cars shall be designed, tested and certified for operation on all classes of track (per 49 CFR Part 213) from FRA Class 1 to Class 8, at the maximum allowable speed on each class of track.
- e). The Cars shall be qualified and capable of dead-in-tow operation at speeds up to 125 mph and 5" cant deficiency.
- f). Track quality shall be assumed to be minimally compliant for each class of track, per FRA regulations and AREMA standards.
- g). Ride quality standards and testing methods are specified in Chapters 7 and 20.
- h). The Cars shall operate on standard gauge (56.5 in.) track.
- i). The braking performance of the Cars shall comply with Chapter 9 and Amtrak braking performance drawing S-603.
- j). The Cars shall be capable of negotiating a 250 ft radius (23 degree) horizontal

curve, coupled to other equipment, without damage to the track or any portion of the Cars, including trucks and suspension, couplers, draft gears, air and electrical connections, diaphragms or carbody.

- k). The Cars shall be capable of negotiating a 2000 ft radius vertical curve (concave or convex), coupled to other equipment, without damage to the track or any portion of the Cars, including trucks and suspension, couplers, draft gears, air and electrical connections, diaphragms or carbody.
- l). The Cars shall be dynamically stable at all speeds up to and including 5 mph above maximum design speed.
- m). No wheel of the Cars shall experience more than 50% wheel unloading when the train is stopped on a 7 in. super-elevation.
- n). The Cars shall be capable of operating at a minimum of 5" cant deficiency, without requiring tilt, according to 49 CFR Part 213.329.
- o). The Cars shall be capable of safely passing other cars that are operating at maximum authorized track speed in either direction on adjacent tracks with 12 ft centers.
- p). The Cars shall be capable of negotiating a number 8 crossover between two tracks with 12 ft centers and a number 7 crossover between two tracks with 13 ft centers, coupled to other equipment, without damage or separation of any inter-car connections including air hoses and electrical connectors.
- q). The Cars shall be capable of negotiating facing number 8 turnouts per Amtrak Drawing No. AM 73195-A arranged to form a "S" curve with a minimum of 12 ft between track centers, coupled to other equipment, without damage or separation of any inter-car connections including air hoses and electrical connectors.
- r). The Cars shall be capable of negotiating two 400-foot radius reverse curves with zero tangent in-between, coupled to other equipment, without damage or separation of any inter-car connections including air hoses and electrical connectors.

1.10 Catenary Wire

- a). The Cars shall be immune to the effects of any electrical interference from 12 kV and 25 kV catenary systems, including induced electrical currents into the carbody and potential ground return currents through the trucks and wheelset journal bearings.

1.11 Passenger Station Platforms

- a). The Cars shall be designed to serve high- and low-level boarding station platforms.
 - i). Low level station platforms may be either below Top of Rail, at Top of Rail, 8 inches above Top of Rail and 61 inches from centerline of track, or 15 inches above Top of Rail and 64 inches from centerline of track.
 - ii). High level station platforms are 48" above Top of Rail.

- iii). Many of the at or below TOR platforms are controlled by freight railroads who will protect their clearances. Careful consideration must be provided for these platforms as well.

1.12 Environment

- a). The Cars design shall comply with the environmental requirements of Amtrak Specification 963.
- b). The equipment shall be designed and built for use in the North American passenger rail environment.
- c). Special considerations for the high humidity and salt content in the air from the coastal marine areas, excessively fine dust, and from below freezing temperatures to high temperatures exceeding 125°F (51.7°C) shall be incorporated into the design.
- d). To the maximum extent possible, exterior equipment, cables, hoses and pipes shall be protected against debris strikes. Each mitigation, however, will need to be balanced with impacts to maintainability and shall be submitted to Amtrak for review and approval during the design review process.

1.13 Standard Keys

- a) A total of two types of standard keys shall be used on the various car types, a coach (Conductor's) key and a maintenance key, along with provisions in the Food Service car galley for use of crew-supplied padlocks.

1.14 Documentation Requirements

- a). All documents shall, as a minimum, contain the following:
 - i). A title page with a clear and concise title block, which includes all pertinent references to the Contract and an accurate description of enclosed information.
 - ii). Display approval signatures of the original document on the title page to serve as an easy reminder of the approval signatures required for all future revisions.
 - iii). Display Amtrak's contract number on the title page.
 - iv). Display the originating company's name and address on the title page.
 - v). Display the overall revision level on the title page and display the varying revision level on each consecutive page.
 - vi). Display the unique document number on each page of the document.
 - vii). Record the specific changes of a revision on a dedicated page that includes space for new approval signatures for that revision without requiring the removal of previous approval signatures.

- viii). Record the revision levels of individual pages on a dedicated page for verification of proper document composition.
- ix). Contain a table of contents and an itemized listing of tables and figures.

* End of Chapter 1 *

Amtrak Single Level Fleet Replacement

Technical Specification

2. References and Glossary

Revision 0

Table of Contents

2.1	Overview	2-1
2.2	Supplemental Regulations, Standards, Specifications and Drawings.....	2-1
2.3	Regulations	2-1
2.4	Standards.....	2-5
2.5	Definitions	2-16
2.6	Acronyms and Abbreviations	2-29

2.1 Overview

- a). Regulations, standards and specifications that are referenced in this document are listed below as a guide to the Contractor but shall not be construed as complete.
- b). The Contractor is responsible for ensuring that all applicable regulations, standards and specifications in effect at time of Award are followed when complying with the requirements of this specification.
- c). Nothing in this specification shall relieve the Contractor from ensuring that all applicable regulations, standards and specifications are followed. The Contractor shall provide the Compliance Matrix required by Chapter 3 as proof of compliance for those items so governed before the first batch of cars are accepted.

2.2 Supplemental Regulations, Standards, Specifications and Drawings

- a). Regulations, standards, specifications and drawings, which may pertain to this specification, are listed below as information. The following list is furnished as a guide to the Contractor but shall not be construed as complete or actually used. When any of the following are superseded by an approved revision, the revision shall apply.
- b). Unless specified otherwise, the Contractor shall be responsible for acquiring and maintaining copies of all applicable references from the appropriate source.
 - i). Amtrak shall not be obligated to provide these referenced documents unless specifically stated.
 - ii). The Contractor will be responsible for determining if there are newer versions of the referenced specifications/regulations/standards and obtaining them.

2.3 Regulations

- a). ADA (Americans with Disabilities Act)
 - i). 36 CFR 1192.99: Floors, Steps and Thresholds
 - ii). 36 CFR 1192.113: Doorways
 - iii). 36 CFR 1192 Appendix: Advisory Guidelines
 - iv). 49 CFR Subtitle A, Figure 4: Intercity Rail Car (with accessible restroom)
 - v). 49 CFR 38.101: Lighting
 - vi). 49 CFR 38.117: Floors, Steps and Thresholds
 - vii). 49 CFR 38.123: Restrooms
 - viii). 49 CFR 38.125: Mobility and Accessibility
 - ix). 49 CFR 38.159: Mobility Aid Accessibility

- x). Americans with Disabilities Act of 1990 and regulations promulgated thereafter, including 49 CFR 27, 37 & 38.
 - xi). Rail Vehicle Accessibility Advisory Committee (RVAAC) of the United States Access Board
- b). Canadian Transport Commission
 - i). General Order O-10: Railway Safety Appliance Standards
- c). DOE (U.S. Department of Energy)
 - i). Energy Policy Act (EPAAct) of 2005
- d). EPA (Environmental Protection Agency)
 - i). Title 40:
 - (1) Part 40 CFR Protection of Environment
 - (2) Part 82: Protection of Stratospheric Ozone
 - (3) Part 201: Noise Emission Standards for Transportation Equipment; Interstate Rail Carriers
 - (4) Part 1033: Control of Emissions from Locomotives
- e). FAA (U.S. Federal Aviation Administration)
 - i). AC 43.13-1A, Section 449: Stripping Insulation
- f). FDA (U.S. Food and Drug Administration)
 - i). 21 CFR 1250: Interstate Conveyance Sanitation
 - (1) 1250.41: Submittal of Construction Plans
 - ii). 2017 U.S. Food & Drug Administration: Food Code
 - iii). Handbook of Sanitation of Railroad Passenger Cars, 1964
- g). FRA (Federal Railroad Administration)
 - i). 14 CFR 25.853: Compartment Interiors
 - ii). 21 CFR Part 1250: Interstate Conveyance Sanitation
 - iii). Title 49, 49CFR Transportation, Section II, Parts 200-299
 - iv). 210: Railroad Noise Emission Compliance Regulations
 - v). 213: Track Safety Standards
 - (1) 213.329: Curves, Elevation and Speed Limitations

- vi). 213.333: Automated Vehicle Inspection Systems
- vii). 213.345: Vehicle Qualification Testing
- viii). 213.57: Curves; Elevation and Speed Limitations
- ix). 221: Rear End Marking Device-Passenger, Commuter and Freight Trains
- x). 222: Use of Locomotive Horns at Public Highway-Rail Grade Crossings
- xi). 222.21: When Must a Locomotive Horn be Used?
- xii). 223: Safety Glazing Standards--Locomotives, Passenger Cars and Cabooses
- xiii). 231: Railroad Safety Appliance Standards
- xiv). 236: Rules, Standards, and Instructions Governing the Installation, Inspection, Maintenance, and Repair of Signal and Train Control Systems, Devices, and Appliances
- xv). 236 Subpart I: Positive Train Control Systems
- xvi). 238: Passenger Equipment Safety Standards
 - (1) 238.103: Fire Safety
 - (2) 238.105: Train Electronic Hardware and Software Safety
 - (3) 238.107: Inspection, Testing and Maintenance Plan
 - (4) 238.111: Pre-revenue Service Acceptance Testing Plan
 - (5) 238.112: Door Emergency Egress and Rescue Access Systems
 - (6) 238.113: Emergency Window Exits
 - (7) 238.114: Rescue Access Windows
 - (8) 238.115: Emergency Lighting
 - (9) 238.121: Emergency Communication
 - (10) 238.123: Emergency Roof Access
 - (11) 238.131: Exterior Side Door Safety Systems
 - (12) 238.205: Anti-Climbing Mechanism
 - (13) 238.207: Link Between Coupling Mechanism and Car Body
 - (14) 238.215: Rollover Strength
 - (15) 238.217: Side Structure

- (16) 238.219: Truck-to-Carbody Attachment
- (17) 238.227: Suspension System
- (18) 238.231: Brake System
- (19) 238.233: Interior Fittings and Surfaces
- (20) 238.235: Doors (Emergency Egress)
- (21) 238.303: Exterior Calendar Day Mechanical Inspection of Passenger Equipment
- (22) 238.307: Periodic Mechanical Inspection of Passenger Cars and Unpowered Vehicles Used in Passenger Trains
- (23) 238.435: Interior Fittings and Surfaces
- (24) 238.441: Emergency Roof Access
- (25) 238 Appendix B: Test Methods and Performance Criteria for the Flammability and Smoke Emission Characteristics of Materials Used in Passenger Cars and Locomotive Cabs
- (26) 238 Subpart B: Safety Planning and General Requirements
- (27) 238 Subpart C: Specific Requirements for Tier 1 Passenger Equipment
- xvii). 239: *Passenger Train Emergency Preparedness*
 - (1) 239.101: Emergency Preparedness Plan
 - (2) 239.107: Emergency Exits
- xviii). 243: Training, Qualification, and Oversight for Safety-Related Railroad Employees
- xix). 571.208, Subpart 6: Federal Motor Vehicle Safety Standards: Occupant Crash Protection
- h). FTA (Federal Transit Administration)
 - i). FTA-PA-27-5194-12.1: Quality Management System Guidelines
- i). Transport Canada
 - i). TC O-0-10: Installation of Air Reservoirs
 - ii). TC O-0-16: Railway Passenger Handling Safety Rules
 - iii). TC O-0-26: Passenger Car Safety Rules
 - iv). TC O-0-76: Locomotive Safety Rules

- v). TC O-07-01: Passenger Train Brakes
- j). USPHS (U.S. Public Health Service)
- i). U.S. Public Health Service Food Code 2017

2.4 Standards

- a). AAMA (American Architectural Manufacturers Association)
 - i). 501.1-05: Standard Test Method For Water Penetration Of Windows, Curtain Walls And Doors Using Dynamic Pressure
- b). AAR (Association of American Railroads)
 - i). C-II: Design, Fabrication, and Construction of Freight Cars
 - ii). M-101: Axles Carbon Steel, Heat-Treated
 - iii). M-107/M-208: Wheels, Carbon Steel
 - iv). M-114: Helical Springs, Heat-Treated Steel
 - v). M-201: Steel Castings
 - vi). M-601: Hose, Wrapped, Air Brake, "End Hose"
 - vii). M-618: Hose, Air, Wire-Reinforced
 - viii). M-1001: Design, Fabrication, and Construction of Freight Cars
 - ix). RP-585: Wiring and Cable Specification
 - x). S-100, Section B: Bushings, Stainless Steel Tube–Coupler Shanks and Yokes
 - xi). S-400: Brake Equipment-Installation Specifications
 - xii). S-471: Brake Pipe Restriction Test
 - xiii). S-4200: ECP Cable-based Brake Systems – Performance Specifications
 - xiv). S-4210: ECP Cable-based Brake System Cables, Connectors and Junction Boxes – Performance Specifications
- c). AHRI (Air-Conditioning, Heating, and Refrigeration Institute)
 - i). 700: Specifications for Fluorocarbon Refrigerants
- d). Aluminum Association
 - i). AA-ADM-105: Aluminum Design Manual: Specifications and Guidelines for Aluminum Structures

- ii). Aluminum Company of America (ALCOA) Technical Report 524, Specification Covering Use of Aluminum in Passenger Carrying Railway Vehicles
- iii). Aluminum Standards and Data
- e). ANSI (American National Standards Institute)
 - i). B16.18: Cast Copper Alloy Solder Joint Pressure Fittings
 - ii). C82.2: For Lamp Ballasts-- Method of Measurement of Fluorescent Lamp Ballasts
 - iii). S1.4: Specification for Sound Level Meters
 - iv). S3.2-2009: Method for Measuring the Intelligibility of Speech over Communication Systems
 - v). Z26.1: Safety Code for Safety Glazing Materials for Glazing Motor Vehicles Operating on Land Highways
- f). ANSI (American National Standards Institute)/ASME (American Society of Mechanical Engineers)
 - i). B1.1: Unified Inch Screw Threads (UN and UNR Thread Form)
 - ii). B1.13M: Metric Screw Threads
 - iii). B16.22: Wrought Copper and Copper Alloy Solder-Joint Pressure Fittings
 - iv). B18.1.2: Large Rivets (1/2 Inch Nominal Diameter and Larger)
 - v). B31.1: Power Piping
- g). ANSI (American National Standards Institute)/IEEE (Institute of Electrical and Electronics Engineers)
 - i). 730: Software Quality Assurance Plans
 - ii). 1016: IEEE Standard for Information Technology-Systems Design-Software Design Descriptions
 - iii). C37.13: IEEE Standard for Low-Voltage AC Power Circuit Breakers Used in Enclosures
 - iv). C37.14: IEEE Standard for DC (3200V and below) Power Circuit Breakers Used in Enclosures
 - v). C37.16: Low-Voltage Power Circuit Breakers and AC Power Circuit Protectors
- h). APTA (American Public Transportation Association)

- i). Passenger Rail Equipment Safety Standards (PRESS) for Rail Programs
 - ii). Manual for the Development of System Safety Program Plans for Commuter Railroads
 - iii). Manual of Standards and Recommended Practices for Rail Passenger Equipment
- i). ASHRAE (American Society of Heating, Refrigeration and Air Conditioning Engineers)
 - i). 41.1-1986 (R2006): Standard Method for Temperature Measurement
 - ii). 37-2009: Methods of Testing for Rating Electrically Driven Unitary Air-Conditioning and Heat Pump Equipment
 - iii). 23-2016: Guideline for the Design and Application of Heating, Ventilation, and Air-Conditioning Equipment for Rail Passenger Vehicles
- j). ASME (American Society of Mechanical Engineers)
 - i). Boiler and Pressure Vessel Code
 - ii). Code for Pressure Piping
 - iii). B1.13M: Metric Screw Threads: M Profile
- k). ASTM (American Society for Testing and Materials)
 - i). A6: Standard Specification for General Requirements for Rolled Structural Steel Bars, Plates, Shapes, and Sheet Piling
 - ii). A53/A53M-07: Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
 - iii). A380-06: Standard Practice for Cleaning, Descaling, and Passivation of Stainless Steel Parts, Equipment, and Systems
 - iv). A488/A488M-07: Standard Practice for Steel Castings, Welding, Qualifications of Procedures and Personnel
 - v). A502-03: Standard Specification for Rivets, Steel Structural
 - vi). A572, A568, A588, A606, A715, A710: High Strength Low Alloy Structural Steel
 - vii). A588: Standard Specification for High-Strength Low-Alloy Structural Steel
 - viii). A606: Standard Specification for Steel, Sheet and Strip, High-Strength, Low-Alloy, Hot-Rolled and Cold-Rolled, with Improved Atmospheric Corrosion Resistance

- ix). A666: Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar
- x). A710: Standard Specification for Precipitation-Strengthened Low-Carbon Nickel-Copper-Chromium-Molybdenum-Columbium Alloy Structural Steel Plates
- xi). A715: Standard Specification for Steel Sheet and Strip, High-Strength, Low-Alloy, with Improved Formability
- xii). A802: Standard Practice for Steel Castings, Surface Acceptance Standards, Visual Examination
- xiii). B26/B26M-09: Standard Specification for Aluminum-Alloy Sand Castings
- xiv). B32-08: Standard Specification for Solder Metal
- xv). B75-02: Standard Specification for Seamless Copper Tube
- xvi). B85/B85M-09: Standard Specification for Aluminum-Alloy Die Castings
- xvii). B108/B108M: Standard Specification for Aluminum-Alloy Permanent Mold Castings
- xviii). B117: Standard Practice for Operating Salt Spray (Fog) Apparatus
- xix). B247-09: Standard Specification for Aluminum and Aluminum-Alloy Die Forgings, Hand Forgings, and Rolled Ring Forgings
- xx). B633-07: Standard Specification for Electrodeposited Coatings of Zinc on Iron and Steel
- xxi). C177-10: Standard Test Method for Steady-State Heat Flux Measurements and Thermal Transmission Properties by Means of the Guarded-Hot-Plate Apparatus
- xxii). C542-05: Standard Specification for Lock-Strip Gaskets
- xxiii). C1166-06: Standard Test Method for Flame Propagation of Dense and Cellular Elastomeric Gaskets and Accessories
- xxiv). D395-03: Standard Test Methods for Rubber Property-Compression Set
- xxv). D412-06ae2: Standard Test Methods for Vulcanized Rubber and Thermoplastic Elastomers—Tension
- xxvi). D523-08: Standard Test Method for Specular Gloss
- xxvii). D573-04: Standard Test Method for Rubber—Deterioration in an Air Oven
- xxviii). D618-08: Standard Practice for Conditioning Plastics for Testing
- xxix). D638-08: Standard Test Method for Tensile Properties of Plastics

- xxx). D624-00: Standard Test Method for Tear Strength of Conventional Vulcanized Rubber and Thermoplastic Elastomers
- xxxi). D746-07: Standard Test Method for Brittleness Temperature of Plastics and Elastomers by Impact
- xxxii). D790: Standard Test Methods for Flexural Properties of Unreinforced and Reinforced Plastics and Electrical Insulating Materials
- xxxiii). D952: Standard Test Method for Bond or Cohesive Strength of Sheet Plastics and Electrical Insulating Materials
- xxxiv). D1149-07: Standard Test Methods for Rubber Deterioration-Cracking in an Ozone Controlled Environment
- xxxv). D2240-05: Standard Test Method for Rubber Property—Durometer Hardness
- xxxvi). D2261: Standard Test Method for Tearing Strength of Fabrics by the Tongue (Single Rip) Procedure
- xxxvii). D3574-95: Seat Cushion Testing Requirements
- xxxviii). D3774-96(2008)e1: Standard Test Methods for Width of Textile Fabric
- xxxix). D3775-08: Standard Test Method for Warp (End) and Filling (Pick) Count of Woven Fabrics
- xl). D3776/D3776M - 09a: Standard Test Methods for Mass Per Unit Area (Weight) of Fabric
- xli). D3884: Standard Test Method for Abrasion Resistance of Textile Fabrics
- xl ii). D4956-07: Standard Specification for Retroreflective Sheeting for Traffic Control
- xl iii). E94-04: Standard Guide for Radiographic Examination
- xl iv). E119-10b: Standard Test Methods for Fire Tests of Building Construction and Materials
- xl v). E162-09: Standard Test Method for Surface Flammability of Materials Using a Radiant Heat Energy Source
- xl vi). E165-02: Standard Test Method for Liquid Penetrant Examination
- xl vii). E168-06: Standard Practices for General Techniques of Infrared Quantitative Analysis
- xl viii). E446-98(2004)e1: Standard Reference Radiographs for Steel Castings Up to 2 in. [51 mm] in Thickness

- xlix). E662-09: Standard Test Method for Specific Optical Density of Smoke Generated by Solid Materials
- l). E709-01: Standard Guide for Magnetic Particle Examination
- li). E709-08: Standard Guide for Magnetic Particle Testing
- lii). E802-95: Standard Reference Radiographs for Gray Iron Castings Up to 4 1/2 in. (114 mm) in Thickness
- liii). F1344-10: Standard Specification for Rubber Floor Tile
- l). AWS (American Welding Society)
 - i). AWS Welding Handbook
 - ii). B2.1/B2.1M: Specification for Welding Procedure and Performance Qualification
 - iii). B2.2/B2.2M: Specification for Brazing Procedure and Performance Qualification
 - iv). B2.3/B2.3M: Specification for Soldering Procedure and Performance Qualification
 - v). C1.1M/C1.1:2000 (R2006): Recommended Practices for Resistance Welding
 - vi). C7.2: Recommended Practices for Laser Beam Welding, Cutting and Drilling
 - vii). C7.4/7.4M: Process Specification and Operator for Laser Beam Welding
 - viii). D1.1/D1.1M: Structural Welding Code – Steel
 - ix). D1.2/D1.2M: Structural Welding Code, Aluminum
 - x). D1.3/D1.3M: Structural Welding Code – Sheet Steel
 - xi). D1.6/D1.6M: Structural Welding Code, Stainless Steel
 - xii). D1.9/D1.9M: Structural Welding Code— Titanium
 - xiii). D17.2/D17.2M: Specification for Resistance Welding in Aerospace Applications
 - xiv). D17.3/D17.3M: Specification for Friction Stir Welding of Aluminum Alloys for Aerospace Applications
- m). Boeing
 - i). BSS-7239: Test Method for Toxic Gas Generation by Materials on Combustion
- n). Bombardier

- i). SMP 800-C: Toxic Gas Generation of “Flex 35 Rev. D” Rubber Compound
- o). British Railways Board Group Standard
 - i). GM/TT0088, Issue 1: Geometric Interfaces Between Railway Wheelsets and Track
- p). CENELEC (European Committee for Electrotechnical Standardization)
 - i). EN 50128: Railway Applications - Communications, Signaling and Processing Systems - Software for Railway Control and Protection Systems
- q). CSA (Canadian Standards Association)
 - i). C22.2, No. 197-M1983: PVC Insulating Tape
- r). EIA (Electronic Industries Alliance)
 - i). 649-A 2004: National Consensus Standard for Configuration Management
- s). European Norms
 - i). DIN EN 13452-1: Railway Applications – Braking - Mass Transit Brake Systems – Part 1: Performance Requirements
 - ii). BS EN 50126: Railway Applications. The Specification and Demonstration of Reliability, Availability, Maintainability and Safety (RAMS)
 - iii). BS EN 50155: Railway applications. Rolling stock. Electronic equipment
- t). GSA (General Services Administration) – Federal Standards
 - i). QQ-B-654A: Brazing Alloys, Silver
 - ii). QQ-P-416F: Plating, Cadmium (Electrodeposited) (S/S by SAE-AMS-QQ-P-416)
 - iii). TT-P-38E: Paint, Aluminum, Ready-mixed
 - iv). TT-P-664D: Primer Coating, Alkyd, Corrosion-inhibiting, Lead and Chromate Free, Con-compliant (S/S by SSPC-PAINT25)
 - v). WW-C-563A: Conduit, Metal, Rigid, Electrical, Thin Wall Steel Type (Electrical Metallic Tubing), Straight Lengths, Elbow, & Bends (S/S by UL797)
 - vi). WW-C-566C: Conduit, Metal, Flexible (S/S by A-A-55810)
 - vii). WW-T-799F: Tube, Copper, Seamless, Water (For use with Solder-flared- or Compression-type Fittings) (S/S by ASTM-B88)
- u). IEC (International Electrotechnical Commission)
 - i). 60571: Electronic Equipment used on Rail Vehicles

CONFIDENTIAL — DO NOT DISTRIBUTE

- ii). 61373: Railway Application, Rolling Stock Equipment, Shock and Vibration Tests
- v). IEEE (Institute of Electrical and Electronics Engineers)
 - i). 16: Standard for Electrical and Electronic Control Apparatus on Rail Vehicles
 - ii). 1016: Standard for Information Technology-System Design-Software Design Descriptions
 - iii). 1568-2003: Recommended Practice for Electrical Sizing of Nickel-Cadmium Batteries for Rail Passenger Vehicles
 - iv). C37.13: Standard for Low Voltage AC Power Circuit Breakers Used in Enclosures
 - v). C37.14: Standard for Low Voltage DC Power Circuit Breakers Used in Enclosures
 - vi). C37.16: Standard for Preferred Ratings, Related Requirements, and Application Recommendations for Low-Voltage AC (635 V and below) and DC (3200 V and below) Power Circuit Breakers
 - vii). P1477: Passenger Information System for Rail Transit Vehicles
- w). IESNA (Illuminating Engineering Society of North America)
 - i). LM-79-08: Electrical and Photometric Measurements of Solid-State Lighting Products
- x). IFI (Industrial Fasteners Institute)
 - i). Inch Fastener Standards, 7th Edition
 - ii). Metric Fastener Standards, 3rd Edition
- y). IPC (Association Connecting Electronics Industries)
 - i). 2221: Generic Standard on Printed Board Design
- z). ISO (International Organization for Standardization)
 - i). 2631: Mechanical Vibration and Shock – Evaluation of Human Exposure to Whole Body Vibration
 - ii). 9001:2000: Quality Management Systems-Requirements
 - iii). 15609-4: Specification and Qualification of Welding Procedures for Metallic Materials – Welding Procedure Specification – Part 4: Laser Beam Welding
- aa). MIL (Military Standards)

- i). MIL-C-5015: Connectors, Electrical, Circular Threaded, AN Type, General Specification for FSC 5935
- ii). MIL-C-7438G: Core Material, Aluminum, for Sandwich Construction
- iii). MIL-DTL-3950G: Detail Specification: General Specification for Switches, Toggle, Environmentally Sealed
- iv). MIL-DTL-55302F: Detail Specification, Connectors, Printed Circuit Subassembly and Accessories
- v). MIL-HDBK-132A: Protective Finishes for Metal and Wood Surfaces
- vi). MIL-HDBK-505: Department of Defense Handbook: Definitions of Item Levels, Item Exchangeability, Models, and Related Terms
- vii). MIL-I-46058C: Insulating Compound, Electrical (for Coating Printed Circuit Assemblies)
- viii). MIL-P-13949: Sheet, Printed Wiring Board
- ix). MIL-P-23469/2B: Pin-Rivet, Grooved, Brazier Head; Straight Shank, Six Locking Grooves, Aluminum Alloy, Corrosion-Resistant and Carbon Steels
- x). MIL-P-8053C: Plywood, Metal-Faced
- xi). MIL-S-83502: Socket, Plug-in, Electronic Components, Round to Style (T05)
- xii). MIL-DTL-83731B: Detail Specification: General Specification for Switches, Toggle, Unsealed and Sealed
- xiii). MIL-S-83734: Sockets, Plug-in Electronic Components (Right Angle Leads, for 14 and 16 Pin Dual-in-Line Packages)
- xiv). MIL-PRF-8805D: Performance Specification: General Specifications for Switches and Switch Assemblies, Sensitive, Snap Action (Basic, Limit, Push Button and Toggle Switches)
- xv). MIL-STD-882E: Standard Practices for System Safety
- xvi). MIL-STD-883H: Department of Defense Test Method Standard: Microcircuits
- xvii). MIL-STD-1472: Human Engineering
- xviii). MIL-T-16366F: Terminals. Electric Lug and Conductor Splices, Crimp-Style
- xix). MIL-T-55164C: General Specification for Terminal Boards, Molded Barrier, Screw and Stud Types, and Associated Accessories
- bb). NFPA (National Fire Protection Association)
 - i). 10: Standard for Portable Fire Extinguishers

- ii). 70: National Electric Code
- iii). 130: Standard for Fixed Guideway Transit and Passenger Rail Systems
- cc). SAE (Society of Automotive Engineers)
 - i). AMS-T-81914/1: Tubing, Plastic, Flexible, Convolute, Polytetrafluoroethylene, Standard Convolutions
 - ii). AS7928: General Specification for Terminals, Lug: Splices, Conductor: Crimp Style, Copper
 - iii). J995_199907: Mechanical and Material Requirements for Steel Nuts
 - iv). Civilian American and European Surface Anthropometry Resource Project (CAESAR I)
- dd). Amtrak Specifications to be provided by Amtrak
 - i). AMT-3: Air Brake and Train Handling Rules and Instructions 223: 480VAC Head End Power Jumper & Receptacle Hardware for Passenger Cars & Standby Equipment
 - ii). 315: Public Address/Intercom System
 - iii). 323: High Performance Wire and Cable for Use on Passenger Vehicles
 - iv). 352: Flammability, Smoke Emissions and Toxicity for use on Railway Passenger Cars and Locomotive Cabs
 - v). 353: Vendor Maintenance Manuals
 - vi). 354: Builder Operating & Maintenance Manual Family
 - vii). 429: Specification for Describing Environmental and Operating Conditions
 - viii). 498: 480, 240, 208, 120 VAC and 72VDC Switchboard Panels
 - ix). 528: 480, 240, 208, and 120 VAC 72VDC Relay and Contactor Panel
 - x). 563: Specification for Material and Workmanship for Replacement Truck Springs
 - xi). 665: Seat Cushion Assemblies
 - xii). 685: Disposable Air Filter
 - xiii). 696: Valve and Exterior Equipment Identification Tags & Labels and Operating Instructions
 - xiv). 697: National On-Board Signage Manual
 - xv). 700: Schematic, Wiring and Piping Diagram Drawings

- xvi). 742-1: Paints and Coatings
- xvii). 759: Replacement of Copper Waste Piping with Non-Metallic Pipe
- xviii). 771-1: Specification for General Requirements for Wheels
- xix). 794-1: Specification for Low Location Exit Path Marking Systems for use on Amtrak Passenger Cars
- xx). 907: Specification for Passenger Car Wheelsets
- xxi). 963: Operational and Environmental Conditions for Rail Rolling Stock
- xxii). 967: Manufacture and Acceptance of Passenger Seating for Intercity Rail Cars
- xxiii). 973: Specification for Passenger Car Disc Brake Pad Qualification Test
- xxiv). 1004: Specification for Thermally Actuated Automatic Drain Valve for Freeze Protection on Passenger Cars
- xxv). 1118: Specification for Shunt Improvement Device
- ee). Drawings to be provided by Amtrak
 - i). Amtrak
 - (1) A-63-7675-15: Trainline Standard: 27 Point MU System
 - (2) A-63-7676-1: Trainline Standard 27 PT Communication System
 - (3) B-144: Standard Amtrak Coach Key (J.L. Howard Part No. 2555)
 - (4) C-01-1498: 27-Pin Communication Jumper Cable
 - (5) C-63-7422: 27-Pin MU Jumper Cable
 - (6) C-63-7437: 27-Pin MU Receptacles
 - (7) C-96-7591: Standard Trash Container (Amtrak Part No. 24-045-18737)
 - (8) D-00-1359: Speed Sensor and Cable Assembly
 - (9) D-00-7075: Temperature Probe and Connectors
 - (10) D-05-1355: Amtrak Clearance Diagram
 - (11) D-12-7191: 480 VAC Jumpers and Housing
 - (12) D-63-7439: 27-Pin Communication Receptacle
 - (13) D-63-7440: 27-Pin Communication Dummy Receptacle
 - (14) D-65-7449: Power Transformers

- (15) E-140-2959: Emergency Equipment Cabinet Arrangement
- (16) S-603: Braking Distance Calculations
- (17) 73195.001.04: No. 8 Welded SGM Turnout
- ii). Metro-North Commuter Railroad Company
 - (1) MSC100001: Clearance Diagram
- iii). Supplemental Documentation
 - (1) Amtrak Intercity Trainset Technical Specification Clarification and Detail – Digital Technology

2.5 Definitions

- a). The definitions and abbreviations defined below are used throughout this technical specification.
- b). Wherever in the Contract Documents terms are used, the definition, intent and meaning shall be interpreted as follows:
 - i). **A**
 - (1) **A-End** (of the car) — Defined as the end of the car opposite from the B-end of all cars except the Cab car.
 - (2) **Acceptance** — Status of a submittal by which Amtrak will accept the document for its purpose in the design review process allowing the Contractor to proceed. Amtrak acceptance in no way relieves the Contractor of meeting all requirements of the specification.
 - (3) **Accessible** — To be compliant with the applicable standards for accessibility as defined by the Americans with Disabilities Act of 1990 (ADA) as amended.
 - (4) **Accessible Toilet Room (ATR)** — Toilet room in the passenger rail cars, designed to be compliant with all applicable standards for accessibility as defined by the Americans with Disabilities Act of 1990 (ADA) as amended.
 - (5) **Actuator** — A self-contained brake system component that generates the force to apply the brake shoe or brake pad to the wheel or disc. An actuator typically consists of a cylinder, piston and piston rod.
 - (6) **Adhesion, Coefficient of** — During rolling contact, the ratio between longitudinal tangential force at the wheel-rail interface and normal force.
 - (7) **Amtrak** — The National Railroad Passenger Corporation, which has its headquarters at 1 Massachusetts Avenue, NW, Washington, DC

20001, and any permitted assignee of Amtrak's rights under the Contract.

- (8) **Analysis** — Written report of the systematic examination of the design, performance and condition of parts, components and systems against Contract and Technical Specification requirements.
- (9) **Approval** — Review and acceptance, in writing, by Amtrak. Amtrak approval in no way relieves the Contractor of meeting all requirements of the specification.
- (10) **Approved Equivalent** — The term "approved equivalent" shall mean an item, which is fully equivalent or superior in terms of form, fit, function, performance and properties, to the specified item.
- (11) **Assembly** — A collection of subassemblies and components typically performing a variety of functions within the context of a larger system.
- (12) **Authorize** — To give authority or power to proceed.
- (13) **Availability** — The percentage of the car fleet usable for revenue service at the beginning of each day's schedule. Also, on per car basis, the percentage of time a car is usable for service:

$$\text{Availability} = \frac{\text{MTBF}}{\text{MTBF} + \text{MTTR}}$$

ii). **B**

- (1) **Baseline Design** — The design of the car or any of its components, apparatus, systems, subsystems, or materials, which has received both drawing approval and first article approval by Amtrak.
- (2) **Baseline Work** — All activities, which shall be performed on the cars in order to comply with the requirements of this Specification.
- (3) **B-End** (of the car) — The end of the car where the hand brake is located on all car types.
- (4) **Bill of Materials** — A list of the components, sub-assemblies, assemblies, and systems required to manufacture the final railcar. The bill of material includes quantities, weights, material, manufacturer's name, and manufacturer's part number.
- (5) **Braking, Blended** — In braking, the simultaneous control of dynamic (rheostatic and/or regenerative) and friction braking, with the effort of each continuously proportioned to achieve the required total braking effort.
- (6) **Braking, Dynamic** — An electric primary braking system on locomotives so equipped, whereby the traction motors act as generators and the current derived thereof is modulated. This includes both rheostatic and regenerative modes.

CONFIDENTIAL — DO NOT DISTRIBUTE

- (7) **Buff** — Compressive forces acting longitudinally through the carbody's primary structure.
- (8) **Burn-In** — Operating a component, system, or device in a test mode, often in an extreme or cycled temperature environment, for a specified period of time or distance, to confirm reliable operation.
- (9) **Business (Working) Days** — A weekday (Monday to Friday) in the United States that is not an Amtrak holiday. (Also see "**Days**")

iii). **C**

- (1) **Calibration** — Comparing the performance of a measuring device of unknown accuracy against one of known accuracy.
- (2) **Cant Deficiency** — The condition when a rail vehicle's actual speed through a curve is greater than the speed at which the components of wheel-to-rail force, normal to the plane of the track, would be equalized for the outside and the inside rails.
- (3) **Car/Cars** — The railroad passenger cars to be provided by the Contractor pursuant to this Contract.
- (4) **Carbuilder** — See Contractor.
- (5) **Characteristics** — Any distinct property, or attribute, of the material, or services, that can be described, and measured, to determine conformance, or non-conformance, to Contract requirements.
- (6) **Commissioning** — Activities involved in delivering, adjusting, and testing the cars to demonstrate compliance with Specification requirements and prepare the cars for revenue service.
- (7) **Component** — Usually self-contained, a component is comprised of parts, devices and structure and performs a distinctive function necessary to the operation of a system or subsystem.
- (8) **Concept Drawings** — An initial set of drawings showing the general car layout and arrangement.
- (9) **Conformed Specification** — These Specifications as revised to include and reflect all approved change orders, variances and waivers implemented throughout the duration of the Contract.
- (10) **Contract Deliverable Requirements List (CDRL)** — List of documents and other deliverable items that the Contractor is required to deliver to Amtrak. CDRL is also used to refer to a specific item on the list.
- (11) **Contractor's Drawings** — Items such as general drawings, detail drawings, graphs, diagrams, sketches, calculations, and catalog cuts which are prepared by the Contractor to detail its work.

- (12) **Crash Energy Management, CEM** — Carbody design such that the structures crush in a controlled manner and absorbs energy with the goal to significantly improve crashworthiness.

- (13) **Customer** — Amtrak

iv). **D**

- (1) **Days** — Days shall mean a United States calendar day unless otherwise specified.
- (2) **Delivery, Delivered** — The arrival of the completed vehicle at Amtrak's designated facility, ready for commissioning and acceptance testing.
- (3) **Defect** — Any instance of non-conformance with a specification for material, appearance, finish, function, performance or manufacture.
- (4) **Detrucking** — The complete disconnection and removal as required of all structural, mechanical, pneumatic, and electrical connections between the truck assembly and carbody in order to facilitate the complete jacking of the car to remove the carbody weight from the truck assembly.
- (5) **Device** — Any component, subsystem or system, whether electrical, mechanical, pneumatic or hydraulic.

v). **E**

- (1) **Equal/Equivalent** — Whenever the words "equal", "approved equal", "equivalent" or "approved equivalent" are used in connection with a specified component, material, system characteristic or performance requirement, the Contractor shall prepare and submit for Amtrak approval an analysis that demonstrates that a design, component or system characteristic as proposed by the Contractor has equal or superior appearance, performance interchangeability, availability and compliance with specification requirements to that of the design, component or system as originally specified. This equivalency shall take the form of a specification variance and shall only be permitted with the specific written approval of Amtrak. The reason for the variance request must be included in the analysis as submitted.

vi). **F**

- (1) **Fail-Safe** — A characteristic of a system which ensures that no malfunction will create a condition that is not known to be safe.
- (2) **Failure** — A condition in which equipment, components or systems do not function as specified, designed or intended.

- (3) **Failure Mode and Effects Analysis (FMEA)** — A procedure for analysis of potential failure modes within a system for the classification by severity or determination of the failure's effect upon the system.
- (4) **Failure Rate** — The frequency of failure, expressed as failures per hour or failures per mile. Failure rate is the mathematical reciprocal of MTBF or MDBF.
- (5) **Fault Tree Analysis** — A failure analysis in which an undesired state of a system is analyzed using Boolean logic to combine a series of lower-level events. This analysis method is mainly used in the field of safety engineering to quantitatively determine the probability of a safety hazard.
- (6) **Field Modification Instructions (FMI)** — Instructions for applying and installing engineering solutions to resolve fleet-wide defects and/or upgrade installations and/or systems to vehicles that have already been shipped from the factory.
- (7) **First Article** — The first one of any production components of the base item or vehicle that is manufactured using production parts, components, processes and procedures.
- (8) **First Article Inspection (FAI)** — The examination and approval by Amtrak of an initial part, major assembly, subassembly, system, subsystem, apparatus, or material, manufactured or assembled by either the Contractor or Subcontractors. The first article approval establishes the baseline design, configuration and the minimum level of quality for the balance of the production run.
- (9) **Fleet** — All equipment under the contract including all options for additional exercise.
- (10) **Fleet Defect** — Identified when 5% of the quantity of a warranted item fails or where 5% of cars per a fleet type are affected, including those items for which the warranty period expired before Amtrak recognizes the failure.
- (11) **Free Travel** — The vertical lineal distance between the top of rail and a car body reference point as measured under static conditions when comparing an empty car (AW0) and fully loaded car (AW3).

vii). H

- (1) **Hazard** — A real or potential condition that can cause injury, death, damage to or loss of equipment or property or damage to environment.
- (2) **Head End Power (HEP)** — Electrical Power (480 VAC, 3-phase, 60 Hz power) produced by a locomotive or power car, or supplied from stationary substation, which is used as the primary electrical power source by the cars.

viii). I

- (1) **Independent Failure** — A failure which is not the result of another failure, either directly or indirectly.
- (2) **Indicated** — As shown on the Contract Drawings, as described in the Specifications, or as required by other Contract Documents.
- (3) **Inspection** — The careful examination, measurement, and testing of the characteristics and performance of materials, components and systems to ensure conformance with Contract requirements.
- (4) **Inspection Equipment** — Any tool, gauge, fixture, apparatus, or other device used for inspection purposes.
- (5) **Inspector** — The person or firm designated and authorized to perform quality control inspections.
- (6) **Interface** — The points where two or more physical subsystems or systems meet to transfer load, energy or information.

ix). L

- (1) **Left-Hand Side** — The side of the car on the left, when standing inside the car at the B-end facing the A-end.
- (2) **Line Replaceable Unit (LRU)** — A modular component designed to be replaced quickly at an operating location to restore the car to an operational ready condition.
- (3) **Lowest Level Replaceable Unit (LLRU)** — The lowest unit (component) of a system or subsystem, which is removable and replaceable from an installed position by standard attachments (e.g., bolts and nuts, quick-disconnects, etc.).

x). M

- (1) **Maintainability** — A measure of a car's ability to be properly maintained considering the ease and frequency of maintenance tasks, ability to efficiently use applied labor, and accessibility of equipment to be maintained by Amtrak's maintenance staff. Maintainability is sometimes quantified by the Mean Time To Repair (MTTR).
- (2) **Material** — An all-inclusive term used to denote raw materials, parts, components, assemblies, and equipment used in the finished product.
- (3) **Mean Time Between Failures (MTBF)** — The mean operating time between consecutive independent failures, measured in calendar days as a ratio of the cumulative time to the number of failures under stated conditions.

$$MTBF = \frac{\text{Total Operating Time (hours)}}{\text{Total Number of Failures}}$$

CONFIDENTIAL — DO NOT DISTRIBUTE

- (4) **Mean Distance Between Failures (MDBF)** — The mean operating mileage between consecutive independent failures computed as a ratio of the cumulative mileage to the number of failures under stated conditions.

$$\text{MDBF} = \frac{\text{Total Operating Distance (miles)}}{\text{Total Number of Failures}}$$

- (5) **Mean Time Between Component Failures (MTBCF)** — The mean time between individual component failures

$$\text{MTBCF} = \frac{\text{Total Operating Distance (miles)}}{\text{Total Number of Component Failures}}$$

- (6) **Mean Distance Between Service Failures (MDBSF)** — The mean operating mileage between service failures caused by equipment or system failures.

$$\text{MDBSF} = \frac{\text{Total Operating Distance (miles)}}{\text{Total Number of Service Failures}}$$

- (7) **Mean Distance Between Train Delays (MDBTD)** — The mean operating mileage between train delays caused by equipment or system failures.

- (8) **Mean Time To Repair (MTTR)** — The average time required to repair a failed component or device and return it to production status, including time needed for the maintainer to access, remove, replace/repair, close, and test-out the failed component or device. MTTR shall not include logistics time. Expressed mathematically, it is the total corrective maintenance time for failures divided by the total number of corrective maintenance actions for failures during a given period of time.

$$\text{MTTR} = \frac{\text{Total Repair Time (hours)}}{\text{Total Number of Repairs}}$$

- (9) **Mileage, Operating** — The total distance traveled by the cars during scheduled and unscheduled movements.
- (10) **Modify** — To change the design, placement, or other aspect(s) of an item to provide for a different form, fit or function or to resolve deficiencies or improve performance.

xi). **N**

- (1) **New** — An item, OEM or approved equal, which has not previously seen service in whole or in part.
- (2) **No-Motion** — The vehicle speed at or below the lowest speed detectable by the vehicle control systems. Also known as “zero speed”.

- (3) **Normal** — As in, example, "normal operating conditions" or "operating normally" -- A condition in which relevant vehicle equipment is not in a failure mode and the environment is as specified.
- (4) **Notice** — A written announcement from Amtrak.
- (5) **Notice to Proceed (NTP)** — A written notice from Amtrak to the Contractor to officially start work on the Contract.

xii). **O**

- (1) **Open Items** — Items not resolved on the car and documented as incomplete. It is the Contractor responsibility to resolve and close these issues. Open items may be documented at any time during the Contract duration.
- (2) **Original Equipment Manufacturer (OEM)** — The original manufacturer of a hardware subsystem, component or completed vehicle.

xiii). **P**

- (1) **Permissive** — Potential system response that results in a less safe condition such as proceed versus stop, a higher speed versus a lower speed, acceleration versus deceleration, brakes released versus brakes applied, or no actuation of alarm versus actuation of alarm.
- (2) **Pilot Car(s)** — the first car (of each type) to be fully assembled at the Contractor's final assembly facility.
- (3) **Procurement (Work)** — The furnishing of all equipment, items, materials, parts, systems, data, design, services, incidentals, labor and management and performance of the contractual requirements defined in the Contract Documents, including changes thereto, in order to produce and deliver the specified cars, spare parts, hardware and software goods, and services.
- (4) **Proof** (used as a suffix) — Apparatus as designated as splash-proof, dust-proof, etc., when so constructed, protected, or treated that its successful operation is not interfered with when subjected to the specified material or condition.
- (5) **Push-Pull Operations** — A method of controlling the actions of the propulsion, braking and other systems of a train from a control cab, located in either the locomotive or the cab car, for bi-directional operation.

xiv). **R**

- (1) **Railroad** — Amtrak, or the owner(s) of the operating railroad over which Amtrak's trains operate, and/or the property and/or

improvements used in connection with such operating railroads, as defined by 49 CFR Part 238.

- (2) **Rapid Prototype Car(s)** — the first car (of each type) to be prototyped for form and fit issues that can be identified prior to production at the Contractor's final assembly facility.
- (3) **Redundancy** — The existence of more than one means for accomplishing a given function. The ability to accomplish a given function by two or more independent means.
- (4) **Reliability** — The ability of a system to perform the required function under stated operating conditions for a stated period of time. This is defined as the failure rate of an item expressed as a percentage or in time of operating hours. The desired result is to have high reliability (100%) with a low failure rate (0%).
- (5) **Remanufacture** — To rebuild and recertify to OEM standards for functionality and appearance. Parts that cannot be remanufactured shall be renewed.
- (6) **Renew** — To replace with a new equivalent component (regardless of condition of part being renewed).
- (7) **Repair** — Correct specific damage to return to original condition or functionality.
- (8) **Restrictive** — Potential system response that results in a safer condition such as stop versus proceed, a lower speed versus a higher speed, deceleration versus acceleration, brakes applied versus brakes released or actuation of alarm versus no actuation of alarm.
- (9) **Revenue Service** — When a rail car is available to the general public and there is a reasonable expectation of carrying passengers that either directly pay fares, are subsidized by public policy, or provide payment through some contractual arrangement. Vehicles operated in fare free service are considered in Revenue Service.
- (10) **Right-Hand Side** — The side of the car on the right, when standing inside the car at the B-end facing the A-end.

xv). **S**

- (1) **Safe** — Secure from potential harm, injury, danger or risk; free from danger or risk.
- (2) **Safety** — The condition in which persons and equipment are free from threat, danger, harm, or loss arising from improper design, manufacture, assembly or function, or a failure of the car or any of its components or systems.

- (3) **Safety Critical** — A system, or any portion thereof, means the correct performance of which is essential to safety of personnel or Vehicle, or both; or the incorrect performance of which could cause a hazardous condition, or allow a hazardous condition which was intended to be prevented by the function or system to exist.
- (4) **Service** — (as in service use, service braking.) The operation of the cars under normal conditions.
- (5) **Service Failure** — A car-related failure causing a train in service to be:
 - (a) More than 15 minutes late at its destination terminal;
 - (b) Canceled either at its originating point or en route; or
 - (c) Loss of any passenger amenities affecting 10% or more of passengers from a car
 - (d) Loss of 50% of food service in the Café/Lounge
 - (e) Loss of water and waste system in a car during Revenue Service
 - (f) Loss of doors that inversely affects boarding and alighting, passenger comfort and/or any passenger accommodation
 - (g) For the Standard Coach, High-Capacity Coach and Café/Lounge Cars, any passenger impact items, including but not limited to, HVAC, lighting, and windows that affect ten percent (10%) or more of the revenue seating capacity for the affected car or adversely affects the viewing pleasure of the passenger
 - (h) Mobility device lift (Option) failure resulting in manual operation when boarding or alighting a passenger.
 - (i) HVAC failure resulting in a hot car (+4 degrees) or cold car (-4 degrees) condition from the set point temperature.
- (6) **Services** — Work and incidental material specified in a Contract such as inspection, nondestructive examination, calibration, testing, welding, analysis, etc.
- (7) **Shipment** — The physical movement of the cars from the Contractor's production facility to the Contractor's designated acceptance facility or other designated destination.
- (8) **Shop Drawings** — Drawings or sketches prepared by the Contractor for use in its manufacturing facility, assembly facility, or shop, to fabricate, assemble, and/or install parts of the vehicles, whether manufactured by it from raw materials or purchased from others in a ready-to-use condition.

- (9) **Slide, Wheel** — During braking, the condition when the rotational speed of the wheel is slower than that of the actual pure rolling contact between tread and rail.
- (10) **Slip, Wheel** — During acceleration, the condition existing when the rotational speed of the wheel is faster than that of pure rolling contact between tread and rail.
- (11) **Special Tools** — All specialized tools, gauges, meters, diagnostic Vehicle (including laptop computer software), etc. that will be necessary to operate, maintain, overhaul, inspect, test, troubleshoot and repair all configurations of the rolling stock throughout its design life. Special tools do not include those tools that are commercially available “off the shelf”.
- (12) **Specified or As specified** — As stated in this document or other referenced documents.
- (13) **Speed, Design** — The specified maximum possible operating speed of the car. The car and all components shall be suitable for safe operation at all speeds up to and including this speed.
- (14) **Standards and Specifications** — When industry, government, association, or society standards or specifications are referred to, the applicable issue at the time of Notice to Proceed (NTP) signing shall be used.
- (15) **Step, Signal** — A signal having a constant value prior to the step and a different constant value immediately thereafter.
- (16) **Stop, Emergency** — The stopping of a vehicle or train by an emergency brake application.
- (17) **Subassembly** — A collection of components used to perform a distinct function, usually in conjunction with other subassemblies and components, as part of a larger system. Subassemblies are usually replaceable as units, such as circuit boards, bearings and valves.
- (18) **Subsystem** — A defined portion of a system.
- (19) **Superelevation** — The vertical difference between the top surface of the outside and inside rails of a curve.
- (20) **System** — A combination of hardware, people, and or software systems, in any combination which are integrated to perform a specific operational function.

xvi). T

- (1) **Tamperproof** — Fasteners are designated as tamperproof when they are selected so that they can not be easily loosened with common tools such as screwdrivers or pliers.

- (2) **Tare** — A term in weights and measurements which refers to the weight of an empty container. The tare weight can be subtracted when a filled container is weighed to determine the weight of the contents alone.
- (3) **Test, Installation and Removal** — Tests are maintainability related tests which are used to ensure equipment, as designed, can be easily removed and replaced.
- (4) **Test, Proof of Design** — Proof-of-Design tests are engineering tests which are used to ensure equipment, as designed, meets the functional and performance requirements of the vehicle specifications.
- (5) **Test Plan** — A document that defines the plan and schedule for conducting all the tests required on the vehicle.
- (6) **Test Procedure** — A step-by-step procedure that identifies the equipment, exact sequence of events and criteria used to ensure that components and systems function properly.
- (7) **Test, Production** — A series of tests applied to each component or vehicle to ensure all systems and components perform according to design and specification.
- (8) **Tight (used as a suffix)** — Apparatus is designed as watertight, dust-tight, etc., when so constructed that the design will exclude the specified material from affecting the functioning condition or performance of the component or system.
- (9) **Time, Warm-up** — The elapsed time from application of power to an operable device until it is capable of performing its intended function.
- (10) **Train** — Any number of cars coupled to a locomotive or a source of self-propulsion, and moving as one.
- (11) **Train Delay** — A train delay is defined as a car-related failure that causes a train in service to be: more than 15 minutes late at its destination terminal; canceled either at its originating point or en-route; or reduced in size or revenue capacity due to requiring a failed car to be removed from the train.
- (12) **Tram** — A condition of ideal truck geometry in which the axles are perfectly parallel and the wheels longitudinally in perfect alignment. The centers of the journal bearings represent the corners of a perfect rectangle. Tram is checked by measuring the diagonal and longitudinal distances between reference points on the axle bearing housing.

xvii). U

- (1) **Unsafe** — A safety risk is not acceptable according to the risk criteria defined in the System Safety Program Plan (SSPP).

- (2) **U.S. Department of Transportation (USDOT)** — Means the Secretary of the USDOT and other persons who may at the time be acting in the capacity of the Secretary, or authorized representative or any person otherwise authorized to perform the functions to be performed hereunder, including representatives of the Federal Transit Administration (FTA) and Federal Railroad Administration (FRA).

xviii). V

- (1) **Vehicle History Book** — A document specific to an individual rail vehicle containing records of technical and parts data pertinent to that individual vehicle.
- (2) **Verification** — Examination and testing by the QA Representative to confirm decisions made by those performing the work concerning conformance of material to Contract requirements.
- (3) **Vehicle** — Same as car or locomotive.

xix). W

- (1) **Warp, Track** — The difference in crosslevel of any two points within the specific distance along the track. The warp parameter in the track geometry is used to specify the maximum in the crosslevel difference of the track in any segment (tangents, curves and spirals).
- (2) **Weatherproof** — Able to withstand exposure to all weather and environmental conditions without damage or loss of function.
- (3) **Weights, Assigned** — The loaded car categories assigned by Amtrak as the basis for structural repair design and for subsystem and vehicle testing as indicated. Four weight categories are assigned:
 - (a) AWO: Actual weight of empty car, ready for revenue service, but with neither crew nor passengers aboard. Includes full fresh water supply, empty waste system and full complement of provisions in the Food service car.
 - (b) AW1: Car at seated load and no standees.
 - (i) Seated Load is defined as all the passenger seats occupied plus one crew member per car.
 - (c) AW2: Car at normal full load.
 - (i) Normal Full Load is defined as seated load plus one standee per 3 ft² of clear floor space.
 - (d) AW3: Car at crush load.
 - (i) Crush Load is defined as seated load plus one standee per 1.5 ft² of clear floor space. Each passenger or standee is assumed to weigh an average of 180 pounds.

- (4) **Weight, Dry** — The measured axle weight of an empty passenger rail car (measured dry). Fully assembled but with no water or provisions.

xx). Z

- (1) **Zero Speed** — See “No motion”.

c). Clarifications

- i). Whenever in the specifications or on the plans the words **"required," "determined," "directed," "specified," "authorized," "ordered," "given," "designated," "indicated," "considered necessary," "deemed necessary," "permitted," "reserved," "suspended," "established," "approval," "approved," "disapproved," "acceptable," "unacceptable," "suitable," "accepted," "satisfactory," "condemned,"** or words of like import are used, it shall be understood as if such words were followed by the words in writing, **"by Customer," "to Customer," "Amtrak"** unless otherwise specifically stated.
- ii). Wherever the words **"provided," "supplied,"** or **"installed"** are used in the specifications in reference to work to be performed by the Contractor, it shall be understood to mean **"furnished and delivered completed and ready for revenue service."**

2.6 Acronyms and Abbreviations

- a). The following is a list of acronyms and abbreviations in this specification. The list is not intended to be all-inclusive.
- i). **A**
- | | | |
|------|---------------|--|
| (1) | AALA | American Association of Laboratory Accreditation |
| (2) | AAR | Association of American Railroads |
| (3) | AC | Alternating Current |
| (4) | ADA | Americans with Disabilities Act of 1990 as amended |
| (5) | AED | Automated External Defibrillator |
| (6) | AEI | Automatic Equipment Identification |
| (7) | AESS | Automatic Engine Stop Start |
| (8) | amp | ampere |
| (9) | ANSI | American National Standard Institute |
| (10) | APTA | American Public Transportation Association |
| (11) | ASHRAE | American Society of Heating, Refrigeration and Air |

- Conditioning Engineers
- (12) **ASME** American Society of Mechanical Engineers
 - (13) **ASSE** American Society of Sanitary Engineers
 - (14) **ASTM** American Society for Testing and Materials
 - (15) **ATC** Automatic Train Control
 - (16) **ATOR** Above Top of Rail
 - (17) **ATR** Accessible Toilet Room
 - (18) **ATS** Automatic Train Stop
 - (19) **AW0** Empty vehicle operating weight, Ready-to-Run
(Assigned Weight "0" load)
 - (20) **AW1** Car at seated load and no standees
 - (21) **AW2** Car at normal full load
 - (22) **AW3** Car at crush load
 - (23) **AWS** American Welding Society
- ii). **B**
- (1) **BC** Battery Charger
 - (2) **B.C.P.** Brake Cylinder Pressure
 - (3) **BP** Brake Pipe
 - (4) **Btu** British Thermal Unit
- iii). **C**
- (1) **C** Celsius
 - (2) **CAD** Computer-Aided Design
 - (3) **CCJPA** Capitol Corridor Joint Powers Authority
 - (4) **CCTV** Close Circuit TV
 - (5) **CCU** Communication Control Unit
 - (6) **CDU** Central Diagnostics Unit
 - (7) **CDRL** Contract Deliverable Requirements List

- (8) **CDT** Central Diagnostics Terminal
- (9) **CEM** Crash Energy Management
- (10) **CFC** Chlorinated Fluorocarbons
- (11) **cfm** Cubic Feet per Minute
- (12) **CFR** Code of Federal Regulations
- (13) **CO** Central Office
- (14) **COMM** Communication
- (15) **COTS** Clean, Oil, Test and Stencil
- (16) **CPM** Critical Path Method

iv). **D**

- (1) **DB** Dry Bulb
- (2) **dB** Decibel
- (3) **dB/sec** Decibels per second
- (4) **dBA/sec** Decibels (Acoustic) per second
- (5) **DC** Direct Current
- (6) **dBA** Decibels (Acoustic)
- (7) **DCS** Data Communication System
- (8) **DC** Direct Current
- (9) **DCS** Data Communication System
- (10) **DR** Design Review
- (11) **DTE** Diagnostic Test Equipment
- (12) **DTN** Data Trainline Network
- (13) **DVD** Digital Versatile Disc
- (14) **DVD-RW** Digital Versatile Disc – Rewriteable

v). **E**

- (1) **EAB** Electronic Air Brake
- (2) **ECP** Electronically Controlled Pneumatic

- (3) **ECR** Engineering Change Request
 - (4) **EEPROM** Electrically Erasable Programmable
Read Only Memory
 - (5) **ECR** Engineering Change Request
 - (6) **e.g.** exempli gratia (for example)
 - (7) **EMC** Electromagnetic Compatibility
 - (8) **EMD** Electro Motive Diesel
(a locomotive and component manufacturer)
 - (9) **EMI** Electromagnetic Interference
 - (10) **EMIS** Equipment Maintenance Information
 - (11) **EPA** U.S. Environmental Protection Agency
Equipment Maintenance Information
 - (12) **EPROM** Erasable Programmable Read Only Memory
 - (13) **ER** equalizing reservoir
 - (14) **etc.** et cetera (and so forth)
 - (15) **ETMS** Electronic Train Management System
- vi). **F**
- (1) **F** Front (end of locomotive or cab car designator
as defined by 49 CFR Part 229.11)
 - (2) **F** Fahrenheit
 - (3) **FAI** First Article Inspection
 - (4) **Fc** foot-candle
 - (5) **FCC** Federal Communication Commission
 - (6) **FDA** U.S. Food & Drug Administration
 - (7) **FDR** Final Design Review
 - (8) **FEA** Finite Element Analysis
 - (9) **FEM** Finite Element Model

- (10) **FMEA** Failure Mode and Effects Analysis
- (11) **FMECA** Failure Modes and Effects Criticality Analysis
- (12) **FMI** Field Modification Instruction
- (13) **Fpm** feet per minute
- (14) **FRA** Federal Railroad Administration
(U.S. Department of Transportation)
- (15) **FRP** Fiberglass Reinforced Plastic
- (16) **Ft** Foot
- (17) **ft²** square foot
- (18) **ft³** cubic foot
- (19) **FTA** Federal Transit Administration
(U.S. Department of Transportation)

vii). **G**

- (1) **g** Acceleration due to gravity
- (2) **gal** Gallon
- (3) **GB** Gigabyte
- (4) **GFCI** Ground Fault Circuit Interrupter
- (5) **GHz** Gigahertz
- (6) **gpm** gallons per minute
- (7) **GPS** Global Positioning System

viii). **H**

- (1) **HAZ** Heat-Affected Zones
- (2) **HBPS** Holding Brake Pressure
- (3) **HDL** Hydrodynamic Labyrinth
- (4) **HDMI** High Definition Multimedia Interface
- (5) **HEP** Head End Power
- (6) **Hg** Mercury (pressure or vacuum – measured in inches)

- (7) **HPPL** High Pressure Photoluminescent
- (8) **hr** Hour
- (9) **Hz** Hertz
- (10) **HVAC** Heating, Ventilation, and Air Conditioning
- ix). **I**
 - (1) **i.e.** id est (that is)
 - (2) **IC** Intercommunication
 - (3) **IDR** Intermediate Design Review
 - (4) **IEC** International Electrotechnical Commission
 - (5) **IEEE** Institute of Electrical and Electronic Engineers
 - (6) **IGBT** Insulated Gate Bipolar Transistor
 - (7) **in.** Inch
 - (8) **in²** square inch
 - (9) **IPC** Illustrated Parts Manual
 - (10) **IPS** Iron Pipe Size
 - (11) **ISO** International Organization for Standardization
 - (12) **ISP** Internet Service Provider
 - (13) **IVDN** Inter-Vehicle Data Network
 - (14) **IWS** Instrumented Wheelset
- x). **J**
 - (1) **JEDEC** Joint Electronics Device Engineering Council
- xi). **K**
 - (1) **K** Kelvin
 - (2) **kg** Kilogram
 - (3) **kHz** Kilohertz
 - (4) **km** Kilometer
 - (5) **ksi** 1000 pounds per square inch (psi)

- (6) **kW** kilowatt
- xii). **L**
- (1) **LAHT** Low Alloy High Tensile
- (2) **lb** Pound
- (3) **lbf** pounds of force
- (4) **lbs/ft2** pounds per square foot
- (5) **LCC** Life Cycle Cost Analysis
- (6) **LCD** Liquid Crystal Display
- (7) **LDS** Local Diagnostic and Test System
- (8) **LED** Light Emitting Diode
- (9) **LLEPM** Low Location Exit Pathway Markings
- (10) **LLRU** Lowest Level Replaceable Unit
- (11) **lm** Lumen
- (12) **Log** Inspection and Test Log
- (13) **LRU** Line Replaceable Unit
- (14) **LSA** Lead Service Attendant
- (15) **lx** Lux
- (16) **LVPS** Low Voltage Power Supply
- xiii). **M**
- (1) **m** Meter
- (2) **mA** Milliampere
- (3) **MAP** Maintenance Analysis Program
- (4) **MB** Megabyte
- (5) **Mbps** Megabits Per Second
- (6) **MCAT** Minimally Compliant Analytical Track
- (7) **MCSCM** Mechanical Committee of
Standard Coupler Manufacturers

- (8) **MDBCf** Mean Distance Between Component Failures
 - (9) **MDBF** Mean Distance Between Failures
 - (10) **MDBSF** Mean Distance Between Service Failures
 - (11) **MDBTD** Mean Distance Between Train Delays
 - (12) **mg/sq.in.** milligrams per square inch
 - (13) **MHz** Megahertz
 - (14) **MIG** Metal Inert Gas
 - (15) **MIL** Military Specification
 - (16) **min** Minute, minutes
 - (17) **mm** Millimeter
 - (18) **MP3** MPEG Audio Layer 3
 - (19) **MPa** Megapascal
 - (20) **mph** miles per hour
 - (21) **mphps** miles per hour per second
 - (22) **mphpsps** miles per hour per second per second
 - (23) **MR** Main Reservoir
 - (24) **MSDS** Material Safety Data Sheet
 - (25) **msec** Milliseconds
 - (26) **MTBF** Mean Time Between Failures
 - (27) **MTTR** Mean Time To Repair
 - (28) **MU** Multiple Unit
 - (29) **mV** Millivolt
- xiv). **N**
- (1) **N/A** Not Applicable
 - (2) **NAS** Network Attached Storage
 - (3) **NBS** National Bureau of Standards
 - (4) **NC** Normally Closed

- (5) **NDE** Non-Destructive Examination
- (6) **NEC** Northeast Corridor
- (7) **NEMA** National Electrical Manufacturers Association
- (8) **NFLNo** Field Lubrication
- (9) **NFPA** National Fire Protection Association
- (10) **NIC** Network Interface Card
- (11) **Ni-CAD** nickel-cadmium
- (12) **NO** Normally Open
- (13) **NPT** National Pipe Thread
- (14) **NRPC** National Railroad Passenger Corporation (Amtrak)
- (15) **NPRD** Non-Electronic Parts Reliability Database
- (16) **NSF** National Sanitation Foundation
- (17) **NTP** Notice-to-Proceed
- (18) **NTSB** National Transportation Safety Board

xv). **O**

- (1) **OCU** Operator Control Unit
- (2) **ODBC** Open Data Base Connectivity
- (3) **ODK** Operator Display Keypad
- (4) **OEM** Original Equipment Manufacturer
- (5) **OFE** Oxygen Free Electronic
- (6) **OSHA** Occupational Safety and Health Administration
- (7) **OTIS** Onboard Train Information System
- (8) **oz** ounce

xvi). **P**

- (1) **p/n** part number
- (2) **PA** Public Address
- (3) **PA/IC** Public Address/Intercom

(4)	PC	Personal Computer
(5)	PCB	Printed Circuit Board
(6)	PCMCIA	Personal Computer Memory Card International Association
(7)	PCS	Pneumatic Control Switch
(8)	PDF	Portable Document Format
(9)	PDR	Preliminary Design Review
(10)	PHS	Public Health Service
(11)	PIDS	Passenger Information Display System
(12)	PIS	Passenger Information System
(13)	PISCU	Passenger Information System Control Unit
(14)	PKO	Power Knock/Out
(15)	PM	Preventative Maintenance
(16)	PMP	Project Management Plan
(17)	POS	Point-of-Sale
(18)	ppm	parts per million
(19)	pphm	parts per hundred million
(20)	PRIIA	Passenger Rail Investment and Improvement Act
(21)	PROM	Programmable Read-Only Memory
(22)	psi	pounds per square inch
(23)	psig	pounds per square inch (gauge)
(24)	PTC	Positive Train Control
(25)	PTE	Portable Test Equipment
(26)	PTT	Push to Talk
(27)	PTU	Portable Test Unit
(28)	PVC	Polyvinyl Chloride
(29)	PWM	Pulse Width Modulation

xvii). **Q**

- (1) **QA** Quality Assurance
- (2) **QC** Quality Control

xviii). **R**

- (1) **RAID** Redundant Array of Independent Disks
- (2) **RAM** Random Access Memory
- (3) **RAM** Reliability Availability and Maintainability
- (4) **RDT** Reliability Demonstration Test
- (5) **RFI** Radio Frequency Interference
- (6) **RFP** Request for Proposal
- (7) **RGB** red green blue
- (8) **RH** Relative Humidity
- (9) **rms** root mean square

xix). **S**

- (1) **S&I** Service and Inspection
- (2) **SAE** Society of Automotive Engineers
- (3) **SCFM** Standard Cubic Feet per Minute
- (4) **sec** Second
- (5) **SIV** Secondary Impact Velocity
- (6) **SNR** Signal-to-Noise Ratio
- (7) **SQL** Structured Query Language
- (8) **SSP** System Safety Plan
- (9) **SSS** Sign System Server

xx). **T**

- (1) **t** Thickness
- (2) **T/L** Trainline
- (3) **T/R** Transmitter/Receiver

- (4) **TB** Terabyte
- (5) **TBD** To Be Determined
- (6) **TCD** Train Communications Data
- (7) **TFT** Thin Film Transistor
- (8) **TIG** Tungsten Inert Gas
- (9) **TLC** Trainline Complete
- (10) **TMS** Train Monitoring System
- (11) **TOR** Top of Rail
- (12) **TSA** US Transportation Security
- (13) **TSSSA** Technical Support, Spares and Supply Agreement
- (14) **TTCI** Transportation Test Center

xxi). **U**

- (1) **U.S.** United States
- (2) **UL** Underwriter's Laboratories, Inc.
- (3) **ULSD** Ultra Low Sulfur Diesel
- (4) **UMLER** Universal Machine Language Equipment Register
- (5) **USB** Universal Serial Bus
- (6) **USDOT** United States Department of Transportation
- (7) **USPHS** U.S. Public Health Service of the
U.S. Department of Health and Human Services
- (8) **USS** United States Steel Corporation
- (9) **UV** Ultraviolet

xxii). **V**

- (1) **V** Volt
- (2) **VAC** Volt Alternating Current
- (3) **VDC** Volts Direct Current
- (4) **VDSL2** Very High Speed Digital Subscriber Line 2

- (5) **VTI** Vehicle Track Interaction
- xxiii). **W**
- (1) **W** Watt
- (2) **W/ft²** watts per square foot
- (3) **WB** Wet Bulb
- (4) **WCRS** Waste Collection and Retention
- (5) **WiFi** Wireless Fidelity (Wireless Local Area Network protocol, IEEE 802.11b, 802.11g and 802.11n)
- (6) **WLAN** Wireless Local Area Network
- (7) **WMS** Work Management System
- (8) **WPS** Welding Procedure Specifications
- xxiv). **Y**
- (1) **yr** Year
- xxv). **Z**
- (1) **Z** Impedance

* End of Chapter 2 *

Amtrak Single Level Fleet Replacement

Technical Specification

3. Project Management & Reviews

Revision 0

Table of Contents

3.1	Overview.....	3-1
3.2	Project Management Plan (PMP).....	3-1
3.3	System Integration Plan (SIP) and Interface Control Document (ICD)	3-2
3.4	Coordination with TSSSA Contract	3-3
3.5	Galley Design Specialist.....	3-4
3.6	Interface with Subcontractors, Designers, and Suppliers.....	3-4
3.7	Documentation Control.....	3-5
3.8	Initial Meetings.....	3-5
3.9	Project Review Meetings (PRM).....	3-6
3.10	Project Schedule (PS)	3-7
3.11	Project Progress Schedule Updates	3-9
3.12	Recovery Schedule	3-11
3.13	Design Review Overview.....	3-11
3.14	Amtrak Involvement.....	3-20
3.15	Design Review Stages	3-21
3.16	Mockup Development and Review	3-30
3.17	Virtual Mock-Up	3-39
3.18	Renderings	3-40
3.19	Color Material and Finish (CMF)	3-43
3.20	Requirements for Drawings, Documents and Data	3-44
3.21	Rapid Prototype Cars	3-49
3.22	CDRLs	3-50

3.1 Overview

- a). This chapter includes Project Management requirements for schedule, drawings, document control, and other program support functions.
- b). All correspondence, drawings, data, manuals or other written communications pertaining to this Contract shall be in the English language.
- c). All dimensions shall be shown in standard imperial units of inches and decimals, with a metric equivalent shown in parentheses adjacent to the imperial dimension. If a component or subassembly uses metric units as the primary system of measurement, then imperial equivalents shall be provided in parentheses.

3.2 Project Management Plan (PMP)

- a). The Contractor is required to develop a Project Management Plan (PMP) which shall define how the project is to be executed, monitored and controlled.
- b). The PMP shall be submitted to Amtrak for review and approval no later than 30 days after NTP. **[CDRL 3-01]**
- c). The PMP shall include as a minimum the following elements:
 - i). Project Description
 - ii). Organizational Chart including all staff supporting the program
 - (1) Key positions including Senior to Mid-level Management shall identify the individual and his/her contact information.
 - (2) First Level Management and resource staff positions shall be shown to clarify staffing levels, but do not need to include the individual's information. However, the planned date of filling each of these positions shall be identified.
 - iii). Roles, responsibilities and authority of all key and decision-making personnel
 - iv). Contact information for principal subcontractors
 - v). Document control processes
 - vi). Communication processes
 - vii). Risk Management processes
 - viii). Material Procurement Management Plan that includes draft list of major sub-suppliers
 - ix). Project Schedule Management Plan, the contractor will provide a narrative describing how the schedule will be managed throughout the period of performance of the Contract. Specifically, the policies, procedures, and

documentation for planning, developing, managing, executing, and controlling the project schedule.

- x). Reference to document names and numbers for processes such as:
 - (1) Configuration Management
 - (2) Change Management
 - (3) Field Service Support
 - (4) Warranty Support
- d). For the duration of the Contract, the Contractor shall revise and resubmit the PMP to properly reflect the processes and procedures implemented in the performance of the contracted work.
 - i). The Contractor shall revise the PMP when it varies significantly from implemented practice but at a minimum every twelve months.
 - ii). Should Amtrak become aware of significant discrepancies between the PMP and the Contractor's practice, it would request a revision and resubmittal.
- e). The Contractor's Project Manager shall be the prime contact person to Amtrak.
 - i). All Subcontractor formal correspondence shall be through the Contractor's Project Manager.
- f). Any proposed changes to key personnel named in the Project Organizational Chart shall be formally submitted in advance of implementation for Amtrak review and approval.

3.3 System Integration Plan (SIP) and Interface Control Document (ICD)

- a). The Contractor's Systems Integration Plan (SIP) shall be based on the Preliminary Systems Integration Plan submitted as part of the Contractor's proposal.
- b). The SIP shall include the Contractor's processes and procedures for validating and verifying that system integration is embedded in the design and manufacturing processes of the cars.
- c). The SIP shall identify a System Integration Lead who shall be responsible for all mechanical, electrical and digital integration between systems and sub-systems.
 - i). The System Integration Lead shall be maintained on the project throughout the design review process until acceptance of the pilot cars.
- d). The SIP shall detail the system integration between all systems, cars, locomotives and with Amtrak's infrastructure.
- e). The SIP shall explain how integration with suppliers' systems will be managed.

- f). The SIP shall be submitted to Amtrak for review and approval no later than 30 days prior to the Preliminary Design Review meeting. **[CDRL 3-02]**
- g). The SIP shall detail the implementation of a single Interface Control Document (ICD) which will cover each type and class of car.
- h). Any interfaces and/or protocols between two (2) or more systems or components shall be tracked through the ICD.
- i). Any interface mitigation resolution shall be documented in the ICD.
- j). The ICD shall include, as a minimum:
 - i). System
 - ii). Interface type
 - iii). Interface from
 - iv). Interface to
 - v). Description/Requirement
 - vi). Method of Validation
 - vii). Other information as required to ensure proper integration
- k). The ICD shall be submitted to Amtrak for review and approval, no later than 30 days prior to the first Preliminary Design Review meeting and then quarterly thereafter until a minimum of 10 cars have been accepted. **[CDRL 3-03]**
- l). The ICD shall be maintained throughout the production process and shall be revised, as necessary, to reflect engineering changes and field modifications. Any subsequent updates to the ICD shall be submitted to Amtrak for review and approval.
- m). Prior to the ICD submittal to Amtrak, the Contractor's System Integrator shall review and approve all design documents that describe interfaces between and among components, systems and cars.

3.4 Coordination with TSSSA Contract

- a). The Management Teams for the cars and the TSSSA contracts shall both be overseen by a single Fleet Director.
- b). The Fleet Director shall be maintained through the delivery of the final piece of equipment on the base cars contract.
- c). The Fleet Director shall attend, at a minimum, all car monthly status meetings.
- d). The Cars and TSSSA Team shall present to Amtrak as a single entity with conflicting priorities between the groups never impacting the progress of the

program as a whole.

- e). The Fleet Director shall ensure that both teams are working cohesively optimizing system reliability and transitioning to TSSSA technical services.
 - i). The Fleet Director shall ensure TSSSA Technical staff are in attendance at Design Review meetings to ensure long-term maintenance concerns are considered.
 - ii). The Fleet Director shall ensure that the TSSSA technical services personnel have extensive experience gained through the production of the Car Contract.

3.5 Galley Design Specialist

- a). Throughout Design Review and Car production, the Contractor shall maintain a galley design specialist to support the development, simulation and optimization of the food service areas on the cars.
- b). The galley design specialist may be a direct employee of the Contractor or a consultant but shall be a recognized expert in the field of restaurant design and on-board food service in the transportation industry.
- c). The galley design specialist shall participate in design reviews, mock-up evaluation, workshops and qualification testing of on-board food service areas.
- d). The galley design specialist shall be considered a key member of the Contractor's design team.

3.6 Interface with Subcontractors, Designers, and Suppliers

- a). The Contractor shall inform all designers and subcontractors of all specified requirements and ensure that appropriate engineering management tools are utilized to coordinate and provide communication among the designers of interrelated systems.
- b). Subcontractors shall be made aware of additional requirements listed throughout other chapters of this technical specification.
- c). Subject to Amtrak review and approval, the Contractor may request major Subcontractors be granted access to the Project's collaborative website.
- d). All applications of material or equipment by the Contractor shall be with the full concurrence of the Subcontractor that the application is suitable and within the recommended limits of operation of the material or equipment.
- e). The Contractor shall have all relevant designers and Subcontractors available when required for:
 - i). Meetings
 - ii). Resolution of Production or Manufacturing problems

- iii). Testing
- iv). Resolution of design, integration, or quality deficiencies
- v). Resolution of Systems Reliability problems, and
- vi). All other similar situations.
- f). During all phases of this project, Amtrak shall have access to all designers and Subcontractors through coordination with the Contractor's Project Manager.
- g). The Contractor shall coordinate all the project administration, scheduling, design, validation, commissioning and warranty activities with Amtrak's project management team.
- h). At Amtrak's sole discretion, suppliers' technical staff must attend all relevant design reviews throughout the process to ease the communication flow between Amtrak, the Contractor and Suppliers.

3.7 Documentation Control

- a). Amtrak shall use its Document Management System (DMS) as the documentation control system for the TSSSA program.
- b). While the Contractor may opt to use its own document control system internally, it shall use the DMS when submitting documents and contract letters to Amtrak and shall adhere to the processes inherent to that system.
- c). During the course of the TSSSA program, Amtrak will have the right to transition to a different documentation management program.

3.8 Initial Meetings

- a). Within 15 calendar days after NTP, a series of Kick-off Meetings shall be conducted for the Contractor to accomplish the following:
 - i). Review Contractor's Project mobilization activities
 - ii). Introduce the Key personnel of the team
 - iii). Establish communication protocols
 - iv). Establish the document coding schemes
 - v). Establish formats for Project Schedule and Monthly Reports
 - vi). Establish the format for an Open Items Tracking Matrix
 - vii). Establish project control methodology
 - viii). Confirm plans for initial activities prior to start of formal progress reporting, including all CDRLs due in the next 90 calendar days.

- ix). Confirm that the Contractor is familiar with Amtrak's Operations and Maintenance environment; and
- x). Identify any Contractor early needs for information or decisions required from Amtrak.
- b). Five (5) days before scheduled Kickoff Meeting, the Contractor shall submit the Kickoff Meeting Presentation. **[CDRL 3-04]**
- c). Within 30 days after NTP, a detailed Specification Review (section by section) shall be conducted to address:
 - i). Any outstanding questions the Contractor may have regarding the Technical and Commercial Specifications requirements.
 - ii). In addition to the Contractor, all key subsystem suppliers shall participate.
 - iii). The Contractor and applicable subcontractors and suppliers shall be required to sign off indicating its understanding of each specification section.

3.9 Project Review Meetings (PRM)

- a). PRMs will be held at least monthly and will provide a forum to assess specific issues or to review issues that may have an impact on the design.
- b). These review meetings will analyze and address both technical and commercial issues for which agreement could not be reached during DRMs.
- c). The meetings will be attended by Contractor and Amtrak, and possibly external stakeholders designated by Amtrak or Contractor, e.g. FRA.
- d). These meetings have two objectives, first to allow the participants to maintain a close involvement in the project's development, and second to allow Contractor's project team to answer questions and resolve issues that arise during the project.
- e). The PRM shall achieve these goals by:
 - i). Reviewing Contractor's project progress report and ensuring that appropriate responsibility for actions is agreed upon.
 - ii). Ensuring that the Cars comply with the quality, safety and technical matters of the Contract.
 - iii). Identifying contractual matters which could potentially affect Contractor's performance.
 - iv). Identifying any major concerns regardless of source and ensuring that appropriate actions are agreed to facilitate resolution of such concerns.
 - v). Review any emerging issues.
- f). The agenda for these meetings will not be fixed but will be customized for critical

issues at hand.

- g). Amtrak shall circulate an agenda at least one week prior to each meeting. Appropriate data packages covering the information to be discussed shall be submitted by Amtrak and Contractor prior to the upcoming meeting.
- h). Attendees:
 - i). Amtrak and Contractor's Project Director shall attend the meeting.
 - ii). Other members of Amtrak and Contractor's organizations may attend as required.
 - iii). Contractor shall ensure that persons knowledgeable in the topics to be discussed, including the appropriate subcontractors, are present as required at these meetings.
- i). All participants will have an opportunity to include on the agenda any issues that they deem important and in need of resolution at the meeting.
- j). Meeting notes and action lists will be produced by Amtrak for each review meeting to allow issues to be followed up at subsequent meetings.
 - i). Amtrak shall provide the draft minutes and action list to the Contractor for review.
 - ii). After revision, the minutes and action list shall be formally submitted to the Contractor and entered into the contract record.

3.10 Project Schedule (PS)

- a). The Contractor shall be required to use Oracle Primavera P6 to produce the Project Schedule (PS) Baseline, and all schedule updates, revisions, look ahead schedules, recovery schedules, and Time Impact Analysis schedules.
- b). Baseline Project Schedule (PS): The Baseline PS and an associated narrative shall be submitted to Amtrak no later than 30 days after NTP for Amtrak's review and approval. **[CDRL 3-05]**
- c). The PS and associated narrative shall detail the Contractor's approach to meeting the required contractual project milestones.
- d). The PS requirement is established to ensure adequate planning, scheduling, management, and execution of the Work by the Contractor and to enable Amtrak to evaluate Work progress.
- e). The PS shall encompass the Contractor's total execution of its Contract with Amtrak and shall be updated and submitted monthly to reflect actual versus planned progress for each item listed.
- f). Work items shall be discrete items of Work accomplished during the performance of the Contract and that, when complete, produce definable, recognizable entities

or stages within the project.

- g). The Baseline PS shall include detail activities for all scope and deliverables listed in the Contract, including but not limited to:
 - i). All Contractual Milestones and Key milestones and events, including those identified in the Contract Specification
 - ii). Projected Payment Milestones dates
 - iii). Necessary points of required input from Amtrak or third parties
 - iv). Activities for procurement of each subcontractor, with a milestone for Contract signing for each subcontractor
 - v). Contractor and Subcontractor/Supplier submittals including review cycles
 - vi). Project Design Review meetings
 - vii). Drawing packages requiring approval, with separate activities for “preparation”, “submission”, and “Amtrak review”.
 - viii). Any regulatory approval periods shall be visible activities with durations
 - ix). All major off-site inspections and approval tests
 - x). All major steps of car body and truck fabrication
 - xi). All major subsystem fabrication and deliveries
 - xii). All assembly milestones
 - xiii). All deliverables
 - xiv). All progress milestone payments
 - xv). All CDRLs including but not limited to; design drawings, procedures, functional descriptions, and other documents required to be prepared by the Contractor and reviewed and accepted by Amtrak.
 - xvi). Activities for each test required by Contract, for each car
 - xvii). Activities for conditional acceptance of each car
- h). Where a given contractual deliverable or requirement must be completed for each car, separate activities must be included for each car.
- i). Additional Baseline PS requirements:
 - i). The Baseline PS start date shall be the Contract NTP date, and the schedule shall not show any activities with dates prior to NTP.

- ii). The Baseline PS shall include a 7-day work week calendar, which is applied to all contractual milestones.
- iii). The Baseline PS shall also include a 5-day work week calendar with holidays which is applied to all work activities.
- iv). All activities in the schedule, with the exception of NTP, shall be assigned at least one appropriate predecessor activity.
- v). All activities in the schedule, with the exception of the Final Completion milestone, shall be assigned at least one appropriate successor activity.
- vi). The majority of logic relationships must be “finish-to-start”.
- vii). While the use of lags is acceptable, overuse is not; only a small percentage of logic relationships may use a lag. Negative lags, or leads, are not acceptable.
- viii). No date constraints may be used. Float constraints, such as “Finish on or Before” may be used if appropriate.
- j). The Baseline PS shall include a detailed schedule narrative including:
 - i). The general approach to the project and schedule, design, fabrication, manufacturing, assembly and methods, inspection, testing, shipping, delivery, and approval.
 - ii). A description of the critical path, and all near-critical paths, which are paths in the logic network with 2 weeks or less of total float.
 - iii). A listing and descriptions of all project risks to the schedule.
 - iv). Any required mitigation to address project delays.
 - v). A section describing the status of all key / contractual milestones.

3.11 Project Progress Schedule Updates

- a). The PS and an associated narrative shall be updated and submitted on a monthly basis by the Contractor to accurately reflect current project progress status.
- b). Actual start dates and actual finish dates are to be entered, and remaining durations reduced as appropriate.
- c). All initial baseline dates shall remain listed on the schedule status reports in order to measure performance.
- d). All actual dates must be before the data (schedule revision) date.
- e). Activity IDs can never be changed in a schedule update.
- f). The data (schedule revision) date of each schedule update shall be the first day of

the month, and the schedule update shall be submitted to Amtrak on or before the 10th of each month.

- g). A schedule narrative shall be provided each month, and shall include:
 - i). The status of all contractual / key milestones
 - ii). A discussion of the overall current schedule status and causes of any schedule impacts, with suggested mitigations.
 - iii). A discussion of progress made during the update period.
 - iv). A listing of work planned in the coming update period.
 - v). A description of the current critical path, and near-critical paths, with reasons given for any change to the previous update's critical path
 - vi). In the event that a schedule revision identifies a slippage beyond a contractually required milestone, the narrative shall include a detailed description of the reason for the slippage and the mitigation proposed by the Contractor to bring the PS back into compliance.
 - vii). Non-compliance with key milestones such as pilot car delivery or car production may result in a request for a Recovery Schedule per Section 3.9.
 - viii). A section that lists all Amtrak schedule comments, with responses to those comments.
 - ix). An appendix which lists all changes made to the schedule, with a reason given for each change. The changes that must be listed and explained are:
 - (1) Added activities
 - (2) Deleted activities
 - (3) Changes to original durations
 - (4) Added logic ties
 - (5) Deleted logic ties
 - (6) Any changes to constraints
 - (7) Changes to activity descriptions
 - (8) Changes to calendar assignments.
- h). Revised PS submittals do not relieve the Contractor of any schedule requirements as outlined by the Contract.
- i). Changes to any schedule related Contract requirements can only be obtained by the formal change order process in the General Provisions.

3.12 Recovery Schedule

- a). If any schedule update is forecasting for the project to be late, Amtrak may require the Contractor to submit a recovery schedule to Amtrak for review and approval.
 - i). The Recovery Schedule shall be submitted within 21 calendar days of the request.
 - ii). The recovery schedule shall be accompanied by a narrative that describes in detail how the Contractor is planning to recover time.
 - iii). All changes made to the schedule to recover time must be listed and explained.

3.13 Design Review Overview

- a). Purpose
 - i). Design Review will be a robust mechanism through which the Contractor shall develop, submit and receive approval for the designs necessary for the manufacture and supply of the Cars.
 - ii). Design Review is intended to:
 - (1) Determine whether Contractor has identified and understands the technical requirements;
 - (2) Determine whether Contractor has identified an adequate approach to demonstrate that each design requirement has been or will be met;
 - (3) Determine whether Contractor has identified all interfaces and has a comprehensive System Integration approach;
 - (4) Observe the relationship between Contractor and major suppliers and to ascertain that Contractor provides adequate technical oversight;
 - (5) Determine the state of Contractor's Quality Assurance program; and
 - (6) Determine the readiness of the design and Contractor to proceed to the next stage of the design, manufacturing and testing.
 - iii). The Contractor must recognize that the Design Review Process shall not be used to seek approval or authorization for deviations from any Contract requirements for the design of the Cars.
 - (1) Such changes will be handled in accordance with the General Provisions to the Contract, including without limitation Article 15 ("Changes") and Schedule 3 Change Request Process.
- b). General
 - i). The design review process shall begin no later than three months after NTP.

- ii). The overall Design Review Process shall consist of three sequential stages (see Section 3.10 for additional detail):
 - (1) Preliminary Design Review (PDR)
 - (2) Intermediate Design Review (IDR)
 - (3) Final Design Review (FDR).
- iii). Design review activities shall continue throughout the entire pre-production period, with each succeeding stage presenting greater amounts of detail and reflecting the progress of the designs.
- iv). As a minimum, each design review package shall be completed and approved, including Contractor's resubmission of design documents with revisions in accordance with detailed review comments, before progressing to the next review process.
- v). The Contractor shall be solely responsible for the vehicle design, including all sub-systems and materials.
 - (1) The Contractor shall be responsible to ensure that all systems, components, parts, and other equipment furnished by different subcontractors shall function as intended when installed and integrated in each car.
 - (2) The Contractor shall provide equipment meeting all specified performance levels and be compatible with all elements of the railway system on which Amtrak will operate the equipment, for the useful life of the equipment.
 - (3) Safety, reliability, ease of maintenance and compatibility with any of Amtrak's existing locomotives is imperative.
 - (4) The Contractor shall submit the design of all components being purchased from third party suppliers for review and discussion at the design review sessions.
- c). Design Review Area Features
 - i). The features / Systems / Sub-systems that will be subject to design reviews, include, but are not limited to, the following:
 - (1) Transverse disciplines:
 - (a) Gauge/clearance calculation
 - (b) Safety
 - (c) RAM (Reliability, Availability and Maintainability)
 - (d) EMC (Electro Magnetic Compatibility)

- (e) ADA (Americans with Disabilities Act) and accessibility
- (f) Acoustics
- (g) Dynamic behavior
- (h) Fire and smoke performance
- (i) Serviceability/Maintainability
- (j) Climatic adaptation
- (k) Aerodynamics and cross wind calculations
- (2) Mechanical disciplines:
 - (a) Virtual Mock-Up Review
 - (b) Weight calculations
- (3) Interiors and Industrial Design:
 - (a) Interior car arrangement
 - (b) Aesthetic design
 - (c) Customer experience
 - (d) Usability
 - (e) Interaction and functional design
 - (f) Ergonomics and human factors
 - (g) Color material and finish (CMF)
 - (h) Branding and Brand Application
 - (i) Mock-Up Review
 - (j) Accessibility review
- (4) Sub-systems:
 - (a) CBS (Car Body Shell) for each different carbody arrangement, including floor System and FEA (Finite Element Analysis) calculations
 - (b) Smoke detection system/fire extinguisher
 - (c) HVAC (including air flow calculation) passenger cars
 - (d) Lighting

- (e) Luggage racks and storage
- (f) Passenger Seats, all types
- (g) Booth Seats
- (h) Toilets
- (i) Food preparation areas, including the Café/Lounge car.
- (j) Glazing
- (k) Signage
- (l) Public address, passenger information, intercommunication, WiFi and entertainment
- (m) Digital technologies
- (n) Diagnostics
- (o) Cybersecurity
- (p) Communications
- (q) Doors (Passenger access and interior doors) and steps
- (r) Diaphragm/Gangway & articulation
- (s) Couplers and draft gear
- (t) Battery and battery charger
- (u) Brake System
- (v) Wheel slide protection
- (w) TCMS (Train Control and Monitoring System)
- (x) Electrical cubicles & harnesses
- (y) Truck to Carbody Connection
- (z) Trucks
- (aa) Maintainability Demonstrations
- (bb) Mock-Up Review
- (5) Interoperability with legacy equipment (Viewliner I and II fleet)
- d). Design Review Process Governance

- i). The Contractor and Amtrak will work closely together in a collaborative way to ensure that the final design of the cars meets the contractual requirements and resolve any technical problems or issues that may arise during the project.
- ii). This collaboration will be via:
 - (1) A continuous involvement by Contractor with Amtrak and stakeholders to resolve and validate all of the design-related issues that arise during the project, through the review meetings.
 - (2) Specific meetings where detailed analyses are reviewed by the parties for complete areas.
 - (3) A review of deliverables (including, where appropriate, but not limited to, drawings, 3D data or models, assembly drawings, technical descriptions, calculation notes, studies, electric diagrams, pneumatic diagrams, test procedures and operation and maintenance documentation) to be submitted for review.
- e). Design Review Plan
 - i). Within 30 days of NTP, the Contractor shall submit for Amtrak review and approval a Design Review Plan (DRP) detailing the performance of the engineering design objectives, detailed submittal schedule, functions, processes and procedures throughout the design process. **[CDRL 3-06]**
 - ii). Design Review will begin once the DRP has been accepted by Amtrak.
 - iii). At a minimum, Design Review will continue throughout the entire pre-production period until acceptance of the pilot cars to ensure:
 - (1) No objection by Amtrak to the proposed car design in order to enable Contractor to procure materials and equipment to support the start of production of the cars.
 - (2) Amtrak's acceptance of a comprehensive, final set of fully representative drawings, 3D Models and Sub-system technical/functional Specifications.
 - iv). The Design Review Plan shall include at a minimum:
 - (1) Definition of the organization and relationships within the engineering team, with identification of the subgroups as organized by function or system.
 - (2) Definition of the relationship of the engineering team to the overall organization of the Contractor.
 - (3) The relationship between the engineering team and collaborative teams such as the testing team and the production process team.

- (4) Critical path/workflow plan for completion of all engineering functions.
 - (5) A well-defined list of deliverables for each design review stage that Contractor will submit to Amtrak to comply with the requirements of this Contract and in coordination with the PS.
 - (6) The schedule for the progress and completion of major design activities including, but not limited to:
 - (a) All stages of design reviews;
 - (b) Mock-up review;
 - (c) Finalization of engineering;
 - (d) Test plan development;
 - (e) Car shell stress and structural performance analyses;
 - (f) Proof of design testing;
 - (g) Delivery of all required engineering documentation.
 - (7) Oversight of subcontractor and supplier engineering functions and integration of supplier engineering into the Contractor's design and design process.
 - (8) Manufacturing engineering plan, including assembly station work scope, parts flow and estimated labor hours/station staffing plan. A comprehensive manufacturing engineering plan shall be submitted to Amtrak for review.
 - (9) Car shell engineering plan, including design, finite elements analysis, quasi-static and dynamic testing, measurement of critical dimensions, acceptance and shipment, and inspection/repair procedures.
 - (10) Completed car weight control plan.
- f). Design Review Packages
- i). At least 30 days prior to the start of the design review process, the Contractor must submit to Amtrak for review and approval a detailed Drawing Tree. **[CDRL 3-07]**
 - (1) The drawing tree shall include all production, assembly and component drawings that are expected to be produced at all levels including unique drawing identification for each level.
 - (2) It is the intention that this drawing tree will be utilized to ensure all drawings have been submitted to Amtrak for review and approval throughout the design review process.

- (3) The top 4 levels of drawings will be provided by the Contractor at Preliminary Design Review.
 - (4) Subsequent levels will be submitted for additional detail during Intermediate Design Review.
 - (5) Final Design Review will not be approved until a full package of all production drawings is submitted and approved by Amtrak.
 - ii). Design review documentation will be submitted on an ongoing basis prior to the formal design package being submitted.
 - iii). For each Design Review Meeting, the Contractor shall submit a design review package at least thirty (30) days prior to the performance of the corresponding DRM.
 - (1) Amtrak will review the design review package with the goal of providing advance comments to the Contractor prior to the DRM.
 - iv). No DRM will be held without the entirety of the design package in question having been provided to Amtrak.
 - v). In the event of a late or insufficient documentation submittal, Amtrak shall determine if a delay of the corresponding meeting is necessary.
 - vi). If, for any reason, any particular design review package and its approval falls on the critical path and/or may put the Contract Time Plan at risk, Contractor will promptly notify Amtrak with sufficient advance notice in order that appropriate review prioritizing actions will be mutually agreed and implemented to expedite the design review.
 - vii). In all submissions and at all sessions, the Contractor and supplier presentations shall be organized to show exactly how the design meets each specific requirement of the Technical Specification.
- g). Design Review Meetings (DRM)
- i). All design review meetings shall be held at an Amtrak facility unless otherwise mutually agreed to by Amtrak and the Contractor.
 - ii). Amtrak will record the minutes of each design review meeting, and within two weeks of the meeting shall provide a package that shall include the meeting minutes and a copy of all documents that the Contractor presented and/or discussed at the meeting.
 - (1) Meeting minutes shall also include a summary of action items generated at the meeting. Items shall be referred to as action items if action or a decision is pending at the time that the minutes are issued.
 - iii). An action items matrix shall be maintained by Amtrak that includes both Contractor and Amtrak open action items.

- (1) The action items matrix shall include technical references, the open item description, action required, responsibility and status (open or closed).
 - (2) The open items on the action items matrix shall be reviewed at each design review meeting and regularly after Final Design Review (FDR) meetings until all items are closed.
- iv). Each design review meeting shall include adequate time to properly walk through the entire System Functional Description at a minimum while utilizing drawings, 3D models and virtual reality to further explain the designs being presented.
- v). Subsequent design review meetings shall be scheduled if the first design review meeting is deemed unacceptable by Amtrak.
- h). Formal Design Review Response/Comments
- i). Amtrak will complete the design review and issue its formal review comments/submission as expeditiously as possible.
 - ii). Amtrak's formal design review response will take in to account the issues progressed/closed out during the DRM as well as any open action documentation received following the DRM.
 - iii). Amtrak's formal response to the design review package will include a status as per 3.12.i). which will govern the Contractor's authorization to progress.
 - iv). The required review by Amtrak of all Contractor submitted design documentation does not relieve the Contractor of any of its contractual design responsibility.
- i). Design Review Submission Statuses
- i). Upon review of design submittals, Amtrak shall respond to the Contractor with comments and a submittal status. Status categories are as follows:

For Information	The submittal has been reviewed for information and does not require a formal status
Rejected	The submittal does not demonstrate the minimum level of content, completeness, or quality. The submittal must be completely revised and resubmitted. The Contractor shall not progress to the next phase of the design process or manufacturing.
Revise and Resubmit	Specific comments are provided for the Contractor to address in the revision and resubmittal of the submittal. The Contractor shall not progress to the next phase of the design process or manufacturing.

Conditionally Accepted	Specific comments are provided for the Contractor to address in the revision and resubmittal of the submittal. However, the design has reached a completeness to allow progress to the next phase of the design process and/or manufacturing. However, design progression or manufacture related to the remaining open comments are at the Contractor's risk.
Accepted	The design submittal is considered closed. The Contractor may progress to the next phase of the design process and/or manufacturing.

j). Weekly Engineering Meetings

- i). The Contractor shall participate in weekly engineering meetings to discuss current, relevant technical issues, challenges with the ongoing systems' design and any other pertinent technical concerns.
- ii). At times during the design review process, additional specific engineering meetings may be required.

k). Additional Design Review Communications

- i). In addition to Project Review Meetings (PRM), Design Review Meetings (DRM) and Weekly Engineering Meetings, the Contractor's technical project team shall maintain continuous communication with Amtrak and its stakeholders.
 - (1) This communication may be by telephone, e-mail, video conference, or face-to-face meetings.
 - (2) This communication will be used to highlight potential issues, including Contractor assumptions, conceptual design solutions, and comments on the emerging designs.
 - (3) These communications are intended to provide an efficient process for providing directions on a regular basis, allowing the participants to maintain a close involvement in the project.
 - (4) The Contractor is reminded, however, that design acceptance must be documented in formal Contract correspondence.

l). Changes to Approved Designs

- i). If the Contractor wishes to propose a deviation from a previously approved design, a request for change shall be submitted to Amtrak for review and acceptance prior to introducing any change to the accepted configuration.

- (1) The Request for Change shall be made per the requirements of the General Provisions and shall include revised drawings and data substantiating the suitability of the design.
- ii). Any component changes to form, fit, or function subsequent to design reviews shall be updated in the documentation and resubmitted to Amtrak.
 - (1) The implementation of any change which deviates from the design, arrangement and/or configuration previously approved by Amtrak without prior submission and approval by Amtrak may require rework or replacement back to the approved design.
 - (2) The determination of the necessity for rework shall be solely at the discretion of Amtrak.

3.14 Amtrak Involvement

- a). Amtrak shall be an integral part of all aspects of the design, inspection, testing and approval program for the cars.
- b). Amtrak shall designate staff or representatives to participate in the design review and inspection process on behalf of Amtrak.
- c). Amtrak shall have the right to invite or permit to participate in any design review, audit or test anyone Amtrak deems appropriate.
- d). Individuals or entities designated by Amtrak including, but not limited to the Federal Railroad Administration (FRA), shall be afforded all desired access to the project, including design reviews, witnessing of tests and audits.
- e). Only those individuals, designated in writing by the Contracting Officer's Technical Representative (COTR), shall have the authority to take actions on behalf of Amtrak that relate to the DRP, including, but not limited to, approvals, acceptances and providing design review comments.
- f). The Contractor shall not recognize the actions of those individuals not so designated in writing.
- g). Amtrak will give Contractor reasonable notice of stakeholder participation but reserves the right to include participants without notice.
- h). Amtrak's participation, review and acceptance shall be necessary for:
 - i). Design review and evaluation
 - ii). Supplier selection
 - iii). QA program review and approval
 - iv). Supplier Quality Audits
 - v). First article inspection and acceptance

- vi). Inspection of all phases of car production
- vii). Testing
- viii). Car acceptance
- ix). Sample selection
- x). Post-delivery training
- xi). Warranty administration.

3.15 Design Review Stages

a). General

- i). The requirements for the three Design Review phases are summarized in Sections:
 - (1) 3.15c). Preliminary Design Review (PDR)
 - (2) 3.15d). Intermediate Design Review (IDR)
 - (3) 3.15e). Final Design Review (FDR)
- ii). Progression from PDR to IDR and IDR to FDR, may be done on a system-by-system basis, with the approval of Amtrak, otherwise the progression shall follow the requirements of Sections 3.15c), 3.15d), and 3.15e).
- iii). Mockups, Virtual Reality, product accommodations and CMF reviews shall be incorporated into the three design reviews.

b). Compliance Matrix **[CDRL 3-08]**

- i). Beginning with PDR, the Contractor shall develop and maintain a matrix showing all technical requirements of the contract and the Contractor's proposed design and/or component to meet each requirement.
- ii). The compliance matrix shall be maintained throughout the three Design Review stages.
- iii). Contractor will report the progress against the compliance matrix as one of the first steps of each design review meeting.
- iv). The compliance matrix portion of the design review for each Sub-system/design area will cover regulatory compliance, compliance with industry standards and compliance with the technical requirements of the contract.
- v). The matrix shall include the detail of where in the design review documentation each compliance is validated.

- vi). The compliance matrix shall outline all non-compliances with the technical specification at the time of Contract Award. Any non-compliance identified after Contract Award shall be handled via the Change Review Process.
 - vii). Non-compliances identified after Contract Award may not be accepted by Amtrak.
 - viii). Post-Contract Award non-compliances that are accepted by Amtrak and result in a savings to the Contractor shall be commercially credited to Amtrak.
- c). Preliminary Design Review (PDR)
- i). The PDR of a system design will be conducted to achieve an approved 30% completion of the system's design and will provide a comprehensive overview of its development. **[CDRL 3-09]**
 - ii). Review of the car concept in the PDR stage of the project will include as a minimum, presentation of layouts, car body structure, external livery, interior design proposals, brief technical description of features / Systems / Sub-systems, truck concept and materials (e.g. electric, pneumatic).
 - iii). The PDR presentations will include a review of the design concept, written descriptions of the functionality, schematics and/or block diagrams of the System wiring, arrangement drawings and technical specifications and drawings of each major System and component as applicable to this design phase and the deliverables listed in Section 3.13.
 - iv). The objective is to conduct an initial analysis of proposed design solutions based on parameters such as functionality, performance, maintainability, software logic, ease of cleaning, reliability, security, etc., so that potential changes are identified as early as possible.
 - v). Amtrak retains the right to redline, comment, and request changes to improve design and/or functionality.
 - vi). PDR submittals and activities shall comprise but are not limited to the following:
 - (1) Compliance Matrix **[CDRL 3-10]**
 - (2) Drawing Tree and Schedule **[CDRL 3-11]**
 - (a) A drawing schedule, based on the required Drawing Tree, for all distinct releases covering the design of all areas and subsystems of the cars in conformance with the Contractor's configuration management plan shall be prepared prior to the start of the PDR and submitted to Amtrak for approval.
 - (b) Each release shall be given a proper title for the top drawing and a drawing number.

- (c) Arrangement drawings to be developed during the PDR shall also appear on this schedule with a title and number.
 - (d) The drawing schedule shall be immediately updated to reflect any revisions.
 - (e) At a minimum, the Contractor shall provide the initial release drawings of the top 4 levels of the drawing tree for review during PDR.
- (3) System Functional Description **[CDRL 3-12]**
 - (a) A detailed system functional description including dimensions and layout drawings.
- (4) Arrangement Drawings and Related Documents **[CDRL 3-13]**
 - (a) During PDR arrangement drawings and related documents of the cars and all major subsystem hardware items as described above shall be submitted to Amtrak for review and approval. Drawings shall show at a minimum:
 - (i) Overall dimensions, orientation, center of gravity, weight, points of normal support, and method of support during mounting and removal.
 - (ii) Location of all doors, access panels and covers in relation to any enclosed equipment.
 - (iii) Required space for opening of all doors and access panels.
 - (iv) Location and space requirements for ventilation intake and exhaust openings and cable entrances.
 - (v) Location and space requirement for all major equipment.
 - (vi) Conceptual interior and exterior renderings, including CMF and product accommodation.
 - (vii) CMF Palette
- (5) Detailed Technical Specification **[CDRL 3-14]**
 - (a) No later than 30 days prior to the first PDR meeting, the Contractor shall submit detailed technical specifications for all major systems and components.
- (6) Review Program
 - (a) The Contractor shall submit to Amtrak an interim detailed technical specification **[CDRL 3-15]** covering the methods,

materials and arrangements proposed for construction of the pilot cars.

- (i) The document shall be similar in style and format to this Technical Specification, which shall take precedence in the event of any differences.
 - 1. If the pilot cars return to the Contractor's facility after testing for rebuilding and modifications to bring the cars up to the latest configuration, any equipment requiring renewal, such as brake components to reset the COTS date, must also be addressed. The Pilot car rebuild plan, and schedule shall be submitted to Amtrak for approval)
 - (ii) An appendix shall give a complete tabulation of all suppliers and the products each is supplying and shall also include an update to the pre-award Buy America submittal, indicating any revisions to the manufacturer of goods and country of origin. **[CDRL 3-16]**
- (b) After approval by Amtrak, it shall be updated by the Contractor every 30 days to continuously represent the current configuration of the details of the car, including all specification changes and addendums.
 - (c) A monthly revision sheet shall contain a complete listing of the original and revised text, and details of the approval given by Amtrak.
 - (d) During the design review process, Amtrak may request a 3D model of specific components such as a restroom module or a coach seat.
 - (i) 3D files shall be provided in a neutral file format such as STEP or IGES.
 - (ii) 3D files shall be provided within 10 days of request.
- (7) Weight Analysis **[CDRL 3-17]**
- (a) After receipt of the approved minutes of the first design review meeting the Contractor shall submit to Amtrak a report on the estimated car weight. The document shall then be revised and resubmitted to Amtrak at intervals agreed to with the car builder until the complete weighing of the pilot car.
 - (b) This shall include the most recent weights for the car body without trucks, each truck, and the complete car.

- (c) It shall also include a list of weights for every subsystem on the car, indicating its percentage of the total car weight, and if these subsystem weights are based on actual scale weights of complete equipment.
 - (d) The Contractor shall weigh all components as early as possible.
- d). Intermediate Design Review (IDR)
 - i). The IDR will be held when the design of the cars is approximately 60% complete. **[CDRL 3-18]**
 - ii). The IDR will represent an advancement of the design of the cars from the PDR to development of draft production drawings, arrangements, component and material specifications, and schematics for all Systems (Sub-systems and components) on each car type as applicable to this design phase and as agreed by the parties in the design review program.
 - iii). This information will be used by Amtrak to evaluate the proposed design of the cars to a level of detail sufficient that Contractor will be able to proceed with the development of the car design to the 90% draft final stage.
 - iv). The intent of the IDR is to present and provide all Sub-systems and their credentials, review of in-depth System and functional descriptions, review of main layouts (e.g. roof, under frame, body sides, traction System, software logic, auxiliaries, interiors etc.), calculations and simulations, consumptions and functionality (e.g. electrical diagrams).
 - v). IDR submittals and activities shall comprise but are not limited to the following:
 - (1) The continuation and updating of all activities specified as ongoing in the PDR, i.e., weights analysis, updated technical specifications, functional analysis, drawing schedule, arrangement drawings and supplier identification.
 - (2) Submission of all documentation identified for IDR on the Design Review Summary Matrix below.
 - (3) Detailed Drawings and Related Documents
 - (a) The Contractor shall submit as a minimum the following detailed drawings and related documents to Amtrak for review and approval:
 - (i) All drawings identified in the approved Drawing Tree, properly dimensioned, detailed, to scale and in accordance with the approved drawing schedule. **[CDRL 3-19]**
 - (ii) Provide all updated drawings that reflect changes from the PDR meetings as well as provide at least two additional

levels of the drawing tree for review and approval by Amtrak. **[CDRL 3-20]**

- (iii) During IDR, it is expected that drawings shall present manufacturer and model information for all material called out on the BOM of each drawing. Identification of a generic or unspecified component will not be acceptable.
- (iv) Draft single line control schematic **[CDRL 3-21]** and functional block diagrams for each subsystem **[CDRL 3-22]**, and electrical wiring diagrams and schematics **[CDRL 3-23]** for all electrical circuits.
- (v) A complete set of draft drawings related to clearance. **[CDRL 3-24]**
 - 1. These shall include static and dynamic envelopes relative to the wayside allowances, including clearances for all parts of the truck, and general arrangement drawings with all static dimensions including camber, low level platforms, high level platforms, curves, etc.
- (vi) Single line piping and flow diagrams for all pneumatic circuits, displaying all valves and control components. **[CDRL 3-25]**
- (vii) Manufacturer's data and specification sheets on all control items. **[CDRL 3-26]**
- (viii) Updated Compliance Matrix **[CDRL 3-27]**
- (ix) Update interior and exterior renderings **[CDRL 3-28]**
[CDRL 3-29]
- (x) CMF Palette **[CDRL 3-30]**
- (xi) Interior Material Samples **[CDRL 3-31]**
- (xii) Layout of Product Accommodations **[CDRL 3-32]**
- (xiii) Draft maintenance requirements and necessary procedures for all equipment in each subsystem. **[CDRL 3-33]**
 - 1. These shall be listed from daily inspection and periodic inspection to complete overhaul, with frequency and time needed to service being tabulated, and shall highlight all FRA-required inspections.

- vi). Amtrak comments from the PDR stage shall be reviewed, and the Contractor shall provide documentation that Amtrak's comments were incorporated into the car design.
 - (1) All drawings, specifications, schematics, and other project documentation shall be updated for the IDR.
 - (2) Once reviewed, the drawings and designs shall be updated to incorporate Amtrak comments.
- e). Final Design Review (FDR)
 - i). The Final Design Review (FDR) of the system components shall be held at the 95% or greater percent level of design and IDR has been closed out.
[CDRL 3-34]
 - ii). FDR in summary will provide for an in-depth review of System and function descriptions, schematics of the system wiring, drawings of each assembly, sub-assembly, component, and sub-component showing dimensions and structural elements, calculations and simulations, weight estimates, consumptions, full functionality, final layouts, specifications, drawings, diagrams, test procedures and software functionality details.
 - iii). FDR submittals and activities will represent a continuation and updating of all activities specified as ongoing in the PDR, IDR and mock-up review as applicable to this design review stage.
 - iv). Redlines and comments from the IDR and mockup review shall be reviewed.
 - v). Amtrak retains the right to provide additional comments during this process as production progresses and concerns are brought to Amtrak's attention.
 - vi). FDR submittals and activities shall comprise but are not limited to the following:
 - (1) The continuation and updating of all activities specified as ongoing in the PDR, IDR, and mockup review, i.e.:
 - (a) Critical Path Method
 - (b) weights analysis **[CDRL 3-35]**
 - (c) detailed technical specification **[CDRL 3-36]**
 - (d) functional analysis **[CDRL 3-37]**
 - (e) drawing schedule **[CDRL 3-38]**
 - (f) arrangement drawings **[CDRL 3-39]**
 - (g) supplier identification **[CDRL 3-40]**

- (2) Detailed Drawings and Related Documents — The Contractor shall submit as a minimum the following detailed drawings and related documents to Amtrak for review and approval:
- (a) All drawings identified in the approved Drawing Tree, properly dimensioned, detailed, to scale and in accordance with the approved drawing schedule. **[CDRL 3-41]**
 - (b) Single line control schematic **[CDRL 3-42]** and functional block diagrams **[CDRL 3-43]** for each subsystem, and electrical wiring diagrams and schematics for all electrical circuits. **[CDRL 3-44]**
 - (i) All test points shall be displayed.
 - (ii) The functional block diagrams shall identify the "normal" functional paths as well as the functional paths made available through cutouts, bypasses, and redundant circuits.
 - (iii) The diagrams shall identify, as a minimum, the critical hardware that permits safe movement of the car, safe ingress/egress of passengers, and essential environmental needs of the passengers and Operator.
 - (iv) The functional block diagrams shall display the levels of hardware (as defined in Military Specification MIL-HDBK-505) that identify the Lowest Level Replacement Unit (LLRU).
 - (c) A complete set of drawings related to clearance **[CDRL 3-45]**. These shall include static and dynamic envelopes relative to the wayside allowances, including clearances for all parts of the truck, and general arrangement drawings with all static dimensions including camber, low level platforms, high level platforms, curves, etc.
 - (d) Single line piping and flow diagrams for all pneumatic circuits, displaying all valves and control components. **[CDRL 3-46]** All test points shall be displayed.
 - (e) Graphs and curves giving response and functional characteristics of the cars, subsystems, and major items. **[CDRL 3-47]**
 - (f) Manufacturer's data and specification sheets on all control items. **[CDRL 3-48]**
 - (g) Maintenance requirements and necessary procedures for all equipment in each subsystem. **[CDRL 3-49]**
 - (i) These shall be listed from daily inspection and periodic inspection to complete overhaul, with frequency and time

needed to service being tabulated, and shall highlight all FRA-required inspections.

- (3) Stress Analysis — A Finite Element stress analysis (FEA) of the car body shall be submitted to Amtrak for approval, see Chapter 6 for more detail. **[CDRL 3-50]**
 - (4) Final Interior and Exterior Renderings **[CDRL 3-51] [CDRL 3-52]**
 - (5) CMF Boards and Samples **[CDRL 3-53]**
- f). Design Review Summary Matrix
- i). The Contractor shall be required to submit all documentation required by the requirements of 49 CFR 238.110 as listed in the Notice of Proposed Rule Modification for submittal to the FRA as required. **[CDRL 3-54]**

Element	Sub-Element	PDR	IDR	FDR
System Design	Functional Description	X	X	X
	Supporting Calculations & Analyses		X	X
	Contractor Specification	X	X	X
	Car body FEA Analysis		X	X
	Outline Drawings	X	X	X
	Exploded Isometric Drawings		X	X
	Interior Layout and Product Design	X	X	X
	Exterior Design and Livery	X	X	X
	Detailed Drawings	X	X	X
	Control schematic & functional block diagrams		X	X
	Clearance Drawings	X	X	X
	Piping and flow diagrams		X	X
	Component Details		X	X
	Technical Specification Data Sheets	X	X	X
	Installation Drawings		X	X
	Maintenance Clearance Drawings		X	X
	Bill Of Materials		X	X
	Complete list of LRUs		X	X
	Interface Analysis	X	X	X
	Interface Drawings		X	X
	Subcomponent & Supplier Information	X	X	X
	Subcomponent Drawings	X	X	X
	Fire Safety & Toxicity Analysis		X	X
	Weight Report	X	X	X
	EMI Susceptibility		X	X
	EMI Mitigation Plan	X	X	X
	Signage and Decal Plan		X	X
	Renderings	X	X	X
	Virtual Mock-Ups	X	X	X
	Soft Mock-Ups	X	X	
	Hard Mock-Ups		X	X
	Virtual Mock-Ups	X	X	X
Support	Training Requirements	X	X	X
	Training Plan and Syllabus		X	X
	Maintainability Report	X	X	X
	Maintenance Requirements	X	X	X
	Maintenance Documentation Plan	X	X	X
	Maintenance Documentation Drafts		X	X
	Spare Parts Requirements		X	X
CDRL	All	X	X	X
Testing	Test Plan	X	X	X
	Test Procedures		X	X

3.16 Mockup Development and Review

a). Mockup and Rendering Review Plan

CONFIDENTIAL — DO NOT DISTRIBUTE

- i). The Contractor shall develop and submit a Mockup and Rendering Review Plan no later than thirty (30) days after NTP. **[CDRL 3-55]**
 - ii). The Plan shall describe all mockups and renderings to be developed by the Contractor, the locations where the mockups will be built and reviewed, and the schedule for completion and review of the mockups and renderings.
 - iii). Contractor may propose as an option to provide full-scale completed cars to satisfy the mockup requirements, subject to review and approval. For more mockup and rendering requirements see Sections 3.13 and 3.14.
- b). Mockups Overview
- i). Purpose
 - (1) The Contractor shall produce full-scale mock-ups for the purpose of presenting the design concepts for the exterior and interior of the car types.
 - (2) The mock-ups shall be used to demonstrate compliance with the specification requirements for passenger amenities and arrangements, passenger and crew ergonomics, access to equipment and controls, verification of lines of sight, accessibility of equipment for maintenance and passenger accessibility in compliance with ADA, Accessibility Specification for Transportation Vehicle, and 2010 (or newer) ADAAG Standard, and specification requirements.
 - (3) The mock-ups shall also be used to help Amtrak finalize the Contractor's implementation of Amtrak's design vision and CMF as shown in Exhibit F.
 - (4) The mock-ups shall be used to identify potential problem areas and facilitate the development of alternative solutions.
 - ii). General
 - (1) The Contractor shall provide full-scale mock-ups of each of the different car types included in the procurement.
 - (2) There shall be two types of each mock-up:
 - (a) Soft mock-ups shall be refined throughout PDR and IDR.
 - (b) The hard mock-up shall be refined throughout IDR and FDR.
 - (3) Each car class/variant shall be represented by its own stand-alone mock-up rather than conflating elements from several car variants into one "mixed" mock-up.
 - (4) The mock-ups shall be of sufficient size to include all requirements included in this chapter, including, but not limited to those in Section 3.16e).

- (a) Soft Mock-ups must also meet the requirements of Section 3.16c).
 - (b) Hard Mock-ups must also meet the requirements of Section 3.16d).
 - (5) Each mock-up interior shall be complete and fully operational with respect to details and shall show the location and arrangement of all components, devices and amenities including all lighting and PIDS.
 - (6) The Contractor may build additional mockups for Amtrak review at different points in the design review process, to assist in the development and finalization of the design.
- iii). Location
- (1) The Contractor is responsible for supplying the facility for the mockups for the duration of the mock-up period.
 - (2) The mock-ups will be required to be built and presented within the Washington DC Metro Area, or at a location approved by Amtrak.
 - (3) The mock-ups must be presented in a space that is accessible and has accessible facilities.
 - (4) The location proposed for the mock-ups shall be attainable by public transportation.
 - (5) The location selected for the mock-ups shall be submitted to Amtrak for review and approval.
 - (6) Amtrak shall visit the proposed mock-up site prior to its acceptance of the proposed location.
- iv). Materials and Finishes
- (1) The initial presentation of the mock-ups may use materials that provide an indication of the equipment and component layout.
 - (2) As the design progresses, the materials and equipment shall be replaced with the final design components, except as specifically allowed by Amtrak.
 - (3) Equipment, controls and indicators may be represented by placeholders sized, shaped and colored as they would be on actual consoles.
 - (4) Except as otherwise indicated, all equipment shall be functional; but not required to meet the performance requirements.
 - (a) When powered, all indicators, lights, doors, fans etc., shall operate.

- (5) Electronic equipment shall be wired to permit function (e.g., indicators illuminating or fans running) when powered by an external power supply.

v). Electrical Power

- (1) The mock-up shall be provided with power supplies for the conditioning and conversion of power.
- (2) Only 120 or 240 Vac power shall be necessary to be supplied to the mock-up.
- (3) The Contractor shall specify the required amperage and install circuit protection for the incoming power.

vi). Accessibility

- (1) The mock-ups themselves should be fully accessible and provide safe access for people with disabilities including those who use wheeled mobility devices, as well as deaf, hearing impaired, blind and low vision.
- (2) Mock-ups should be built with any necessary ramps to access points.
- (3) Mock-ups should include the ability to test accessibility with user groups of people who use mobility devices.
 - (a) They shall provide an accurate representation of accessible space, including the features required in this area like table, reading light, seat reservation display and any PIDS.
 - (b) A seat should be available to safely test a transfer maneuver.
 - (c) If the option for the on-board mobility lift is exercised it will be installed as part of the mock-ups.
- (4) Soft mock-ups for accessible restrooms should be built in such a way to test and validate various handhold locations and sizes, as well as all interaction points like switches and buttons.
 - (a) These features should be easily swappable and moveable in a single focus group setting.
- (5) Accessible restrooms should be in a suitable condition for testing by people who use wheeled mobility devices who will need to test transferring to toilets.
- (6) Accessible turning circles will have all functional devices and apparatuses in place along the circumference of the turning circle. This will allow “real-world” test will all potential barriers in place. Accessible pathways, turning circles and accessible space requirements should

be represented and marked on the floors of the mock-ups, including, but not limited to:

- (a) Any access from platform to an accessible space.
- (b) Routes from accessible spaces to accessible restrooms.
- (c) Access between coach car and Café/Lounge car.
- (d) Accessible aisle through Café/Lounge.

vii). Review Process

- (1) Mockups shall be complete a minimum of 15 days prior to the first stakeholder review at each applicable design review stage.
 - (a) There shall be at least 2 rounds of soft mockup reviews.
 - (b) There shall be at least 2 rounds of hard mockup reviews.
- (2) Each mockup review phase will span several weeks with up to 300+ external stakeholders reviewing and providing feedback to the current state of the designs.
- (3) Amtrak expects to make various visits to view the mock-ups throughout the design review process.
 - (a) Visits are expected to include stakeholders from both inside and outside the Amtrak organization.

viii). Approval

- (1) Approval of the mock-ups shall occur when the design elements demonstrated in the mock-ups have been frozen.
- (2) Amtrak will continue to visit and reference the mock-ups until the FAI of the first car or the FAI of each different car type is completed, whichever is later.

ix). Disposal of Completed Mock-ups

- (1) The Contractor is responsible for disposing of the mockups when the mockup deliverable is approved and closed by Amtrak.
- (2) Contractor must request and receive permission from Amtrak prior to disposing of completed Mock-ups, as Amtrak retains the right to keep portions of, or the whole mockups as they see fit.

c). Soft Mock-Ups **[CDRL 3-56] [CDRL 3-57]**

i). Purpose

- (1) The purpose of the soft mock-ups is to evaluate special layouts and designs, and to identify potential problem areas and facilitate the development of alternative solutions.
- ii). Materials and Finishes
 - (1) Soft mock-ups are not expected to be manufactured using final proposed materials.
 - (2) Soft Mock-ups can be built from MDF/Plywood, foam core, machined foam board, comfort foam.
 - (3) Seat surfaces should have a covering of soft foam.
 - (4) Interior elements should be painted white and grey
 - (5) Power ports, light switches, and all other user interfaces can be represented as labels but should be accurately placed for review by Amtrak.
- iii). Seating Areas
 - (1) Soft mock-ups of seating areas shall include accurate representations of seats in both reclined and upright positions, tables, cup holders and seat trays to assess spacing and relative positions.
 - (2) Representation of typical coach and premium coach sections should be shown – with representation of, side wall, ceiling, luggage rack, window sizes and window mask treatments and seat reservation display. This should be at least 1 window module in length.
 - (3) Accurate aisle width should be represented with seating installed or configured so this can be tested.
- iv). Storage Areas and Components
 - (1) A preliminary functional example of an overhead luggage rack shall be provided mounted at the design height and including the adjacent ceiling panel, built so that the loading and removal of baggage may be performed.
 - (2) A mock-up of the luggage tower should be shown in respect of its condition against a sidewall, bulkhead and aisle built so that the loading and removal of baggage may be performed.
 - (3) Stowage pockets, luggage shelves and luggage area should be dimensionally accurate and suitable construction to test storage of luggage, bottles etc.
- v). Lighting

- (1) Lighting should be represented in the correct positions and controlled by the grouping as specified in the technical specification.
 - vi). Food Service
 - (1) All food service soft mockups (Café) should be designed in modular format with key equipment as separate representative blocks.
 - (2) The equipment positions will need evaluation and will be subject to user testing.
 - vii). Vestibule
 - (1) The vestibule Soft Mockup shall show the general arrangement of the entrance area for a car.
 - viii). Restrooms
 - (1) Standard restrooms and accessible restrooms can be supplied as isolated mockups; however, they must provide an accurate representation of interior volumes, handholds, and suitable strength to test toilet seats etc.
- d). Hard-Mockups **[CDRL 3-58] [CDRL 3-59]**
 - i). Purpose
 - (1) Hard mock-ups shall be used to help Amtrak finalize material, color and finish.
 - (2) Comments from the mockup reviews shall be incorporated into the design and presented to Amtrak for review and acceptance.
 - ii). Materials and Finishes
 - (1) Hard mock-ups should be finished with final materials and finishes where possible.
 - (a) Some materials can be represented with indicative materials and finishes with the approval of Amtrak.
 - (2) The hard mock-ups shall include all finishes, colors, patterns, textures, fasteners and hardware represented in the Contractor's proposal design.
 - (a) All materials utilized should be the final material choice unless otherwise approved by Amtrak.
 - (3) All mockups shall be constructed of materials with sufficient strength so that they can be evaluated safely and thoroughly by Amtrak.

- (a) This includes the ability to sit on seats, lean on countertops, open and close doors, simulate operation of controls, appliances and equipment; and view the mockup from a variety of angles.
 - (4) The final mock-ups shall include all finishes, colors, patterns, textures, fasteners and hardware represented in the Contractor's proposal design.
 - (5) All materials utilized should be the final material choice unless otherwise approved by Amtrak.
 - (6) Approved decals and signage must be included.
 - (7) Except as otherwise indicated, all equipment shall be functional; but not required to meet the performance requirements.
 - (a) When powered, all indicators, lights, doors, fans etc., shall operate.
 - (b) Electronic equipment shall be wired to permit function (e.g., indicators illuminating or fans running) when powered by an external power supply.
 - (c) Passenger Displays shall be functional.
 - (d) Lighting shall be identical to what is installed in each car type.
- iii). Food service areas shall include all equipment and countertops.
- iv). Equipment, electrical lockers and equipment lockers
 - (1) All on-board and undercar lockers shall be mocked up with all switches, breakers, relay panels, access panels, doors, controls, indicators and components simulated to evaluate access, visibility, maintainability and removal.
 - (2) All equipment shall be accurately represented to allow for the evaluation of maintainability.
- e). Required Elements of Mockup Deliverables
 - i). Each mock-up shall include, at a minimum, the following elements as applicable for the respective car type:
 - (1) At least four rows of seats
 - (2) Workstation table between the facing seats
 - (3) Cafe Tables and seats
 - (4) Accessible Toilet Room

- (a) A fully equipped Accessible Toilet Room (ATR) shall be included for the purpose of evaluating and confirming that the design arrangement of the ATR meets all ADA/ADAAG requirements for layout, circulation and access to controls and appliances.
- (5) Overhead luggage racks, including reading lights
 - (a) A fully functional example of an overhead luggage rack shall be provided mounted at the design height and including the adjacent ceiling panel, built so that the loading and removal of baggage may be performed.
- (6) Wall panels, window, window mask and shades
- (7) Partitions and windscreens (if applicable)
- (8) Convenience outlets with USB ports
- (9) Heater grilles and diffusers
- (10) Working passenger side doors
- (11) End door, Diaphragms/Gangways and Car-to-Car Connection
 - (a) The end door and car-to-car connection shall be complete, operable, accurate in all mechanical details, and representative of all the actual components between two of the mock-ups.
- (12) All Corridors, end doors, and partition doors
- (13) Handrails (where applicable)
- (14) Bike Rack/Luggage Shelf Area
- (15) Interior doors
- (16) Ceiling panels
- (17) Floor panels
- (18) All lighting
 - (a) Lighting shall be identical to what is installed in each car type.
- (19) Approved decals, placards and signage
- (20) Crew arrangements
- (21) Working passenger displays
- (22) Equipment, electrical and equipment lockers:

- (a) All on-board lockers shall be mocked up with all switches, breakers, relay panels, access panels, doors, controls, indicators and components simulated to evaluate access, visibility, maintainability and removal.
 - (b) All equipment shall be installed to all for the evaluation of maintainability.
- (23) Vestibule, side doors, trap door, folding steps, wall, and ceiling panel area for access to door equipment:
 - (a) Vestibule with working passenger side doors, trap door, folding steps, wall, and ceiling panel area for access to door equipment.
 - (b) The vestibule side doors, trap door, folding steps, ceiling, and wall area shall be included to simulate access to all side door equipment that requires inspection, adjustment or maintenance.
 - (c) All wall and ceiling panels shall correctly simulate the means of attachment, removal and operation, to ensure that the ceiling panels are safe and easy to use by maintenance personnel.
 - (d) High level and low-level station platform boarding areas shall be included.
- (24) All safety and emergency equipment.
- (25) Exterior
 - (a) The mock-up exterior shall be complete with respect to details and shall show the location and arrangement of all devices including, but not limited to, car ends, decals, paint finish, lights, indicators, crew steps, and handles.
 - (b) Exterior Livery should be applied to the exterior of the car.
- ii). The Cafe/Lounge Car shall also include, at a minimum:
 - (1) All food service equipment
 - (2) Café area
 - (3) At least two (2) modules of café/lounge seating
 - (4) Accessible café/lounge table area

3.17 Virtual Mock-Up

- a). The Contractor shall utilize an electronic virtual mockup from the conceptual stages of the project through FDR.
- b). The virtual mock-ups shall be delivered as fully 3 dimensional virtual environments

running in real-time on stand-alone 6DOF (6 Degree of Freedom) headsets.

- i). The headsets will fully track head movements allowing the user to explore the environments fully and naturally.
- ii). The virtual mock-up platform should be designed to be collaborative, supporting up to the simultaneous participation of up to ten (10) users.
- iii). The design data shall be optimized to run on the proposed platform.
- c). 3D modeling and VR shall be used to expedite the presentation and acceptance of concepts.
- d). The virtual mock-up shall be a real time tool to evaluate design decision and alternatives analysis through the design review process and shall be presented prior to and in parallel with the required physical mockups.
- e). Virtual mock-ups shall also be used to evaluate equipment placement and potential maintainability issues not specifically associated with the Industrial Product Design.
- f). The virtual mock-ups shall clearly and accurately show the car arrangement of each different car type including seating conditions (reclined and upright), doors, sidewalls, ceilings, lighting, partitions, accommodations, branding, equipment,
- g). Color, finish and signage shall be accurately represented to the greatest extent possible.
- h). The virtual mockup shall also provide a means for evaluating maintainability as the car design progresses.
- i). The virtual mockup shall be presented during IDR and FDR for all systems to ensure no interferences are present.
- j). The virtual mockups shall be an integral element of each design review phase.
- k). Acceptance of the virtual mockups shall be required as part of the completion of each design review phase prior to progressing to the next design phase:
 - i). PDR [CDRL 3-60]
 - ii). IDR [CDRL 3-61]
 - iii). FDR [CDRL 3-62]
- l). The virtual mockups shall present the industrial product design and shall include the up-to-date CMF application and the representation of accurate lighting.

3.18 Renderings

- a). General

- i). The Contractor shall submit renderings and associated 3D data to facilitate the interior and exterior design efforts at each stage of the design process.
 - ii). The renderings should be delivered to a high production value and present the design to a photorealistic level, including accurate representation of color, materials, textures, and finishes, lighting and reflections.
 - iii). The renderings shall convey the design, appearance and functional intent of the proposed product.
 - iv). The renderings shall show the proposed position, size and appearance of equipment, components, furniture, and appliances in each space.
 - v). The first set of renderings shall be submitted 30 calendar days prior to the first Interior PDR. **[CDRL 3-63]**
 - vi). Revised renderings shall be revised and submitted as the design changes through IDR **[CDRL 3-64]** and FDR **[CDRL 3-65]** until the interior and exterior design is frozen.
 - vii). Renderings shall be provided electronically in both TIFF and JPEG formats with a minimum of 1920 x 1080 resolution.
 - viii). Format
 - (1) Renderings shall be provided electronically in both TIFF and JPEG formats with a minimum of 1920 x 1080 resolution.
 - (2) Additionally, each submittal package of renderings shall include full color print versions at a minimum of 11' x 17', printed on glossy paper.
 - (3) Amtrak accepted final renderings shall be provided in high resolution electronic format as well as 24 (twenty-four) sets of high-quality sets of high-quality D size (24 inches x 35 inches) poster board backed prints for display in public forums.
- b). Interior Renderings
- i). Interior renderings shall be provided to convey the options for interior layouts.
 - ii). Renderings shall be submitted for each product type, car class/variant.
 - iii). Renderings shall be fully detailed and shall present all amenities and features included on-board the cars.
 - iv). Renderings should accurately represent all the color materials and finishes.
 - (1) These should be supported by the Color Material and Finish (CMF) sample boards at each stage.

- v). Renderings should accurately show the lighting conditions as well as different lighting states (daytime mode and evening mode).
- vi). Renderings should depict the various configurations of equipment and accommodations, such as upright and reclined seating arrangements that cater to both seating and sleeping needs.
- vii). Renderings included in the PDR package shall include:
 - (1) Renderings of each proposed seating design concept.
 - (a) Renderings shall include front, back, side and three-quarter images.
 - (b) Renderings shall present the full feature set of each proposed concept, as well as the equipment in all seating conditions (reclined upright, table out etc.).
 - (c) Rendering shall include annotated break out of key features and shall identify key and critical dimensions.
 - (2) Interior renderings showing all accessible spaces in each car type.
 - (a) All accessible coach spaces
 - (b) Schematic 3D data and screen shots/renders showing all elements and break out of parts and annotated to break out of key features and identify key and critical dimensions.
 - (c) All vestibules and Pathways
 - (d) Café/Lounge and Coach
 - (e) All restrooms
- viii). Renderings included in the IDR package shall include:
 - (1) Revised full of renderings for all spaces presenting how the design is evolving and clearly identifying any changes or revisions since the PDR submittal.
 - (2) Renderings shall incorporate the application of the current Color Material and Finish as well as all states and lighting conditions.
- ix). Renderings included in the FDR package shall include:
 - (1) Final and full suite of all spaces as final renderings for sign off on design. Minimum of 6 renders of each space.
 - (2) Final full and comprehensive Schematic renders – showing all features sets and key dimensions

- (3) Creation of final design book combining renders, drawings, layouts and schedule of finish.

c). Exterior Renderings

- i). Throughout the Design Review process, the Contractor shall submit to Amtrak for review and approval exterior renderings of each car type and variant.
 - (1) Renderings shall show the complete cars, fully equipped and in a ready for service condition, including end masks, doors, windows, and all exterior features.
 - (2) The Renderings shall include proposed livery color scheme, finish and use of decals (reflective and non-reflective).
 - (3) To facilitate the review of reflective decals, the Renderings shall include night-time view of front, side and three quarter profile view.
- ii). A minimum, six (6) sets of renderings (each with all the necessary views) shall be submitted for Amtrak review and acceptance as the design evolves over the Design Review Process.
 - (1) Each successive set of renderings will show refined levels of detail and communicate how the contractor will deliver the exterior livery design ambitions set out by Amtrak design vision.
- iii). Livery design shall be supported by 2D elevation artworks for all car types – supplied as .PDF. **[CDRL 3-66]**
- iv). Final artworks should be supplied as color correct artworks with application guidelines. **[CDRL 3-67]**

3.19 Color Material and Finish (CMF)

- a). A robust process will need to be developed by the Contractor to deliver the design vision with a CMF scheme that represents its brand and unique Amtrak brand DNA. For further clarification of expectations, refer to Exhibit F.
- b). As part of the process, the Contractor shall provide:
 - i). Evolving sets of materials boards and samples are required at each stage of the design review process. **[CDRL 3-68] [CDRL 3-69] [CDRL 3-70]**
 - ii). Samples boards should be produced that include all interior materials and finishes for the Coach cars and Café/Lounge environments.
 - (1) Sample boards shall be delivered as a collection of all materials that represent all the materials in each area.
 - (2) Individual samples will not be reviewed or approved without the context of the other materials in the palette for that space.

- (3) Samples will not be approved without an accompanying 3D render of the space showing an accurate representation of the color, material, and finish.
- iii). Material suppliers and detailed material specifications and data sheets are required for review by Amtrak for each material. **[CDRL 3-71]**
- iv). Large samples for flooring and seating should be delivered to coincide with Soft-mock up review.
- v). Duplicate sample boards should be produced (3 sets per space).
- vi). The Contractor shall support up to three rounds of sampling as materials are color matched, or materials refined.
 - (1) Material supplier briefs must be submitted to Amtrak for review and approval to ensure that they meet Amtrak's needs and expectations.
 - (2) Specific refinement will be expected for seating and flooring with rounds of color matching by suppliers expected up to five rounds.
- vii). A Schedule of Finish documentation which shall identify the CMF for every part of the interior. **[CDRL 3-72]**

3.20 Requirements for Drawings, Documents and Data

- a). Individual drawings shall be prepared for each part incorporated, designed and/or manufactured by or for the Contractor for the construction of the cars.
- b). Any and all drawings, shop drawings, plans and specifications produced by the Contractor shall upon presentation to the Authority, become the property of Amtrak consistent with the General Provisions.
- c). Assembly, sub-assembly and arrangement drawings shall include a complete Bill of Materials on the field of the drawing or as a subsequent sheet.
 - i). The Bill of Materials shall describe all items, including the subcontractor's parts and all equipment and details which form part of the assembly.
- d). American Welding Society (AWS) standards, references and symbols shall be used at weldments in drawings.
- e). All the drawings supplied by the Contractor in accordance with this Specification shall be so delineated that the wiring, piping, or mechanical interference between components shall be readily and clearly identifiable.
- f). The Contractor's Safety Engineer shall review all design layouts, assembly, and subassembly drawings of safety related features prior to their submission to Amtrak and/or their release for production to ensure the safety of operations personnel, maintenance personnel and the riding public.
- g). Drawing Sizes and Requirements

- i). All drawings shall be prepared in American National Standards Institute (ANSI) standard sizes.
 - ii). All Contractor drawings shall utilize a standard title block in the lower right corner and application block in the upper-right hand corner
 - (1) The arrangement for the title block and the application block shall be agreed upon prior to the start of PDR.
 - iii). The Contractor shall be responsible for the conformity and standardization of all sub-suppliers drawings to be submitted to Amtrak.
- h). 3D CAD Data Requirements
 - i). Contractor shall provide 3D CAD data in the form of well-organized STEP files, with both assemblies and part-level geometry
 - ii). Files shall be version-controlled and date-stamped to allow for traceability and proper review.
 - iii). The data shall be reviewable in native 3D environments to support detailed evaluation and integration.
 - iv). Viewer-only platforms or proprietary viewer formats are prohibited.
- i). Bills of Material
 - i). All drawings shall include Bills of Material with a numbering system for easy identification on the drawing.
 - ii). Bills of Material shall indicate piece part and assembly weights.
 - iii). Bills of Material shall include US equivalent units.
 - iv). Bills of Material shall be carried on the drawings, or on attached sheets of the same size.
 - v). Bills of Material descriptions shall positively identify the materials used.
 - vi). For items on the Bills of Material referring to common manufactured materials, the description shall contain the manufacturer name, and manufacturer's part numbers for the material.
 - vii). The Bill of Material shall have a separate column for future insertion of Amtrak's part numbers.
- j). Dimensions
 - i). All dimensions shall be shown in both imperial and metric units.
 - (1) Metric dimensions, enclosed in parentheses, shall follow imperial dimensions.

- ii). Imperial units shall be shown consistently on all drawings as follows:
 - (1) Inches and fractions, or inches and decimals throughout.
 - (2) One inch mark (") shall be shown to the right of each dimension.
 - (3) Decimals shall be shown with maximum of three significant figures to the right of the decimal point as required.
- iii). Dimensions up to and including 72" shall be shown in inches.
- iv). Dimensions above 72" shall be shown in feet and inches.
- k). Metric units shall be shown consistently on all drawings as follows:
 - i). Metric units shall be shown as millimeters and decimals.
 - ii). Millimeter units shall be accompanied by one blank space and the letters "mm" to the right of the figures.
 - iii). Dimensions smaller than one meter shall be shown in millimeters.
 - iv). Dimensions one meter and larger shall be shown in meters and decimal meters (1.000 m)
 - v). Decimal units shall be shown with as many significant figures to the right of the decimal point as required.
- l). Stationing
 - i). Numerical station dimensions and lines shall be used on all assembly drawings, and as frequently as possible on detail drawings and views, to locate the individual items in the overall car configuration. All assembly and sub-assembly drawings shall contain station information to accurately locate the item on the car.
 - ii). Stations shall be shown in three planes:
 - (1) Longitudinally, commencing with the pulling face of coupler (P.F.C.) at the front end of the car.
 - (2) Transversely, commencing with the longitudinal centerline of the car and increasing left and right.
 - (3) Vertically, commencing with the tops of the running rails.
 - (4) Station figures shall be enclosed in circles.
 - (5) Transverse dimensions shall have the letters "L" or "R" shown below the figures, to indicate "left" and "right".

- (6) Vertical dimensions shall have the letters "ATOR" (above top of rail) shown below the figures.
- m). Numbering
 - i). The Contractor shall confer with Amtrak to develop a numbering system compatible with both the Contractor and Amtrak's standard numbering systems.
 - ii). All revisions of drawings shall be identified with an alphabetic suffix.
- n). Integrated Schematics Package
 - i). General
 - (1) The Integrated Schematic Package shall be submitted as a component of the Running Maintenance Manuals.
 - (2) The Integrated Schematic Package shall be comprised of two parts:
 - (a) Integrated Schematics
 - (b) Integrated Wiring Diagrams
 - (3) The Integrated Schematics shall include all electronic and electrical components on the car.
 - (a) All minor subsystem components housed in "black boxes" shall also be included in the Record Drawings Schematic Package.
 - (b) The Integrated Schematic shall provide the physical location of all electrical system components.
 - ii). Electrical Schematics
 - (1) The Contractor shall prepare and submit, for acceptance by the Authority, an integrated schematic diagram package relating all electrical systems and including all components and all wiring on the cars.
 - (2) The schematic diagram shall be one which can be readily followed by technicians with basic electrical knowledge.
 - (3) Both an alphabetic tabulation and pictorial locator of all electrical components and devices and the physical location of these components shall be included with the integrated schematics.
 - (a) This tabulation should also identify the circuits where components are used, and the location of each circuit in the schematic package.

- (b) Each drawing within the schematics shall include a grid locating system which shall be referenced for continuation to other drawings.
- (c) Wire List
 - (i) The schematics shall be accompanied by a complete Wire List. The list shall include for each wire, as a minimum:
 - 1. Originating equipment
 - 2. Destination equipment
 - 3. Wire size and type
 - 4. Conduits and Raceways through which the wire runs
 - 5. Wire number
 - (ii) This Wire List shall be provided in an electronic database format (with database software and license provided).
 - 1. The database shall be arranged in logical fields that will allow various sorts of the information (such as by equipment, wire number, conduit, etc.).
 - 2. Both hardcopy and electronic media file shall be provided.
- iii). Pneumatic Schematics
 - (1) In addition to electrical schematics, the integrated schematic package shall contain pneumatic schematics including, at a minimum:
 - (a) Compressed Air System
 - (b) Brake System
 - (c) Secondary Suspension
 - (d) Any other pneumatic components or systems.
- iv). Wiring Diagrams
 - (1) Complete wiring diagrams shall also be provided for all car wiring.
 - (2) These diagrams shall be arranged logically and all text shall be clearly legible.
 - (3) Wiring Diagrams shall:
 - (a) Identify all conduits and raceways in which wires are run

- (b) Identify all wires in each conduit/raceway
 - (c) Clearly denote all connections at terminal blocks and connectors.
- (4) A separate drawing noting the physical locations of all terminal boards and junction boxes shall be provided as part of the wiring diagram package
- v). Format
 - (1) Sample formats for the following shall be submitted to Amtrak for review and approval before submittal as a component of the maintenance manuals:
 - (a) Electrical Schematics **[CDRL 3-73]**
 - (b) Pneumatic Schematics **[CDRL 3-74]**
 - (c) Electrical Component/Device Table **[CDRL 3-75]**
 - (d) Wiring Diagram **[CDRL 3-76]**
 - (e) Wire Run List **[CDRL 3-77]**
 - (2) The schematics shall be provided in B size, 11 inch by 17 inch packages.
 - (3) All schematics shall be prepared so that all text and other items on the drawings are clearly legible on the 11 inch by 17 inch sheets.
- o). All other document control and formatting requirements shall be discussed and agreed upon within 30 days after the project kick-off meeting.

3.21 Rapid Prototype Cars

- a). In previous contracts, Amtrak has allowed Contractors to progress with the development of rapid prototype cars (RPC) in parallel with the Design Review process.
- b). The advantage of this process was to help prove out manufacturability issues, confirm system integration and conduct pre-qualification testing prior to the construction of the deliverable pilot cars.
- c). Should the Contractor desire to propose the incorporation of rapid prototype cars, it should develop and submit to Amtrak a proposal for review and acceptance detailing the following:
 - i). A detailed schedule showing the progression of the RPC in parallel with the Formal Design Review Process.
 - ii). Detail of the implementation of gateways in the Design Review Process which will limit and control the progression of the RPC process.

- iii). A discussion of how the RPC process will be used to support and optimize the Design Review Process.
- iv). Should the Contractor desire to utilize an RPC as a production car, a plan on how it would be remanufactured to comply with the following:
 - (1) Completion of all FMIs
 - (2) Replacement of any pre-FAI components with post FAI equipment
 - (3) Agreement with final design configuration
 - (4) All quality requirements of this specification, including formal re-inspection of the updated vehicle by Amtrak resident inspectors
 - (5) Final and complete vehicle testing
- d). The following shall be considered constraints for the development of a Rapid Prototype Car process:
 - i). Process shall not be started until after the carshell design and testing has been completed. The carshell shall be manufactured to the final configuration and using the production process.
 - ii). The RPCs shall not be considered the pilot cars and shall not be the first cars to be delivered to Amtrak.
 - iii). The incorporation of an RPC process shall not negatively impact the contractual schedule.
 - iv). The incorporation of an RPC process shall not result in an increased contract cost to Amtrak.
 - v). The incorporation of an RPC process shall not negatively impact the material supply for the pilot or production cars.
 - vi). The complete vehicle FAI shall not be performed on the RPCs.
- e). The decision to allow the incorporation of an RPC program shall be solely at Amtrak's discretion.

3.22 CDRLs

CDRL	Description	Due
CDRL 3-01	Project Management Plan (PMP)	NTP + 30 days
CDRL 3-02	System Integration Plan (SIP)	30 days prior to 1 st PDR meeting
CDRL 3-03	Interface Control Document (ICD)	30 days prior to 1 st PDR meeting
CDRL 3-04	Kickoff Meeting Presentation	At least 5 days before kickoff

CONFIDENTIAL — DO NOT DISTRIBUTE

		meeting and within 10 days of NTP
CDRL 3-05	Baseline Project Schedule (Baseline PS) and Narrative	NTP + 30 days
CDRL 3-06	Design Review Plan	NTP + 30 days
CDRL 3-07	Detailed Drawing Tree	30 days prior to 1 st PDR meeting
CDRL 3-08	Compliance Matrix	Contract Award and 30 days prior to each design review
CDRL 3-09	Preliminary Design Review (PDR)	90 days after Contract Award
CDRL 3-10	PDR – Compliance Matrix	30 days prior to 1 st PDR meeting
CDRL 3-11	PDR – Drawing Tree and Schedule	30 days prior to 1 st PDR meeting
CDRL 3-12	PDR – System Functional Description	30 days prior to 1 st PDR meeting
CDRL 3-13	PDR – Arrangement Drawings and Related Documents	30 days prior to 1 st PDR meeting
CDRL 3-14	PDR – Detailed Technical Specification	30 days prior to 1 st PDR meeting
CDRL 3-15	PDR – Detailed Technical Specification covering methods, materials and arrangements for pilot car construction.	30 days prior to 1 st PDR meeting
CDRL 3-16	PDR – Table of suppliers and products	30 days prior to 1 st PDR meeting
CDRL 3-17	PDR – Weight Analysis	30 days prior to 1 st PDR meeting
CDRL 3-18	Intermediate Design Review (IDR)	60 days after the closure of PDR
CDRL 3-19	IDR – All Drawings in the Drawing Tree	30 days prior to IDR meeting
CDRL 3-20	IDR – Drawing Tree: 2 Additional Levels	30 days prior to IDR meeting
CDRL 3-21	IDR – Draft Single Line Control Schematic	30 days prior to IDR meeting
CDRL 3-22	IDR – Functional Block Diagrams	30 days prior to IDR meeting
CDRL 3-23	IDR – Electrical Wiring Diagrams & Schematics	30 days prior to IDR meeting
CDRL 3-24	IDR – Clearance Drawings	30 days prior to IDR meeting

CDRL 3-25	IDR – Piping Diagrams	30 days prior to IDR meeting
CDRL 3-26	IDR – Manufacturer’s Data and Spec Sheets for all Control items	30 days prior to IDR meeting
CDRL 3-27	IDR – Updated Compliance Matrix	30 days prior to IDR meeting
CDRL 3-28	IDR – Updated Interior Renderings	30 days prior to IDR meeting
CDRL 3-29	IDR – Updated Exterior Renderings	30 days prior to IDR meeting
CDRL 3-30	IDR – CMF Palette	30 days prior to IDR meeting
CDRL 3-31	IDR – Interior Material Samples	30 days prior to IDR meeting
CDRL 3-32	IDR – Layout of Product Accommodations	30 days prior to IDR meeting
CDRL 3-33	IDR – Draft Maintenance Requirements and Procedures	30 days prior to IDR meeting
CDRL 3-34	Final Design Review (FDR)	90 days after the close of IDR
CDRL 3-35	FDR – Weight Analysis	30 days prior to FDR meeting
CDRL 3-36	FDR – Detailed Technical Specification	30 days prior to FDR meeting
CDRL 3-37	FDR – Functional Analysis	30 days prior to FDR meeting
CDRL 3-38	FDR – Drawing Schedule	30 days prior to FDR meeting
CDRL 3-39	FDR – Arrangement Drawings	30 days prior to FDR meeting
CDRL 3-40	FDR – Supplier Identification	30 days prior to FDR meeting
CDRL 3-41	FDR – All Drawings in the Drawing Tree	30 days prior to FDR meeting
CDRL 3-42	FDR – Single Line Control Schematic	30 days prior to FDR meeting
CDRL 3-43	FDR – Functional Block Diagrams	30 days prior to FDR meeting
CDRL 3-44	FDR – Electrical Wiring Diagrams & Schematics	30 days prior to FDR meeting
CDRL 3-45	FDR – Clearance Drawings	30 days prior to FDR meeting
CDRL 3-46	FDR – Piping Diagrams	30 days prior to FDR meeting

CDRL 3-47	FDR – Graphs and Curves of Response and Functional Characteristics	30 days prior to FDR meeting
CDRL 3-48	FDR – Manufacturer’s Data and Spec Sheets for all Control items	30 days prior to FDR meeting
CDRL 3-49	FDR – Maintenance Requirements and Procedures	30 days prior to FDR meeting
CDRL 3-50	FDR – Finite Element Stress Analysis	30 days prior to FDR meeting
CDRL 3-51	FDR – Final Interior Renderings	30 days prior to FDR meeting
CDRL 3-52	FDR – Final Exterior Renderings	30 days prior to FDR meeting
CDRL 3-53	FDR – CMF Boards & Samples	30 days prior to FDR meeting
CDRL 3-54	All documentation required by 49 CFR 238.110 as listed in the NPRM.	30 days prior to IDR
CDRL 3-55	Mockup and Rendering Review Plan	NTP + 30 days
CDRL 3-56	1 st Round of Soft Mockups	15 days prior to the first PDR stakeholder review
CDRL 3-57	Updated Soft Mock-ups	15 days prior to the first IDR stakeholder review
CDRL 3-58	1 st Round Hard Mock-Ups	15 days prior to the first IDR stakeholder review
CDRL 3-59	Updated Hard Mock-ups	15 days prior to the first FDR stakeholder review
CDRL 3-60	VR – PDR Submittal	30 days prior to PDR
CDRL 3-61	VR – IDR Submittal	30 days prior to IDR
CDRL 3-62	VR – FDR Submittal	30 days prior to FDR
CDRL 3-63	1 st Round Renderings	30 days prior to PDR
CDRL 3-64	Updated Renderings	30 days prior to IDR
CDRL 3-65	Renderings	30 days prior to FDR
CDRL 3-66	Livery Artworks	30 days prior to FDR
CDRL 3-67	All Approved Physical Material Samples	30 days prior to FDR

CONFIDENTIAL — DO NOT DISTRIBUTE

CDRL 3-68	Initial Color Material and Finish (CMF) Boards	30 days prior to PDR
CDRL 3-69	Sampling and Color Boards	30 days prior to IDR
CDRL 3-70	Color Material and Finish Boards	30 days prior to FDR
CDRL 3-71	Material Suppliers and detailed Material Specifications and Data Sheets	30 days prior to each Design Review
CDRL 3-72	Interior Schedule of Finish documentation	30 days prior to each Design Review
CDRL 3-73	Draft Formats – Electrical Schematics	30 days prior to IDR
CDRL 3-74	Draft Formats – Pneumatic Schematics	30 days prior to IDR
CDRL 3-75	Draft Formats – Electrical Component / Device Table	30 days prior to IDR
CDRL 3-76	Draft Formats – Wiring Diagram	30 days prior to IDR
CDRL 3-77	Draft Formats – Wire Run List	30 days prior to IDR

* End of Chapter 3 *

Amtrak Single Level Fleet Replacement Technical Specification

4. Reliability, Availability and Maintainability

Revision 0

Table of Contents

4.1	Reliability Overview	4-1
4.2	Reliability Program Plan.....	4-2
4.3	Reliability Requirements	4-3
4.4	Failure Review Board.....	4-5
4.5	Reliability Demonstration Testing.....	4-6
4.6	Maintainability	4-10
4.7	CDRL List.....	4-16

4.1 Reliability Overview

- a). This chapter defines the Reliability, Availability, and Maintainability (RAM) and Warranty requirements for the Amtrak Single Level Fleet Replacement program, including analysis and other submittal requirements.
 - i). The Contractor shall ensure that the level of reliability, availability, and maintainability provided by the cars supplied under this Contract meet or exceed the minimum requirements defined in this technical specification.
- b). The single level fleet will spend much of their operating life hundreds of miles away from the nearest repair point with no onboard mechanical personnel and few if any tools and where alternative transportation for passengers in the event of a mechanical failure will be limited and time consuming to obtain if available at all.
- c). Reliability and uptime of systems is of the utmost importance on these cars.
 - i). Designs must be robust, prioritizing reliability in all mechanical, electrical, and digital aspects.
 - ii). Where possible, system design should incorporate elements that will allow partial functionality when some components have failed, or lockouts to allow the car to continue to move safely until a repair point can be reached.
- d). The Contractor shall incorporate a Design for Reliability (DfR) philosophy throughout the design process.
 - i). DfR is a process that ensures a product, or system, performs a specified function within a given environment over its expected lifetime.
 - ii). DfR requires the integration of product design and process planning into a cohesive, interactive activity known as concurrent engineering.
 - iii). The Contractor shall discuss the implementation of DfR in its Reliability Program Plan.
 - iv). By employing DfR, Contractor shall consider reliability throughout the design process to minimize the types and impact of component failures, minimize single point failures, and identify and mitigate failures of critical components that affect system operation.
 - v). DfR would be expected to include:
 - (1) Utilize mature designs for systems and components.
 - (2) Select suppliers with effective parts controls programs.
 - (3) Minimize design complexity and dormant failure possibilities.
 - (4) Consider parts obsolescence in the design process.
 - (5) Ensure component duty cycles do not exceed limits.

- (6) Ensure heat sources are insulated from critical components.
- (7) Ensure components are isolated to minimize shock and vibration.
- (8) Use electro-magnetic interference (EMI) protection on all electronic equipment.
- (9) Use best reliability design practices.
- (10) Redundancy between components wherever practical.

4.2 Reliability Program Plan

- a). The Contractor shall develop and implement a Reliability Program Plan to ensure the vehicle, its systems, and its subsystems meet or exceed the reliability requirements specified in this Chapter.
- b). The Contractor shall be responsible for providing all measures required to meet the specified requirements, including design, manufacture, installation, retrofit of the entire fleet, and all changes.
- c). No later than 30 days after NTP, the Contractor shall submit a Reliability Program Plan **[CDRL 4-01]** prior to Preliminary Design Review (PDR) and it shall be updated throughout the design process.
- d). The Plan shall be submitted for Amtrak's review and approval.
- e). The Reliability Program Plan should discuss the following items:
 - i). Reliability program objectives and requirements.
 - ii). Reliability program schedule, including activities and delivery dates.
 - iii). Organization structure, including the name(s) and qualifications of the Reliability Engineer(s).
 - iv). Methodologies used for analyses to ensure Plan requirements are achieved, including criteria for Line Replaceable Unit (LRU) classification.
 - v). Process for identifying subcontractors based on history of reliability capabilities and controls for activities of subcontractors and equipment suppliers.
 - vi). Reliability allocations.
 - vii). Method for component qualification and parts selection.
 - viii). Reliability demonstration test plans, including pass-fail criteria.
 - ix). Failure Review Board (FRB).
 - x). Reliability database or process to control failure data for FRB.

- xi). Corrective action procedures, including procedure for failure analysis, root cause identification and verifying implementation of corrective actions. This should also address Fleet Defects.
- xii). Failure Reporting, Analysis and Corrective Action System (FRACAS), including documentation procedures for capturing failure data, to include factory testing.
- xiii). Reliability Progress Reporting, which details implementation of the approved program.
 - (1) Reports shall be submitted to Amtrak on at least a monthly basis to provide updates on critical Reliability KPIs (MDBCf, MDBSF, Availability, Failures and Fleet Defects).

4.3 Reliability Requirements

- a). Every complete car, as well as each constituent component, assembly, subsystem and system element shall be designed in such a manner as to perform its function reliably in revenue service for the stated life expectancy of the component.
- b). Failure Rates
 - i). Each car under all system operating conditions shall operate with a failure rate not exceeding that defined in these Technical Specifications.
 - ii). The car design and implementation of the design shall provide Amtrak with equipment that meets the Mean Distance Between Service Failure (MDBSF) and Mean Distance Between Component Failure (MDBCf) requirements.
 - iii). Compliance with MDBSF requirements shall include all failure modes for systems, subsystems, and components to meet the following requirements:
 - (1) Coach MDBSF = 120,000 miles
 - (2) Café/Lounge MDBSF = 120,000 miles
 - (3) The reliability objectives shall be based on single car operation at an average speed of 65 mph (104.6 kph.) and a utilization of 215,000 miles/yr. (344,000 km/yr.).
- c). A Service Failure shall be defined as in Chapter 2. Passenger Comfort
 - i). A Passenger Comfort Failure shall be defined as a car-related failure resulting in decreased availability of passenger amenities that does not meet the definition of a Service Failure, i.e., loss of control panels, lighting, PIDS, seating capabilities.
 - ii). Passenger Comfort Failures shall be captured in MDBCf calculations.

- iii). Passenger Comfort Failures are inherent component failures which exclude consumables, vandalism, human error, incorrect maintenance, and quality issues.
- iv). Component Reliability Requirements
 - (1) The following MDBCf requirements shall be met:

Figure 4-1: MDBCf Requirements

System	MDBCf
Braking System	300,000 miles [482,700 km]
Side and End Doors	300,000 miles [482,700 km]
HVAC System	380,000 miles [611,420 km]
Couplers	300,000 miles [482,700 km]
Trucks and Suspension	750,000 miles [1,207,008 km]
Auxiliary Power Systems	360,000 miles [579,363 km]
Lighting	1,000,000 miles [1,609,344 km]
Wheels and Axles	300,000 miles [482,700 km]
Communications Systems	600,000 miles [965,606 km]
Water and Waste System	750,000 miles [1,207,008 km]
Food Service (Café)	750,000 miles [1,207,008 km]
Toilet room	750,000 miles [1,207,008 km]

- d). Reliability Prediction Analysis
 - i). The Contractor shall submit a Reliability Prediction Analysis **[CDRL 4-03]** prior to PDR, and approved prior to Final Design Review (FDR), to demonstrate how the system and subsystem reliability requirements can be achieved with their design.
 - ii). The Reliability Prediction Analysis should utilize historical reliability data wherever possible and minimize the use of handbook practices such as MIL-HDBK-217F or the NPRD.
 - iii). The Reliability Prediction Analysis shall be updated throughout the design process, no less frequently than bi-monthly.
 - iv). The Reliability Prediction Analysis shall be performed to the LRU level.
- e). Fleet Defects
 - i). A Fleet Defect is identified when % of the quantity of a warranted item fails or where 10% of cars per a fleet type are affected during the warranty period as noted in the Specification.
 - ii). Amtrak may classify the total of such items as a failure, or fleet defect, including those items for which the warranty period expired before Amtrak recognized the failure.

- iii). The Contractor is responsible for failure analysis, corrective action and all costs of labor and material, for defect identification and location, and for removal, repair or replacement of defective parts, and for alterations, repairs, tests and adjustments in connection therewith made to obtain car performance identified in the technical specifications.
- iv). Replaced or repaired items due to a fleet defect are warranted and guaranteed for the remainder of the warranty period or for one (1) year, whichever period is greater.
- f). Availability Requirements
 - i). Car reliability and car maintenance requirements shall be such that fleet availability shall exceed 99.99%, where Availability is defined as:
 - (1) MTBF (Mean Time Between Failures) see Chapter 2.
 - (2) MTTR (Mean Time To Repair) see Chapter 2.
 - Availability =
$$\frac{\text{MTBF}}{\text{MTBF} + \text{MTTR}}$$
 - ii). Availability shall be measured daily and the exact time at which it will be measured must be approved by Amtrak.

4.4 Failure Review Board

- a). A Failure Review Board (FRB) shall be jointly established consisting of representatives from Amtrak and from the Contractor.
 - i). The core members of the FRB shall be the Contractor's Warranty Manager and Reliability Engineers and Amtrak's assigned Reliability Representative/Warranty Officer and COTR.
 - ii). The core members shall be supplemented by appropriate personnel from Amtrak, the Contractor, and subcontractors/suppliers, as required, to facilitate a thorough and accurate review of all the data.
 - iii). The Contractor shall ensure the participation of subcontractors/suppliers to provide subject matter expertise of any problems with components/subsystems and to expedite resolution.
- b). The FRB shall meet regularly, beginning when the first cars undergo factory acceptance testing and continuing through the Reliability Demonstration Test to the end of the Warranty Period.
 - i). FRB meetings shall be scheduled weekly with the understanding that Amtrak may, at its sole discretion, require more or less frequent meetings depending on the reliability of the equipment.
- c). Responsibilities

- i). The FRB shall review the failure report forms and logs to verify failure classifications and assign responsibilities of failures.
- ii). The FRB shall review all reliability test data and failure reports, review failure analyses, report progress toward meeting reliability requirements, identify areas needing improvement, and propose actions to ensure the successful completion of the reliability demonstration.
- iii). The FRB shall correct and update failure reporting, analysis and corrective action system (FRACAS) data.
- d). In the event the FRB is unable to reach agreement on the categorization of failures (chargeable/non-chargeable) or on the corrective action to be taken for any item, Amtrak's Reliability Representative will forward the issue, with relevant records and documentation, to Amtrak's COTR.
 - i). The COTR will act as the arbitrator for all project issues.
 - ii). Where appropriate, Amtrak's COTR will meet with the Contractor's representative to determine the path forward.
 - iii). Upon agreement, the decision will be formally communicated to the Contractor and the FRB.

4.5 Reliability Demonstration Testing

a). General

- i). As a condition precedent to Final Fleet Acceptance, a Reliability Demonstration must be successfully performed, analyzed and reported upon by the Contractor to validate the reliability of the cars, systems, subsystems and components during revenue service.
- ii). The Contractor shall closely monitor the failure modes of all systems to ensure that the cars will meet requirements.
- iii). If at any time during the Reliability Demonstration the failure rate of any system exceeds the allowable failure rate (i.e., the MDBCF requirements listed in Figure 4-1), the Contractor shall seek modifications and changes to bring the system into compliance.
- iv). Reliability calculations will be performed using a 12-month rolling average.
 - (1) All equipment failures during car burn-in shall be reported and recorded, but not counted in establishing MDBCF and MDBSF values.
 - (2) Determination of pass or fail will be assessed only at the end of the reliability demonstration.

b). Grace Period

- i). During the first six (6) months of data collection, Amtrak will consider the reliability results as biased by system interface issues, workmanship issues, and infant mortality failures and will not hold the Contractor responsible for its reliability goals.
 - ii). The Failure Review Board shall, however, be active during this grace period.
 - iii). During the grace period, the Contractor must submit a procedure to identify the collection, review and control of the failure data pertinent to the Reliability Demonstration.
- c). Reliability Progress Reporting
- i). The Contractor shall submit monthly Reliability Progress Reports **[CDRL 4-02]** following the first Failure Review Board (FRB) meeting.
 - ii). The format for the monthly reports shall be determined by the FRB members, but shall include, at a minimum, the following:
 - (1) RAM activities within the reporting period, including minutes and actions of the Failure Review Board meetings.
 - (2) Reliability Test Report.
 - (3) Reliability achievements and problems.
 - (4) Reliability requirements, generic formulas and performance summaries for all defined requirements:
 - (a) Mean Distance Between Service Failures – Car Level
 - (b) Mean Distance Between Service Failures – Subsystem Level
 - (c) Mean Distance Between Component Failures – Car Level
 - (d) Mean Distance Between Component Failures – Subsystem Level
 - (e) Availability
 - (f) Fleet Defect items
 - (5) Reliability critical items.
 - (6) Expected reliability activities within the next reporting period.
 - (7) A summary and schedule of corrective actions, including in-progress and planned.
- d). Component Failures

- i). For all parts or material returned to the Contractor for repair or replacement, the Contractor shall provide a failure analysis report form to Amtrak.
 - ii). The failure analysis form shall clearly identify the part by description and part number; identify the car and service mileage of that car, the date and nature of the failure.
 - iii). The Contractor shall, within 60 days, provide Amtrak with the results of a root cause analysis for the failure along with any proposed action in the Reliability Report.
- e). Reliability Design Modifications or Changes
 - i). The Contractor shall make necessary modifications during the reliability demonstration program in order to achieve the MDBCf and MDBSF requirements.
 - ii). The Contractor shall submit all requests for such design changes within 60 days of the end of the reliability demonstration using the Engineering Change Request (ECR) system and shall gain Amtrak approval prior to the implementation of any change.
 - iii). All reliability-related modifications defined during the reliability demonstration program shall be implemented on all cars and spare parts within 180 days of the date of approval of the modifications by Amtrak.
- f). Reliability Demonstration Duration and Conclusion
 - i). The Reliability Demonstration will commence with the Approval for Revenue Service of the first car and continue until two (2) years after the Final Acceptance of the last car.
 - ii). Satisfaction of the reliability demonstration shall only be met when the specified availability and reliability requirements for each complete system within the fleet (that is all cars installed and commissioned) is achieved based on a consecutive 12-month period of test time.
 - (1) In the event the reliability demonstration is declared failed, the Contractor shall continue testing and extend the test period until the reliability demonstration is successful, unless otherwise directed by Amtrak.
 - iii). If two (2) years after the Final Acceptance of the last car it cannot be determined that all specified reliability requirements have been met, the Contractor shall re-design and modify or replace all such systems, subsystems, components, parts or equipment as needed to achieve acceptable reliability, at the Contractor's expense, regardless of whether these items have exhibited the defect or failure and regardless of the warranty status.

- (1) Cars so modified shall undertake a further reliability demonstration of at least six months duration to prove reliability.
 - (2) Modifications shall continue at the Contractor's expense until the specified MDBCF and MDBSF reliability levels are met.
 - (3) Should such modifications not be completed within this six-month period, Amtrak shall have the right, at its sole discretion, to perform any necessary engineering or studies, and to correct the defect or failure.
 - (a) All costs incurred by Amtrak for such engineering and corrective work shall be at the Contractor's expense.
 - (b) Any items replaced by Amtrak during such corrective work will be disposed of by Amtrak in the manner requested by the Contractor and at the Contractor's expense.
 - (c) If the Contractor fails to furnish disposition instructions, Amtrak will dispose of such items at the Contractor's expense, where applicable.
- g). Reliability Demonstration Report
- i). Within 30 days after the completion of the Reliability Demonstration Test, the Contractor shall submit the Reliability Demonstration Report **[CDRL 4-04]** verifying that the reliability requirements of this chapter have been met.
- h). Reliability Demonstration Plan
- i). Prior to the start of Final Design Review, the Contractor shall submit for Amtrak review and acceptance a Reliability Demonstration Plan (RDP). **[CDRL 4-05]**
 - ii). The RDP shall define the specific procedures, facilities, staffing, and protocols to be employed by the Contractor during the Reliability Demonstration to monitor, test, adjust, and report progress toward achieving the reliability requirements of this Specification. Specifically, the Contractor shall provide a procedure to be followed in the reliability demonstration that includes, at a minimum:
 - (1) Method for all equipment failures to be reported during reliability testing, including forms and reliability database.
 - (2) The reliability program shall utilize failure data collected through the failure tracking process.
 - (3) Monitoring of overall car reliability on car and component level.
 - (4) Tracking of all component failures and identification of Fleet Defect.
 - (5) Details of the burn-in period for each car.

- (a) All equipment failures during the burn-in shall be reported and recorded, but not counted in establishing MDBCF values.
- (6) Procedure for corrective action when necessary to meet reliability requirements.
 - (a) This shall include proposed reliability demonstration restart procedures, proposed changes, and appropriate supporting data.
 - (b) The proposed plan shall clearly identify a specific method for verifying the effectiveness of change(s).
 - (c) Credit may not be taken for time from previous failed tests, and the specified performance and other required characteristics of the equipment shall not be changed to achieve reliability requirements.
- (7) Method for recording all relevant data necessary to calculate MDBCF values for the car and major systems and to verify successful demonstration of the MDBCF requirements.

4.6 Maintainability

a). General

- i). The Contractor shall consider maintainability and its effect on the total cost of ownership of these vehicles throughout the vehicle design process.
 - (1) The general goal shall be to maximize the ease of testability, reparability, and maintenance of equipment and components that affect system operation during the car useful life.
 - (2) The quantifiable goal of the designing for maintainability shall be that the target for Mean Time To Repair (MTTR) for running repairs and troubleshooting target shall be 30 minutes.
- ii). Initiatives which may improve the maintainability of the vehicles may include:
 - (1) The use of modular design.
 - (2) Inter-changeability of components performing similar functions.
 - (3) Accessibility of components and fasteners.
 - (4) Moveability of replaceable components.
 - (5) Reparability including appropriate Maintenance Manual data.
 - (6) Appropriate self-test features.
 - (7) Built-in quick disconnect test points for air and electrical systems.

- (8) Design of simplified test equipment for use as troubleshooting aids.
 - (9) Minimize the use of specialized tools to replace components.
 - (10) Equipment covers and access panels incorporate rugged, quick-removal fasteners.
 - (11) Use of consistent fastener types, where applicable.
- iii). The car shall be designed and built to minimize maintenance and repair time and overall costs over the car life. The following shall be considered good practice in designing for maintainability and shall be utilized in the car design:
- (1) All systems and components serviced as part of periodic preventive maintenance shall be readily accessible for service and inspection from under the car (from a pit), from ground level or from inside the car. Periodic maintenance shall not require the use of cranes or fall protection.
 - (2) Removal or physical movement of components unrelated to the specific maintenance and repair tasks involved shall be minimized or eliminated.
 - (3) Relative accessibility of components, measured in time to gain access, shall be inversely proportional to frequency of maintenance and repair of the components. (Items requiring more frequent maintenance shall be easier to access).
 - (4) Items which may need to be accessed while operating over the road, including cut-out cocks to keep the train moving or portions of systems operating even when some components have failed, must be readily accessible by the crew. Access from within the car is best. If necessary to place it undercar or in the equipment room, it must be within easy reach of the side of the car
 - (5) Assemblies and components that are physically interchangeable shall be functionally interchangeable.
 - (6) Modular or plug-in assemblies and components that are not functionally interchangeable shall not be physically interchangeable.
 - (7) Systematic fault isolation procedures shall be developed for inclusion in the maintenance manuals.
 - (8) Local built-in test points and fault/status indicators shall be provided and clearly marked for all major systems including friction braking, Heating, Ventilation and Air Conditioning (HVAC), passenger doors, auxiliary power, battery charger, Public Address (PA), wi-fi, trainline, toilet system and food service equipment (chillers).

- (9) All test points, fault indicators, modules, wire terminations, piping, tubes, wires, etc., shall be identified by name plates, color coding, number coding or other means to assist the maintenance personnel.
- (10) Component placements in equipment cabinets, enclosures or confined places shall give the most accessible positions to those items requiring the most frequent maintenance or adjustment. For example, the toilet room and kitchen equipment.
- (11) Door panels and openings shall be of sufficient quantity, size and placement to permit ready access from normal work areas.
- (12) Standard, commercially available components and hardware shall be used wherever possible.
- (13) Captive fasteners shall be used on covers and access panels where periodic maintenance and inspection are to be carried out. The use of special tools for removal shall be avoided.
- (14) Cabinets and access panels will prioritize the use of quarter-turn hardware, pencil latches, and coach keys. Special keys are only allowed with express permission from Amtrak Access shall be provided, to the greatest extent possible, to structural components to allow inspection for cracks and corrosion.
- (15) Major components shall be designed for ease of removal. Handles and lifting eyes shall be provided as applicable, on heavy equipment and components not readily accessible.
- (16) Means shall be provided to verify the operability of redundant hardware components, and their switching devices, during maintenance, troubleshooting and testing.
- (17) Requirements for special tools and fixtures shall be minimized.
- (18) Any component that may need to be removed from inside the car needs to easily be able to fit through window openings, end doors, access door/hatch or lower body doors after the car is fully fitted-out and in service.
- (19) Required list of tools for each task shall be provided.

b). Maintainability Plan

- i). The Contractor shall prepare and submit for review at PDR, a Maintainability Program Plan **[CDRL 4-06]** utilizing design standards that minimize Mean Time To Repair (MTTR), cleaning and maintenance costs throughout the car's intended useful life.
- ii). The plan shall include the systems and car MTTR goals for the proposed car.

- iii). An overall quantitative maintainability requirement goal for the car's corrective maintenance shall be the weighted average of the MTTR (Mean Time To Repair) of the key system elements.
 - iv). Diagnostic and set-up time shall not be included in the MTTR.
 - v). Preventive maintenance is defined as the maintenance tasks performed to minimize the possibility of future equipment failure, reduce or minimize wear rates, replace consumable parts, and satisfy warranty requirements.
 - vi). The elapsed time required to perform preventive maintenance (exclusive of servicing) on the car shall be demonstrated.
 - vii). The objectives of the maintainability program, including corrective and preventive maintenance, shall provide for:
 - (1) Maximization of car availability
 - (2) Minimization of maintenance costs, including cleaning
 - (3) Minimization of car down time
 - (4) Minimization of special and high skill levels for maintenance
 - (5) Minimization of special tools and fixtures
 - viii). Components and sub-assemblies requiring occasional removal shall be plug-in units, adequately identified and secured and keyed to prevent misapplication.
 - ix). The need for adjustments shall be avoided wherever possible.
 - x). Adjustment points shall be readily accessible, adequately identified and self-locking to prevent inadvertent operation and drift.
- c). Mean Time to Repair Requirements
- i). The Mean Time To Repair (MTTR) a car fault and restore the car to operational readiness shall not average more than 1.5 hours.
 - ii). MTTR shall be defined as the average time required to fix a failed component or device and return it to production status, including time needed for the maintainer to diagnose, access, remove, replace/repair, close, and test-out the failed component or device.
 - iii). MTTR shall not include logistics time.
 - iv). The weighted average of the MTTR values for the following subsystem elements shall be no greater than:

Figure 4-2: MTTR Requirements

System	MTTR or Replace Major Module (hours)
Braking System	1
Side and End Doors	0.5
HVAC System	1
Couplers	2
Trucks and Suspension	1.5
Auxiliary Electrical System	1
Lighting	0.5
Wheels and Axles	1.5
Communications Systems	1
Water and Waste System	1
Food Service (Cafe and Lounge)	1
Toilet room	1

v). Maintainability Analysis

- (1) As part of FDR, the Contractor must submit a Maintainability Analysis **[CDRL 4-07]** per type of cars for Amtrak approval.
- (2) The maintainability analysis must:
 - (a) Demonstrate the MTTR requirement based on all LRU failure rate as well as their replacement times.
 - (b) Include all scheduled maintenance tasks and their time estimates.

vi). Lifecycle Cost Analysis (LCC)

- (1) The Contractor must submit a Life Cycle Cost Analysis (LCC) **[CDRL 4-08]** at FDR.
- (2) The LCC analysis must estimate all maintenance costs as well as overhaul costs to determine the cost of maintenance during the vehicles service life.
- (3) An estimated life cycle shall be provided for all major components and LRU's.
- (4) These documents must be approved prior to final approval of FDR.

d). Maintainability Demonstration

- i). The Contractor shall perform a formal maintainability demonstration.
- ii). The procedures used in the maintainability demonstration shall be the same as those included in the maintenance manuals delivered.

- iii). The maintainability demonstration must be held at Contractor's facility or the facility of a sub-supplier.
- iv). Maintainability Demonstration Plan **[CDRL 4-09]**
 - (1) The Contractor shall submit a Maintainability Demonstration Plan based on MIL-HDBK-470 for Amtrak approval prior to qualification testing of the first car.
 - (2) The Plan shall include a list of tasks to be performed during the demonstration for Amtrak approval.
 - (3) The Plan shall also include the template that will be used to record the results of the maintainability demonstration of each task, including fields to record the task name, time to access, remove, replace/repair, close, and test-out the component.
 - (4) The maintainability demonstration shall include:
 - (a) preventive maintenance
 - (b) corrective maintenance
 - (c) train recovery
 - (d) Accessibility
 - (e) Troubleshooting guide(s)
- v). The preventive maintenance demonstration shall include the periodic inspections and any preventive maintenance tasks identified by the Contractor during the Maintenance Analysis.
- vi). The corrective maintenance demonstration shall include change-out of LRUs and LLRUs and use of special tools where special emphasis, instruction, or proficiency is needed.
- vii). The LRU and LLRU change-outs shall demonstrate compliance with the MTTR requirements of each system element.
- viii). The adequacy of the car design for maintainability shall be evaluated to the satisfaction of Amtrak using product components and equipment, mockups and actual cars during the design, production and acceptance phases.
- ix). The maintainability of following systems shall, as a minimum, be demonstrated. However, Amtrak reserves the right to request the demonstration of additional systems.
 - (1) Braking System
 - (2) Side and End Doors

- (3) HVAC System
- (4) Couplers
- (5) Trucks and Suspension
- (6) Auxiliary Electrical System
- (7) Lighting
- (8) Wheels and Axles
- (9) Communications Systems
- (10) Water and Waste System
- (11) Food Service (Café/Lounge)
- (12) Toilet room
- (13) Diagnostic and digital systems (PIDS, onboard computers, etc.)
- (14) On-Board Mobility Lift (Option)
- x). This demonstration shall include a shop exercise to troubleshoot, to change out of components, to perform corrective maintenance, and to use the Contractor supplied special tools and equipment.
- xi). The demonstration shall also consider train-car lifting and crane access when developing the maintainability demonstration plan and maintenance manuals.
- e). Maintainability Demonstration Conclusion
 - i). If at the end of the demonstration it cannot be determined that all specified maintainability requirements have been met, the Contractor shall re-design and modify or replace elements as needed to achieve acceptable maintainability at the Contractor's expense.
 - ii). Cars so modified shall undertake a further maintainability demonstration to prove maintainability.
- f). Maintainability Demonstration Report
 - i). Upon completion of the Maintainability Demonstration Test, the Contractor shall submit the Maintainability Demonstration Report **[CDRL 4-10]** verifying that the maintainability requirements of this chapter have been met.

4.7 CDRL List

CDRL	Description	Due
CDRL 4-01	Reliability Program Plan	NTP + 30 days

CONFIDENTIAL — DO NOT DISTRIBUTE

CDRL 4-02	Reliability Progress Reports	Within 90 days following the 1 st FRB, then monthly
CDRL 4-03	Reliability Prediction Analysis	30 days prior to PDR
CDRL 4-04	Reliability Demonstration Report	Reliability Demonstration Test + 30 days
CDRL 4-05	Reliability Demonstration Plan	30 days prior to start of FDR
CDRL 4-06	Maintainability Program Plan	30 days prior to PDR
CDRL 4-07	Maintainability Analysis	30 days prior to FDR
CDRL 4-08	Life Cycle Cost Analysis	30 days prior to FDR
CDRL 4-09	Maintainability Demonstration Plan	180 days prior to qualification testing of 1 st car
CDRL 4-10	Maintainability Demonstration Report	Within 30 days after completion of the Maintainability Demonstration Test

* End of Chapter 4 *

Amtrak Single Level Fleet Replacement

Technical Specification

5. Quality Assurance

Revision 0

Table of Contents

5.1	Overview	5-1
5.2	Regulations, Standards, Specifications and Drawings.....	5-1
5.3	Quality Assurance (QA)	5-1
5.4	Project Quality Plan.....	5-2
5.5	Book of Quality.....	5-4
5.6	Additional Quality Requirements.....	5-4
5.7	Initiatives that Promote Sustainability in the Manufacturing Process.....	5-10
5.8	First Article Inspection (FAI).....	5-11
5.9	Inspection.....	5-17
5.10	CDRLs.....	5-25

5.1 Overview

- a). This chapter describes the Contractor quality, manufacturing and inspection requirements for the single level fleet.
- b). The Contractor is expected to have an overall Quality Assurance Program that is implemented throughout their organization and a project specific Project Quality Plan, described below.

5.2 Regulations, Standards, Specifications and Drawings

- a). Amtrak takes no responsibility for the identification of applicable chapters and paragraphs of regulations and standards with which the Contractor must comply.
- b). Nothing in this specification shall relieve the Contractor from ensuring that all applicable regulations, standards, and specifications are followed.
- c). The Contractor shall provide proof of compliance with all applicable regulations, standards, and specifications per Section 3.15 b).
- d). The Contractor is responsible for ensuring that all applicable regulations, standards, and specifications are followed when complying with the requirements of this document.
- e). A summary list of regulations, standards and specifications is listed in Chapter 2 as a guide to the Contractor but shall not be construed as complete.

5.3 Quality Assurance (QA)

- a). The Contractor shall develop and implement a Quality Assurance (QA) program that conforms to the latest edition of FTA-PA-27-5194-12.1: *Quality Management System Guidelines*, to assure the delivery of a quality product.
- b). The elements of the QA program shall encompass and control the Contractor's entire organization and all other manufacturers, subcontractors and suppliers that perform work relating to this Contract.
- c). Should the Contractor's QA program be structured following other Quality System standards such as ISO or IRIS, for example, the Contractor shall include in the Project Quality Plan, described below, a cross-reference matrix of the Standard's requirements versus the FTA-PA-27-5194-12.1.
- d). The QA Program shall ensure that all aspects of car design, component manufacture and testing, car assembly and testing, and car commissioning are in full conformance with the design, materials and workmanship requirements provided in these Technical Specifications, and are comprehensively documented.

5.4 Project Quality Plan

a). Overview

- i). A Contract-specific Project Quality Plan (PQP) shall be prepared that details when and where in the manufacturing process each element of the Contractor's and major supplier's organizations will perform specific actions required by the associated QA manual using the quality procedures found therein.
- ii). The PQP shall also specifically identify an adequate number of qualified staff to carry out the required QA tasks and their roles and responsibilities.
- iii). The PQP shall be provided to Amtrak for review and approval sixty (60) days after NTP. **[CDRL 5-01]**
- iv). The PQP shall present how the Contractor shall meet the quality assurance requirements of this Technical Specification.
- v). Required elements of the PQP include:
 - (1) Overview of Contractor's QA program.
 - (2) Contractor's PQP cross-reference matrix of the Contractor's Quality Program elements versus the FTA Quality Management System Guidelines listed above.
 - (3) Corporate organization chart showing how the unit responsible for QA fits into the overall corporate structure, including how it relates to other functional units such as engineering, purchasing, production and warranty, and how QA communicates with those other functions to ensure quality objectives are met.
 - (4) Organization chart for the QA unit, including names, duties and responsibilities, and contact information for QA unit personnel.
 - (5) Specific QA policies, procedures and objectives that are implemented at all stages of the project to ensure that the highest quality is maintained through the life of the project.
 - (6) References to all project management, administrative, design, production, inspection, testing and warranty procedures relevant to the manufacturing and servicing of the coaches.
 - (7) Role of Amtrak in the QA process, including Amtrak design reviews, inspections and hold points, and Amtrak's authority to require corrective action to resolve quality problems.
 - (8) Process for implementing, monitoring, and revising/improving QA policies and procedures, including the means by which QA has the ability to take corrective action to resolve quality problems within engineering, production or testing, and the authority that gives QA the ability to stop production if problems go uncorrected.

CONFIDENTIAL — DO NOT DISTRIBUTE

- (9) Process for engineering changes, configuration management, production control and other manufacturing tools to ensure that vendors and production are working to current revisions of all drawings, specifications, policies and parts lists.
 - (10) Process for auditing production to determine if QA policies and procedures are being implemented and maintained, and how problems are corrected.
 - (11) Process by which vendors and suppliers are verified to be in compliance with the Contractor's QA program, and the process for ensuring that vendors adhere to the PQP, including source inspections, inbound material inspections, resolving vendor quality problems, certification of parts authenticity and anti-counterfeiting efforts, and long-term parts availability in conformance with contractual provisions.
 - (12) Inspection process for monitoring quality during production, including flow chart and process for resolving defects and closing out non-conformances.
 - (13) Schedule for inspection and recalibration for all tools and devices used for measurement, testing or inspection.
 - (14) Comprehensive inspection plan (see Section 5.9)
 - (15) Process and objectives for defect reduction over the term of production of the cars, including trend analysis, engineering changes if necessary and modifications to inspection and testing processes.
 - (16) Monitoring of post-delivery performance of delivered cars, including evaluation and analysis of fleetwide failures, engineering changes to production, and field modifications to delivered coaches if necessary. Refer to the Technical Support, Spares and Supplies Agreement for applicable failure rates.
 - (17) Process for monitoring the System Safety Program including dedicated resource for managing System Safety.
 - (18) The PQP shall also contain or refer to a comprehensive collection of standard forms to be utilized for documentation of quality control activities.
 - (a) These forms shall be designed to assure compliance of materials, processes, personnel and products to the approved design drawings and applicable specifications.
- vi). The approved PQP and supplemental manuals, procedures and instructions shall be subject to regular scheduled and/or unscheduled audits by Amtrak.
 - vii). A quality organization chart included in the PQP shall show the reporting relationships of all QA management staff.

- (1) The quality organization chart shall identify that the quality assurance function is fully independent of the production team.
- (2) The organization of the Contractor's QA program shall report directly to the General Manager of the Contractor's facility or the Contractor's Project Manager.
 - (a) In any case, it must be completely independent of the Contractor's manufacturing or purchasing divisions.

viii). QA Authority and Autonomy

- (1) The PQP shall clearly describe that the Contractor's QA representatives have the responsibility and sufficient authority to ensure that a nonconforming or discrepant product or service will not be used delivered to Amtrak.
- (2) The QA personnel shall have complete freedom to identify and evaluate problems; to recommend solutions; to verify implementation of solutions; and to control further processing, delivery, or installation of a nonconforming or deficient item until proper and documented disposition has been obtained.

5.5 Book of Quality

- a). During the construction of the first car of each car type, the Contractor shall develop a Book of Quality for each car type.
- b). The Books of Quality shall be developed and submitted to Amtrak for review and approval prior to the inspection of the first production car of each car type.
- c). The Books of Quality shall be organized starting with zones of visibility, with Zone 1 being most visible to passengers and so on down to completely hidden areas.
- d). The Books of Quality shall clarify inspection and acceptance criteria for all inspection categories such as gaps, flushness, depth of scratches, diameter of dimples, repairs, etc.

5.6 Additional Quality Requirements

- a). QA Organization Responsibility
 - i). The Contractor shall, for the purposes of this Contract, designate a Project Quality Manager who has sufficiently defined responsibility, authority, resources and organizational freedom of action to be in charge of, and implement on behalf of the Contractor, such QA as is required to ensure a proper control of the production process.
 - ii). The QA organization must report independently from production and have fully independent authority to reject unsatisfactory material and subassemblies regardless of any effect on the progress of the Work.

b). Personnel Qualifications

- i). The Contractor's QA personnel performing inspections and tests shall be certified for such work.
- ii). Certification of personnel shall be by the virtue of those skills which are obtained by experience or training and verified by testing.
- iii). All manufacturing personnel performing special processes, such as welding, brazing, etc. shall be trained and AWS certified for such work. All certifications shall be maintained and kept up to date throughout the production build.
- iv). Welding inspections shall be completed by AWS certified Welding Inspectors. All certifications shall be maintained and kept up to date throughout the production build.
- v). Records of personnel certifications shall be maintained and monitored by the Contractor's QA department. These records shall be made available to Amtrak for review.
- vi). The Contractor shall, upon request, make measuring and control recordings available to Amtrak for review and provide copies of documentation as requested.
- vii). The Contractor shall ensure that inspection and tests are based on the latest approved revision or change to drawings, specifications, and all other applicable design documentation.

c). Revision Control Procedure

- i). Prior to the start of PDR, the Contractor shall develop and submit to Amtrak for review and approval a revision management procedure which controls the adequacy, completeness, change and update of drawings and other design documentation. **[CDRL 5-02]**
- ii). This procedure shall be in coordination with the change control system as provided in this Specification and Contractor's configuration management system.
- iii). The Contractor shall ensure that requirements for the affectivity point of changes are met and that obsolete drawings and change requirements are promptly removed from all points of issue and use.
 - (1) Means of recording the effective points shall be employed and made available to Amtrak.

d). Non-Conforming Material

- i). Identification and Disposition

- (1) The Contractor shall establish and maintain an effective and positive system for controlling nonconforming material and/or workmanship, including procedures for its identification, segregation, and disposition.
 - (2) Dispositions allowing the use or repair of nonconforming material or workmanship shall require Amtrak's approval.
 - ii). Segregation of Non-Conforming Materials
 - (1) All nonconforming material shall be positively identified to prevent unauthorized use, shipment or intermingling with conforming material.
 - (2) Holding areas and procedures developed by the Contractor and reviewed and accepted by Amtrak shall be established and maintained by the Contractor for the duration of the Contract.
 - iii). Corrective Action
 - (1) Corrective action and related information shall be documented and made available to Amtrak upon request.
 - (2) Corrective action shall extend to the performance of all sub-suppliers and include as a minimum:
 - (a) Analysis of data and examination of discrepant products to determine extent and causes with corrective action implemented in an expeditious manner prior to the next shipment, order or inspection.
 - (b) Introduction of required improvements and corrections, initial review of the adequacy of such measures, and monitoring of the effectiveness of corrective action taken.
 - (c) Analysis of trends in processes or performance of work to prevent nonconforming products.
- e). Subcontractor Quality Assurance Requirements
 - i). The Contractor shall require that each subcontractor or supplier establish and maintain a QA program compliant with that of the contractor and acceptable to the Contractor and Amtrak for the services and items it supplies.
 - ii). The Contractor is responsible for all subcontractor and supplier quality and performance.
 - iii). The Contractor shall survey, audit and periodically review each subcontractor and their facilities to assure adequate capabilities to perform subcontracted efforts in compliance with the Contractor's QA program. These surveys/audits shall be documented and available to Amtrak upon request.

- iv). Each major subcontractor or supplier shall have a QA system that is approved by the Contractor and fully implements the PQP of the Contractor as it applies to the subcontractor or supplier's scope of work.
- f). Quality Assurance Assessments (Audits)
 - i). Amtrak Quality Assurance Audits of Contractor, Subcontractors and Suppliers
 - (1) Amtrak shall, throughout this Contract, have the right to access and visit all facilities of the Contractor, subcontractors and suppliers associated with this contract to conduct initial and on-going assessments (audits).
 - (a) Amtrak will perform scheduled and unscheduled audits of the Contractor's/Subcontractor's/Supplier's quality assurance activities.
 - (b) These assessments shall determine if the QA programs are being properly adhered to in compliance with the approved PQP, and that they are producing quality products compliant with the requirements of this Contract.
 - (c) During these assessments, the Contractor shall provide Amtrak personnel reasonable assistance as they inspect production facilities, examine operations in progress and review documentation.
 - (2) At a minimum, the following audits of the Contractor will be performed:
 - (a) During production of the first carshell (will include an audit of both the Contractor and major subcontractors)
 - (b) During manufacturing, installation of equipment, and testing
 - (c) Before acceptance of the first car
 - (3) The Contractor will be notified of other audits to be performed by Amtrak as deemed appropriate.
 - (4) The Contractor will be provided with an audit report containing audit result information following an Amtrak performed audit.
 - (a) If any deficiencies are noted, Amtrak shall provide its findings detailing the identified deficiencies.
 - (b) The Contractor shall implement corrective action and notify Amtrak of the mitigation that was implemented.
 - ii). Contractor Quality Assurance Self Audits
 - (1) The Contractor shall perform periodic internal quality assurance audits and inspections throughout the life of the project/during the execution

of the Contract to ensure that all QA program obligations are being fulfilled, that all aspects of Amtrak-approved PQP have been effectively implemented, and that all deliverables meet the requirements of the Technical Provisions and all approved drawings and procedures. These internal self-audits shall be documented and available to Amtrak upon request.

- (2) The Contractor shall provide Amtrak with an internal audit schedule **[CDRL 5-03]** at the onset of the project and whenever revisions to the schedule occur.
- (3) Deficiencies discovered during the audit process shall be documented and corrected.
 - (a) Corrective actions shall include measures to preclude recurrence of the deficiency.
 - (b) Deficient areas shall be re-audited on an accelerated schedule.
 - (c) These deficiencies shall be documented and available to Amtrak upon request.
- (4) Amtrak audits and monitoring will be performed independent of and in addition to the Contractor's quality assurance function, but will in no way replace, negate, override or lessen the Contractor's QA obligations.

iii). Contractor Quality Assurance Audits of Subcontractors/Suppliers

- (1) The Contractor shall audit subcontractors to assure compliance with the approved PQP.
- (2) As a minimum, the following audits of each subcontractor shall be performed:
 - (a) Prior to a subcontracted or purchased item being delivered
 - (b) Within thirty (30) days of the scheduled First Article Inspection (FAI), qualification test or the Contractor's acceptance of any supplied items or services
- (3) Amtrak shall be notified in advance of any scheduled audit and may participate as a witness on any Contractor performed audit. These audits shall be documented and available to Amtrak upon request.

g). Quality Assurance Records

- i). The Contractor shall maintain adequate records of compliance with its QA program plan for the life of the Contract and through any subsequent warranties.

- ii). These records shall be made available to Amtrak on request, and a complete set of records shall be submitted to Amtrak at the end of the warranty period.
- h). Audit Reports and Corrective Action
 - i). The Contractor shall fully plan and document all quality audit activities performed internally and at subcontractor premises.
 - ii). The Contractor shall develop an audit report within thirty (30) days of each audit detailing any non-compliances found during the audit, corrective action requests and establishing dates by which the corrective actions are required.
 - iii). The Contractor shall submit a Monthly Quality Report (MQR) that describes the status of key project elements described in the PQP as well as all other quality issues affecting the project.
 - iv). The Contractor shall submit its first draft MQR to Amtrak for review and acceptance within sixty (60) calendar days of NTP. **[CDRL 5-04]**
 - v). For the duration of the Contract, the Contractor shall submit a monthly MQR to Amtrak, as part of the Monthly Project Report (MPR).
- i). Monthly Quality Report (MQR) Content
 - i). The MQR shall include, but not be limited to:
 - (1) Description of the current status of the design and/or production status of the project
 - (2) Status of PQP open issues
 - (3) Status of Project Quality Management
 - (4) Status of Contractor corrective actions
 - (5) Status of First Article Inspection (FAI) open issues
 - (6) Status of non-conforming material
 - (7) Status of field modifications
 - (8) Contractor's project audit schedule and results
 - (9) Subcontractor and supplier audit schedule and results
 - (10) Project Quality KPIs
 - (11) Contractor's internal activities
 - (12) Vendors and Sub-Contractors activities
 - (13) Software quality assurance audit results; and

(14) FRB major issues

- j). Monthly Project Quality Meetings
 - i). The Contractor shall hold monthly Project Quality meetings with Amtrak to discuss quality issues and review the MQR. The quality meetings shall include any relevant subcontractors as required.

5.7 Initiatives that Promote Sustainability in the Manufacturing Process

- a). The Contractor shall submit to Amtrak for review documentation regarding initiatives it has undertaken to promote sustainability and reduce the amount of material and energy waste produced by the manufacturing process. **[CDRL 5-05]**
- b). This documentation shall extend to the strategies employed by the Contractor's suppliers and vendors.
- c). These initiatives shall identify how manufacturing waste and energy consumption will be reduced, including tangible and quantifiable goals and the method for monitoring and improving the success of the program.
- d). The waste reduction strategies may include (but are not limited to):
 - i). Creation and utilization of reusable packaging for the transport of materials and components between the facilities of the parts supplier and the Contractor
 - ii). Use of recyclable materials for packaging
 - iii). Use of recycled or renewable materials in the production process
 - iv). Reuse or recycling of excess material created during the manufacturing process
 - v). Use of energy-efficient or low-emission vehicles and equipment for transportation and production purposes
 - vi). Capture of reusable or recyclable materials such as office paper, cardboard, copier toner, beverage containers and other post-consumer recyclable material
 - vii). Use of facilities that meet the standards of the Leadership in Energy and Environmental Design (LEED) program
 - viii). Employee awareness campaigns that promote reduction of material and energy waste; and
 - ix). Strategies that promote the reduction of unnecessary use of materials and energy.
- e). The Contractor's waste reduction program shall provide to Amtrak quarterly reports **[CDRL 5-06]** that document the status of the program and the level of success that the program is achieving.

5.8 First Article Inspection (FAI)

a). General

- i). The Contractor shall perform a First Article Inspection (FAI) of all major components, subassemblies and fully assembled coaches.
- ii). Amtrak or its representatives shall be present to witness all FAIs.
- iii). The Contractor shall perform a satisfactory preliminary FAI on each article prior to notification of Amtrak of an FAI.
- iv). The Contractor shall lead, document and report on all FAIs.
- v). FAIs shall be conducted at the manufacturing facility of the material of interest, be it the Contractor, a subcontractor or a supplier.

b). FAI Plan and Process

- i). Within ninety (90) days of NTP the Contractor shall develop an FAI Plan and submit to Amtrak for review and approval. **[CDRL 5-07]**
- ii). The FAI plan shall include the following requirements at a minimum:
 - (1) A list of assemblies, subassemblies and components subject to FAI along with their projected schedule.
 - (2) A tracking system to identify each FAI subject and accurately reflect the present status of each inspection. The tracking system shall be maintained through the completion of all scheduled FAIs.
 - (3) The sample for each FAI shall be considered to be complete by the manufacturer and shall reflect the approved baseline drawings.
 - (4) The FAI sample shall have been produced using the production methodology and tooling.
 - (5) Successful completion of engineering tests for the subsystem is a prerequisite for conducting the FAI.
 - (6) The FAI shall be performed using the approved baseline drawings in conjunction with the Technical Specification reflecting specific requirements of the subject along with any special tools and/or equipment needed to verify the design requirements, configuration, and operation (if applicable) of the item being inspected.
 - (7) All technical data required for the maintenance manual and/or parts catalogs shall be submitted as initial drafts prior to the full acceptance of the FAI. **[CDRL 5-08]**
 - (a) The initial drafts shall contain enough information to adequately maintain the equipment during the pilot program and initial production Coach delivery.

- (8) Amtrak shall be given notice of an upcoming FAI at least thirty (30) days before its schedule date for domestic FAIs and forty-five (45) days before its scheduled date for international FAIs.
- iii). The FAI Plan shall be updated monthly and presented as an attachment to the program meeting minutes.
- iv). None of the material and/or parts listed in this Chapter of the Technical Specification shall be installed on the equipment unless the FAI has been performed and approved by Amtrak.
- c). Amtrak Participation
 - i). For equipment that requires an FAI, the equipment shall not have passed the FAI unless Amtrak or its representative participates in the inspection to its satisfaction.
 - ii). An inspection that requires Amtrak participation but is conducted without a qualified Amtrak representative shall not be considered as having passed.
 - iii). Amtrak reserves the right to waive their own participation of FAIs given that the Contractor has provided the requisite amount of notification of the scheduled FAI.
 - iv). Should Amtrak arrive for an FAI and find the Contractor and/or supplier unprepared, the FAI shall be considered failed.
 - v). Should the equipment fail inspection, the problem(s) shall be corrected and re-inspected to Amtrak's satisfaction before the FAI is considered passed and production released.
 - (1) FAI findings shall be closed in person upon resolution of the issue. Closure is to be conducted at the car builders' facility unless alternative arrangements are agreed upon.
- d). Systems Requiring FAI Approval
 - i). The FAI Plan shall include a listing of all items proposed to be subject to an FAI. It is noted that this list may be expanded as the design review progresses and additional critical components are identified.
 - ii). At a minimum, the FAI program shall include the following components:
 - (1) Carshell
 - (2) Floor panels
 - (3) Door leaves
 - (4) Gangway and or Diphragms
 - (5) Door hardware, latches

- (6) Manual doors (if provided)
 - (7) Power doors, operators and controls (if provided)
 - (8) Onboard mobility device lift (if provided)
 - (9) Windows, including emergency windows or emergency egress hatches
 - (10) Truck-frame
 - (11) Truck-fully assembled
 - (12) Wheel and axle assemblies
 - (13) Couplers and draft gear
 - (14) Air brake system
 - (15) Seats including booths
 - (16) Digital signage and displays
 - (17) Tables (workstation and food service area)
 - (18) HVAC system, controls and temperature controls
 - (19) All external and internal lighting systems
 - (20) Communication system, including Central Diagnostics Unit, and Digital Trainline systems
 - (21) Food service equipment including refrigeration system
 - (22) Restrooms (modules)
 - (23) Water supply system
 - (24) Waste collection and retention system
 - (25) Sidewall Panels
 - (26) Ceiling Panels
 - (27) First completed production car for each car type
- iii). The final approval of all colors and finishes shall also be subject to FAI and acceptance by Amtrak. See Chapter 11 of the technical specification for more information.
 - iv). Equipment shall be shipped from the point of manufacture only after the FAI has been approved.

- v). FAI's will not be performed unless the design drawings, production processes, production tooling and any other relevant documentation required for the item to be inspected have been approved.
- e). Approved FAI Items / FAI Sample / Golden Unit
 - i). Approved FAI items shall establish the quality of workmanship for the remainder of the same items being produced.
 - (1) That quality shall be well documented.
 - (2) Samples of welds, fit-ups, finishes, and colors, photographs, FAI documentation, etc., shall be retained for the duration of the production phase in a secure area at the Contractor's facilities for reference by the Contractor's and Amtrak's representatives.
 - (3) Changes, modifications or adjustments to this baseline must be approved by Amtrak and will be cause for initiating another FAI by Amtrak.
 - ii). The FAI sample (Golden Unit) shall be retained by the equipment manufacturer and may be installed on the last applicable model of the production cars.
 - (1) Either Amtrak or the Contractor may deny usage of the FAI unit in production if just cause is provided such as configuration control.
 - (2) The FAI sample must be stored at the Contractor's facility and must be updated with any modifications throughout the duration of the Contract.
 - (a) This requirement does not apply to any completed car FAI.
- f). FAI Preparation
 - i). Availability of the information in a timely manner is essential to ensure that the appropriate level of Amtrak's technical expertise is available for each FAI and that the individuals have sufficient prior information to inspect the equipment.
 - ii). The Contractor shall provide the following information to Amtrak at least thirty (30) business days before a scheduled FAI **[CDRL 5-09]**:
 - (1) A complete list of the equipment and its bill of materials to be inspected.
 - (2) Identify each completed assembly along with the configuration in which it is to be presented.
 - (3) A copy of the technical Specification for the equipment and the subcontractor's scope of supply.
 - (4) A complete drawing package with current drawing approvals.

- (a) The drawing package should be in sufficient detail to inspect, at a minimum, the fit and finish of the assembly and subassemblies, wire and pipe routing, clearances between components, ergonomic considerations, and any other details that are required to ensure that the equipment is acceptable for the intended purpose.
 - (5) System schematics, electrical, fluid, pneumatic and piping, with current approvals.
 - (a) The schematics shall be sufficient to determine that the equipment will operate as intended.
 - (6) Routine test report(s).
 - (7) All instruction manuals, operating manuals, maintenance procedures and heavy repair shall be presented at the FAI for review.
 - (8) A report by a recognized independent testing laboratory certifying that all materials used in the equipment comply with the 49 CFR Part 238 Appendix B requirements and NFPA 130, as applicable.
 - (9) All material certifications.
 - (10) Calibration certificates for all routine test equipment and inspection tools.
 - (11) An Amtrak-approved FAI and acceptance test procedure and an Amtrak approved qualification test procedure to which the equipment will be inspected. A functional test shall be required as part of the FAI.
- iii). Should any of the above documents be incomplete or otherwise unacceptable to Amtrak, this shall be grounds to delay the FAI until they are made right.
- (1) The burden of any delay shall be with the Contractor.
- iv). In addition, during the FAI the Contractor shall provide the following, as applicable:
- (1) The Contractor shall make available all previously submitted and accepted pertinent calculations or analyses that show that the design is adequate for the purpose intended.
 - (2) The Contractor's complete stress analysis and summary, submitted under shall be available during the carshell FAI.
 - (3) All manufacturing variations of specified materials that vary in color, texture, pattern, etc., shall be presented, for approval by Amtrak, at FAI.
 - (a) Samples of acceptable variation extremes will be retained for reference in future inspections.

- v). The FAI shall include a maintainability demonstration for repairs, the removal/reinstallation of consumables, and routine inspections.
- vi). FAIs are considered closed when all FAI open items are closed.
- vii). All the information listed above shall be included in a FAI Binder, that after the FAI is concluded, is submitted to Amtrak for review and acceptance.
[CDRL 5-10]
- g). FAI Findings
 - i). The Contractor shall provide, within ten (10) business days of each FAI, an FAI report which shall include a copy of all the documents presented and/or discussed at the meeting. **[CDRL 5-11]**
 - ii). The Contractor shall be required to mitigate any unsatisfactory findings at an FAI, up to and including revisiting the design of affected components or subcomponents regardless of FDR status.
 - (1) Instances of an unsatisfactory demonstration encompass, but are not restricted to:
 - (a) The operation of components is impeded or compromised due to conflicts within the system.
 - (b) Improper design or omission of components resulting in a failure of functionality or unsatisfactory operational efficiency.
 - (c) Tolerance issues which result in interferences between components.
 - (d) Identification of potential safety issues that pose a risk for injury during operation or maintenance activities.
 - iii). The Contractor shall include an action plan to correct all deficiencies discovered during the FAI.
 - iv). The FAI will remain open until all action items are completed to Amtrak's satisfaction.
 - v). Depending on the severity of the deficiency, follow-up FAI may be required.
- h). FAI Photographs
 - i). Within thirty (30) days following each FAI the Contractor shall provide color photographs of each item on which an inspection was performed.
 - (1) The photographs shall be provided on 8.5 in. by 11 in. size paper and also in a digital format.
 - ii). A second set of these photos shall be compiled into an album for Amtrak's reference for future Coach inspections and will be supplied to Amtrak with the delivery of the first shipment of cars. **[CDRL 5-12]**

5.9 Inspection

a). General

- i). As part of the Project Quality Plan, the Contractor shall include a comprehensive inspection plan covering the processes and procedures proposed to ensure the overall quality and compliance of the equipment under this Contract.
- ii). Amtrak shall, at all times, have the right to inspect any and all work being performed for this Contract.
- iii). The Contractor shall grant Amtrak access to the facilities of the Contractor, subcontractors and suppliers to conduct initial and on-going inspections and assessments of the work to determine if it is being performed in accordance with both the requirements of the Contract as well as all approved design documents.
- iv). During these assessments, the Contractor, subcontractors and suppliers shall make every reasonable effort to assist Amtrak personnel, including the supply of any necessary equipment to access areas of the assembly and all equipment necessary to perform inspections.
- v). Inspection or lack of inspection, approval, or acceptance of any portion of the work by Amtrak shall not relieve or release the Contractor from its obligations to fully comply with all requirements of the Contract documents.
- vi). For hold point inspections, the Contractor shall not progress without approval or a waiver from Amtrak.
- vii). The Contractor shall correct any portion of the work not meeting the requirements of the Contract documents at the Contractor's expense to the satisfaction of Amtrak.
- viii). Amtrak at any time before issuance of final acceptance for any car may order re-inspection of any portion of the work.

b). Inspections and Tests

- i). Inspection of components to be used by the Contractor in performance of the work under this Contract shall be the responsibility of the Contractor
- ii). It is preferable for inspections to be performed at the plant where the respective processes are taking place to give the Contractor and/or supplier every opportunity to correct, under factory conditions, any inadequacies found.
- iii). Inspection of supplier components shall also be performed at the Contractor's plant to identify any damage in transit.
- iv). Amtrak, its representatives and its designees, including the FRA, shall also have the right to:

- (1) inspect selected items at any time, whether or not accompanied by the Contractor's representative.
 - (a) This shall in no way lessen or eliminate the Contractor's responsibility to make proper inspection.
- (2) inspect at subcontractor manufacturing facilities any materials, processes, assembly and testing of equipment it deems necessary to validate compliance with the Contract, technical specifications and accepted design documents.
- (3) Have access at all times to those parts of the Contractor's and/or subcontractor's plants in which any portion of the work is performed for the purposes of:
 - (a) inspecting materials and workmanship, and
 - (b) determining conformity to the Specification during the progress of construction and assembly of the equipment.
- v). If any portion of the car shall become hidden by subsequent work contrary to the specific request of Amtrak, that portion of the car shall be made visible for Amtrak inspection by the Contractor at the Contractor's expense (Section 5.8 f).
- vi). Amtrak shall be allowed to participate in all Contractor and/or subcontractor tests and inspections of all components of the equipment, at the Contractor's and subcontractor's plants, for the purpose of QA.
 - (1) Such right to participate shall include Amtrak's right to supplement its on-site inspector with additional experts as necessary according to the particular nature of the test or inspection involved.
- vii). The presence of Amtrak in the plant of either the Contractor or subcontractor shall not, in any way, supplant or relieve the Contractor's responsibility for making proper inspections or meeting the requirements of the Specification.
- viii). Amtrak shall have the right to reject all materials and workmanship that do not conform to the Specification.
 - (1) When 3 or more rejections occur for the same item or component, the Contractor shall prepare a written report for Amtrak detailing the problem(s) discovered during inspection and the efforts to be taken to remedy the problem(s).
 - (2) No further acceptance or production shall take place until the Contractor notifies Amtrak in writing that the problems have completely resolved.
- ix). The Contractor shall document the results of both inbound material inspection and outbound Coach inspection and testing for each car.

- (1) A “traveler” shall be attached to each car to track QA functions as the work progresses through the shop.
 - (2) A copy of the report must be attached to each car through conditional acceptance.
 - x). If Amtrak has reason to believe that defective work has been performed or permitted by Contractor, or that defective materials were used, Amtrak may examine any partially or fully completed work.
 - (1) If Amtrak makes such an examination, Contractor shall at its own expense furnish the appliances and labor required by Amtrak to make such investigation and inspection.
 - (2) Any defective or nonconforming work so disclosed shall be promptly corrected by Contractor at Contractor’s expense.
 - xi). Except as otherwise provided herein, costs incurred by Amtrak in performing or participating in inspections under this Contract shall be borne by Amtrak.
 - (1) However, Contractor shall reimburse Amtrak for Amtrak’s costs incurred as a result of any re-inspection resulting from a failed inspection or Contractor’s failure to meet a scheduled inspection or where a scheduled inspection was postponed and rescheduled upon less than three (3) days’ notice to Amtrak.
 - xii). Inspection and Test Log
 - (1) An Inspection and Test Log (Log) shall be maintained by the Contractor during equipment assembly.
 - (2) The Log shall be submitted to Amtrak for review before each Coach will be released for shipment to the delivery site. **[CDRL 5-13]**
 - (3) All Contractor and Amtrak in-process inspection sheets and test data records for that car shall be contained in this Log, which will be provided in the vehicle history book.
 - xiii). For those routine inspections and tests of components that are typically performed solely by Amtrak, the Contractor shall give at least 72 hours’ notice of such inspections or tests to Amtrak.
 - (1) Amtrak shall be allowed to participate in such Contractor or subcontractor inspections or tests at the Contractor’s or subcontractor’s plants for the purposes of QA.
 - xiv). The Contractor must maintain office copies of all records, and they must be accessible to Amtrak, not more than five (5) days after such notice is given.
- c). Contractor Provisions for Amtrak Inspectors
 - i). From NTP continuously through production, the Contractor shall provide office facilities for Amtrak representatives at no additional cost to Amtrak.

CONFIDENTIAL — DO NOT DISTRIBUTE

- ii). Office facilities will be required at the car construction plants, including the final assembly site and the carshell fabrication site (if a separate facility), as well as similar facilities at any car or equipment qualification testing sites for the duration of the tests.
 - iii). These office facilities shall enable convenient inspection of materials, work and equipment under this contract.
 - iv). The office facilities shall be secure, heated, cooled, and adequately lighted private office for a minimum of five people, with access to toilets and a private conference area, and shall be furnished with desks, chairs and lockable locker facilities.
 - v). Desks and file cabinets shall be lockable, and all keys submitted to Amtrak.
 - vi). A minimum of five dedicated telephones with an outside line, high speed Internet connection, access to a photocopy machine capable of high-quality copies shall be provided within Amtrak's office.
 - vii). Reserved parking places shall also be provided for all Amtrak representatives assigned to the Contractor's facility.
 - viii). Amtrak requires that the Amtrak designated office facility be prepared for up to 15 Amtrak individuals working at the facility at one time.
 - ix). All resident inspectors, test engineers and the dedicated Amtrak program team require Contract or badges for access to the plant as well as our office facility.
 - x). Electronic copies of all drawings, manufacturing procedures, test procedures, test reports, test equipment calibration certificates, welder certifications, diagrams, schedules, changes, deviations, revisions and data shall be made available to Amtrak at the same time these are made available to the Contractor's QA department.
 - (1) Data shall be sufficient to verify design, construction, assembly, installation, workmanship, clearance, tolerance and functioning of the coaches.
- d). Scheduling of Inspections and Tests
- i). Inspection and testing activities by Amtrak staff will normally be conducted during normal daytime shifts and will not be conducted on Saturdays, Sundays or any holidays observed by the Contractor.
 - (1) Amtrak staff may be made available in extenuating circumstances outside normal hours, provided a fully substantiated request is made at least forty-eight (48 hours) in advance in writing and is approved by Amtrak.
 - (2) This request will include compensation by the Contractor to Amtrak for this additional expense, as defined in the General Provisions.

- ii). The Contractor shall provide Amtrak a one-week inspection/test look ahead **[CDRL 5-14]** to plan and make resources available.
- iii). In preparation for an upcoming inspection or test, the Contractor shall provide Amtrak with the proposed activity schedule, location and associated processes, procedures and documentation. This information shall be provided to Amtrak per the following schedule:
 - (1) For inspections and testing activities in the Contractor's facilities, the Contractor shall present a written schedule of activities to Amtrak's inspectors at least 24 hours before the activities are to take place.
 - (2) In case an inspection or test proposed for performance outside that standard work schedule of Amtrak's resident inspector, the Contractor shall notify Amtrak at least 72 hours before the scheduled test or inspection.
 - (3) For inspections and testing activities at subcontractor's facilities in the US, after written notice is submitted to Amtrak ten (10) business days prior to the activities, Amtrak will advise within five (5) calendar days whether a representative will attend the inspection or test.
 - (4) For inspections and testing activities at subcontractor's facilities outside of the US, after written notice is submitted to Amtrak forty-five (45) business days prior to the activities, Amtrak will advise within five (5) calendar days whether a representative will attend the inspection or test.
- e). Receiving Inspection
 - i). The Contractor shall provide for the inspection of all incoming systems, subsystems, components, parts, equipment and materials to ensure their conformance with procurement documents and condition.
 - ii). All material certifications and test reports used as the basis for acceptance shall be reviewed for compliance with specifications, retained by the Contractor and kept readily available for inspection by Amtrak personnel.
- f). Manufacturing/Assembly Inspection Hold Points
 - i). The Contractor shall establish inspection hold points in the manufacturing process to provide for critical inspections by the Contractor's quality staff and Amtrak's representative of completed operations/installations or to inspect items that are about to be covered by succeeding assembly operations.
 - ii). As part of the PQP, the Contractor shall submit a list of hold point inspections per car type **[CDRL 5-15]** for review and approval, which shall include as a minimum the following:
 - (1) Each carshell section before painting
 - (2) Each carshell section after painting

- (3) Each truck frame
- (4) Each assembled truck, prior to installation under a car
- (5) Each car underfloor area prior to receiving trucks
- (6) Each carshell water tightness test prior to installation of insulation and interior finishings
- (7) Each car final water tightness test
- (8) Each car interior wiring and components before being covered by panels
- (9) Each car underfloor area and connections prior to concealment
- (10) Each finished car interior
- (11) Each finished car exterior
- iii). The Hold Point Inspection Plan shall include a pre-inspection performed internally by the Contractor prior to the inspection witnessed by Amtrak.
- iv). Prior to submitting an invitation to Amtrak inspectors/engineers, the Contractor shall complete its own internal inspection and work off all identified findings.
 - (1) Amtrak may request the results of the pre-inspection prior to the performance of the witness inspection.
- v). The Contractor shall provide Amtrak at least 24 hours advance notice of each such inspection or 72-hours for off-site inspectors/engineers.
- vi). If during manufacturing or testing, a component is replaced after it has gone through a hold point inspection, a subsequent hold point inspection shall be scheduled after the replacement.
- vii). Amtrak reserves the right to add hold point inspections based on inspection findings or changes to the design or production process even after the initial plan had been accepted.
- viii). The Contractor and Amtrak representatives shall use inspection forms to record any discrepancies noted during inspection.
 - (1) Nonconforming products shall not be released from a hold point area until all discrepancies have been corrected.
 - (2) The inspection forms shall be posted at or near the point of inspection for each car and included in the vehicle history book when all discrepancies have been eliminated.
- g). Production Completion Inspection

- i). After all work, including factory static and dynamic testing as per Chapter 20 of the technical specification is completed, the Contractor shall perform the Production Completion Inspection, including function testing of each system, according to an Amtrak approved procedure.
- ii). All manufacturing or testing non-conformance reports shall be closed out and no configuration upgrades or applicable FMIs will be pending before pre-shipment inspection begins.
- iii). The vehicle history book as specified in Chapter 23 shall be complete and ready for review and approval signature by Amtrak.
- iv). The Contractor shall provide a qualified supervisor to accompany Amtrak during inspection to assure that proper corrective action is taken.
- v). The Contractor shall provide Amtrak with labor and appropriate tools to remove or open and reapply covers and doors.
- vi). During inspection, all systems shall be operational with use of approved types of special equipment or power supplies.
- vii). Should the Contractor plan to store the car for any longer than 14 calendar days, the Production Completion Inspection shall validate that the car is properly prepared and protected for such storage.
- viii). The Contractor shall provide Amtrak 72 hours advance notice of each such inspection.
- ix). The Production Completion Inspection shall be documented using an Amtrak approved inspection form.
- x). The Production Completion Inspection Form shall be signed off by both the Contractor and Amtrak.
- xi). Any damage to the cars and/or any parts or components thereof which become damaged from any cause whatsoever, subsequent to the performance of the Production Completion Inspection and prior to the Pre-Shipment Inspection, shall be made good at the expense of Contractor with no extension of the Contract Time or increase in the Contract Amount.
- xii). Subsequent to the performance of the Production Completion Inspection, no components or material may be removed from the inspected vehicle to facilitate the inspection or testing of another vehicle.
 - (1) Removal of any components or material shall nullify the Production Completion Inspection.
 - (2) Amtrak may seek the return of any milestone payments made against such a nullified Production Completion inspection until the respective car has been returned to its completed state and the inspection has been successfully reperformed.

- xiii). Minor open items shall be documented on the form and be approved by Amtrak.
- xiv). Closure of Production Completion Inspection open items shall be documented and included in the Vehicle History Book for the affected car.
- h). Pre-Shipment Inspection
 - i). Should the planned shipment date be more than 14 calendar days after the completion of the Production Completion Inspection, a Pre-Shipment Inspection including function testing of each system, according to an Amtrak approved procedure shall be performed.
 - ii). The Pre-Shipment Inspection shall validate the completion of all production work, including factory static and dynamic testing as per Chapter 20 of the technical specification.
 - iii). All manufacturing or testing non-conformance reports shall be closed out and no configuration upgrades or applicable FMIs will be pending before pre-shipment inspection begins.
 - iv). The Pre-Shipment Inspection shall validate that the vehicle history book as specified in Chapter 23 is complete and has been approved and signed by Amtrak.
 - v). The Contractor shall provide a qualified supervisor to accompany Amtrak during inspection to assure that proper corrective action is taken.
 - vi). The Contractor shall provide Amtrak with labor and appropriate tools to remove or open and reapply covers and doors.
 - vii). During inspection, all systems shall be operational with use of approved types of special equipment or power supplies.
 - viii). The Contractor shall provide Amtrak 72 hours advance notice of each such inspection.
 - ix). Pre-Shipment inspections shall be documented using an Amtrak approved inspection form.
 - (1) Prior to shipment, the Pre-Shipment Inspection Form shall be signed off by both the Contractor and Amtrak.
 - (2) Minor open items shall be documented on the form and be approved by Amtrak.
 - (3) Closure of these Pre-Shipment open items shall be documented and included in the Vehicle History Book for the affected car.
 - x). Any damage to the cars and/or any parts or components thereof which become damaged from any cause whatsoever, during the progress of production or shipping or otherwise before risk of loss has passed to Amtrak, shall be made good at the expense of Contractor or the Subcontractor in

whose plant the damage occurs, and with no extension of the Contract Time or increase in the Contract Amount.

i). Shipping Inspection

- i). Following pre-shipment inspection, the Contractor shall ensure the car is properly prepared, protected and loaded for shipment in accordance with approved procedures.
- ii). For shipments by sea, this shall include all necessary preparations for shipment below decks.
- iii). Amtrak representative(s) will then perform a cursory walk-through inspection to confirm that the car has been adequately prepared for shipment before issuing a Release for Shipment document to the Contractor.
 - (1) The Contractor shall provide Amtrak 72 hours advance notice of each such inspection.
- iv). See Chapter 22 for additional shipping requirements.
- v). Should a car need to be stored for longer than thirty (30) days, the Contractor shall submit a Long-Term Storage Plan to Amtrak for review and approval.

j). Modification Inspection

- i). The Contractor shall provide written procedures for Amtrak review and approval, for the inspection of any modifications or retrofits arising from engineering changes implemented either at the Contractor's facility or on Amtrak property.
- ii). Upon completion of the change, the Contractor shall verify satisfactory completion and modify any quality assurance documentation affected by the change, including the Vehicle history book.
- iii). The Contractor shall provide Amtrak 72 hours advance notice of each such inspection.

5.10 CDRLs

CDRL	Description	Due
CDRL 5-01	Project Quality Plan (PQP)	NTP + 60 days
CDRL 5-02	Revision Management Procedure	30 days prior to PDR
CDRL 5-03	Internal Audit Schedule	NTP + 30 days
CDRL 5-04	Monthly Quality Report (MQR)	NTP + 60 days, then monthly
CDRL 5-05	Documentation of Initiatives to Promote Sustainability	NTP + 30 days
CDRL 5-06	Waste Reduction Program Quarterly Reports	NTP + 90 days
CDRL 5-07	FAI Plan	NTP + 90 days

CONFIDENTIAL — DO NOT DISTRIBUTE

CDRL	Description	Due
CDRL 5-08	FAI – Technical data for maintenance manuals and parts catalogs	Prior to full acceptance of FAI
CDRL 5-09	FAI Documentation	30 business days before FAI
CDRL 5-10	FAI Binder	After conclusion of FAI
CDRL 5-11	FAI Report	Within 10 business days of FAI
CDRL 5-12	Complete set of FAI photographs	With 1 st shipment of cars delivered
CDRL 5-13	Inspection and Test Log for each coach	Before release for shipment
CDRL 5-14	Inspection and Test 1-Week Look Ahead	14 days prior to initiation of any manufacturing activities then, every weekly
CDRL 5-15	PQP – List of Hold Point Inspections for each car type	NTP + 60 days

* End of Chapter 5*

Amtrak Single Level Fleet Replacement

Technical Specification

6. Carbody

Revision 0

Table of Contents

6.1	Overview	6-1
6.2	General Requirements	6-1
6.3	General Design Details	6-1
6.4	Structural Design Details.....	6-7
6.5	Truck to Carbody Interface.....	6-15
6.6	Doorways, Trapdoors and Passageways.....	6-15
6.7	Diaphragm.....	6-16
6.8	Lifts (Option).....	6-17
6.9	Safety Appliances	6-19
6.10	Equipment, Equipment Boxes, Equipment Rooms and Access Doors	6-20
6.11	Windows.....	6-24
6.12	Insulation.....	6-27
6.13	Exterior Finish	6-28
6.14	Graphics and Labels	6-29
6.15	Automatic Equipment Identification (AEI) Tags.....	6-30
6.16	Stress Analyses	6-31
6.17	CDRLs.....	6-36

6.1 Overview

- a). This chapter defines the structural performance characteristics of the individual carbody shells. It also lists analysis and other submittal requirements.
- b). The structure of the cars shall be independent from each other and capable of meeting all structural requirements on a stand-alone basis.
- c). The car structures shall comply with the latest applicable APTA recommended practices and FRA passenger equipment requirements and shall minimize weight to the greatest extent possible.
- d). All required standards shall utilize the most recent revisions available at the date of NTP.
- e). If contradictions arise between this Technical Specification, APTA recommended practices, and/or FRA requirements, the more stringent shall be used unless otherwise approved by Amtrak.
- f). All materials and workmanship shall comply with the requirements of Chapter 19.

6.2 General Requirements

- a). The design of each carbody shall be compliant with the Tier I requirements of the FRA contained in the 49 CFR Part 238. Specifically, the carbody shall comply with 238.203 through 238.219 without utilizing alternative compliance.
- b). Each carbody's design shall conform to the applicable sections of the most recent edition of the APTA-PR-CS-S-034 standard, "Design and Construction of Passenger Railroad Rolling Stock," as of the time of the Notice to Proceed (NTP).
- c). In the selection of the type and thickness of material to be used, the Contractor shall be guided by the desire to obtain the maximum strength and reliability with the minimum weight and minimum number of different material grades which is obtainable at reasonable cost.
- d). The Contractor shall base its structural design on the specific loads, deflections and properties of structural sections called for in this Specification.
- e). For structures not specifically covered, the Contractor shall base its design on its experience, subject to successful stress analysis and structural testing.
- f). The structure and equipment supplied shall resist these loads, including fatigue loads, with factors of safety consistent with those which have previously been shown to be successful for existing North American Intercity passenger equipment for service at maximum design speed.

6.3 General Design Details

- a). General

- i). The structure of the individual carbody shell shall be designed and manufactured to provide for the mounting and functioning of all the elements/features defined in this Specification, including:
 - (1) Passenger seating and related convenience features
 - (2) Doors, passageways, windows, and emergency exits
 - (3) Mechanical elements such as trucks, brakes and HVAC
 - (4) Electrical elements such as lighting, communications, and control trainlines
 - (5) Accessibility equipment as required by ADA requirements
 - (6) All ancillary equipment
 - (7) Diaphragms or Gangways
 - ii). The general arrangement of carbody shells, layout/mounting of the subcomponents, and equipment access setups shall be approved by Amtrak during the mockup and design review process described in Chapter 3.
- b). Dimensions, Weights and Under Car Clearance
- i). The individual cars shall meet the dimensional and clearance drawing requirements stated in Chapter 1.
 - ii). Each completed car shall comply with the minimum allowable clearance above top of rail for the carbody and all associated components under the worst combination of conditions, including fully worn wheels, solidly compressed or broken springs, AW3 passenger load, carbody deflection to zero camber and environmental conditions including wind, snow and ice.
- c). Physical Requirements
- i). The carbody structure shall be designed to prevent water, snow, debris or dust ingress when operating at any permissible speed up to maximum design speed under all weather conditions consistent with the worst case climatic data as specified in Amtrak Specification 963.
 - ii). The carbody shall be designed to be watertight for a service life of at least 40 years, without maintenance.
 - iii). Housings for externally mounted equipment shall be completely watertight when covers are in place, excluding battery boxes and the HVAC unit, which shall be designed to prevent water intrusion while allowing adequate ventilation and air flow.
 - iv). Pneumatic equipment that can tolerate environmental exposure may be mounted in an unsealed container per manufacturer's recommendations.

- v). Drain holes shall be provided to prevent the accumulation of water.
 - vi). Exterior surfaces shall not contain pockets that may accumulate or retain water or debris such as leaves.
 - vii). Exterior structural pockets with flat bottom surfaces shall, at a minimum, include drain holes.
 - viii). The carbody shall be designed for ease of accident repair, including replacement of any CEM components, CEM structural zones skin panels, and any undercar components or covers.
 - ix). The Contractor shall review these and other aspects of the carbody design with Amtrak during the design review process.
 - x). The Contractor shall include accident repair procedures as part of the deliverables, which will cover a range of scenarios identified by Amtrak, including sideswipes, dragged rolled-over equipment, strike damage to the lead end of the end car and sides of all cars, and automotive grade crossing collision damage to the underframe components of all cars.
 - xi). Some recommended design techniques consist of use of spot welds, and not seam welds, for attachment of the visible exterior side sheathing, and the routing of underfloor car piping and electrical cables as far inward from the end sheeting and as close to the center sill as possible.
- d). Carbody Materials
- i). Materials used in carbody construction shall be in accordance with APTA Standards PR-CS-S-034, PR-CS-S-004-98, PR-CS-S-015 and the requirements of Chapter 19.
 - ii). The carbody shall be constructed of either stainless steel, American Iron and Steel Institute (AISI) type 301LN or approved equivalent.
 - iii). Components such as bolsters, end draft sills, end sills/anticlimbers, structural shelves, corner posts and collision post stubs may be fabricated from High-Strength Low-Alloy (HSLA) steel per American Society for Testing and Materials (ASTM) A588, or approved equal.
 - iv). Selected steel shall have inherent corrosion resistance equal to or greater than A588 when evaluated per ASTM G101, paragraph 6.3.1.1.
 - v). All welding and fastening shall conform to the requirements of Chapter 19.
 - vi). Other alternate materials and fabrication techniques providing equivalent strength, fatigue resistance and performance goals may be proposed by the Contractor for Amtrak approval.
 - vii). The method used by the Contractor to prevent corrosion from the inside surfaces of closed structural sections (i.e. inside of tubular sections) shall be

- identified at the design review. **[CDRL 6-01]** At a minimum, each such element shall include a drain hole.
- viii). There shall be no corrosion that reduces the load carrying ability below the design strength requirements for the design life of the vehicle.
 - ix). This can be met by material selection, coating or corrosion allowance and shall be submitted for review and approval at the design review.
 - x). Cross sectional views shall be provided on carshell drawings and must be submitted for approval at the design review.
 - xi). Drawings must be submitted not only of individual structural members, but all sub-assemblies and assemblies in order to have a clear record of the carshell assembly construction and process.
 - xii). Carshell drawings shall be submitted for Amtrak review and approval 30 days before starting the fabrication of any components for the carbody structure. **[CDRL 6-02]**
 - xiii). The drawings shall show the location of all principal framing members, their cross sectional area, material, metal thickness along with detailed type and method of joining and applicable references to Welding Procedure Specifications.
 - xiv). Bill of materials shall be provided to link the drawing number and location each part in its assembly level drawing.
 - xv). Thickness of all sheathing materials shall be provided.
 - xvi). This information shall be of sufficient detail to permit manufacture of any structural parts necessary to repair damage to a car.
- e). Carbody Exterior Finish
- i). Specifications and samples for all external surfaces meeting the grit requirement of TS19.5.6 shall be submitted for review and approval. Three samples of all exterior finishes shall be submitted to Amtrak for approval. **[CDRL 6-03]**
 - ii). These approved samples shall then be used throughout the program as references to maintain quality.
 - iii). All exterior surfaces shall be free of ripples and buckling.
 - iv). Dents, gashes or other surface imperfections shall not be permitted. Maximum allowable variation from a straight line or the designed curved line shall be as follows:
 - (1) All exterior side and roof surfaces not hidden by covers or shrouds shall have a maximum 0.09375 in. variation (peak to valley) in 3 ft

measured in any direction or 1/300 of the span between adjacent members or areas questioned as ripples.

- (2) Areas within 8 in. of the side doors and vehicle ends may have a gradual slope towards the doors and ends with a maximum deviation of 0.1875 in. from the side sheet contour.
- (3) Exterior surfaces hidden by covers and shrouds shall have a maximum 0.3125 in. variation (peak to valley) in 3 ft measured in any direction.
- (4) All other sheet metal exposed to view, inside or outside the assembled vehicle, shall have a maximum variation from a straight line on flat surfaces measured in any direction of 0.1875 in. and 0.125 in. over a distance of 36 in. and 12 in.

f). Fabrication

- i). The carbody shall be fabricated so that the shells are identical to the maximum extent practical.
- ii). The level of tolerance in different dimensions of carshell build shall be identified in the design process.
- iii). Undercar and interior components shall be designed to accommodate those tolerances while remaining interchangeable between cars.
- iv). Unless otherwise approved by Amtrak, the carbody shall be assembled using fusion welding or resistance welding.
- v). Connections consisting of primary structural members shall be designed so that the ultimate strength of the connection exceeds the ultimate strength of the weakest member joined.
- vi). Mechanically fastened connections used in the construction of the carbody structure should be avoided, however, rare exceptions can be submitted for Amtrak approval with fatigue analysis and a factor of safety of 2.0 based upon the proof load for limited connections.
- vii). Clamping force friction shall be ignored in the design and analysis of mechanically-fastened connections.
- viii). Self-tapping screws shall not be used for structural connections.
- ix). Fabrication practices shall ensure that the life of the vehicle is not shortened because of fatigue, corrosion, breakage or wear.
- x). Maintenance practices shall be considered so that parts are not easily lost and cannot be installed in more than one orientation.
- xi). Fasteners shall be captive wherever practical.

- xii). A sufficient number of jigs, fixtures and templates shall be used to assure interchangeability of components and uniformity of structure throughout the fleet.
 - xiii). Parts of the bodies, such as underframes, side frames, end frames and roofs shall be built on jigs.
 - xiv). All weld and bolt patterns shall be identical on all cars.
 - xv). Visible weld and bolt patterns shall be uniform and symmetrical and shall be submitted for review and approval by Amtrak.
 - xvi). All equipment hangers shall be interchangeable on all cars without the use of shims or elongated holes.
- g). Equipment Access
- i). Apparatus and truck equipment requiring frequent inspection or attention, including any element of a CEM system that requires periodic inspection to confirm serviceable condition, shall be readily accessible and replaceable.
 - ii). The frequency of required service shall govern the degree of accessibility. Apparatus requiring attention more frequently than every 120 days, or in emergencies, shall be accessible from the side of the car or from the inside of the car unless specifically approved by Amtrak.
 - iii). All undercar shrouds shall be spaced a minimum of 3 ft. from the adjacent truck to permit ease of truck access at outlying maintenance points not having a maintenance pit. Shrouds shall be designed to be identical for ease of replacement in the future. If different sizes are needed, Contractor shall be required to obtain specific approval from Amtrak.
 - iv). All other underfloor apparatus shall be arranged to provide ready access from the side of the car.
 - v). Large apparatus shall be capable of ready replacement by forklift truck from the side of the car, or by overhead crane through appropriately sized roof access panels and lifting eyes.
 - vi). All protective devices on the car shall be accessible to maintenance personnel from the side of the car.
 - vii). For purposes of this paragraph, protective devices shall include devices requiring replacement or resetting to move the car or cause auxiliaries to function, such as air brake cut outs, circuit breakers, fuses, latching protective relays, etc.
 - viii). Locations for all protective devices shall be identified on arrangement and installation design drawings and approved by Amtrak.
 - ix). Apparatus supports, and housings shall be mounted interchangeably.

6.4 Structural Design Details

a). Level

- i). The difference in height Above Top of Rail (ATOR) of the four corners of each finished car shall not exceed $(1/2750)$ of the carbody length, measured at the car ends.
- ii). The measurement shall be made on the completely assembled and equipped car mounted on its completed trucks at AW0.
- iii). The measurement may be made from any suitable structural member of the underframe and shall be documented in each vehicle history book.

b). Camber

- i). Carbody camber shall be defined as its vertical curved shape as viewed in side elevation and shall have a smooth curvature from end-to-end of the carbody.
- ii). Each completed car shall have a positive camber not to exceed $(1/2000)$ of the carbody length under AW1 conditions.
- iii). It must be designed so that under full AW3 load, and for the life of the car, a negative camber does not occur.
- iv). The maximum difference between the cambers of each side sill, measured at the location of maximum deflection, shall not exceed 0.125 in.
- v). The Contractor shall evaluate and submit camber values at AW0, AW1 and AW3 load for approval at the design review.
- vi). Camber requirements shall be validated during the AW3 vertical load test.

c). End Doors

- i). The end of each car shall be equipped with a weathertight lockable sliding pocket powered door with manually operated override unless otherwise approved by Amtrak.
- ii). Door must be airtight to prevent the entrance of diesel fumes.

d). Strength, Stiffness and Fatigue Requirements

- i). The strength of the carbody, and all carbody components, shall meet the Tier I requirements of 49 CFR Parts 229 and 238.
- ii). All safety critical structural connections that are in an impact load path shall be designed so that, in case of excessive impact, failure shall be by buckling or crushing of structural elements rather than by shearing of structural elements or by failure of connections between elements.

- iii). The cars shall also be designed, at the minimum, for the worst loading case arising out of the possible simultaneous combinations of the following operational loads acting on the car:
 - (1) Car tare weight (AW0)
 - (2) Crush passenger load (AW3)
 - (3) Vertical, lateral and torsional dynamic load due to wheel/rail interaction
 - (4) Loads due to vehicle pitching caused by braking
 - (5) Snow or ice loads
 - (6) Aerodynamic loads
 - (7) Train passing wind loads: Compressive and lateral loads caused by another train passing in the opposite direction on an adjacent track with relative speeds of 285 mph
 - (8) Buff/draft loads
 - (9) Racking or torsional loads
- iv). The carbody strength shall be sufficient to permit operation under the above defined loads for the design life of the car (40 years) without structural damage, including fatigue cracks.
- v). For the operational cases defined above, the stresses in the carbody shall not exceed the lesser of 50% of the guaranteed minimum material yield or the buckling strength.
- vi). The buckling strength of all structural members with a compressive stress equal to, or greater than 35% of its material's yield strength shall be calculated.
 - (1) Any variations in the material compression moduli with stress shall be addressed in the buckling strength calculations.
 - (2) These calculations shall also address the inelastic buckling strength of structural members subjected to any combination of compression and shear.
- e). Natural frequency
 - i). The FEA model shall be used to calculate natural frequency of the carbody under AW0 and AW3 load and supported at the bolsters.
 - ii). The natural frequency of the carbody under AW3 load, and rigidly supported at the bolsters, shall be no less than 2.5 times the natural frequency of the car's secondary suspension system.

f). Fatigue

- i). The carbody shall be designed to permit operation under nominally expected operational loads in the three orthogonal directions and about the torsional axis, for the design life of the car (40 years) without fatigue cracks/issues.
- ii). Fatigue critical joints and members shall be identified using an appropriate analytical method such as finite element analysis (or alternate method as approved by Amtrak). The key load cases from a fatigue consideration are:
 - (1) Vertical loads from car weight and passenger loads (from AW2 loading)
 - (2) Load input at the carbody/truck interface due to vehicle-track interaction
 - (3) Load input at the coupler interface due to traction and braking
- iii). Compliance with the design life requirements shall be demonstrated through cumulative damage analyses on all potential fatigue critical locations.
- iv). The methodology for the cumulative damage analysis shall be approved by Amtrak.
- v). Load spectra for the cumulative damage analyses may be obtained from the following:
 - (1) Actual test data from existing equipment that is substantially similar, running on similar North American track and having similar braking/acceleration profiles.
 - (a) Details on any dissimilarities shall be provided and suitably accounted for.
 - (2) Dynamic analysis of vehicle performance under the appropriate modes, the results of which must be verified by test on the first vehicles.
 - (3) For the vertical direction, the number of cycles in the life of the vehicle calculated from the first free-free vertical bending mode natural frequency of the car. This will give a constant amplitude loading, the dynamic factor for which shall not be less than $\pm 20\%$.
- vi). Alternatively, an endurance limit analysis may be used for materials that have an established endurance limit, such as materials covered by AWS Standard D1.1.
 - (1) All stress range cycles shall be below the endurance limit or 10 million cycles, whichever is more stringent.
 - (2) The dynamic load factor shall be determined by the Contractor and shall not be less than $\pm 20\%$.

- (3) An endurance limit extrapolated from test results shall not be acceptable.
 - (4) An endurance limit calculated using a survival percentage is not acceptable unless explicitly approved by Amtrak, but in no case shall the percent survival be below 97.5%.
 - vii). A detailed fatigue analysis clearly identifying the endurance limits, allowable fatigue stresses, fatigue stress ranges and load cycle information shall be submitted for review and approval. **[CDRL 6-04]**
 - viii). Fatigue design data such as allowable fatigue stress levels, endurance limits, S-N curve data, MGD characteristics, etc. shall be derived from current versions of nationally accepted standards such as the AAR Manual of Recommended Practices, AWS Standards, or the Aluminum Association Aluminum Design Manual, Specifications and Guidelines for Aluminum Structures, American Association of State Highway and Transportation Officials, or other publication that is acceptable to Amtrak.
 - ix). For joint designs not covered by the above (IE spot and laser weld joints), the Contractor shall conduct the fatigue tests necessary to develop the needed design data.
- g). Underframe Structure
 - i). Coupler carrier
 - (1) The coupler carrier, and those portions of the carbody to which it is attached, shall be designed to withstand the loads caused by supporting one end of the car on the coupler carrier, with the truck attached, such as might occur during emergency jacking or lifting with a crane in the event of a derailment.
 - (2) Under this coupler carrier load, the allowable design stress of the coupler carrier, or any part of the carbody structure to which it is attached, shall be 80% of whichever is lowest of the yield strength, the critical buckling stress or ultimate tensile strength.
 - (3) The coupler carrier and its pocket on all car types shall be capable of having an APTA Type H knuckle coupler applied.
 - (4) Alternate designs may be proposed to Amtrak for approval.
 - ii). Body bolster or equivalent structure
 - (1) The design shall provide clearance for the truck in all positions and accessibility for truck maintenance and de-trucking.
 - (2) Positive stops and safety hangers shall be provided between the carbody and the truck to limit the vertical and transverse movement of suspended trucks when the carbody is lifted with trucks attached.

- iii). Cross bearers, floor beams and floor pans
 - (1) No moisture, dirt, dust or debris shall be able to enter into the subfloor for the life of the vehicle.
 - (2) The floor pan, or equivalent structure, shall be designed to facilitate replacement or repair of damaged portions and yet provide the attachment and seal welds required to meet the structural, car pressurization and fire safety requirements.
 - (3) Adhesives shall not be utilized to seal the floor pan or equivalent structure.
 - (4) The cross bearers and floor pans, if used, shall be constructed of stainless materials.
 - (5) The floor pan shall contain the underfloor thermal and acoustic insulation.
 - (6) The pans shall be suitably reinforced for structural rigidity and to prevent resonant noise and vibration and “oil canning” under any operating condition.
- iv). Subfloor and floor system.
 - (1) Floors shall be designed and manufactured so that no permanent deformation or soft spots shall occur during the required service life of the vehicle.
 - (2) Floors shall be watertight and resistant to spills, washing solutions and moisture. Standing water is prohibited from entering and collecting in any cavities inside of the carbody. Material choices shall be reviewed and approved by Amtrak to ensure that any retained moisture does not adversely affect the life of the carbody.
 - (3) The floor panel system shall be waterproof and resistant to degradation.
 - (4) Floor system panels shall be fully sealed composite panels, as large as practical shall minimize joints in walkways and shall have no joints in the doorways.
 - (5) Plymetal floor panels are not permitted.
 - (6) If the floor system is designed to be primary structure, it shall be represented in all tests and analyses.
 - (7) The maintenance manual shall specify the strength and attachment requirements for replaceable elements of the floor system.
 - (8) The number of unique floor panels shall be minimized throughout the vehicle and between vehicles.

- (9) Under a dead load and a maximum passenger loading of AW3, the floor panels shall deflect by no more than 1/250 of the short span between crossmembers, up to a maximum of 0.0625 in., without permanent deformation.
- (10) The sub-floor and its attachments to adjacent structural members shall be capable of resisting the shear resulting from the specified compression loading without permanent deformation.
- (11) The flooring system shall meet 49 CFR 238.103 Fire Safety requirements, utilizing ASTM E119 testing as detailed in Appendix B of the CFR with a minimum fire-endurance rating of 30 minutes at AW3.
- (12) The representative section of each unique floor assembly configuration shall be reviewed and approved by Amtrak but shall be no less than the entire width by 10 feet.
- (13) All joints shall lie on supporting structure.
- (14) The floor shall not squeak for the life of the vehicle.
- (15) Tapping plates for above-floor equipment shall be suitably attached.
- (16) Carpeting or composite floor covering, where specified, shall be installed per manufacturer's recommendation and shall be approved by Amtrak.

h). Collision posts

- i). If CFR 238.211.d will be followed in lieu of other collision post standards and regulations, a documented engineering analysis shall be submitted for review and approval by Amtrak within 30 days of NTP verifying the coupling system and supporting structure is capable of preventing disengagement and telescoping. **[CDRL 6-05]**
- ii). Analysis and test plan information applicable to the collision post and coupler shall be included.
- iii). Car ends utilizing collision posts to meet telescoping regulations shall meet the following requirements:
 - (1) A continuous cross section shall be fully welded to the bottom and top of the underframe and continue up to at least 18 in and then taper to a point at 30 in or continue to the roof.
 - (2) Longitudinal overload of collision post at 30 in above the underframe resulting in failure along the post shall not cause deformation in the connections to the under/frame and its supporting structure. Overload capabilities shall be validated through analysis and testing.

i). Roof

i). General

- (1) The design loads for equipment and apparatus attached or mounted to the roof, including HVAC units, gutters, air scoops, antennae, lights, equipment supports and supporting roof framing shall meet the carbody strength and fatigue requirements in this Specification.
- (2) All parts of the roof structure, sheets, equipment covers, roof walkway, screens and other guards shall have sufficient strength to withstand, without exceeding 80% of the yield strength and critical buckling stress under the following conditions:
 - (a) Three concentrated loads of 250 lbs spaced 30 in. apart, each applied over a 3 in. by 3 in. area, such as might be applied by maintenance personnel working on the roof.
 - (b) The placement of the loads shall be such as to produce the worst-case condition for the roof structure without exceeding the yield strength, 80% of ultimate strength and critical buckling meet the rollover strength requirement defined in 49CFR Section 238.215.
 - (c) loads imposed by a mechanical car washer consisting of a pressure of 60 lbs./ft² over a 12 in. wide band extending transversely across the carbody.

ii). Emergency roof access

- (1) Roof emergency access shall be in accordance with FRA 49 CFR Part 238.123. Perimeter of the cut-zone shall have a retro-reflective sign demarcating the opening, and clearly indicating the purpose, instructions and other emergency signage per APTA Standard PR-PS-S-006-23 and PR-PS-S-002-98.
- (2) Cross sections of the fully assembled vehicle shall be provided at the emergency roof access locations to validate the entire cut-zone has uniform cutting thickness and the space below is free from all obstructions and secondary structure.
- (3) Configuration of the emergency roof access zone with the roof window layout shall be included. **[CDRL 6-06] [CDRL 6-07] [CDRL 6-08] [CDRL 6-09]**
- (4) An emergency egress plan shall also be supplied for each vehicle configuration and shall include a dedicated document with vehicle wide ingress procedure options for emergency responders. **[CDRL 6-10]**

iii). Gutters and deflecting plates

- (1) Water deflecting gutters shall be installed on the roofline above all door openings on both sides of the car, to 12 in. inward from the end of the door opening or the end of the car as appropriate.
- (2) They shall prevent water from dripping into or in front of the side door opening, any exterior indicator lights or key switches when the car is stopped.
- (3) Deflecting plates shall be installed at the ends of the roof of each car to direct water between cars and away from any gangways.
- (4) The design arrangement and installation of roof equipment shall not permit accumulation of water.
- (5) If used, drains shall be fabricated from stainless steel or aluminum tubing and be designed to be inherently protected from clogging (large diameter size, large radii bends, no fittings, large slope, etc.) as a result of debris, leaves, dust, sand or dirt. Drainage provisions must be submitted for approval at the design review.
- (6) Gutters and deflecting plates shall withstand regular passage through a car wash.
- (7) Gutters shall be made from the same material as the carbody shell, roof and side sheets.
- (8) Alternative gutter designs that meet the Specification requirements shall require approval of Amtrak.

j). Jacking Pads and Lifting Eyes

- i). Jacking pads, with anti-skid plates, shall be provided in approved locations on the side sills to lift the car, with trucks attached, for maintenance and for re-railing.
- ii). The car shall be designed to permit jacking or lifting one end of the car for truck removal or re-railing with the other end of the car resting on its truck, without damage to the truck attachments, underframes or any of the underfloor equipment.
- iii). The Contractor shall coordinate the jacking pad locations with Amtrak so as to permit the use of existing shop permanent jacking systems to the greatest extent possible. **[CDRL 6-11]** Jacking shall not require any special attachment or removal of components from the carbody.
- iv). Lifting eyes shall also be provided in approved end-of-car locations to lift the car.
- v). If any lifting fittings or adapters are required for connection to the car, 10 sets shall be provided to Amtrak at the time of delivery of the first car.

- vi). It shall be possible to lift up a complete car, or either end of a car, utilizing portable jacking devices or a crane and to subsequently support the car with portable stands with truck(s) remaining on the rails and remove the lifting device.
- vii). The truck(s) shall be removable without interference, while the car is supported on jacking pads. All such conditions shall be considered at AW0 without exceeding 80% of yield.
- viii). The localized strength around each of the jacking pads and lifting eyes shall be designed for a vertical load of one half the weight of the car at AW0 (including trucks) with a horizontal load of 10% of the vertical load.
- ix). The horizontal load shall be applied simultaneously with the vertical load in any direction to produce the worst stress condition.
- x). The allowable design stress shall be yield or 80% of ultimate, whichever is lower or the critical buckling stress of any part of the lifting location or the structure to which it is attached.
- xi). The empty carbody, with trucks attached (AW0), shall be capable of being lifted on any symmetric lifting eyes or jacking pads without exceeding 80% yield.
- xii). The empty carbody, with trucks attached (AW0), shall be capable of being lifted on the outboard most diagonally opposite jack pads or lifting eyes without exceeding 80% of yield.
- xiii). Analysis of the carbody structure under torsional loading of all diagonal jacking and diagonal lifting cases, and all symmetric lifting and jacking cases, shall be included in the stress analysis.

6.5 Truck to Carbody Interface

- a). The carbody stress analysis must assess the carbody's compliance with the truck-to-carbody connection criteria detailed in Chapter 7.
- b). This assessment shall use the reaction loads derived from the truck-to-carbody connection evaluation presented in Chapter 7.

6.6 Doorways, Trapdoors and Passageways

- a). All car types shall be fully compliant, at the time of manufacture, with all the latest rules and regulations of the Americans with Disabilities Act, as follows:
 - i). For wheeled mobility devices entraining and detraining, vestibules shall be designed for use of a ramp that meets all requirements per Part 1192, Subpart F – ADA, Accessibility Guidelines for Intercity Rail Cars and Systems. Ramps or lifts, supplied by Amtrak, are provided as station equipment and not carried on-board.

- ii). A minimum 32-inch wide clear passage shall be provided through the powered side entrance doors, B-end body-end door (as well as A-End for High Capacity Coach car), collision post door and diaphragm passage, and a path from the B-end vestibule to accessible location within the car interior. A 60-inch turning circle in the vestibule shall be provided.
- iii). A minimum 32-inch wide clear passage shall be provided through the diaphragm and body-end door, and a path to an accessible location within the Café/Lounge car.
- iv). Trap Door and Folding Steps: Each side of the vestibule on each car shall be equipped with a modular trap door and folding step assembly for safe boarding and discharging of passengers at both low and high level platform stations. The module shall be Form-Fit-Functionally interchangeable with the current module on the Viewliner II cars, with the additional requirement of meeting the clearance requirements per D-05-1355 Rev E- Clearance Diagram. The Builder shall demonstrate the interchangeability of the new module with the current VL-II module.
 - (1) The trap door and folding steps shall be compliant with all aspects of ADA requirements.

b). Refer to Chapter 12 for additional details.

6.7 Diaphragm

- a). A modular diaphragm, compliant with Amtrak drawing D-00-2031, shall be provided to enclose the walkway between cars. The diaphragm shall be compliant with Amtrak specification # 332. It shall provide a safe, enclosed passage for passengers/ crew passing between cars. The diaphragm shall provide a tight seal, with the diaphragm from the adjacent car, under all conditions encountered during normal train operation. The car-to-car path shall meet ADA requirements. A minimum clear opening of 32 inches through the diaphragm shall be provided when the car is at rest on level tangent track. Joint between diaphragm and carbody shall be waterproof, so that no water enters the carbody.
 - i). The faceplate shall be approximately 2 inches beyond the coupler pulling face to provide compressive pre-load when the cars are coupled. The foot plate shall be nominal 53 ± 0.5 inches above Top of Rail.
 - ii). The design shall provide a weathertight seal when coupled with legacy equipment. Furthermore, access to legacy equipment to and from the new single level vehicles shall be accessible between cars without any tripping hazards, pinch points, etc. while traversing all track geometries on the long distance service.
- b). Diaphragm Curtain
 - i). Retractable curtains with restraining devices shall be provided on either side in the diaphragm passage. The curtains shall be directly interchangeable, without adapters, with existing curtains, and shall include "automatic

retraction or break away" feature. The diaphragm hook to retain and secure the diaphragm curtain shall be located at identically the same height above top of rail as Viewliner I & II for inter-car compatibility. This dimension may be taken from a convenient carbody reference.

- ii). A safety gate shall be provided to prevent passage through the collision post opening when is open at the end of the train. A mechanism to secure the gate in the extended and retracted position without rattling shall be provided. In either retracted or extended position, the gate shall not interfere with operation of the handbrake, nor infringe on the FRA required clearance.
- iii). All Cars shall be designed to accommodate both a traditional diaphragm or an enclosed gangway to the best extent possible. Amtrak's vision is that this fleet will operate with legacy cars during the initial years of operation which shall require the use of the traditional diaphragm; however, utilizing the same mounting locations, an enclosed gangway may be more advantageous to Amtrak in operation with future fleets. (Option)
 - (1) Amtrak understands that other implications may be necessary to accommodate this change in the future. The Contractor shall provide the required modifications to convert this fleet in the future.

6.8 Lifts (Option)

a). Overview

- i). As an option, Contractor shall provide an on-board mobility lift for use by passengers.
- ii). This section describes the design and functionality of the lift necessary to support this operation.
 - (1) Lift utilized to facilitate boarding of accessible passengers between platform and cars.
- iii). Refer to Chapter 11 and 16 for the passenger interface details of these features.
- iv). Structural connections for lifts shall be evaluated in parallel with the carbody stress analysis and at a minimum include conclusions within the carbody stress analysis report.

- b). Even if the option to install lifts is not exercised, all cars shall have the structural provisions installed to facilitate mounting, should Amtrak decide to pursue this option. These provisions shall be integrated into the car design without compromising structural integrity or functionality.

c). General Requirements

- i). All Lifts and associated equipment shall be suitable for sustained operation under all ambient conditions through which these cars are expected to operate (see Chapter 3).

CONFIDENTIAL — DO NOT DISTRIBUTE

- ii). Controls for each Lift shall be adjacent to the Lift they control. The Accessibility Lift controls shall allow one (1) train crewmember to readily supervise all aspects of the lift operation and movements of the occupant to/from the lift without obstructing or impacting the occupant's movements for the Lifts.
- iii). Lifts shall be included on each accessible coach and café/lounge.
- iv). Lifts on single-level cars shall be sized for moving passengers from the low-level platforms to the boarding door.
- v). Lifts shall be interlocked with the vehicle braking system so that train movement is inhibited with the lift deployed.
- vi). When not in operation the Lifts shall be stowed in such manner to not inhibit passenger movements.
- vii). Lifts shall be capable of lifting 800 lbs (363 kg).
- d). Structural Requirements
 - i). All lifts shall be secured to the car structure in a manner such that twist, roll or flexing of the shell shall not affect lift operation.
 - ii). Lift tracks or guide rails shall not be distorted by carbody or vehicle movement to prevent operation. Clearance between car structure and lift tracks can be developed as needed for design however any bridging between lift platform and car floor shall be automatic.
- e). Lift Requirements
 - i). Two Lifts shall be provided on the cars, mounted on opposite sides of the same vestibule space.
 - ii). Lift operation may be a combination of manual and automatic features. Manual actions to deploy or stow the lift shall be accomplishable by a 5th percentile female; however, shall be designed to be operated by one (1) crew member without any assistance
 - iii). Lift controls shall be in the vestibule space and shall require an Amtrak standard coach key to enable.
- f). Power Requirements
 - i). Lift shall be powered by car 480VAC bus.
 - ii). Controls, indicators, and interlocks shall be powered by cars 72VDC bus.
 - iii). Lift shall meet the requirements of 49 CFR Part 38 Subpart E Paragraph 38.95.
- g). Emergency operation

- i). In the event of a loss of power, the Lift shall include manual operation provisions to allow passengers to be moved between the car floor and platform. Manual operation shall allow for continuous operation to move multiple passengers as needed.
- ii). Manual deployment, lift and lower operations shall be limited to a maximum of 50 lbs. for any individual task.
- iii). The lowest station platform height for the purposes of the lift's upper and lower reach shall be assumed to be the top of rail. The lift design shall also allow for operation when the car is on a curve with up to 7 in. of lean, due to super-elevation.
- iv). The lift shall be of modular, compact design to facilitate removal and replacement for servicing/repair.
- v). Under power operation, the complete cycle of deploying the platform, lowering the lift to platform height, raising the lift to car floor height and stowing the lift platform shall require no more than between 30 and 60 seconds.
- vi). The lift shall comply with the most recent RVAAC recommendations and any applicable ADA standards.

6.9 Safety Appliances

a). Exterior

- i). Railroad safety appliances shall be provided to each car in accordance with 49 CFR Parts 229, 231 and 238, and APTA Standard PR-M-S-016-06.
- ii). An ergonomic evaluation shall be performed by the Contractor and approved by the Engineer regarding the size, placement, and positioning of all safety appliances, especially loop step arrangement and necessary handholds.
[CDRL 6-12]
- iii). The Contractor is requested to recommend improvements which facilitate train crew and maintenance personnel boarding and detrainning.
- iv). Handholds shall be 0.625 inch diameter one piece forged stainless steel and attached with stainless steel bolts or rivets.
- v). The Contractor shall arrange for an FRA sample car inspection of the safety appliance applications and shall provide Amtrak with a copy of the FRA "no exceptions taken" letter prior to release of the first equipment of each type.
[CDRL 6-13]

b). Interior Passenger Grab Handles

- i). ADA compliant passenger grab handles shall be provided throughout the cars for safety, and in particular as follows:

- (1) At each side entrance doorway to allow crew to stand safely in the open doorway; and
- (2) At each side entrance doorway to allow use during the entire boarding and alighting process; and
- (3) On both sides of the passageway adjacent to the diaphragm; and
- (4) Additional handholds shall be provided in the passenger compartment for standing passengers and in the Food service areas. The quantity and location of handholds will be reviewed during design review. See Chapters 9 and 14 for additional details.

6.10 Equipment, Equipment Boxes, Equipment Rooms and Access Doors

a). General

- i). The high-speed nature of service intended for the cars will require a high degree of protection from foreign object damage, and from the effects of winter weather conditions.
- ii). All undercar equipment, other than the trucks, shall be housed in an undercar equipment enclosure fitted with lightweight hinged panels meeting the materials and workmanship requirements of Chapter 19.
- iii). Each compartment of the equipment bay shall be completely enclosed by one (1) hinged access door, one (1) drop-down panel, and one (1) bottom panel on each side of the car longitudinal centerline or another proposed lightweight designed by the Contractor for review and approval by Amtrak. Mounting of equipment on any of the doors and panels is prohibited.
- iv). The enclosure shall be aerodynamically designed for low drag, and to inhibit the collection of water, debris and snow. The sides of the vehicle below the side sills shall incorporate a continuous aerodynamic contour from front to back that shall include the equipment boxes. The outboard ends of the enclosure facing the trucks, and/or the ends of the car shall be reinforced, spaced at least 3 ft. from the trucks for maintenance access, and protected to the greatest extent possible from foreign objects run over by the car.
- v). The enclosures shall quickly allow damaged components to be unbolted and replacement components installed during servicing and allow ease of repair of damaged enclosures at the Amtrak shops. No enclosures shall be directly welded to the carbody.
- vi). The enclosure parts shall be standardized as much as possible and shall be assembled with welding and/or mechanical fasteners. Use of adhesives for enclosure assembly is prohibited.
- vii). A small, separate set of hinged covers shall be provided on each side of the car for the water tank fill points, and the waste tank drain hose/control valve

access points, so as to not require the full side access covers to be opened for their servicing.

- viii). Panels shall be designed to be standardized lengths across the entire car, to the best extent possible, and across car types. Any deviation of this requirement will need review and approval by Amtrak.
- ix). Panels shall be designed so that undercar components or systems requiring daily or routine maintenance are readily and easily accessible.
- x). All equipment boxes, which are required to be watertight, shall be given a water test. Junction boxes are required to be watertight.
- xi). The interior of all electrical equipment boxes and terminal boxes shall be primed and shall be given one coat of white insulating coating.
- xii). A single coat of insulating varnish, enamel or white (or approved color) epoxy powder coating may also be used. Insulating coatings are not required on fiberglass surfaces.
- xiii). Final dimensions, arrangement of all equipment compartment access points and attachments to the carbody shall be subject to approval by Amtrak.

[CDRL 6-14]

b). Carbody Attachment

- i). Brackets and other means of support for the equipment shall be designed and installed to facilitate access for maintenance and servicing and for removal and re-application.
- ii). Fasteners shall be conveniently accessible.
- iii). The attachment of all apparatus over 150 pounds to the carbody shall be in accordance with APTA Standard PR-CS-S-034 Section 2.7.
- iv). Interior fittings shall be in accordance with 49 CFR 238.233 and APTA Standard PR-CS-S-006.
- v). In no case shall the strength of a fastener or the shearing of the fastener through the base material be the limit of the carrying capacity of a member.
- vi). Fasteners are not always torqued correctly and sometimes the nut shakes loose.
- vii). Analysis of all the attachments considering loose bolts should be considered.
- viii). The analysis of the connection shall include considerations for fastener shear, pull out, and fastener tension.
- ix). Equipment supported on resilient mounts shall always be designed to have the resilient mount in compression and have safety straps or other devices that will support it in case of a failure of the resilient mounts.

- x). The design of the safety straps shall include the effect of the equipment dropping from its mounts.
- xi). Under no circumstances shall equipment be supported by bolts in holes that are tapped into the primary structure of the end underframe.
- xii). The following shall apply to apparatus over 25 pounds:
 - (1) Vertically oriented bolts shall not be the primary vertical load-bearing mechanism.
 - (2) Bolted connections shall be designed with a factor of safety of 1.5 using bolts of not less than 0.375 of an inch diameter when analyzed for in-service loads.
 - (3) No bolts in tension may be utilized.
 - (4) All bolted connections in equipment supports shall be supplied with minimum SAE J429 Grade 5 bolts or equivalent, plated for corrosion resistance in accordance with Chapter 18. Alternatively, metric fasteners of at least M10 property class 8.8 or A4-80 may be used.
- c). Floor and Roof Penetrations
 - i). The Contractor shall ensure that all floor and roof penetrations shall be sealed against fire, pressure differential and entry of vermin and provide for a watertight and dust tight carbody.
 - ii). Floor penetrations shall be sealed with an appropriate material to prevent flame propagation from underfloor flame sources; and shall last the life of the car.
 - iii). Considerations shall be made for compliance to ASTM E119 for representative floor penetrations.
 - iv). Full interior to exterior floor penetrations shall be made through sealed tubes to prevent moisture from entering pan to floor area.
- d). Battery Box
 - i). See Chapter 15.
- e). Electrical Connections
 - i). Enclosures which, because of internal layout and/or limited external access, require removal from the car for mid-life overhaul shall have electrical connections made by the use of connectors meeting the requirements outlined in this Specification.
 - ii). The connectors shall lie within the enclosure, and the cables shall enter the enclosure through watertight fittings.

- iii). Fully enclosed cable ducts or conduits shall not connect directly to such enclosures but shall incorporate a flexible or rigid, detachable transition piece that will facilitate breaking the connection.
- iv). Other enclosures shall have cables and wires entering the box through watertight fittings and shall terminate on devices, bus bars, terminal blocks, etc.
- f). Covers
 - i). Outboard covers shall raise upward a minimum of 110 degrees for quick examination of the interior without removing the covers.
 - ii). Inboard covers shall open to the maximum extent possible, but in no case less than 90 degrees.
 - iii). All hinged covers shall also be readily removable.
 - iv). Openings provided upon removal of covers shall be of sufficient size to permit removal and replacement of any component in the box and easy access to equipment in the box for inspection and maintenance.
 - v). All covers shall have a permanently attached "hold open" feature.
 - vi). The "hold open" feature shall in no way interfere with or impede the easy removal or replacement of the cover.
 - vii). These covers shall be provided between the trucks and trucks to end wall as required to complement the overall aerodynamic and aesthetic design and shall not violate any of the clearance requirements of the car.
 - (1) Trucks to end wall may use removable shields in place of covers this will be determined at design review. Clearance between the end of the covers/shields and trucks shall not inhibit truck maintenance, especially that of brake pads and calipers.
 - viii). They shall be designed to be lightweight and readily repairable at Amtrak facilities in the event of debris strikes.
 - ix). Skirt panels shall be operable by a single person, requiring no more than 25 lbs. of force to open, lift, secure open, or close.
 - x). Panels shall be designed to be standardized lengths across the entire car, to the extent possible, and across car types.
 - xi). Panels shall be designed so that undercar components or systems requiring daily or routine maintenance are readily and easily accessible.
 - xii). All latches that must be manipulated to gain entrance to the enclosures shall be quick-release, spring loaded latches which operate with a toggling-type action.

- xiii). Latches must be recessed or have a safety lock which will prevent accidental activation.
- xiv). All latches shall be of the highest quality, designed for heavy-duty railroad service and applied in sufficient number to ensure adequate gasket compression needed for long term watertight quality sealing.
- xv). A spring-loaded safety catch shall be provided at each enclosure cover.
- xvi). The safety catch shall be designed to retain the cover at all operating speeds without the cover latches engaged.
- xvii). The safety catch design shall preclude damage from cover misalignment, slamming covers and attempts to open covers with the catch engaged.
- xviii). An approved cover nameplate shall identify the location of the safety catch.
- xix). All covers more than 3 ft in width shall have two or more handholds arranged about the center of gravity of the cover, and recessed flush into the cover surface. The handholds shall not accumulate debris or moisture.
- xx). The covers shall be arranged so that only one person is required to easily open, remove, reapply, close and lock any cover, regardless of size.
- xxi). Adequate clearances for all handholds, latches, etc., shall be provided so that a person wearing gloves in a winter environment is not hindered.
- xxii). All covers shall fit well and be adequately gasketed where necessary to prevent the entrance of water (including both a driving rain and a high pressure car wash spray), dust and snow.
- xxiii). All gaskets shall remain intact for a period of at least 10 years.
- xxiv). Only one common type of gasket shall be used on all covers using a positive mechanical means of attachment.
- xxv). Flat foam strips or glue-on attachments shall not be permitted. The design shall allow for ease of gasket replacement, without use of adhesives.
- xxvi). All removable doors on underfloor enclosures shall be interchangeable between similar enclosures on different cars without need for adjustments to ensure proper seal operation.
- xxvii). All hinged covers should have the hinge placed so that the cover cannot swing down and contact the rail or ground or fall open due to failure of the latch.

6.11 Windows

- a). General

- i). Frame and glazing rubber of side passenger windows and side door windows shall be designed to securely retain the glazing material under all operating conditions on specified track configurations.
 - ii). Glazing assembly (frame, rubber and glazing material) shall not leak during carbody water tests and shall not rely on sealant.
 - iii). The glazing material shall show no physical damage or degradation of optical qualities when exposed to the environment encountered in rail passenger service.
 - iv). All glazing assemblies shall meet all applicable requirements of 49 CFR Parts 223 and 238 for FRA Tier I service. They shall meet any applicable APTA requirements.
 - v). The Contractor may propose as an alternate design the deletion of the restroom side window for Amtrak approval.
 - vi). Material selection for glazing rubber and all other materials in all locations must take into account the possible interaction between the materials as well as the environment.
 - vii). The design of all glazing shall be approved by Amtrak. **[CDRL 6-15]**
 - viii). Windows shall be designed to not compromise cellular attenuation in any capacity.
- b). Glazing Materials
- i). Glazing material shall be polycarbonate and shall conform to the requirements specified in Chapter 19.
 - ii). Only flat glazing shall be used.
 - iii). The passenger area and restroom side windows shall be double glazed units.
 - iv). All door, sign and interior partition windows shall be single glazed units.
 - v). Material shall be integrally tinted with no appreciable variation in color over the entire area of each glazing and between panel of like color designation and thickness.
 - vi). Color measurements shall be taken with a spectrometer.
 - vii). Markings are to be in accordance with current ANSI Standard Z26.1 and 49 CFR Part 223.
 - viii). Location of these markings must be visible for identification after installation.
- c). Side Windows

- i). General
 - (1) Side windows shall be double glaze and conform to the requirements specified in Chapter 19.
 - (2) The edges of the unit shall be sealed.
 - (3) Retention of glazing material shall allow installation and/or removal of the main rubber extrusion from the carbody frame.
 - (4) The window opening in the carbody shall be as large as practical and reinforced to keep the opening flat.
 - (5) A leak proof seal shall be provided.
 - (6) The use of sealants or adhesives is prohibited to achieve a watertight seal.
- d). Emergency side windows
 - i). A two part "Emergency" handle shall be provided at designated "Emergency" windows for removal of the window from inside of the car.
 - ii). The design of the glazing rubber shall also allow removal of the glazing from the outside of the car by emergency responders as described below.
 - iii). Emergency windows shall be provided and identified in accordance with 49 CFR Part 238 and shall not be less than 4 per car.
 - iv). Bonding the emergency pull handle to the window is not allowed.
- e). Rescue access windows
 - i). All side windows shall be rescue access windows and shall be capable of being removed from the outside of the car by prying and pulling a "zip-strip".
 - ii). Rescue access windows shall provide a means of rescue access by emergency personnel such as, police, fire department, etc.
 - iii). Emergency side windows on each side of the car shall be designated as an emergency and rescue access – dual-function window.
 - iv). Identification and removal instructions shall be provided in accordance with 49 CFR Part 223, 49 CFR Part 238.114, APTA Standard PR-PS-S-002-98, and ASTM Standard D 4956-07 for Type I material sheeting.
- f). Door Windows
 - i). All door windows (such as the side door, end car collision post door and sliding interior door). The side door window dimensions shall permit a standing train crew member to clearly see out of the window.

- ii). The end car collision post door shall be clear and meet the requirements for FRA Type I glazing.
- iii). The side door windows shall be tinted and meet the requirements for FRA Type II glazing.
- iv). The sliding interior door window shall be clear and meet the requirements for FRA Type II glazing.
- g). Exterior Destination Sign Windows
 - i). Each exterior destination sign shall have a flat piece of FRA Type II non-tinted window glazing, of sufficient size to prevent masking the display.
 - ii). The glazing shall be resistant to any defrosting heat which may be applied.

6.12 Insulation

- a). Acoustical Insulation
 - i). To reduce movement, structurally-borne sound and noise generated by the vibration of the roof, floor and side sheets, panels, air conditioning ducts and other metal surfaces, in particular the doors, damping material shall be applied to the inner side of these surfaces where necessary.
 - ii). The thickness of the damping material shall be such that the acoustic requirements are fulfilled.
 - iii). The damping material shall have a vibration decay rate of not less than 35 decibels per second (dB/sec) as measured by the Geiger-Hamme Thick Plate Test Method.
 - iv). The damping material shall have a hydrodynamically smooth finish and shall be receptive to painting.
 - v). It shall be resistant to dilute acids, alkalis, greases, gasoline, aliphatic oils and vermin.
 - vi). It shall be unaffected by sunlight or ozone and shall not become brittle with age.
 - vii). The material shall not contain any asbestos and shall meet the flammability and smoke emission requirements of Chapter 19.
 - viii). Its application shall be according to the supplier's recommendations and shall include an application of a recommended primer.
 - ix). The sound dampener shall be compatible with the material used at the affected locations in the car structure.

- x). The inner surface of the carbody structural shell, except for the end underframe welds, shall be coated, and the inside surfaces of structural members sprayed to the extent necessary.
 - xi). Structural members under the floor of the carbody shall not be coated.
 - xii). The outside or inside surfaces of the main air duct, and all ventilation cross ducts shall be treated with acoustic insulation to reduce noise.
 - xiii). Duct splitters (if used), the underside of the main air duct, top/bottom of floor beams and inside door pockets shall not be coated.
- b). Thermal Insulation
- i). The heat transfer through the carbody, using only the carbody's own floor heaters, shall not exceed 14 Btu/Hr/°F per foot of car length (derived from 1200 Btu/Hr/°F for an 85 ft car) under the environmental conditions specified in Amtrak Specification 963 while the carbody is stationary. Other values may be proposed to Amtrak for consideration.
 - ii). Glass wool or fiberglass insulation shall be used.
 - iii). The use of urethane foam insulation is prohibited.
 - iv). All insulation used shall not mold, rot, have any odor, corrode any metals, nor shake down in long service under vibrating conditions.
 - v). The heat transfer capabilities shall not diminish over the life of the vehicle.
 - vi). The Contractor shall supply a thermal analysis of completed car for approval at the design review.
 - vii). A vapor barrier shall be provided between all interior linings and the carbody insulation.
 - viii). There shall be no all-metal path between interior of the carbody and outside of the carbody skin.
 - ix). The insulation shall be mechanically fastened to the carbody.

6.13 Exterior Finish

- a). General
- i). The exterior finish of the vehicle shall maintain its appearance with regular maintenance.
 - ii). Soon after fabrication, all non-weathering carbon steel portions of the carbody shall be prepared for painting and immediately thereafter painted with the first coat of primer by trained technicians utilizing the paint supplier's written procedures.

- iii). Stainless steel shall not be painted, but shall be sufficiently passivated after assembly, and no signs of rusting at welds or along any portion of the exterior shall be allowed.
 - iv). The surface preparation and graphics applications shall ensure that the car can operate at least eight years between major exterior finish repairs or replacement.
 - v). All exterior surface treatment plans and specifications shall be submitted to Amtrak for review and approval. **[CDRL 6-16]**
 - vi). All paint shall include, at a minimum, a primer coat, color coat and clear coat, applied in accordance with manufacturer specifications.
- b). Painting - Exterior
- i). Care in painting application shall ensure freedom from runs, sags, orange peel and other unsightly paint deficiencies, by trained technicians utilizing the paint supplier's written procedures.
 - ii). Exterior designs shall be approved by Amtrak during Design Reviews.
 - iii). Paint system is subject to approval by Amtrak for its corrosion protection and aesthetic durability.
 - iv). The paint system must allow for at least twelve years of durability.
 - v). Replacement of decals shall withstand a minimum of eight years and not damage the paint surface during removal.
 - vi). Paint system shall meet Amtrak Specification 742-1.

6.14 Graphics and Labels

- a). Exterior Graphics
- i). All exterior graphics, lettering and signage, including vehicle numbers and reporting marks, shall be applied to the vehicle in accordance with Amtrak specifications as identified by Amtrak during design review.
 - ii). The Contractor may request minor modifications to the size, location and placement of decals, striping and paint application in order to accommodate carshell features, equipment, maintenance points or other obstructions that will affect the quality, appearance or longevity of the decals or graphics.
 - iii). All exterior decals shall be retro-reflective unless specified otherwise.
 - iv). All decals, graphics and signage shall be specified and designed to function in the operational, environmental and climatic conditions specified in Amtrak specification 963 with no fading, material degradation, delamination, discoloration, shrinkage or expansion, wrinkling or peeling.

- v). It is the expectation of Amtrak that the exterior livery would be jointly developed by the Contractor and Amtrak.
- vi). It would be expected to be a final design of vinyl material that allows for the wrapping of all exposed stainless steel surfaces of the carbody including the roof, end sheets and any undercar elements including but not limited to shrouds.
- vii). Each mock-up shall have a vinyl wrapped exterior livery for further input on the design direction.
- viii). All exterior decals shall have edge seal applied unless otherwise agreed to.
- b). Labels
 - i). Exterior equipment shall be labeled in accordance with Amtrak Specification 696. Emergency-related decals and signage shall conform to all applicable APTA standards and FRA requirements.
- c). Interchangeable Exterior Signage
 - i). The Contractor shall provide an interchangeable, easily replaceable exterior sign on all car types to be utilized by Amtrak to modify class designation for future operation of the single level fleet.
 - (1) The sign shall be designed to be interchangeable across all cars in the fleet mounted to the carbody within close proximity to the side loading doors using standardized fasteners or approved locking mechanisms allowing for tool-less removal and replacement.
 - (2) The sign shall be constructed of non-flammable, scratch resistant and UV-stable materials suitable for the exterior environment complying with all CFR and ADA requirements.
 - (3) Contractor shall work with Amtrak to develop this signage during the design review process but it is Amtrak's intention that the Standard Coach car can be reclassified as a Business Class car utilizing this interchangeable exterior signage.

6.15 Automatic Equipment Identification (AEI) Tags

- a). Each car shall be equipped with an Automatic Equipment Identification (AEI) transponder tag on each side, located in conformance with Universal Machine Language Equipment Register (UMLER) dimensional and securement requirements and programmed with the reporting marks of the owner, road number of the vehicle and all other technical data required by UMLER.
- b). The Contractor is responsible for ensuring the following:
 - i). Tags are properly installed in accordance with UMLER requirements.
 - ii). Tags are properly programmed with all data required by UMLER; and

CONFIDENTIAL — DO NOT DISTRIBUTE

- iii). The UMLER/EMIS system is updated with the data for each vehicle as required for shipment.

6.16 Stress Analyses

a). Stress Analyses and Test Plan

- i). A stress analysis and test plan for the carbody structure shall be submitted for approval no later than 120 days after NTP. **[CDRL 6-17]**
- ii). Separate plans shall be prepared for each car type as required.
- iii). The Plan shall address the requirements of this specification, any applicable CFR, and the latest APTA Standard PR-CS-S-034-99.
- iv). The Stress Analysis and Test Plan shall be discussed during the first design review meeting.
- v). Each Plan shall be a working document and updated as the design develops.
- vi). When the plan for the analyses and testing is revised, it shall be updated and resubmitted no more frequently than monthly.
- vii). Each revision shall include revision level indications.
- viii). The stress analyses and tests plan shall be approved prior to submittal of the stress analysis report required by this Specification.
- ix). The Plan shall be made a volume of the stress analysis report.
- x). The Plan shall follow the general requirements of the report as identified herein.
- xi). A master table of all different carbody types and their applicable car types for the entire project shall be provided in each plan.
- xii). Carbody types utilizing an analysis or test from a different carbody type for validation shall clearly reference it in the plan.
- xiii). Carbodies which utilize different drawing or part numbers because of small differences that utilize the same validation analysis or test shall include thorough design differences comparisons in the design review package.
- xiv). The Stress Analyses and Test Plan shall detail the methods and approach that will be used to analyze and test the carbody and truck.
- xv). It shall also include the following, with references to standards and publications as appropriate:
 - (1) A comprehensive table of material properties detailing the engineering properties of each grade and temper used in the carbody.

- (a) This table shall include the FEA material property inputs and literature references or testing reports supporting these selections.
 - (2) Detailed and high-resolution illustrations of each material's respective locations.
 - (3) A numbered listing of each load condition for analysis and test, including load magnitudes and points of application, with CFR, APTA, and Specification references.
 - (4) Acceptance criteria for each load condition.
 - (5) Diagrams displaying loads applied and points of support for each load condition for analysis and for testing.
 - (6) A description of the software settings, model setup, and meshing quality assurance.
 - (7) Description and examples of methods for analyzing and evaluating the critical structural connections for static and fatigue (all major joint types shall be included; IE resistant and laser welding). Examples should include partial penetration welds if used (IE resistant and laser welding).
 - (8) Fatigue joint testing plan for joint designs not covered by AAR, AWS, Aluminum Association Aluminum Design Manual.
 - (9) Descriptions and examples of methods used in past projects to evaluate and justify stress singularities and stress concentrations in the FEA results.
 - (10) Table of all interior fittings to be analyzed and vehicle equipment over 150 lbs shall be provided with their respective mass and locations.
 - (11) Description of structural manufacturing work done outside the Contractors main manufacturing facility.
 - (12) If applicable, description of design process for dissimilar metal connections to isolate and prevent any galvanic reactions.
- b). Finite Element Models
- i). The Contractor shall submit electronic copies of the preliminary and final Finite Element (FE) models for review by Amtrak. **[CDRL 6-18] [CDRL 6-19] [CDRL 6-20]**
 - (1) The formats and which major loading results shall be agreed upon between the Contractor and Amtrak.

- ii). As part of the carbody FAI, the carbuilder shall provide reports, models, illustrations, and drawings for the Authority to audit and verify the final FEA model represents the final condition of the carbody structure.
 - iii). If the FEA model does not represent the final condition of the carbody structure such as welds or holes to accommodate interfacing sub-systems, these differences shall be summarized and justified.
 - iv). Car types claiming to use the same carbody structure shall be similarly validated.
 - v). The FEA model shall include the major structural components of the HVAC if not resiliently mounted.
 - vi). Other major equipment which adds considerable stiffness to the carshell may be required at the Authority's discretion.
- c). Carbody Stress Analyses
- i). The stress analysis shall show the calculated and allowable stresses and margins of safety for all elements, for all specified load conditions, and shall include calculations of stresses in joints, joint elements, and other important elements.
 - (1) It shall include FEA results, connection, buckling, natural frequency and fatigue analyses.
 - ii). Preliminary stress analysis results shall be prepared and submitted for review and approval not later than 60 calendar days after approval of the analysis and test plan. **[CDRL 6-21]**
 - (1) Preliminary results of all load cases shall be included.
 - (2) The formats shall be agreed upon between the Contractor and Amtrak. **[CDRL 6-22]**
 - iii). The stress analysis report shall be prepared and submitted for review and shall be fully approved prior to commencing manufacture of any carbody structural parts. **[CDRL 6-23]**
 - (1) The Contractor shall submit the required stress analysis report in compliance with the format and content specified herein.
 - (2) If a cited reference in the report is not readily available to Amtrak, the Contractor shall provide the reference or copies of the pertinent pages.
 - (3) All references shall be in English.
 - (a) If an English language reference is not available, an English translation shall be provided, and both the original and the translation shall be included in the report.

- (4) The report shall demonstrate that all structural members satisfy the requirements of the FRA, APTA and this Specification for compliance with each design load and condition and represent good design practice in the North American railroad industry.
- (5) The report shall be organized and in sufficient detail so that Amtrak can readily follow the theory and its application to the car.
- (6) The Contractor shall certify that the analysis and calculations have been reviewed and validated before the report is submitted to Amtrak.
- (7) If tests are conducted to provide the necessary data, the entire test report shall be submitted.
- (8) This report shall show the test procedure, raw data as well as reduced data, and summary, with detailed discussion of the results.
- (9) The report shall include analyses of all critical connections and summarize the connections in a critical weld list.
- iv). Critical connections which cannot be adequately analyzed shall be prototyped and tested to demonstrate compliance with the requirements of the design and the Specification.
- v). The FEA shall be supplemented as necessary by manual or computer calculations of stresses at joints.
- d). Validation of Stress Analyses
 - i). Validation of the finite element model shall be accomplished by comparing the carbody structural test results for each test required by Chapter 19 with the corresponding stress analysis results.
 - (1) This information shall be tabulated and submitted with the carbody structural test reports for each test. **[CDRL 6-24]**
 - ii). In the test procedure for each test to be used for validation, there shall be a pre-selected list of strain gauges to be used for the comparison, which shall not be less than half of the total number of strain gauges used during the test.
 - (1) This table shall include gauge number, type, element number, general location, stress analysis strain value in the active direction of the gauge, active direction of gauge on carbody, a column for the strain gauge value, and a column for notes.
 - (2) For rosette strain gauges, the information above must be supplied for each leg as well as the combined result.
 - iii). The test report shall include tables that compare stresses calculated from the test strain gauge readings with analytical stresses from the FEA and

shall include the test stress value, the analytical stress value, the percent difference between the two values, and a space for annotation.

- (1) The report shall include a graph plotted using commercially available spreadsheet software comparing the stresses calculated from test strain gauge readings with analytical stresses from FEA.
- iv). For gauges applicable to the individual tests, the percent difference between the two values shall be within $\pm 15\%$ for 80% of the compared values of the test results and analytical results for each gauge type, with none beyond $\pm 30\%$.
 - (1) This shall not include load cells.
- v). It is assumed all gauges of interest will target areas of stress over 35% of the allowable stress.
- vi). Additional strain gauges can be used for experimental or reference only purposes but shall not help satisfy the gauge count requirements and shall be clearly identified as such in all documentation.
 - (1) Such experimental gauges may be applied on or extremely close to weld joints with no penalty to the correlation requirements but are not exempt from the yielding requirements and thus must measure and record data the same as the required gauges.
- vii). If the analyses results do not agree with the test results within the above-specified tolerance, the Contractor shall revise the stress analyses, update the FEM, and re-run all FEA.
 - (1) All manual analyses using data from the FEA shall be recalculated using the corrected values.
 - (2) This process shall be repeated until agreement of results is within the specified tolerance.
 - (3) The stress analysis report shall be revised and re-submitted.
 - (4) All results from re-analysis shall meet specification requirements.
 - (5) The design shall be corrected if such requirements are not met.
- viii). Analytical values which disagree with the test value by more than 15% shall include an individualized and detailed explanation of the reasons for the variance in the carbody test report for individual review and approval by the Authority.
 - (1) This explanation may include supporting manual calculations.
- ix). Approval of the carbody test report shall depend, in part, on the adequacy of the justification for excessive variance between analytical and test stress values.

6.17 CDRLs

CDRL	Description	Due
CDRL 6-01	Method of Corrosion Prevention for Interior Surfaces of Enclosed Structural Sections	30 days prior to PDR
CDRL 6-02	Carshell Drawings	30 prior to initiation of any component fabrication.
CDRL 6-03	Three Samples of all Exterior Finishes	30 days prior to FDR
CDRL 6-04	Detailed Fatigue Analysis	30 days prior to PDR and on-going through each DR
CDRL 6-05	Documented Engineering Analysis (Coupling system and supporting structure verification)	NTP + 30 days
CDRL 6-06	PDR – Cross sections of the emergency roof access locations	30 days prior to PDR
CDRL 6-07	IDR – Cross sections of the emergency roof access locations	30 days prior to IDR
CDRL 6-08	FDR – Cross sections of the emergency roof access locations	30 days prior to FDR
CDRL 6-09	FAI – Cross sections of the emergency roof access locations	30 days prior to FAI
CDRL 6-10	Emergency Egress Plan and Emergency Responder Ingress Procedure	30 days prior to PDR
CDRL 6-11	Jacking Pad Locations	30 days prior to PDR
CDRL 6-12	Safety Appliance Placement Ergonomic Evaluation	30 days prior to PDR
CDRL 6-13	FRA Sample Car Inspection for Safety Appliance Applications	30 days prior to FAI
CDRL 6-14	Equipment Compartment Access Points and Attachments to the Carbody - Final Dimensions and Arrangement	30 days prior to PDR and on-going through each DR
CDRL 6-15	Glazing Design	30 days prior to PDR
CDRL 6-16	Exterior Surface Treatment Plans	30 days prior to PDR
CDRL 6-17	Carbody Structure Stress Analysis and Test Plan	NTP + 120 Days
CDRL 6-18	PDR – Finite Element Model Electronic Copies	30 days prior to PDR
CDRL 6-19	FDR – Finite Element Model Electronic Copies	30 days prior to FDR
CDRL 6-20	FAI – Finite Element Model Electronic Copies	30 days prior to FAI
CDRL 6-21	PDR – Preliminary Stress Analysis Results	60 days after approval of Stress analysis and Test Plan [CDRL 6-15]
CDRL 6-22	Stress Analysis Result Report Format	30 days prior to PDR
CDRL 6-23	Stress Analysis Result Report	30 days before FDR
CDRL 6-24	FEA Model Verification – Tabulation of test results to analysis	Prior to carshell FAI

CONFIDENTIAL — DO NOT DISTRIBUTE

* End of Chapter 6 *

Amtrak Single Level Fleet Replacement

Technical Specification

7. Trucks

Revision 0

Table of Contents

7.1	Overview	7-1
7.2	General Requirements	7-1
7.3	Vehicle/Track System Qualification.....	7-2
7.4	Vehicle Dynamic Performance Requirements	7-4
7.5	Truck-to-Carbody Connection	7-8
7.6	Truck Clearance.....	7-8
7.7	Truck Structural Design.....	7-8
7.8	Truck Component Design	7-12
7.9	Wheel and Axle Assembly	7-14
7.10	Shock Absorbers (Dampers) and Shock Mounts	7-17
7.11	Shock and Vibration.....	7-18
7.12	Electrical Wiring	7-18
7.13	Painting	7-19
7.14	Handbrake Linkage	7-19
7.15	Height Adjustment and Shimming.....	7-19
7.16	Truck Classification Plate.....	7-19
7.17	Maintainability	7-20
7.18	CDRLs.....	7-20

7.1 Overview

- a). This chapter covers the truck design for Amtrak's Single Level Fleet.
- b). The cars shall be equipped with trucks designed for safe and reliable operation at all speeds and cant deficiencies up to their maximum, on all FRA Classes of track up to and including Class 8.
- c). Single-level cars – Maximum operating speed of 125 mph and 5" cant deficiency.
- d). Truck frames may be either cast or fabricated. The trucks shall incorporate braking via disc and tread brakes. If tread brakes are not used, tread scrubbers or suitable alternative will be required. At a minimum one (1) manual mechanical handbrake per car shall be provided. The handbrake shall not require power or air to apply or release the mechanism. The trucks must be designed to accommodate the maximum static axle load as specified in Chapter 1.

7.2 General Requirements

- a). The truck assembly shall be designed for operations specified in Chapter 1, under the environmental and operating conditions identified in Amtrak Specification 963, including track configurations.
- b). Truck designs must have a proven service history in intercity or commuter rail service with a minimum of 2 million miles and must be demonstrated as being compliant with all Specification requirements through finite element analysis, truck dynamic behavior through computer simulation (validated as defined by Amtrak) and instrumented testing at an approved test track facility.
- c). All truck frames and bolsters (if used) shall be directly interchangeable between all locations of a given car type.
- d). All materials and workmanship shall meet the requirements of Chapter 19.
- e). The truck shall be equipped with the brake equipment specified in Chapter 9.
 - i). The disc brake arrangement shall be sufficient for the thermal load produced by the specified braking performance.
 - ii). Brake equipment shall provide braking rates as identified in Chapter 9.
- f). The Contractor shall provide instructions in the appropriate Maintenance Manuals for allowable field repair welding procedures for the truck.
- g). Provisions shall be made for use of a wheel truing machine for re-profiling wheels while mounted on a car without requiring any degree of truck disassembly.
 - i). Access to the ends of the axle for wheel truing shall be available without the removal of any additional parts, including roller bearing end caps (with the exception of plugs or axle tachometer generators).
- h). Components, such as air valves and linkages, wheel slide sensors, speed sensors and wiring shall be located as best as possible to protect them from debris strikes

or have shields added.

7.3 Vehicle/Track System Qualification

- a). Each car type must meet the requirements of 49 CFR Part 213.57, Part 213.329 (d), and the requirements of 49 CFR Part 213.345 for service operation up to the maximum speed and cant deficiency specified in Chapter 7.1.
- b). The truck dynamic characteristics shall be suitable for the train application and must demonstrate appropriate response for all speeds, curves, spirals and turnouts, and for all typical track perturbations found within defined safety limits of FRA track geometry standards and as described in this Specification.
 - i). The truck design must meet this level of suitable performance without use of a tilt system.
- c). Vehicle Dynamic Performance Qualification Plan
 - i). The Contractor shall submit a vehicle dynamic performance qualification plan for Amtrak review and acceptance. **[CDRL 7-01]**
 - (1) The purpose of this plan is to outline the documentation, process and steps which will be followed to ensure all vehicle dynamic performance requirements are met and ensure timely FRA approval of the planned operation.
 - (2) The plan shall outline the approach for each project phase through concept development, design, simulation, testing and model validation.
 - (3) At a minimum this plan must include:
 - (a) Overview of proposed qualification process, key milestones and planned documentation.
 - (b) Outline of planned simulation cases and pass/fail criteria.
 - (c) Preliminary listing of track geometry inputs and rail profiles.
 - (d) Listing of planned tests and test locations for all component and pilot car tests.
 - (e) Outline of FRA submittals required in each project phase for vehicle qualification per 49 CFR Part 213.345. Please reference 49 CFR 238.111 for guidance on documentation specific to the acceptance testing project phase.
 - (f) Outline of simulation model validation plan (i.e. plan for correlation of simulation predicted results with physical test results to ensure validity of the simulation model).
 - ii). After the vehicle dynamic performance qualification plan is approved by Amtrak, each of the subsequent documents listed below shall be submitted for review and approval.

- iii). Periodic vehicle dynamic simulation review meetings between the Contractor and Amtrak will be required as the project progresses through each phase.
 - iv). It is Amtrak's intent to work collaboratively with the Contractor to ensure that the vehicle dynamic model properly represents the vehicle design and that track inputs represent the actual operational environment.
 - v). During these vehicle dynamic simulation meetings, Amtrak must be able to review the fully detailed simulation model, track inputs and results in the native simulation software environment.
- d). Vehicle Dynamic Simulation Plan
- i). The Contractor shall submit a detailed vehicle dynamic simulation plan for Amtrak review and approval. **[CDRL 7-02]**
 - (1) Details of all planned simulation cases and pass/fail criteria.
 - (2) Preliminary listing of key simulation model parameters (mass, suspension type, key dimensions, wheel profile).
 - (3) Description of vehicle model and planned simulation software.
 - (4) Definition of speed and track geometry inputs.
 - (5) Vehicle dynamic simulations must be performed using an industry recognized software (NUCARS, VAMPIRE, SIMPACK, etc.).
- e). Vehicle Dynamic Simulation Report
- i). A vehicle dynamic simulation report must be submitted during the vehicle design process for Amtrak review and approval **[CDRL 7-03]**. At a minimum this report must include:
 - (1) Tabulation of results for all simulation cases.
 - (2) Model parameters fully defining all dimensions, masses, wheelsets, suspension components and friction elements along with an indication of the source of the data (manufacturer specification, Contractor specification, measured data, calculation, etc.).
 - (3) Wheel profile(s), rail profile(s) and resulting wheel-rail contact plots.
 - (4) Detailed plots of simulation results as requested by Amtrak.
- f). Vehicle Dynamic Model Validation Plan
- i). A validated vehicle model is required by 49 CFR 213 Appendix D(2)(a). A vehicle dynamic model validation plan must be submitted to Amtrak for review and approval **[CDRL 7-04]**. At a minimum this plan must include:
 - (1) List of planned quasi-static vehicle characterization tests (static lean, wheel equalization, modal vibration test, truck rotational stiffness, etc.).

- (2) List of vehicle dynamic on-track tests (curving, lateral track perturbation, vertical track perturbation).
- (3) List of planned suspension component tests (springs, dampers, bumpers, traction rods, friction elements, etc.).
- (4) Proposed methods for comparing simulation and test data, including variables to be compared (force, acceleration, modal frequencies, etc.) and acceptance criteria which demonstrated the model has been validated.
- (5) Reference APTA-PR-M-S-031-22 Low-Speed Curving Performance, Chapter 2.7, Validations, for additional guidance.
- (6) Dynamic simulation model shall be delivered for running internal dynamic simulations after completion of the qualification process with the model being fully editable.

g). Vehicle Dynamic Model Validation Report

- i). A vehicle dynamic model validation report must be submitted to Amtrak for review and approval. **[CDRL 7-05]**
- ii). The purpose of this report is to demonstrate that the simulation model has been validated by correlating the simulation predicted results with the physical testing results.
- iii). This report must include correlation of suspension component and vehicle level test results with model inputs and results.
- iv). If this validation effort requires updates to the model, a revision of the vehicle dynamic simulation report must also be submitted.

7.4 Vehicle Dynamic Performance Requirements

a). Wheel Load Equalization

- i). The trucks shall conform to the latest revision of APTA PR-M-S-014-06, Wheel Load Equalization of Passenger Railroad Rolling Stock, for Class G equipment.
- ii). Per FRA Safety Advisory 2013-02, the suspension system shall control static wheel-load distribution when the equipment is stationary on level track such that the lightest wheel load deviates by no more than 5% from the nominal wheel load for a given truck.

b). Static Lean

- i). Maximum Cant Deficiency – Each car type shall meet the requirements of 49 CFR Part 213.329 (d) for wheel unloading and carbody roll angle.
- ii). Maximum Cant Excess – No wheel shall experience more than 50% wheel unloading when the train is stopped on a 7 inch superelevation.

- c). Wind Loading
 - i). A side-wind loading analysis shall be performed per APTA PR-M-RP-009-98 Rev 2, Section 3.9 using the environmental conditions specified by Amtrak Specification 963.
- d). Low Speed Curving
 - i). Simulations shall be performed according to the requirements of APTA-PR-M-S-031-22 Low-Speed Curving Performance Standard.
- e). Minimally Compliant Analytical Track (MCAT)
 - i). Each car type shall demonstrate acceptable performance for MCAT simulations as defined by 49 CFR 213 Appendix D.
 - ii). For the purposes of 49 CFR 213.345 qualification with the FRA, MCAT simulations shall be run with AW0 car loading and all truck components in the new condition.
 - iii). A select sub-set of additional MCAT simulations for Amtrak information, to be proposed by the Contractor and approved by Amtrak, shall be run with AW3 car loading and all truck components in the new condition.
- f). Representative Service Route
 - i). Each car type shall demonstrate acceptable performance for simulations on track segments of each track Class which are representative of the planned operation as defined by 49 CFR 213.345(c)(2)(ii).
 - (1) Measured track geometry for these simulations will be provided by Amtrak.
 - ii). Simulations on representative track segments shall be run with:
 - (1) AW0 car loading and
 - (2) AW3 car loading with all truck components in the new condition.
 - iii). Additional simulations shall be run to ensure safety with truck components in the worn or failed condition: broken coil spring, inoperative damper, high friction at sliding interfaces, stiffening of elastomeric elements due to low temperature and aging, worn wheels.
- g). High Speed Stability
 - i). Each car type must not exhibit truck hunting or sustained vehicle body lateral oscillation up to a maximum service speed of 125 mph, up to a maximum speed of 130 mph (125+5 mph) during qualification testing and up to a maximum speed of 140 mph (125+15 mph) by vehicle dynamic simulation.
 - ii). Limits for sustained truck lateral and vehicle body lateral accelerations are defined by 49 CFR 213.333.

- iii). Linear Modeling
 - (1) Stability simulations must be performed by linear Eigenvalue analysis with creep factor range of 0.67-1.00 and equivalent wheel conicity range of 0.025-0.400.
- iv). Non-Linear Modeling
 - (1) Stability simulations must be performed in both new and worn conditions using the full non-linear model running through a lateral track perturbation at sufficient speed to cause hunting.
 - (2) A “top-down speed sweep” must then be used to determine the critical hunting speed.
 - (3) Simulations must use friction coefficient of 0.5 along with combinations of new/worn wheel profiles and new/worn truck components (dampers, friction elements, elastomer elements, etc.).
 - (4) Amtrak will provide representative worn NRCC6 wheel profiles for simulations.
- h). Ride Quality
 - i). A comfortable ride (as defined in this chapter) shall be provided at all permissible speeds under normal operating conditions for each FRA track class, up to maximum vehicle service speed.
 - ii). Ride quality for all proposed truck designs shall be demonstrated analytically and through actual track testing per the requirements of Chapter 20.
 - iii). A comfortable ride is defined as weighted root mean square (rms) acceleration in the vertical, lateral and longitudinal directions of less than 0.032g (0.315 m/s²) and a crest factor less than 9.
 - iv). The vibration total value (root sum of squares summation) for each measurement point must not exceed 0.051g (0.50 m/s²).
 - v). Both values must be based on data in the frequency range of 0.5 to 80 Hz using a 3-minute sliding window.
 - vi). Weighted rms acceleration and crest factors shall be calculated according to ISO Standards 2631-1 and 2631-4.
 - vii). Simulations shall be performed in the AW1 load condition.
 - viii). Monitoring locations for ride quality shall be chosen at representative floor and seat locations of each car type.
- i). Natural Frequencies and Damping Rates

- i). Eigenvalue analysis must be performed to determine the characteristic damped natural frequencies of the vehicle body and trucks (pitch, bounce, yaw, upper center roll and lower center roll).
 - ii). Truck hunting modes (free wheelset kinematic) and truck oscillation modes (parallel wheelset kinematic) must be determined over the full range of speed and expected equivalent wheel conicity range of 0.025-0.400.
 - iii). Characteristic frequencies and damping rates as a percentage of critical damping must be provided.
- j). P2 Forces
- i). A calculation must be made to show that the vertical track dynamic (P_2) forces do not exceed 68,000 lbs. for a 0.5 degree dip angle and all speeds up to the operating speed limit. The calculation is to consider nominally stiff concrete tie track and to use the British Rail Equation (as defined in British Railways Board Group Standard GM/TT0088 Issue 1).
 - ii). The specific equation to be used is as follows:

$$P_2 = P_0 + 2\alpha v \sqrt{\frac{m_u}{m_u + m_t}} \left(1 - \frac{\pi c_t}{4\sqrt{k_t(m_u + m_t)}} \right) \sqrt{k_t m_u}$$

Where:

P_0	Static wheel load in pounds
α	Dip angle in radians
v	Vehicle speed in inches/second
m_u	Unsprung mass per wheel in lbf/in/sec ²
m_t	Track mass per wheel in lbf/in/sec ²
c_t	Track damping per wheel in lbf/in/sec
k_t	Track stiffness per wheel in lbf/in

Track parameter values are as follows:

α	0.0085 Total dip angle in radians based on ½ degree on both sides of the dip
m_t	1.1335 Track mass per wheel in lbf/in/sec ² for nominally stiff concrete tie track
c_t	671 Track damping per wheel in lbf/in/sec for nominal track conditions (from literature)
k_t	392,900 Track stiffness per wheel in lbf/in for nominally stiff concrete tie track (corresponds to track modulus of 5,100

lb/in/in, assuming a track deflection of 0.084 inches under a 33,000 pound wheel load)

- iii). Calculation of P_2 forces using Contractor proposed alternative values in the British Rail Equation and resulting change in the value of P_2 forces may be considered by Amtrak upon approval of justification for such changes by Amtrak and that such calculations are also approved by the owner of the track or its designated representative.

7.5 Truck-to-Carbody Connection

- a). The truck frames and all components shall be retained to the carbody in accordance with the requirements of 49 CFR Part 238.219 and APTA Standard PR-CS-S-034-99.
- b). The ultimate strength of the truck and the truck-to-carbody connection shall be sufficient to secure the entire truck to the carbody in a manner which will prevent truck separation during derailments, collisions, or other adverse events in which a horizontal load of 250,000 lbs. is applied to the truck frame.
 - i). This load may be transmitted from the truck frame through structural members, positive stops, or other rigid, mechanical safety devices and/or combinations thereof to the carbody bolster.
 - ii). Bolster anchors/traction links (if used) shall not be used to provide any part of this strength.
- c). Vertical safety hangers shall be provided to secure the truck to the carbody.
- d). Depending on truck design, a locking center pin may satisfy this requirement.

7.6 Truck Clearance

- a). All truck-mounted equipment shall conform to the clearance requirements of Amtrak Clearance Drawing D-05-1355 Rev E.
- b). A clearance of at least 2.50 inches shall be provided between truck parts (including wiring, hoses, cables, and chains) and the carbody under AW1 load and the most unfavorable dynamic combination of vertical and horizontal track curvature, wheel wear, lateral and vertical motion, roll, and broken coil springs.

7.7 Truck Structural Design

- a). Structural Validation Plan
 - i). The Contractor shall submit a structural validation plan as outlined by APTA PR-M-RP-009-98 Rev 2, Section 3.1.5, for Amtrak review and approval.
[CDRL 7-06]

- ii). The purpose of the validation plan is to describe in detail the list of the steps planned to demonstrate structural safety and compliance with the requirements defined in the technical specification.
 - iii). The validation plan shall act as a guide for the design and testing process.
 - iv). After the structural validation plan is accepted by Amtrak, each of the subsequent truck structural analysis and test documents listed below shall be submitted for review and approval.
- b). Truck Structural Analysis and Test
- i). The Contractor shall submit each document outlined below, detailing each step of the structural validation plan, for Amtrak review and approval.
 - (1) Truck Stress Analysis Plan **[CDRL 7-07]**
 - (2) Truck Stress Analysis Report **[CDRL 7-08]**
 - (3) Truck Stress Test – Laboratory, Plan **[CDRL 7-09]** (see requirements in Chapter 20 – Truck Frame and Bolster Load Tests)
 - (4) Truck Stress Test – Laboratory, Report **[CDRL 7-10]**
 - (5) Truck FEA Structural Model Validation Plan **[CDRL 7-11]** (can be combined with CDRL 7-09)
 - (6) Truck FEA Structural Model Validation Report **[CDRL 7-12]** (can be combined with CDRL 7-10)
 - (7) Truck Stress Test – On-Track, Plan **[CDRL 7-13]**
 - (8) Truck Stress Test – On-Track, Report **[CDRL 7-14]**
 - (9) Fatigue Assessment Validation Report **[CDRL 7-15]**
 - (10) Manufacturing Validation Report **[CDRL 7-16]**
- c). Allowable Stress
- i). Fatigue
 - (1) Contractor and/or the truck designer shall determine the maximum allowable stresses for the truck frame, bolster and truck components in order to perform without degradation over the 40-year useful life.
 - (2) The allowable stresses shall be determined using industry standard practice and shall be submitted to Amtrak for review and approval as part of the truck stress analysis plan.
 - ii). Static

- (1) Maximum allowable stress shall be 55% of the yield strength of the material.
- iii). Overload
 - (1) Maximum allowable stress shall be the yield strength of the material. No permanent deformation allowed in structural elements.
- d). Truck Design Loads
 - i). The loads specified herein are minimum values.
 - ii). The Contractor shall be responsible for selecting loads that will develop a high level of confidence in the adequacy of the truck design for the intended purpose and application.
 - iii). The highest vertical load of all car types, as seen at the truck, shall be used for the loadings.
 - iv). Loads marked by double asterisk (**) shall be included in the stress analysis but will not be applied during the laboratory truck stress test.
 - (1) Fatigue
 - (a) Vertical – $1.0g \pm 0.2g \times AW1$ loaded carbody weight per truck.
 - (b) Lateral – $\pm 0.15g \times AW1$ loaded carbody weight per truck applied at the carbody center of gravity.
 - (c) Longitudinal – $\pm 0.15g \times AW1$ loaded carbody weight per truck applied at the carbody center of gravity.
 - (d) Braking – Full-service braking, split between tread and disc mounting locations according to Chapter 9.
 - (e) Twist – One wheel lifted/lowered length equal to 1% of wheelbase.
 - **Dampers – $\pm 100\%$ of maximum dynamic condition.
 - **Truck-Mounted Equipment Mass Inertia Loads
 - v). Vertical, lateral, longitudinal and braking loads shall be applied simultaneously with phasing and directions which represent the operating environment.
 - vi). Damper and truck-mounted equipment loads are for localized analysis of brackets and mounts.
 - vii). Twist load shall be applied in combination with vertical load only.
 - (1) Static

- (a) Vertical – 110% of AW3 loaded carbody weight per truck.
 - (b) Lateral – 25% of the vertical load, applied at the carbody center of gravity.
 - (c) Longitudinal – 15% of the vertical load, applied at the carbody center of gravity.
 - (d) Vertical, lateral, and longitudinal loads shall be applied simultaneously.
- (2) Overload
- (a) Vertical – 1.5g x AW3 loaded carbody weight per truck.
 - (b) Lateral – 0.3g x AW3 loaded carbody weight per truck applied at the carbody center of gravity.
 - (c) Longitudinal – 1.0g x truck weight.
 - (d) Braking – Maximum specified deceleration, split between tread and disc mounting locations according to Chapter 9.
 - (e) Twist – Complete wheel unloading at one wheel with Vertical – 1.0g x AW3 loaded carbody weight per truck.

**Dampers – 2 x damper force at reference speed.

**Truck-Mounted Equipment Mass Inertia Loads.

- viii). Vertical, lateral, longitudinal and braking loads shall be applied simultaneously. **Damper and truck-mounted equipment loads are for localized analysis of brackets and mounts. Twist load shall be applied in combination with vertical load as listed.

e). Truck-Mounted Equipment Mass Inertia Loads

i). Truck Frame Mounted Equipment

Direction	Fatigue Acceleration	Overload Acceleration
Vertical	+/- 12 g	+/- 40 g
Lateral	+/- 10 g	+/- 20 g
Longitudinal	+/- 5 g	+/- 10 g

ii). Axle and Axlebox Mounted Equipment

Direction	Fatigue Acceleration	Overload Acceleration
Vertical	+/- 50 g	+/- 140 g
Lateral	+/- 10 g	+/- 20 g
Longitudinal	+/- 10 g	+/- 20 g

7.8 Truck Component Design

- a). Detailed drawings of all truck components shall be provided to Amtrak. **[CDRL 7-17]**
- b). Truck Frame and Bolster
 - i). Truck frames and truck bolsters (if used) shall be of cast or fabricated steel construction.
 - (1) They shall be heat stress-relieved after all primary welding is completed, unless otherwise approved by Amtrak.
 - (2) Critical areas of all welds and castings shall be magnetic-particle inspected per ASTM Standard E709 on all production units.
 - (3) Radiographic inspection per ASTM Standards E94, E446 and E186 and ultrasonic inspection per AWS D.1.1 shall be used to qualify fabrication and casting techniques and for periodic inspection of production lots, see Chapter 19.
 - ii). All truck frame and bolster (if used) openings or voids shall be sealed with plastic plugs or similar arrangements, to prevent the accumulation of wayside debris such as leaves therein.
 - iii). All wearing parts or surfaces shall be provided with renewable liners or bushings.
 - (1) Truck frame pedestals, if used, shall be lined with low-friction components to minimize wear.
 - (2) If possible, the truck design shall permit replacement of pedestal liners without requiring the removal of the wheelset.
 - iv). Retainers shall be provided to prevent an axle from leaving the truck, and to also prevent any primary suspension element from leaving its proper position, when the car is lifted with the trucks attached, or in the event of a derailment.
 - (1) It shall be possible to change a wheelset expediently (by removing the axle retainer and lifting the car above the wheelset, after intra-car couplings are disconnected), to facilitate changing wheels in locations without a drop table, including changing wheelsets in the field after a derailment.
 - v). The truck frame shall include attachment points for lifting by a shop crane.
- c). Bolster Anchor
 - i). Longitudinal forces shall be transmitted between the truck and the carbody through bolster anchors or similar method.

- ii). The bolster anchors, if used, shall be designed to accommodate longitudinal, swiveling and vertical forces encountered during operation on all classes and conditions of track identified in Amtrak Specification 963.
- iii). See Chapter 6 for other requirements for the bolster anchor and related carbody mounting points.
- d). Suspension
 - i). Coil springs and/or rubber element suspension components may be used for primary suspension.
 - ii). Elastomeric suspension components shall be designed for a minimum functional service life (95% survival) of ten years. To the greatest extent possible, elastomeric components which may require replacement between truck overhauls, shall be designed for replacement without truck removal
 - iii). Dampers shall have a minimum functional life (95% survival) of five years.
 - iv). The Contractor shall provide analyses to demonstrate the effect of asymmetric forces from braking on primary suspension deflection, wheelset angle of attack and body yaw accelerations. **[CDRL 7-18]**
 - v). The carbody secondary suspension shall be provided by coil springs or an alternative may be proposed for Amtrak's approval.
 - vi). The secondary suspension shall include internal resilient stops to limit vertical travel and act as an "backup spring" should the main spring element fail.
 - vii). All metal springs shall be mounted using resilient mounting pads to prevent metal-to-metal contact and provide sound and vibration deadening.
 - viii). All mounted equipment shall be designed for ease of inspection, tramming, access, replacement and maintenance, including allowances for witness point or reference marks to assist in automated visual inspection machines.
 - ix). Tram marks shall be located on the top and bottom of the truck frame, allowing tramming without flipping the frame.
 - x). Elastomeric primary springs shall be secured to the truck frame when axle assemblies are removed.
 - xi). Elastomeric primary springs shall be color-coded for spring rate and shall be installed in matching sets, with only one color-code per truck.
 - xii). All coil springs shall meet the latest revision of Amtrak Specification 563 and follow the recommended practices of APTA PR-M-RP-009-98, Section 3.5, Helical Coil Spring Design Guidance.
 - xiii). The Contractor shall submit coil spring design stress calculations for Amtrak review and approval. **[CDRL 7-19]**

- xiv). Coil springs shall be grouped by height under AW0 load after manufacturing, then marked to clearly identify group for each spring (banding, color-coded, etc.).
- xv). All springs must be in the same group for a given truck.
- xvi). In case of a coil spring failure, the system should ensure that the train speed is not compromised, the ride quality remains smooth, and the gangway passageway for customers remains even and safe.
- xvii). Elastomeric components shall be fatigue tested to validate service life.
- e). Stops
 - i). Rubber stops limiting vertical and lateral motion shall be designed with a progressive compression rate and shall not exceed 90% of their design compression under any condition that can be developed in the truck.
 - ii). Lateral stops shall limit the motion of the carbody to stay within the clearance in either direction.
 - iii). Stops that limit truck over-rotation shall be designed to prevent metal-to-metal contact.
- f). Adjustments
 - i). Provisions shall be made for adjusting the carbody height to compensate for wheel wear or other variations and shall have provisions for being captive.
 - ii). Adjustments to carbody height shall not impact ride quality.
 - iii). Suspension design shall permit adjustments to be made without disconnecting the truck from the carbody.

7.9 Wheel and Axle Assembly

- a). General
 - i). Amtrak intends to use existing wheelset designs which are already in service on Amtrak cars.
 - ii). A conventional wheel and axle assembly shall consist of an axle, two wheels, two journal bearings, two brake discs, speed sensor gear at one bearing per axle, bearing temperature sensors which communicate with car diagnostics, and associated materials.
 - iii). Mounting graphs and inspection records shall be included in each vehicle history book for all components.
 - iv). If existing Amtrak wheelsets are deemed incompatible with the new car designs, alternate wheelsets may be proposed by the Contractor and approved by Amtrak.

- v). Wheel and axle assemblies shall utilize materials made to the same specifications as above and, insofar as deemed practical by the Contractor, components in common with the conventional wheel and axle assembly shall be used.
 - vi). All wheelset components shall be manufactured and assembled by a supplier currently certified under the AAR Standard M-1003.
 - vii). It shall be possible to change a wheelset out by removing the axle retainer and lifting the car above the wheelset.
- b). Axles
- i). The axle shall be designed according to APTA PR-M-RP-008-98, Rev.2, Passenger Rolling Stock Axle Design.
 - ii). The axle shall be solid, forged, Grade “F”, carbon steel meeting the chemical composition and mechanical property requirements of AAR Standard M-101, arranged for outboard journal bearings.
 - iii). Axle design and application shall be confirmed with theoretical stress calculations **[CDRL 7-20]**.
 - iv). Axles shall be designed to meet or exceed performance and applicable safety standards.
 - v). Material and heat treatment certification shall be provided with vehicle history final reports.
 - vi). Each axle shall be inspected by both the wet fluorescent magnetic particle and ultrasonic methods.
 - vii). A record of all certification and heat numbers shall be supplied to Amtrak.
 - viii). If possible, the axle shall have an oversize wheel seat to provide longer service life.
- c). Wheels
- i). The wheels shall be 36 in. diameter (nominal) Class B, wrought steel multiple-wear type, of a low stress (S-plate) design, conforming to AAR Standard M-107 and M-208, APTA Standard PR-M-S-012-99 Rev.2, and Amtrak Specification 771, latest issue.
 - ii). The wheels shall be inspected by both the wet fluorescent magnetic particle and ultrasonic methods.
 - iii). Wheel tread profile shall be in accordance with Amtrak wheel profile NRCC6 per drawing 62-00106, Revision D or later, unless otherwise approved by Amtrak.
 - iv). A record of all certification and heat numbers shall be supplied to Amtrak.

- v). Analytical evaluation of the wheel design for combined mechanical and thermal overload conditions shall be performed according to AAR S-660, with thermal input load adjusted to represent the selected tread/disc braking configuration and Amtrak service.
 - (1) Analytical evaluation of the wheel design for fatigue loading shall be performed according to AAR S-669.
 - (2) The results of these analyses shall be submitted to Amtrak for review and approval. **[CDRL 7-21]**
- d). Brake Discs
 - i). For brake disc requirements, see Chapter 9.
- e). Axle Journal Bearings
 - i). The journal roller bearings on conventional axles may be inboard or outboard located, fully enclosed, rotating end cap, grease lubricated, AAR Class "K" roller bearings. Amtrak's preference is for outboard bearings.
 - ii). They shall be configured for No Field Lubrication (NFL), with Hydrodynamic Labyrinth (HDL) seals (or equivalent).
 - iii). The L10 design life of the journal bearing shall be at least 1 million miles under AW3 loading.
 - iv). The Contractor shall provide design analysis to verify the roller bearing estimated L10 life. **[CDRL 7-22]**
 - v). The journal bearing end cap shall incorporate a toothed speed sensor gear and be equipped with a center plastic plug.
 - vi). The speed sensor design must always see the end cap gear teeth under the worst conditions of manufacturing tolerances and wear thresholds for the journal bearing housing, bearing, sensor, etc.
 - vii). The end cap shall provide access to the axle center for wheel truing without removal of the journal bearing mounting bolts or end cap.
 - viii). Journal roller bearings shall be new and meet the requirements of Amtrak Specification 900, *Purchase of New or Reconditioned Roller Bearings*.
- f). Axle Bearing Housings
 - i). Removable axle bearing housings shall be provided.
 - ii). Pressing shall not be required to remove the housing from the bearing.
 - iii). Axle bearing housings shall be common for all locations, including a provision for mounting a speed sensor.

- iv). Each axle bearing housing shall include a hot bearing sensor, such as Amtrak Drawing D-00-7075 Hot Bearing Detector Probe or approved equivalent.
- v). Bearing temperature monitoring shall be integrated into the car diagnostics system, allowing for real-time recording and trending. This functionality will enable proactive maintenance by identifying irregularities and predicting potential failures.
- g). Wheelsets
 - i). Each wheelset shall be assembled in compliance with the requirements of:
 - (1) Amtrak specification 907, APTA-PR-M-S-019-17, *Passenger Wheel Set Assembly*, latest issue, and
 - (2) AAR Manual of Standards and Recommended Practices, Section G, Parts I and II, *Wheel and Axle Manual*, using an AAR certified facility.
 - ii). A wheelset inspection record shall be completed for each wheelset, which shall include component press tonnage charts, all component serial numbers and inspection measurements.
 - iii). Torque seal shall be applied to the head of all fasteners after torquing.

7.10 Shock Absorbers (Dampers) and Shock Mounts

- a). Lateral, yaw and vertical motion of the trucks and carbody shall be damped through the use of shock absorbers (hydraulic dampers).
- b). Shock absorbers, if used, shall terminate in elastomeric bushed connections to eliminate metal to metal contact.
- c). All shock absorbers shall be accessible for replacement without requiring the removal of the trucks from the carbody. Shock absorbers shall be protected from debris strikes from under the vehicle.
- d). Shock absorber mounting brackets on the trucks and carbody shall be designed to last the life of the carbody without wearing, deforming, loosening or otherwise requiring repair, excluding bushing replacement.
- e). Threaded mounting brackets are prohibited.
- f). Durability of the shock absorbers, their mounting brackets and bushings shall be demonstrated analytically and through accelerated life cycle testing simulating actual shock absorber functional service life.
- g). Test plan for the shock absorbers and shock mounts shall be submitted to Amtrak for approval as part of the Contractor's proof of design testing (see Chapter 20).
- h). The shock absorbers shall be appropriately rated for a service life (95% survival rate) of no less than five years.

7.11 Shock and Vibration

- a). All pneumatic, electrical and electronic equipment/components mounted to the truck shall be tested for shock and vibration in accordance with IEC 61373 (1999) – *Railway Application, Rolling Stock Equipment, Shock and Vibration Tests*.

7.12 Electrical Wiring

- a). All electrical wiring shall be protected from damage during service.
- b). Watertight connections shall be provided for connecting electrical devices. At a minimum these connections shall meet IP56.
- c). Speed Sensor
 - i). A speed sensor cable shall be provided on each truck to transmit a signal from the speed sensor on each axle to the wheel slip control system (see Chapter 9).
 - ii). The speed sensor cables shall be attached to the truck frame using elastomer-coated steel clamps on dedicated mounting pads that provide secure attachment while not abrading or pinching the cable.
 - iii). Clamps shall be securely fastened to the truck frame.
 - iv). Appropriate slack shall be incorporated into the cable length to allow free movement of trucks and truck components while providing adequate securement for the cable. Cables shall be protected against debris strikes.
 - v). Cables shall be routed to prevent damage from pinching, stretching or catching on adjacent equipment.
 - vi). Speed sensor and cables shall be per Amtrak Drawing D-00-1359, *Speed Sensor and Cable Assembly*.
- d). Grounding
 - i). An electrical ground path using highly flexible copper cables or straps and ground brushes/rings shall be provided from the carbody to the rail.
 - ii). Grounding paths shall be run from the truck frame to the truck bolster (if used) and from the truck bolster to the carbody.
 - iii). Grounding cables or straps shall not restrict the movement of truck components and shall remain slack under all operating and maintenance conditions. Grounding straps must be visible in normal operating conditions to allow for regular inspection.
 - iv). At least two grounding brush/ring assemblies per truck shall be installed providing a grounding path between the truck frame and axle to bypass current return through the journal bearings.
- e). Shunting

- i). The trucks and its wheelsets shall be designed such that the maximum rail-to-rail resistance through the train shall be no greater than 0.010 Ohms in any combination of vehicles.
- ii). It is preferred that the standard truck and wheelset design be capable of achieving the required shunting performance, however supplemental devices may be incorporated into the truck design to aid shunting.
- iii). Any such supplemental equipment shall be designed in accordance with Amtrak Specification 1118.

7.13 Painting

- a). The truck manufacturer shall apply at least one coat of a metal primer on all exposed surfaces of the trucks immediately after final assembly cleaning, repairs, and inspection.
- b). A final coat of an ASTM B-117 1,000 hour paint shall be applied using an Amtrak-approved color.

7.14 Handbrake Linkage

- a). Truck mounted hand brake linkage shall be lever type unless otherwise approved by Amtrak.
- b). Chains are preferred; however, cables may be used on the truck itself to interconnect the components.
- c). All trucks shall be equipped with necessary attachment points for hand brake linkage and shall accommodate the full range of car height adjustment.
- d). Refer to Chapter 9 Brakes for operator details.

7.15 Height Adjustment and Shimming

- a). Approved provisions shall be made for adjusting the carbody height up to 2.50 inches to compensate for wheel wear or other variations.
- b). The design and method of height adjustment shall allow for quick and easy adjustment without disassembly of the truck or removal of the truck from the car.
- c). Height adjustment may be by shimming, component adjustment or component exchange, to be proposed by the Contractor and approved by Amtrak.
- d). All coil springs and shims shall be positively captured at both top and bottom surfaces.
- e). Visual indication of shimming limits (maximum shim height) shall be provided at each respective shim location.

7.16 Truck Classification Plate

- a). Amtrak standard truck classification plate shall be mechanically applied to both

sides of each truck. The truck classification plate shall contain the following information:

- i). Amtrak name and symbol
- ii). Bearing size
- iii). Center-plate loading
- iv). Wheel size and type
- v). Truck serial number (to be permanently stamped into the plates)
- vi). Manufacturer
- vii). Manufacturer's part number
- viii). Date of manufacture

7.17 Maintainability

- a). The trucks, and associated components (shocks, etc.), attachment fasteners to the carbody shall be accessible with standard pneumatic or hydraulic tools. All fasteners should be readily available and not of a special design.
- b). All major components shall be easily accessible and replaceable during repair or overhaul.
- c). The overhaul manual shall include all details of disassembling, tramming, and reassembling the truck frame for routine overhauls.
- d). The contractor shall provide a heat map of high-stress zones under various dynamic conditions. The intent is to ensure that any welded area in a high-stress zone is visible during daily inspections in normal operation.
- e). Rebuild instructions with parts lists shall be provided for all assemblies and subcomponents.
- f). Documentation requirements are described in Chapter 22.

7.18 CDRLs

CDRL	Description	Due
CDRL 7-01	Vehicle dynamic performance qualification plan	NTP + 120 days
CDRL 7-02	Vehicle dynamic simulation plan	PDR
CDRL 7-03	Vehicle dynamic simulation report	IDR
CDRL 7-04	Vehicle Dynamic Model Validation Plan	IDR
CDRL 7-05	Vehicle Dynamic Model Validation Report	Post Type Tests
CDRL 7-06	Structural validation plan	NTP + 120 days
CDRL 7-07	Truck Stress Analysis Plan	PDR
CDRL 7-08	Truck Stress Analysis Report	IDR

CONFIDENTIAL — DO NOT DISTRIBUTE

CDRL 7-09	Truck Stress Test – Laboratory, Plan	FDR
CDRL 7-10	Truck Stress Test – Laboratory, Report	Post Type Test
CDRL 7-11	Truck FEA Structural Model Validation Plan	IDR
CDRL 7-12	Truck FEA Structural Model Validation Report	Post Type Test
CDRL 7-13	Truck Stress Test – On-Track, Plan	FDR
CDRL 7-14	Truck Stress Test – On-Track, Report	Post Type Test
CDRL 7-15	Fatigue Assessment Validation Report	Post Type Test
CDRL 7-16	Manufacturing Validation Report	IDR
CDRL 7-17	Detailed drawings of all truck components	FDR
CDRL 7-18	Analyses demonstrating the effect of asymmetric forces from braking	IDR
CDRL 7-19	Coil spring design stress calculations	IDR
CDRL 7-20	Axle design and application theoretical stress calculations	IDR
CDRL 7-21	Wheel design analysis for combined mechanical and thermal overload conditions per AAR S-660	IDR
CDRL 7-22	Design analysis verifying roller bearing estimated L10 life	IDR

* End of Chapter 7 *

Amtrak Single Level Fleet Replacement

Technical Specification

8. Couplers and Draft Gear

Revision 0

Table of Contents

8.1	Overview.....	8-1
8.2	General Requirements	8-1
8.3	Performance Requirements.....	8-1
8.4	Coupler and Yoke.....	8-2
8.5	Draft Gear.....	8-2
8.6	Coupler Carrier	8-2
8.7	Coupler Uncoupling Mechanism.....	8-3
8.8	Mounting Arrangement.....	8-3
8.9	Crash Energy Management.....	8-4
8.10	CDRLs	8-4

8.1 Overview

- a). The single level cars shall be equipped with an APTA standard Type H Tightlock coupler and associated draft gear.
 - i). Energy absorbing couplers and draft gears shall be used for each car type as required by the Contractor's car design to achieve compliance with FRA carbody strength requirements in 49 CFR Part 238.
- b). AAR approved tightlock couplers, coupler parts, radial connections, yokes and attachments for passenger equipment cars shall be provided.

8.2 General Requirements

- a). The Type H Tightlock coupler and draft gear assembly shall be compliant with the requirements of APTA Recommended Practice PR-M-RP-003-98.
- b). All couplers, draft gear, and associated components shall conform to the strength requirements specified in all applicable APTA and FRA standards and recommended practices.
- c). Coupler carriers shall be capable of withstanding the vertical forces identified in 49 CFR 238.207.
- d). All components shall be designed to operate properly under the operational and environmental conditions defined in Amtrak Specification 963.
- e). It shall be possible to remove or install a coupler and draft gear assembly without requiring lifting of the carbody or removal of the truck.
- f). The coupler pocket shall be designed to prevent any possibility of moisture being trapped.
- g). The coupler pocket, coupler carrier, draft gear and associated components shall have a modular design for Amtrak's future use. This includes the possibility of changing to drawbars with gangways. The contractor shall demonstrate how this will be possible.

8.3 Performance Requirements

- a). Under normal operating conditions, all couplers, articulations and associated apparatus, including coupler carriers and centering devices, shall be capable of withstanding for any horizontal position of the coupler a vertical load of 100,000 lbs. applied in either direction to the coupler as near to the pulling face as practical, without deformation to the coupler carrier, supporting carbody structure and intermediate connections.
- b). The car shall be capable of operating normally while coupled to any other car or locomotive used in passenger service under the operational and environmental conditions defined in Amtrak Specification 963, including legacy equipment. The car shall be equipped with a centering device to ensure proper alignment during coupling.

- c). Coupler swing shall be such that a car shall be able to negotiate a 250-foot radius (23 degree) curve while coupled to other cars and/or locomotives as specified without damage to trucks, draft gear, carbody, diaphragms, air hoses or car-to-car connections.
- d). End stops or equivalent mechanism shall be installed to prevent damage to car due to a deflected coupler caused by mis-coupling.
 - i). 250-foot radius curve requirement shall be achievable with end stops or equivalent installed.
- e). The coupler air connections shall be designed in conformance with APTA Recommended Practice PR-M-RP-001-97.
- f). Coupler centering devices shall be provided for all H-type couplers to maintain the coupler head in a centered position.
- g). Amtrak shall be able to lift one end of the car using the coupler without causing damage to the car.
 - i). See Chapter 9 for details regarding car-to-car air connections.

8.4 Coupler and Yoke

- a). Material for couplers and yokes shall conform to AAR M-201 for grade E high tensile steel.
- b). The bottom of the end coupler shank shall have a replaceable steel wear plate installed where it contacts the coupler carrier.
- c). Intermediate couplings shall achieve similar performance.

8.5 Draft Gear

- a). The car coupler draft gear characteristics shall be equal or better to twin-cushion WM-6-DP draft gear packs.
- b). The draft gear pockets shall allow for the implementation of push-back couplers if required by the design.
- c). Draft gears shall be designed to take into account the overall car ride quality and compliance with any CEM performance requirements, if utilized.
- d). If regular inspection is required, inspection of draft gears and rubber elements shall be possible without removal of other major components.

8.6 Coupler Carrier

- a). The coupler carrier shall be designed to support adequately and consistently the coupler through its full range of vertical and horizontal movement.
- b). The coupler shall be supported at a nominal 34.5 in. height Above Top of Rail (ATOR), with an adjustment range of plus/minus 1 in., as measured at the center of

CONFIDENTIAL — DO NOT DISTRIBUTE

the coupler when uncoupled.

- c). The coupler carrier shall be designed to accommodate the complete push-back motion of the coupler without interference if an energy absorption function is used.
 - i). During coupler push-back, contact between the coupler head and the coupler carrier shall not result in unintentional activation of the coupler uncoupling mechanism and therefore cause car separation.
- d). A means shall be provided to allow removal and replacement of wear plates, carrier springs and carrier stops.
 - i). The top surface of the coupler carrier shall be equipped with a replaceable nylon (or other low friction material) wear plate.
 - ii). The coupler shall not rest on a metal surface.
 - iii). Alternate service proven methods appropriate for rail vehicle service and as approved during design review process will be considered.

8.7 Coupler Uncoupling Mechanism

- a). All coupler uncoupling levers and hardware shall meet the safety requirements of 49 CFR Part 238.
- b). Each knuckle coupler shall be equipped with an AAR number 6 uncoupling operating mechanism, in conformance with section 5.10 of APTA Standard PR-M-S-016-06.
 - i). It shall be located on the left side when facing the end of the car.
- c). Minimum clearance of 2 in. shall be maintained between uncoupling mechanism and all other components on the end of the car (including jumper cables, receptacles and carbody structural elements such as collision posts) when car is either coupled or uncoupled.
- d). The uncoupling levers shall seat firmly when locked in place, shall not bind when being used, and shall not rattle or vibrate.
- e). The uncoupling levers shall be designed with a locking mechanism to prevent unintentional unlocking of the coupler due to vibration or debris strikes.
- f). Alternative uncoupling lever designs may be proposed.
- g). The uncoupling mechanism shall be designed to accommodate any push-back motion of the coupler without unintentional activation of the coupler lock mechanism causing car separation.
- h). The coupler should have a failsafe mechanism to prevent car separations if components become worn.

8.8 Mounting Arrangement

- a). The proposed mounting arrangement of the coupler assemblies shall be submitted

CONFIDENTIAL — DO NOT DISTRIBUTE

for Amtrak approval during design review. **[CDRL 8-01]**

8.9 Crash Energy Management

- a). If a push-back coupler system is required by design, it shall be coordinated with the carbody Crash Energy Management (CEM) design, if utilized.
 - i). To ensure operational compatibility, any push-back energy absorbing coupler assemblies at the ends shall have a minimum initiation load of 600,000 lbs.
 - ii). The slope of the force during push-back shall be greater than or equal to zero for all CEM elements.
 - iii). The coupling system must be capable of transferring a 150,000 pounds draft load at any time during the push-back sequence to ensure that cars remain coupled during and after an impact.
- b). Indicators shall be provided that shall be visible from outside the car to indicate full or partial activation of the energy absorption unit and the need for its replacement.
 - i). The activation of the energy absorption unit shall be readily apparent when performing periodic inspections.

8.10 CDRLs

CDRL	Description	Due
CDRL 8-01	Proposed mounting arrangement for couplers	During PDR

* End of Chapter 8 *

Amtrak Single Level Fleet Replacement

Technical Specification

9. Brakes

Revision 0

Table of Contents

9.1	Overview	9-1
9.2	General Requirements	9-1
9.3	Performance.....	9-2
9.4	Design Review	9-3
9.5	Car Body Components.....	9-4
9.6	Truck Components.....	9-10
9.7	Wheel Slide Control System	9-15
9.8	Brake Indication Devices.....	9-20
9.9	Hand Brake	9-21
9.10	CDRLs.....	9-22

9.1 Overview

- a). This chapter describes the design and functionality of the electro-pneumatic and mechanical braking systems that shall be provided on the rolling stock equipment.
- b). The braking systems shall include an electro-pneumatic system for service and emergency brake applications, a wheel slide control system and a handbrake.
- c). All materials and workmanship shall comply with Chapter 19.

9.2 General Requirements

- a). Electronic Brake System
 - i). All cars shall be equipped with a Passenger Electronic 26C Emulation Braking system meeting the requirements of APTA PR-M-S-020-17.
 - ii). The brake system on the cars shall also comply with the requirements of Electronically Controlled Pneumatic (ECP) brake system configured per APTA PR-M-S-021-17.
 - iii). This shall include the installation of trainlines, an electrical terminal box at each end of the car (for installation of the inter-car cabling), a terminal box at the brake manifold, conduit connecting them, as well as armored cable wiring.
 - iv). The ends of all cars shall include the ECP inter-car cable and junction connections. Design, arrangement and installation shall be subject to Amtrak approval during design review. **[CDRL 9-01]**
 - v). At a minimum the brake system shall:
 - (1) Be powered by the ECP trainline (when available), by a low voltage source from the car (when available) and/or a back-up battery when car battery is not available. Amtrak understands that interoperability with ECP braking will not be able to be utilized until legacy cars are assembled with ECP equipment.
 - (2) Have a discrete means to configure the brake controller for ECP or brake pipe operation.
 - (3) Incorporate fully pneumatic backup control of emergency brake application, if a malfunction of the electronic brake system occurs, if the car battery is depleted or if no electrical power is present on the car.
 - (4) Accommodate mounting of pneumatics and electronics within a single module or manifold inside of the car.
 - (a) If mounting inside the car is not possible, undercar mounting enclosure shall be sealed from dust, moisture and snow.

- (b) The enclosure shall be shielded from debris damage and its location and arrangement provide easy access for maintenance.
- (5) Incorporate component standardization in accordance with current APTA requirements.
- (6) Use brake control valves meeting the approval of APTA PR-M-S-025-018.
- vi). The air brake equipment shall be arranged to be compatible with Type 26C/26L air brake equipment and trainlines as per APTA PR-M-RP-001-97 currently in use in Amtrak intercity rail passenger service. This is in addition to having complete ECP brake trainline connections, for operation with an ECP-equipped locomotive.
- vii). Nominal air pressures in the air brake system shall be:
 - (1) Main Reservoir: 140 psig
 - (2) Brake Pipe: 110 psig
 - (3) Brake Cylinder: 100 psig maximum
- viii). Each car shall be equipped with a brake pipe for emergency braking to provide break-in-two protection, and a main reservoir pipe.
- ix). All components shall be equipped with an identification plate or tag which includes:
 - (1) Vendor
 - (2) Vendor part number
 - (3) Date of manufacture
 - (4) Serial number

9.3 Performance

- a). The system shall be designed for normal and dead-in-tow operation at all speeds up to 125 mph in train consists of up to 1,530 ft in total length [excluding locomotive(s)] with propulsion provided by the rail passenger locomotives.
- b). The air brake system shall be designed for normal and dead-in-tow operation in conformance with all applicable Amtrak air brake rules, specifically AMT-3.
- c). Braking performance shall be in conformance with the braking performance curve as identified for Average Performance Distance (no safety factor) for Amfleet equipment operating at 125 mph in Amtrak Drawing S-603.
- d). A car built to this specification in a train of up to 1800 ft in total length and one Amtrak ALC-42 or equivalent locomotive shall have a minimum full service braking rate of 1.35 miles per hour per second (mphps) at 125 mph increasing to and

maintaining an average of 2.00 mphps at speeds of 70 mph or less.

- e). The cars shall be loaded to AW2 condition.
 - i). The instantaneous full-service deceleration rate shall not exceed 2.75 mphps nor be less than 1.25 mphps.
 - ii). The emergency brake rate shall not be less than 2.50 mphps at speeds below 70 mph.
- f). The Contractor shall verify that the brakes are fully functional under all operating and environmental conditions found in Amtrak Specification 963.
- g). Locomotive dynamic braking shall not be used to determine compliance with specified brake rates.
- h). The maximum jerk rate (the change in the rate of deceleration) during initial service brake application shall be limited to 1.5 miles per hour per second per second (mphpsps) under all normal conditions.
- i). There shall be no jerk limit for emergency brake applications.
- j). The Contractor shall determine the brake system delay/dead time, build-up time, response time and equivalent deceleration rates for all speeds from maximum speed to full stop.
 - i). This information shall be provided to Amtrak during the brake system design review. **[CDRL 9-02]**
 - ii). The Contractor shall use *Mass Transit Brake System - Performance Requirements* per DIN EN Standard 13452-1 as the method to measure dead time response time and deceleration rate where applicable.

9.4 Design Review

- a). Preliminary design review shall address the following subjects, describing Engineer actions and indications and also providing detailed technical design and performance analysis for the following subjects:
 - i). Concept:
 - (1) Concept and operation of friction brake system
 - (2) Thermal capacity of brake system
 - (3) Calculations showing that the system's performance requirements will be met
 - (4) Graduated release setting of control valve
 - (5) Graduated release mode of automatic brake valve operation
 - (6) Wheel slide control

- (7) Handbrake interface with brake system, as per APTA PR-M-S-006-98.
- (8) Pneumatic supply to accommodate auxiliary systems
- (9) Brake Cylinder Pressure Sensors and Settings
- ii). Operating:
 - (1) Push-pull operation with locomotive in either leading or trailing position
 - (2) Push-pull operation with a non-powered control unit
 - (3) Stopping on a grade
 - (4) Starting on a grade
 - (5) Conductor- or passenger-initiated emergency brake application
 - (6) Train separation (break-in-two)
 - (7) Operation of short trains [consists of up to 300 ft in total length excluding the locomotive(s)]
 - (8) Operation of long trains [consists of up to 1800 ft in length excluding the locomotive(s)]
 - (9) Dead engine movement
- iii). Design and performance analysis will be evaluated during design review, First Article Inspection (FAI) and proof of design testing. **[CDRL 9-03]**

9.5 Car Body Components

- a). Piping and Fittings
 - i). The inside diameter of the trainline Main Reservoir (MR) pipe shall be 1.00 in. Iron Pipe Size (IPS), or equivalent.
 - ii). The Brake Pipe (BP) shall be 1.25 in. IPS, or equivalent.
 - iii). All pipes and fittings in both lines that are located on the exterior of the car shall be 304 stainless steel pipes in accordance with ASTM Standard A-53 or equivalent.
 - iv). Type K copper pipe may be used if located in the car interior.
 - v). Brake pipe trainline must pass Brake Pipe Restriction Test per AAR Standard S-471.
 - vi). Brake Equipment Installation and Design shall conform to AAR Standards S-400, and S-401.

- vii). AAR type branch pipe tees, or approved equivalent, shall be provided and shall be orientated at a 45 degree slope upwards or higher to prevent moisture from being drawn into the branch pipes.
- viii). The trainline MR branch pipe shall be routed to the main reservoir tanks before being routed to the brake manifold.
- ix). Piping shall be routed to avoid traps and avoid draining moisture toward brake valves or brake manifold. Traps and low spots in the piping are prohibited.
- x). The low point of the MR pipe shall be equipped with a heated automatic drain valve, to rid the pipe of moisture buildup; moisture drain shall be in response to either brake release cycle or timed cycle.
- xi). The air supply system shall conform to APTA Standard SS-M-011-99 for compressed air quality for passenger locomotive and car equipment.
- xii). All pneumatic piping shall conform to APTA Standard APTA PR-M-S-029-21.
- xiii). A coalescing filtration system shall be utilized to remove moisture in any portion of the MR pipe before being supplied to the brake system.
- xiv). Inter-car hoses shall be designed to allow for coupling between legacy and new equipment at a length that will not pull apart or drag on the right of way.
- xv). Approved test gauge fittings shall be installed in the brake system piping to facilitate testing and troubleshooting the brake system.
 - (1) They shall include all fittings needed for conducting single car brake tests, including the brake cylinder lines to each truck downstream of all cutout cocks.
 - (2) Protective caps shall be provided as necessary.
- b). Angle and Cut-out Cocks
 - i). Locking handle, ball type, cut-out cocks shall be provided in the MR Pipe and the BP at each end of every car, in a location for ease of access when coupling in restrictive tunnel locations.
 - (1) The BP angle cocks shall not be vented and must include a spring-loaded locking handle.
 - (2) The MR pipe cutout cock shall be vented toward the hose end, oriented below horizontal.
 - (3) The MR pipe cutout must include a spring-loaded locking handle.
 - ii). Each brake manifold shall be provided with a brake pipe cutout cock located for ease of access and simultaneous protection.

- iii). A locking vented ball-type cut-out cock shall be provided in the brake cylinder line to each axle or truck as appropriate for venting brake cylinder pressure.
 - (1) The cutout cock shall be a 3-way type, vented down-stream.
 - (2) The vent port of the cut-out cock shall be tapped for 0.25 in. National Pipe Thread (NPT).
- iv). A single Amtrak-approved brake cylinder cutout shall be provided inside the body of each car, requiring use of the standard coach key to access, to be able to vent the brake cylinder pressure on all axles or trucks in emergency or rescue situations.
- v). All cut-out cock handles, except end of car BP end angle cocks, shall be arranged so that the handles are parallel to the air pipe in the closed position.
 - (1) Closed end of car BP cut-out angle cock handle shall be perpendicular to the air pipe.
- vi). Labels
 - (1) All valves and cocks shall be labeled including the cut-in and cut-out positions.
 - (2) A flow bar cast or stamped into cock handles shall be acceptable for cut-in/cut-out position labeling.
 - (3) All air brake angle cocks and cutout cocks are to be clearly labeled using engraved and color-coded stainless steel or aluminum tags.
- c). Hoses and Couplings
 - i). All connecting hoses, except BP and MR trainline hoses, shall be AAR Standard M-618 double wire braid reinforced hose.
 - (1) BP and MR car and trainline hoses shall be AAR Standard M-601 or M-618 hose.
 - ii). All hose material, when installed on the car, shall be less than one year old from date of manufacture unless approved by Amtrak.
 - iii). MR and BP end hoses shall be supported near the glad hand end from the coupler using rubber hose supports.
 - iv). End hose locations shall be in conformance with APTA Recommended Practice PR-M-RP-001-97 or alternate approaches can be proposed by the Contractor for Amtrak's approval.
 - v). Two dummy couplings, one "F" type and one "E&L" non-vented type, shall be provided at each end of the car along with one ECP dummy coupling.

- (1) The dummy coupling shall be secured to the car with chains in a manner which will prevent the trainline hoses and cables at the ends of the car from dragging when the couplings are connected to the hoses and cables.
- vi). Inter-car jumpers and hoses shall be designed to allow for coupling between legacy and new equipment at a length that will not pull apart or drag on the right of way.
- d). Emergency (Conductor) Brake Application Valves and Vent Valves
 - i). Manually operated conductor's valves shall be provided as follows:
 - (1) On both ends of the passenger compartment of each car just inside the body end door, right side of the door facing outward.
 - (2) At least two conductor's valves shall be provided per the equivalent length of the single-level passenger car.
 - (a) These valves shall be monitored by the car diagnostics system.
 - (3) Ensure no fouling condition in both application and resetting function of conductor valves.
 - (4) The valves shall be located in a conspicuous location for ease of operation.
 - (5) Valves shall not be blocked by any doors or access panels when they are opened.
 - (6) The operating handles shall be red and shall be clearly labeled, in accordance with Amtrak Specification 697, and shall not rattle when in service.
 - ii). These emergency brake valves, when used in conjunction with an appropriate brake application valve, shall cause an emergency brake application when activated.
 - iii). Vent valves shall be provided along the BP in accordance with air brake system design requirements based on brake pipe length and control manifold locations.
 - iv). Ready access shall be provided to all valves to facilitate inspection, replacement and maintenance.
 - v). The valves shall meet the requirements of APTA Standard PR-M-S-007-98.
- e). Air Reservoirs
 - i). Reservoirs of sufficient capacity shall be provided to enable a minimum of three full-service brake applications and releases followed by an emergency brake without recharging.

- ii). The Contractor shall define necessary service inspection and change-out intervals for filters.
- iii). Check valve isolation requirements must be demonstrated for dedicated reservoirs.
- iv). ASME-certified main and auxiliary (brake cylinder) supply reservoirs shall be drilled with telltale holes as described in 49 CFR Part 229 to eliminate the need for hammer and hydrostatic testing.
- v). When installed, they shall include a manual purge valve with locking handle to drain accumulated moisture.
- vi). The reservoir shall not have volume accessible to fluid below the plane of the purge valve inlet.
- vii). All valves shall be easily accessible from the side of the car.
- viii). Main reservoirs and air supply reservoirs used for water raising or other auxiliary functions shall be protected to prevent corrosion. If a coating is applied, the coating must last the life of the tank with no failures impacting any system.
- ix). All reservoirs shall be welded and shall comply with the ASME *Boiler and Pressure Vessel Code* as applicable.
- x). Air reservoirs shall be sloped if drain valves are located at end of the tank.
- f). Control Manifold and Valves
 - i). The Electronic 26C Service portion shall provide the functionality equivalent to a Type 26C service portion and shall be manifold mounted.
 - ii). The air brake control manifold valve may be mounted underfloor.
 - iii). Branches will leave the brake pipe at a 45-degree slope upwards or higher and shall utilize an AAR "branch pipe tee", or approved equivalent.
 - iv). The air brake control manifold shall include test fittings for main reservoir, brake pipe, brake cylinder and #16 air pipes.
 - v). In addition, the relay valve exhaust shall have a threaded exhaust outlet to permit mounting a gauge.
 - vi). Full-face gaskets or O-ring gaskets shall be used for valve portion interface sealing.
 - vii). All stud mounted components shall be designed to allow installation or removal with standard socket wrenches by a single person.
 - viii). Electronic modules, pneumatic modules, cutouts, test points and electrical connections shall be front-plate mounted on the manifold.

- ix). Front-plate mounting is not required if the manifold is oriented so that access is provided to both sides.
- x). All power, input and output connections, external to the manifold, shall be provided with multiple pin connectors or a screw-type terminal block.
- xi). Individual spade-type or threaded connectors are not permitted.
- xii). Ring terminals shall be used if connected to a screw-type terminal block.
- xiii). All valves on the manifold, as well as the manifold itself, shall be easily removable for servicing.
- xiv). All valves shall be individually replaceable with the manifold installed on the car without removing any additional valves or components.
- xv). All air brake system components which are subject to scheduled, regulated maintenance shall be serialized.
- xvi). Valves shall be acoustically isolated from the passenger car interior areas to minimize exposure of passengers and crew to noise generated by the air brake components.
- xvii). Exhausted air shall be piped to the underside (exterior) of the car.
- xviii). All valves that have an exhaust port shall be equipped with a wasp excluder.
- xix). Brake cylinder pressure shall be supplied and maintained by a relay valve with a 1:1 ratio, or approved equivalent.
- xx). All devices shall be clearly and permanently labeled on the manifold body, including cut-in and cut-out positions of all valves and cocks.
- xxi). Etching or silk screen printing during the machining process is acceptable for labeling manifold items.
- xxii). Stamped aluminum tags may be used on valve handles.
- xxiii). Full-service brake and emergency brake cylinder pressure shall be sufficient to achieve the required brake rates.
- g). Auxiliary Air Equipment
 - i). MR air will be used for air-operated auxiliary devices.
 - ii). BP air shall not be used, except for air suspension (if applied).
 - iii). Auxiliary functions shall be isolated from air brake functions and shall be disabled when MR pressure falls below 80 psig.
 - iv). Adjustable-setting auxiliary valves with governors shall regulate air pressure for MR-supplied functions such as water raising and toilets.

- v). Cutout cocks and pressure test ports shall be provided.
- vi). All water raising, or waste system air valves shall be mounted above the water level of the storage tank to prevent backflow of water into the air system during normal operation or when the air system is depressurized.
 - (1) Appropriate check valves will also be used to ensure this functionality.
 - (2) The valves shall be readily accessible for maintenance and replacement.

9.6 Truck Components

a). General

- i). All cars shall be equipped with disc and/or tread brake equipment.
- ii). The actuators for both the disc brakes and/or the tread brakes shall operate at the same air pressure from the same air source.
- iii). Brake effort contributions from disc and tread brakes shall be specified to avoid wheel thermal cracking and brake disc damage.
- iv). Under all circumstances the brake rates defined in this Chapter and in this Specification shall be achieved.
- v). The truck-mounted components as specified have been identified for the purposes of interchangeability with other single level passenger cars.
- vi). The Contractor may propose alternate components for Amtrak approval if the components as specified cannot achieve the specified braking rates or if superior braking performance can be achieved through the use of other brake system components or based on the car design constraints.
- vii). The truck brake equipment and general car arrangement shall facilitate ease of access for disc brake pad and tread brake shoe replacement at remote yard locations, without the need for a servicing pit.

b). Disc Brake Actuator

i). Caliper Assembly

- (1) An air actuated caliper mounted on the truck frame shall be used in conjunction with each disc to develop braking effort.
- (2) Suspension of caliper assembly shall be a 3-point position type or a compact caliper that permits caliper to follow lateral movement of the wheel assembly without restriction.

ii). Slack Adjusters

- (1) Automatic slack adjusters shall have sufficient capacity to maintain nominal pad clearance and piston travel through the full range of new to worn discs and brake pads.
- (2) The slack adjuster shall have sufficient capacity to maintain nominal shoe clearance and piston travel through the full range of new to worn discs and brake pads.

iii). Brake Pads

- (1) The disc brake system shall use pads compliant with Amtrak Specification 973 and approved during Design Review.
 - (2) The disc brake units shall be capable of using 35mm thick brake pads if possible.
 - (3) Performance of brake disc friction material shall be suitable for the speeds, route brake duty cycle and overall train braking performance and shall not induce temperatures that may result in long or short term thermal damage to the disc friction ring as defined by brake disc manufacturer. This requirement shall be validated by a brake pad wear study to ensure that the expected mileage wear rate is met or exceeded.
 - (4) Pad holders and disc pads shall have an approved locking device.
- iv). The disc actuator shall be capable of handling pressure up to 150 psig without damaging the actuator, disc, brake rigging or any other system or component on the vehicle.

c). Brake Discs

- i). The number of brake discs per axle and the type of brake disc (axle or wheel mounted disc) shall be sufficient to meet the brake rates specified herein and not exceed the thermal rating of the disc or pads.
- ii). Brake disc supplier shall provide an analysis of the thermal capacity of the discs based on the planned train operational pattern including frequency of braking for various braking initial speeds and station stopping patterns as provided by Amtrak. **[CDRL 9-04]**
- iii). In the design of axle mounted discs, the fatigue life of the connection between the hub and friction ring must take into account cyclic loading from thermal and shock environments that are separately considered and are encountered in normal service.
 - (1) The shock environment due to wheel/rail interaction at normal revenue speeds is known to result in disc response in the form of a “bending out of plane” vibrational mode.

- (2) The natural resonance frequency of the disc, for this bending mode, shall be demonstrated (by analysis or test) to be greater than 350 Hz.
[CDRL9-05]
- (3) The frequency analysis is to be performed under the assumption that the disc is fixed to the axle or wheel.
- (4) The fatigue life at the most highly stressed location in the connection between the hub and spoke, due to combined strains from thermal and shock load, shall be equal to or greater than the projected service life of the friction ring or 1,000,000 miles, whichever is greater.
- iv). All brake discs shall be manufactured by an Amtrak-approved facility with a history of successfully supplying railway brake discs.
- v). Disc characteristics compliant with the requirements of this Chapter shall be demonstrated during design review.
- vi). The brake disc supplier shall initially investigate if the brake disc currently used by Amtrak for a G-size axle is suitable for this application.
- vii). Design Criteria
 - (1) The brake discs (including friction ring and spokes) shall have adequate mechanical and thermal capacity for service on and off the Amtrak Northeast Corridor (NEC), under the environmental and operating conditions identified in Amtrak Specification 963.
 - (a) The discs shall be designed to withstand the mechanical loads arising from track-generated accelerations and thermal loading from friction braking from initial installation through the projected service life of the disc friction ring.
 - (b) This shall be verified by Finite Element Analysis (FEA) per Section 9.6.c.vii) and a fatigue life estimate **[CDRL 9-06]** based on the results of the analysis performed by the brake disc supplier and shall be submitted to Amtrak for review and acceptance.
 - (2) An analysis shall be conducted to predict the fatigue performance of the proposed brake disc from the thermal loading measured from the dynamometer testing performed pursuant to the requirements of Chapter 20 and submitted to Amtrak for approval.
 - (3) For mechanical loading, each shock event shall translate into a minimum of two full bending stress reversals when evaluating the fatigue life of the disc, to account for the damping of the excitation in the disc.
 - (4) A moment arm shall be taken into account for the distance from the axle box to the center of the disc for vertical shock loads, based on the worst case condition.

- (5) The fatigue analysis of the disc shall take into account fatigue damage from in-service thermal and mechanical loading combined.
- (6) The fatigue limit shall be selected based on at least a 50% probability of survival and shall account for manufacturing technique, surface finish, metallurgical properties, etc. as specified in recognized industry standards.
 - (a) The factor of safety shall be at least 1.50.
 - (b) The factor of safety shall be applied to the stresses obtained from the FEA which are incorporated in the fatigue estimate to reduce the predicted fatigue life.

viii). Brake Disc FEA report

- (1) The brake disc supplier shall submit a brake disc FEA report, for approval by Amtrak. **[CDRL 9-07]**
- (2) The maximum stress from the FEA at the specified loads, with a factor of safety of at least 1.50, shall be less than the allowable fatigue limit.
- (3) The Contractor may elect to simplify the load cases into stepped increments, provided the methodology and the data utilized to establish equivalency is found acceptable to Amtrak.
- (4) The FEA report must include an analysis for fatigue life and must include a Miner's rule calculation showing the damage factors due to loads imposed by vertical and lateral axle box acceleration and thermal loads resulting from friction between the disc and brake pads.
 - (a) The Miner's sum must not exceed 0.3 for the service life of the disc for the hub-friction ring connection.
- (5) The FEA report shall include, but not be limited to, the following:
 - (a) Introduction
 - (b) Table of Contents
 - (c) Summary
 - (d) Physical properties of each material used for the disc.
 - (i) This table shall include, but not be limited to:
 - 1. Yield strength
 - 2. Ultimate strength
 - 3. Elongation
 - 4. Tension modulus

- 5. Compression modulus
- 6. Shear modulus
- (ii) Minimum values shall be used and shall be selected from ASTM (or equal) material specifications, as approved by Amtrak.
- (iii) The brake disc supplier may propose alternate material specifications for Amtrak approval.
- (e) Views of key structural areas (spokes, hub-friction ring connections, etc.) showing member locations and geometry, and indicating the material and thickness of each.
 - (i) Other FEA views may be required where critical stress areas are identified.
- (f) A tabulation or fatigue curve justifying the Contractor's selection of allowable fatigue stresses for the disc material for each transition or joint, and the fatigue-critical stress ranges.
 - (i) The FEA report shall include a description of how this process is carried out.
- (g) The complete test report must be submitted including procedure, raw and reduced data, and summary of results, including:
 - (i) Structural sketches and/or layouts of the critically stressed locations showing locations and shapes depicted in scale, thickness, section properties and material. Methods of joining (if appropriate) shall be defined.
 - (ii) Diagrams displaying externally applied loads and boundary conditions.
 - (iii) Color plots of the stress under each load condition for critically stressed areas.
 - (iv) Natural Frequencies of the disc.
- d). Tread Brake Units
 - i). Tread brake units shall be added to the car to supplement disc braking.
 - ii). A truck mounted air actuated tread brake unit, with integral single acting slack adjuster shall be applied at each wheel.
 - iii). The tread brake unit shall operate in conjunction with the adjacent disc brake caliper from the same air source.
 - iv). Composition brake shoes 2.5 inch thick, of a size and type in general use by Amtrak and conforming to Amtrak Specification 80-276 shall be provided.

- v). Performance of brake shoe friction material shall be suitable for the speeds, route brake duty cycle and overall train braking performance and shall not induce temperatures at the wheel tread that may result in long or short term thermal damage, as defined in 49 CFR Part 238. This requirement shall be validated by a brake pad wear study to ensure that the expected mileage wear rate is met or exceeded.
- vi). A brake key shall secure the brake shoe to the brake heads and shall not require the use of specific tools for installation or removal.
- vii). The design of the tread brake shall accommodate the maximum allowable size wheel with sufficient clearance for operation and maintenance.
- viii). The slack adjuster shall have sufficient capacity to maintain nominal shoe clearance and piston travel through the full range of new to worn wheels and brake shoes and shall provide sufficient clearance to install a 2.5 in. brake shoe against a new wheel.
- ix). Should tread brakes not be required the Contractor shall install enough wheel scrubbers to ensure adequate ground between wheel and rail.

9.7 Wheel Slide Control System

a). General

- i). The wheel slide control system shall modulate the application of the pneumatic brakes to prevent sliding of the wheels through the use of a microprocessor design. The system for each wheel location shall include:
 - (1) System unit/controller with pre-wired connector plugs
 - (2) Modulation type dump valves as required
 - (3) Molded T-harness cable, or equivalent protected cable type as required
 - (4) Active speed sensors (one per axle or wheel location)
 - (5) The ability to perform wheelslide system diagnostics with a laptop Portable Test Unit (PTU) (test unit itself is not required) and by the car CDU.
 - (a) Additionally, the system shall be capable of logging historical data and events by way of the system diagnostics and the car diagnostics unit .
 - (6) Adapter cable to connect a PTU to the wheelslide control unit
 - (7) Wheel Slide Control may be incorporated into the ECP controller with the approval of Amtrak
- ii). The system shall continuously measure the speed of each axle/wheel and take corrective action should a sliding wheel be detected.

- iii). The wheel slide system shall operate under all braking conditions and shall not permit the jerk limit to be exceeded on reapplication of brakes following a slide correction.
- iv). The system shall be designed to prevent permanent thermal damage to the wheel tread as evidenced by spalling, under all adhesion conditions.
- b). Control Unit
 - i). The control unit shall not be mounted under the car unless approved by Amtrak.
 - ii). The wheelslide control equipment is subject to the following conditions:
 - (1) The wheel slide function shall be automatically self-calibrating to continuously adjust for the difference in wheel circumference from nominal new wheel to fully worn wheel rim thickness.
 - (2) The system software shall be designed to account for the rotational inertia properties of the wheel set assembly.
 - (3) Wheel slide corrections shall not occur at normal deceleration rates on dry, level tangent track.
 - (4) System logic and criteria for detection and correction of wheel slide and instantaneous deceleration rate shall be submitted for review and approval. **[CDRL 9-08]**
 - (5) The system software/control electronics shall possess features to prevent inappropriate wheel slide correction function from transient signals arising from one damaged or missing gear tooth.
 - (a) This requirement includes provisions for intelligent interpretation of transient changes in signal amplitude at all speeds due to axle gear run-out, vibration of sensor mounting bracket or sensor/gear clearance settings.
 - (b) Wheel slide protection shall be retained on all remaining axles should the control unit fail to receive one or more axle speed signals.
 - (c) It is recognized that the system performance for the axle with the defective sensor is compromised under these conditions.
 - (6) A safety timing function meeting the requirements of EN Standard 50126 SIL 3 shall be provided to cancel wheel slide corrections exceeding a specified duration to be determined based on final system design.
 - (a) Protection shall be locked out on the affected axle/truck until car is at zero speed.

- (7) The system shall utilize software that is at the current revision at the time of installation. All software revision levels shall be checked at commissioning to verify compliance.

iii). Auxiliary Functions

- (1) The system shall supply at least two auxiliary zero speed signals, provided for door control, as described in Chapter 12, as follows:
 - (a) A zero-speed switching device shall close below 3 mph, and shall open above 3 mph.
 - (b) A 20 mph speed switching device shall close below 20 mph and shall open above 20 mph.
- (2) Logic shall be fail-safe, such that zero-speed and 20 mph relay drop out in the event of any component failure or loss of power.
- (3) Speed signal logic shall meet the requirements of EN 50126 SIL 2.
 - (a) The speed signal shall incorporate separate relays that break both the positive and negative components of the zero and 20 mph signals.
 - (b) Both the normally open and normally closed contacts shall be made external to the unit.
 - (c) Contact rating shall be 0.25A at 80VDC.
 - (d) Contacts shall be high reliability to reduce the probability of welding.

iv). Diagnostics

- (1) The wheelslide control unit shall include integral diagnostic indications (at a minimum) of the following system states with the vehicle moving:
 - (a) Open, shorted or grounded speed sensor circuit
 - (b) Open, shorted or grounded dump valve circuit
 - (c) Electronics fault identified at component level
 - (d) Power loss/low supply voltage
 - (e) Software logic fatal error or program lockup
 - (f) Time out of safety timer
 - (g) Weak/missing speed sensor signal
 - (h) Logging capability for running total of slide corrections

- (i) Locked axle
 - (2) When the car is stationary with adequate power and air, it shall be possible to conduct a self-test that shall verify the following functions in addition to those above:
 - (a) Ability of magnet valves to release and apply brake cylinder pressure
 - (b) Ability to test magnet valve time-out
 - (c) Ability to exercise zero-speed relays
 - (d) Power loss/low supply voltage
 - (3) The diagnostic information listed in Diagnostics and Faults shall interface with the car CDU, if car level diagnostics option is executed, and shall be accessible remotely.
 - (4) Diagnostics and faults shall be capable of remaining in stored memory for no less than 3 months and shall continuously overwrite the oldest data with the newest with the capability of remote access.
 - (5) Refer to Chapter 24 for additional details.
- v). Faults
- (1) Faults detected shall be retained in the fault memory and displayed on the front of the controller using a numerical display that indicates proper system operation, or a fault code. The readout shall:
 - (a) Be able to identify defects down to printed circuit board, individual speed sensor or dump valve level.
 - (b) Include transient faults detected while the car is in motion.
 - (c) Provide sufficient information to enable maintenance personnel to determine if the unit is working properly, and if not, whether the system can be repaired while on the car or must be removed for repairs.
 - (2) A permanent label shall be fixed to or near the wheel slide control unit that identifies the codes for faults represented by the display.
 - (a) It shall also provide instructions for initiation of self-test program and the clearing of faults from memory.
 - (b) The chart shall be positioned so that it can be easily referenced in seated or standing position (as appropriate) while reading the display or manipulating button.
- vi). Components

- (1) All components shall be identified with:
 - (a) Vendor name
 - (b) Vendor part number
 - (c) Date of manufacture
 - (d) Revision level
 - (e) Serial number
- vii). Test Equipment and Software
 - (1) The Contractor shall provide wheelslide system diagnostic software to be used on a PTU. **[CDRL 9-09]**
 - (a) Amtrak shall be licensed and permitted to install and use this software on an unlimited number of laptop computers for the maintenance of the cars or via remote access.
 - (b) Operating and installation instructions for this software shall be included in the vehicle maintenance manuals.
 - (2) The Contractor shall provide a common method for each car for connecting locally to a PTU to the wheelslide control unit and remotely to allow on-car troubleshooting. **[CDRL 9-10]**
- c). Dump Valves
 - i). When a slide condition is detected by the wheel slide control unit, it shall be relieved on a per truck/per axle basis, by controlled reduction of brake cylinder pressure by an electro-pneumatic modulating type dump valve.
 - ii). Braking shall be reapplied after correction is made at a rate designed to take maximum advantage of prevailing adhesion without exceeding the jerk rate.
 - iii). Air consumption shall be minimized during slide correction.
 - iv). The dump valve porting and internal capacity shall be optimized for car dead and displacement brake cylinder volumes.
 - v). The manufacturer must provide a pre-wired mating plug connector for each dump valve.
 - vi). The wire pigtail must be molded construction and sealed at the plug.
- d). Speed Sensors and Wiring
 - i). Axle/wheel speed shall be determined from an active speed sensor mounted on a journal bearing adapter and a toothed gear mounted on the axle.

- (1) The sensor shall detect all speeds down to 0 mph at 0.01 mph increments.
- ii). The speed sensors shall connect to the wheelslide control unit through a T-harness, or equivalent protected cable system.
- iii). The T-harness or equivalent protected cable system shall connect to the carbody wiring through a MIL standard circular connector, mounted to an electrical box on the carbody.
- iv). Terminal and junction boxes shall not be mounted on the trucks.
- v). The speed sensor cables and T-harness, or equivalent protected cable system, shall be attached to the truck frame, or equivalent, using coated clamps that provide secure attachment while not abrading or pinching the cable.
 - (1) Each clamp shall secure no more than one cable.
- vi). Clamps shall be attached to the truck frame, or equivalent, using fasteners and lock washers.
- vii). There shall be sufficient slack in the speed sensor wiring to allow the bearing adapter to move to the bottom of the pedestal opening without stressing the cable (such as when the truck is lifted with axles installed).
- viii). Cables and harnesses shall be accessible for replacement while the car is at a normal service and inspection facility.
- ix). Mounting and wire routing of all truck components shall be arranged to minimize the exposure to wayside debris damage.

9.8 Brake Indication Devices

a). Indicators

- i). Indicators, one on each side of the car at each truck or axle, shall be connected to the brake cylinder supply line between the brake cylinder cut-out cock and the brake cylinder.
- ii). These indicators shall provide a positive visual status of the brake system to crew members.
- iii). The indicators shall be readily visible from station platforms as well as track level, and from both ends of each side of the car.

b). Pressure Switches and Brake Status Lights

- i). A pressure switch shall be provided for each truck or axle, monitoring the brake cylinder pressure downstream of the truck or axle cutout cock.
- ii). A test fitting shall be provided in each brake cylinder line to the trucks/axles, downstream from cutout cock and dump valve.

- iii). In addition, a test fitting shall be provided for each pressure switch to check calibration. These pressure switches operate the brake applied/released indicator lights.
- iv). Trainline function is as follows:
 - (1) Brake released: continuity when air brake pressure on both trucks “zero” and handbrake is released.
 - (2) Brake applied: continuity when brake cylinder pressure on both trucks is applied at “Min” or more.
- v). The exterior of each car adjacent to the air brake control manifold shall be equipped with two 3-lamp LED indicator assemblies, as specified in Chapter 13.
- vi). Indicators shall display the following aspects, top to bottom:
 - (1) Solid Green: All service brakes released
 - (2) Solid Yellow: Service brakes applied
 - (3) Flashing Yellow: Handbrake applied (with air brakes applied or released)
- vii). For handbrake applications, a weatherproof micro-switch or pressure switch shall be provided to indicate handbrake status to the car’s exterior brake status lights, and to the locomotive via the 27-point communication trainline and the digital trainline.
 - (1) The switch shall be weatherproof to prevent damage from environmental conditions.
- viii). Alternatively, an integrated car diagnosis could be implemented. An electronic monitoring computer in certain areas of the car could allow a full diagnosis of all the car axles brake status from only one point.
- ix). A pressure transducer or pressure switch monitors the brake cylinder pressure downstream of each truck or axle cutout cock. Output from those pressure measuring devices will be routed to car electronics, and from there to the monitoring centers in the car via communication car buses including historical data storage. In parallel, brake pressure indicators will be maintained on the exterior of the car. Communication trainlines will provide the same functionality.

9.9 Hand Brake

- a). A sufficient number of wheels shall be equipped with handbrakes, such that compliance with APTA Standard PR-M-S-006-98 is achieved.
- b). The handbrake shall be capable of holding AW3 loaded car, on a 5% grade, with an applied force of 125 lbs, 3 inches from the end of the handle under all normal truck wear (tread, wheel and brake shoe) conditions.

CONFIDENTIAL — DO NOT DISTRIBUTE

- c). The system shall be able to be applied and released infinite times without air or power.
- i). The handbrake shall be provided with a lever type handle at the B-end of each car in the diaphragm area.
- d). Operating instruction labels shall be provided for the train crew regarding manual operation and rescue operation when normal air or electrical supplies are disrupted. These shall be provided at the control location and also at the ends of the cars.

9.10 CDRLs

CDRL	Description	Due
CDRL 9-01	Design of ECP brake system inter-car cable and junction connection	30 days prior to Brake System PDR meeting
CDRL 9-02	Brake system delay/dead time, build-up time, response time and equivalent deceleration rates for all speeds from maximum speed to full stop.	30 days prior to Brake System IDR meeting
CDRL 9-03	Brake System design and performance analysis	30 days prior to Brake System IDR meeting.
CDRL 9-04	Disc Brake Thermal Capacity Analysis from supplier	30 days prior to Brake System IDR meeting
CDRL 9-05	Brake Disc Natural Frequency Analysis	30 days prior to Brake System IDR meeting
CDRL 9-06	Brake Disc Fatigue Life Estimate	30 days prior to Brake System IDR meeting
CDRL 9-07	Brake Disc FEA Report	30 days prior to Brake System IDR meeting
CDRL 9-08	Wheel Slide System Detection Logic and Criteria	30 days prior to Brake System IDR meeting
CDRL 9-09	Wheelslide System Diagnostic Software (5 electronic copies for PTU)	With Pilot Car Delivery
CDRL 9-10	Wheelslide PTU Connection Cables (qty. 40 minimum)	With Pilot Car Delivery

* End of Chapter 9 *

Amtrak Single Level Fleet Replacement

Technical Specification

10. HVAC System

Revision 0

Table of Contents

10.1	Overview	10-1
10.2	Design Parameters	10-3
10.3	Comfort Requirements	10-5
10.4	Air Conditioning.....	10-6
10.5	Heating.....	10-10
10.6	Ventilation	10-14
10.7	Fresh Air Dampers	10-17
10.8	Controls.....	10-18
10.9	Accessibility and Maintainability.....	10-23
10.10	CDRLs.....	10-24

10.1 Overview

a). General

- i). Each car in any configuration shall be equipped with two independent HVAC units to provide heating, ventilation and air conditioning to the car, along with the overhead and convection heaters evenly distributed in the vehicle interior.
 - (1) The cars shall have roof mounted HVAC units that must be removable without opening covers and hatches.
 - (2) The covers and hatches shall be coordinated with the appearance and contour of the main structural roof.
 - (3) There shall be no handles, flanges or other drag or noise inducing features on the hatch covers which project above the basic contour of the unit.
- ii). The HVAC units shall be identical, self-contained, independent, easily removable, interchangeable among like cars and have seamless integration with the car shell design and contained within a stainless steel or aluminum housing and shall be mounted in a watertight recess on the main carbody or structural roof with an IP rating of 66 or better. If dissimilar metals are used, there shall be sufficient dielectric isolation from the carbody.
- iii). The HVAC units shall utilize scroll compressors using an US EPA approved refrigerant and choose a unit capable of handling refrigerant regulation updates by the EPA for cooling and shall supply a ceiling-mounted main air distribution duct capable of supplying all air diffusers along the length of the car.
- iv). Each HVAC unit shall consist of one or more compressor/condenser sections and one or more evaporator sections with electric heating units.
- v). In the event of a failure of one of the HVAC units, the ducting shall be capable of providing limited air supply throughout the entire car whether through automated dampers or split ductwork.

b). Design Requirements

- i). The HVAC system shall provide a comfortable temperature-controlled environment of the interior areas of all areas of the cars.
- ii). The cars shall be designed to operate in all environmental and climatic conditions identified in Amtrak Specification 963.
- iii). The HVAC system components shall be service proven and supported by design and test information to demonstrate compliance with the Contract requirements.

- iv). The HVAC units shall be controlled depending on car type. Likewise, the floor heat shall be independently controlled, with different approaches for open-body and compartmented car types.
- v). Single-level car passenger loads shall be assumed to be AW1 for cooling load calculations.
- vi). ASHRAE standards for passenger and solar heat load will be used.
- vii). Heating and cooling requirements shall simulate loading and unloading as follows in all outside ambient temperatures identified in Amtrak Specification 963.
 - (1) This shall include the opening of all sets of side doors on alternating sides of the vehicle every 15 minutes, with the doors held open for 2 minutes each time.
- viii). Ambient conditions as specified and heat losses due to car motion shall be included in HVAC system performance evaluation.
- ix). Air losses due to door and carbody leakage shall be included in the HVAC system performance evaluation, including the temperature gradient end to end of the Car (one end hot and one end cold).
- x). Supply air flow shall be balanced in all occupied areas of the car as well as food service area.
- xi). Dampers on the fresh air intake vents shall control the amount of outside air taken in by the HVAC system.
- xii). Freeze protection shall be provided and turned on when the ambient outside temperatures drop below 45°F, and shall shut off when the outside temperatures rise to 50°F.
- xiii). The Contractor shall prepare, and submit for Amtrak's approval during design review, a detailed heating and cooling load analysis along with recommended heating, cooling and ventilation capacities of all car types.
[CDRL 10-01]
- xiv). The HVAC unit manufacturer shall conduct qualification testing to verify the heating and cooling capacity of the unit per ASHRAE Standard 37-2009 and to verify the design approved by Amtrak.
- xv). Power
 - (1) Power to the HVAC system and controls shall be from the following supplies:
 - (a) HVAC system:
 - (i) 480VAC, 3-phase, 60 Hz supply
 - (b) Temperature controls:

- (i) 120VAC, 1-phase, 60 Hz supply
- (c) Freeze protection circuits:
 - (i) 120VAC, 1-phase, 60 Hz supply.
- (2) Alternate supply voltages may be proposed to Amtrak for approval.
- (3) The HVAC system shall be designed to perform at the nominal voltages and operate within the voltage and frequency tolerance ranges specified in Amtrak Specification 963.
- (4) To minimize the effects of motor inrush currents on the head end power system, the controls on each car shall incorporate a soft start or a method to provide randomly staggered starting of the refrigerant compressor motors in the car.
- (a) Control scheme shall be submitted for review and approval.
[CDRL 10-02]
- (5) HVAC system circuit breakers, temperature display, fault detection and protection, and status indicator screen shall be located in the electrical locker and shall be accessible only to the operating and maintenance crews.
- (6) Circuit breakers, controls and relays shall be inaccessible to the passengers.
- xvi). Temperature controls shall be reliable and maintain car temperature at desired values.
- xvii). The control system(s) shall not shut down by themselves and require manual reset. All connectors shall be rated to an IP rating of 68 or better.
- xviii). The HVAC unit shall utilize a scroll compressor using an US EPA approved refrigerant for cooling, hermetically sealed, without threaded components, or other non-brazed fittings, except for service ports (high and low pressure and, if required, charging port).
- xix). Pressure transducers shall be provided to allow the microprocessor to monitor both the discharge and suction line pressures.
 - (1) This information shall be available to technical personnel for troubleshooting purposes.
- xx). The performance of the entire assembled HVAC system as installed in a completed car, if necessary, shall be verified at the climate room test.

10.2 Design Parameters

- a). The following parameters are to be assumed in the design of the cooling system:

Figure 0-1: Cooling System Design Parameters

Ambient Temperature	110°F Dry Bulb/76°F Wet Bulb, with 120°F air entering the condenser
Solar Load	Based upon worst case conditions in Miami, FL
Passenger Heat Load	440 BTU/hr/person at a heat ratio of 0.60
Number of Passengers	60 seated passengers per car (load level AW3)
Carbody Heat Transmission	In accordance with the Contractor's carbody insulation design to meet the requirements of this Specification, but not greater than 1200 BTU/hr-F° for standard car length of 85 ft
Minimum Fresh Air	12 Cubic Feet per Minute (cfm)/seated passenger, with 9cfm/seated passenger permitted at outside temperatures above 100°F.
Other Heat Loads	Normal vehicle lighting, electrical equipment and appliance loads

- b). The following parameters are to be assumed in design of the heating system:

Figure 0-2: Heating System Design Parameters

Ambient Temperature	-30°F Dry Bulb
Carbody Heat Transmission	In accordance with the Contractor's carbody insulation design to meet the requirements of this Specification, but not greater than 800 BTU/hr-°F for stainless steel, or 1600 BTU/hr-F° for aluminum.
Minimum Fresh Air	12 Cubic Feet per Minute (cfm)/seated passenger, with 9cfm/seated passenger permitted at outside temperatures below 0°F.
Solar Load	None
Passenger Load	None
Other Heat Loads	"Quiet car" lighting only (see Chapter 13)

- c). The city of Chicago, IL should be considered for worst case heating load requirements and the city of Phoenix, AZ should be used for cooling load calculations.

10.3 Comfort Requirements

a). Interior

- i). The following temperatures shall be maintained within the car, including toilet rooms when the associated ambient outside temperatures are present:

Figure 10-3: Required Interior Vehicle Temperatures

Outside Ambient	Interior Vehicle Temperature
Below -30°F	As system will provide
-30°F to +60°F	70°F ± 2°F (±4°F for toilet room)
60°F to 110°F	74°F ± 2°F (±4°F for toilet room)
Above 110°F	As system will provide, but no less than 30°F below outside temperatures up to 130°F.
Layover Heat Mode	50°F ± 5°F (±4°F for toilet room)

- ii). During all modes of air conditioning, the interior relative humidity shall not exceed 55%.
- iii). Except within the area of the side doors and vestibules, the HVAC system shall maintain a temperature variation of the following:
- (1) Vertical variation:
 - (a) On any vertical line, 4 in. above floor to 43 in. above floor, not closer than 12 in. from walls, and not closer than 20 in. from doors.
 - (b) 3°F maximum difference between end points of the vertical line.
 - (2) Horizontal variation:
 - (a) On horizontal planes measured 4 in., 43 in. and 67 in. from floor, not closer than 12 in. from walls and not closer than 20 in. from doors.
 - (b) The temperature at any point within each plane should not exceed ± 3°F from the average temperature in that plane.
- iv). The average car temperature shall recover within 2°F of the required interior vehicle temperature within three minutes maximum following a two-minute door opening of all doors on one side of the car.
- (1) It shall be demonstrated that this requirement can be met during two hours of continuous door cycling on alternate sides of the vehicles of

two minutes open and 15 minutes closed at the design conditions in both heating and cooling modes.

- v). When the car interior temperatures are within the ranges specified, the air temperature differential between the car interior and the air leaving the diffuser at the slot outlets shall not be greater than 25°F.
 - vi). An exhaust duct system and fan shall be used to collect air from public restroom exhausting it into the undercar equipment bay, both to provide pressurization and also ventilation with some heating/ cooling value.
 - vii). The Supply Air Diffusers made of stainless steel or satin finish to be approved during design review shall be provided in the lower row of windowsills to distribute conditioned.
- b). Noise
- i). The overall HVAC system shall be designed to minimize noise in the passenger and crew areas of the cars.
 - ii). The noise level from the HVAC system shall not exceed the values in Figure 10-4.

Figure 10-4: Maximum Noise Levels

Interior noise level: Coach seating areas, toilet rooms and galley	As specified in Chapter 11
Exterior noise level	75 Decibels (Acoustic) (dBA) max (15 ft from centerline of vehicle)

- iii). Particular care shall be required at the return air grilles, and galley ceiling air diffusers.
- iv). The main parts of the HVAC system should minimize the transmission of noise and vibration into the car interior.
- v). Vibration eliminators shall be incorporated in the base of compressors or motors, if necessary, and in the refrigerant lines between resiliently mounted compressor(s) and rigidly mounted piping.
- vi). The evaporator blower and condenser fan assemblies shall be balanced according to IEEE Standard 11-2000 "IEEE Standard for Rotating Electric Machinery for Rail and Road Vehicles" with no more than 0.001-inch peak-to-peak displacements in any direction.

10.4 Air Conditioning

- a). General

- i). The vehicles shall be cooled using electromechanical equipment that has been proven in rail service. Self-contained, hermetically sealed, roof-mounted HVAC units shall be provided on the cars.
 - ii). The HVAC units shall all be identical. The units shall be designed for an approved refrigerant at the time of delivery of the first vehicles, conforming to 40 CFR Part 82. All components within the unit, such as seals, shall be compatible with the refrigerant and its associated lubricants.
 - iii). Each occupied area of each car shall be supplied by two HVAC units arranged so that conditioned air will be evenly distributed to all areas in the event of a failure of one of the HVAC units.
 - iv). The air conditioning system shall be designed and adequately sized to maintain interior car temperature as specified at the normal ambient conditions.
 - v). For ambient temperatures at or above 110°F Dry Bulb/76°F Wet Bulb, with air entering the condenser above 120°F, the air conditioning system shall be capable of maintaining cooling at a reduced capacity, but in no case shall the average interior temperature be less than 25°F below the outside temperature.
 - vi). Application and integration of the system are to be in accordance with the recommendation of the air conditioning manufacturer who shall also specify air flow requirements.
- b). Refrigerant
- i). The units shall be designed for an approved refrigerant at the time of delivery of the first cars, conforming to 40 CFR Part 82.
 - ii). All production units must comply with any new regulations regarding refrigerant phase out enacted at the time of manufacture, and any new refrigerant or component changes associated with new regulations must be backward compatible with earlier production units.
 - iii). All components within the unit, such as seals, shall be compatible with the refrigerant and its associated lubricants.
- c). Components
- i). The refrigeration system shall include, at a minimum, the following components and features or alternative design as approved by Amtrak:
 - (1) Drain Pan
 - (a) A condensate drain pan shall be provided beneath the evaporator coil, headers, thermal expansion valves and coil U bends to collect moisture from the evaporator components subject to sweating.

- (b) The condensate drain pan shall be made of stainless steel, with stainless steel or copper alloy fittings and shall discharge into the rooftop drain pan.
 - (c) The HVAC unit shall be mounted above rooftop drip pans and shall be sealed against moisture entering the carbody.
 - (d) The drain pans shall catch the evaporator condensate as well as any water entering the compressor/condenser section.
 - (e) All collected moisture shall be directed to the roadbed through the car sidewall, without leaking into the car structure and shall not be discharged on undercar structure, wheels, brakes, trucks, or electrical equipment.
 - (f) Elastomeric silicone rubber flapper type check valves must be provided at the ends of the condensate drains.
 - (g) The exits of the drain pan lines to the undercar shall be arranged in an approved manner that shall be readily accessible for maintenance and shall be protected against clogging and rodent/wasp entry.
 - (h) Drain pan design and maintenance shall be presented for review and approval during design review.
- (2) Compressors
- (a) A service proven and efficient variable speed single scroll or two scroll type refrigerant compressors operating seamlessly between 30% and 100% capacity.
 - (b) If tandem scrolls are employed, means shall be provided to alternate use of compressors during single stage cooling so as to equally distribute use and wear.
 - (c) The Contractor may propose an alternative capacity regulation method for review by Amtrak.
 - (d) Pump-Down
 - (i) Refrigerant compressor shutdown control shall be by means of a pump down cycle that senses suction line pressure. The system shall automatically reset without faults of the input power to the compressors was interrupted.
 - (ii) Refrigerant system controls must include a bump start process that prevents liquid build up in a loss of power condition when pump down was not initiated or at start up if pump down routine has not occurred in the previous 90 minutes.

- (iii) Pump-down or similar system must not be initiated if the system shut down is initiated by a protective safety device such as excessive pressure, temperature, or current protective devices.
 - (iv) A refrigerant control box, readily accessible within the return air opening, shall be provided containing transducers, service switches, etc.
- (3) Condenser Fans
 - (a) Direct drive condenser fan and motor assemblies.
 - (b) Condenser fan motors must be rated IP56 per IEC 60529 or higher.
- (4) Condenser Coil Assemblies
 - (a) Condenser coil assemblies with 0.008 in. thick copper or an approved coated aluminum fins on copper tubing at a spacing of 8 fins per in.
 - (b) Fins and tubes evaluated for minimum 600 hours in AASS per EN ISO 9227.
- (5) A charging port and an evacuation port equipped with high quality Schrader valves and sealing metal caps.
- (6) Filter Drier
- (7) Discharge line check valves
- (8) Sight glass/moisture indicators
- (9) Direct drive supply air blower and motor assemblies
- (10) Liquid line solenoid valves (2 per unit)
- (11) Thermal expansion valves (2 per unit)
- (12) Evaporator Coil Assemblies
 - (a) Evaporator coil assemblies with two interlaced cooling circuits for modulated and full cooling.
 - (b) The assembly shall have 0.008 in. thick copper or an approved coated aluminum fins on copper tubing at a spacing of 10 fins per inch.
 - (c) Fins and tubes evaluated for minimum 480 hours in AASS per EN ISO 9227.
- (13) High- and low-pressure switches

(14) High- and low-pressure transducers

d). Leak and Charging Procedure

- i). Leak and Charging procedure for Refrigeration System shall be submitted to Amtrak for review and approval. **[CDRL 10-03]**

10.5 Heating

a). General

- i). Each zone of the car shall be electrically heated using forced air overhead heaters in the HVAC unit and by convection heaters evenly distributed in the vehicle interior to provide maximum possible comfort for all passenger areas of the car.
- ii). The heating system shall compensate for carbody losses and fresh air heating loads.
- iii). The floor level heating elements as fan motor, heating resistor and safety thermostats are considered an LLRU.
- iv). The heating system shall be designed, controlled and be adequately sized to maintain interior temperatures as specified, throughout the car at normal outside ambient conditions.
- v). Main heat shall be divided into stages to allow control of overhead heat output.
- vi). The size of each heating stage shall be chosen and controlled so that cycling of the heating contactors is minimized.
- vii). The maximum allowable heater grill and enclosure surface temperature accessible to passengers or train crew shall not exceed 125°F.
- viii). Antifreeze protection, activated at an outside temperature of 45°F, shall be provided for the water tank and water drain valves, doors and thresholds, and elsewhere as required.
- ix). The protective heater circuits shall be protected by an independent circuit breaker.

b). Layover Mode

- i). Layover heat shall be provided by the HVAC system, the toilet room auxiliary heater and floor heat shall maintain an interior temperature of 50°F ± 5°F.
- ii). During layover heating, the fresh air damper shall be closed, and the evaporator fan shall only operate below 50°F ± 5°F or above 85°F ± 5°F.
- iii). In layover mode, the dampers shall be fully closed and the temperature at the coldest place in the car cannot be less than 35°F.

c). Freeze Protection

- i). Freeze protection system shall be provided to the side doors, thresholds, water tanks, water drain valves and all water and waste system components that may be exposed to freezing conditions.
- ii). Freeze protection heaters shall have an LED indicator easily accessible by the maintainers. This applies to external mechanical components such as steps, waste valves, and similar systems exposed to freezing conditions.
- iii). The system shall be controlled and monitored through the HVAC controller and shall allow unrestricted vehicle operation of systems down to -30°F ambient temperature under all weather and car operating conditions, including at full operating speeds

d). Overhead Heaters

- i). Overhead heaters shall be supplied within the evaporator compartment to provide tempering for fresh air intake and for reheat to maintain humidity control under partial cooling operation of the air-conditioning apparatus.
- ii). The total heat capacity in shall be divided into stages of approximately 1/3 and 2/3 of total capacity, allowing for HIGH, MEDIUM, and LOW power operation.
- iii). The heater elements shall be of low thermal inertia, open coil, resistance wire type with terminations, and insulated supports as approved by Amtrak.
- iv). Alternative configurations shall be submitted to Amtrak for review and approval.
- v). The heaters shall be powered from the nominal 480 VAC supply and shall be staged to provide variable power operation.

e). Overhead Heater Protection

- i). The overhead heaters shall be protected against over-temperature.
- ii). Over-temperature protection utilizing airflow detection, resettable and manual reset devices and other control means shall be evaluated during design review prior to approval by Amtrak.
- iii). An automatically resettable overheat protection thermostat (OHPT1) shall be installed in a location to sense the temperature reliably and accurately in the area of the heater coils.
- iv). The thermostat shall be wired directly in series with the coil of the overhead heat contactor and shall also provide feedback to the control logic.
- v). The set point shall be selected such that the overhead heaters may cycle indefinitely on overhead thermostat control with no damage caused to any HVAC system components.

- vi). The set point shall also prevent nuisance trips from any condition that may be expected to arise during normal operation, including operation over the allowed range of input voltage and air filter maximum recommended pressure drop.
 - vii). A backup overhear protection thermostat (OHPT2) shall be provided to positively remove power to the overhead heater elements in the event of a control failure or failure of the overhear thermostat.
 - viii). The backup protection may be a thermostatic sensor wired to a shunt-trip circuit in the overhead heat circuit breaker.
 - ix). The set point shall be selected such that no damage shall occur to any HVAC component by temperatures reached before or after the back-up protection device actuates.
 - x). The setting of the back-up device shall be coordinated such that it will not actuate under any conditions which may be achieved with normally operating controls and functional overhear thermostat.
- f). Heated Floor Panels
- i). As an alternative, all passenger loading entrance areas shall be equipped with service proven heated floor panels or alternative solution to ensure no ice or water accumulation at the passenger entrance.
 - ii). The heated floor panels shall not be covered and any replacement of a heated floor panel shall not require the disassembly of other assemblies unless otherwise approved by Amtrak.
 - iii). The total floor heat capacity in each zone shall have uniform temperature distribution throughout the whole vehicle for passenger comfort.
 - iv). Each floor panel must be protected with two levels of over-temperature protection as specified under UL 1995, Section 30, Electric Heaters.
 - v). Fault detection and diagnostic features of heated floor panels shall be submitted for review and approval. **[CDRL 10-04]**
 - (1) These features shall be available to be accessed remotely.
 - vi). Alternate methods of heating and temperature regulation, ground fault detection and protection may be submitted for consideration by Amtrak.
- g). Floor Heaters
- i). Floor heating shall be provided throughout the passenger areas using convection type heaters.
 - ii). The Contractor shall take appropriate steps in the design of the floor heat system to minimize overall power demand while complying with all technical requirements of this specification.

- iii). Alternative capacity regulation method may be provided for approval by the Amtrak.
- iv). Floor heating shall be provided using electric strip heaters, powered from the 480 VAC HEP supply, mounted behind stainless steel heater guards along the side walls at the floor.
- v). The electric floor heater elements shall be of the strip-heater type consisting of a nickel-chromium resistance wire embedded in a baked, compressed, refractory material sealed within a rust proof, high heat transfer metal sheath.
- vi). The heater elements shall be mounted on ceramic standoffs, or equivalent, to provide a high resistance to arcing or grounding under wet conditions.
- vii). The floor heat shall have sufficient capacity to heat the car interior from 12° F to 70° F with the ventilating fans and overhead heat inoperative and without benefit of solar or passenger loads.
- viii). The heaters shall be uniformly distributed.
- h). Heater Fault Detection and Protection
 - i). Each heated floor and floor heater circuit shall have its own circuit breaker, fault detection and protection.
 - ii). The heater fault detection circuit shall be able to indicate if any of the heaters in the circuit is either open, shorted, or grounded.
 - iii). Each heater circuit shall have current input to and output from the floor heaters monitored by the differential relay which energizes for a predetermined difference between the two.
 - iv). When this relay energizes, both the positive and negative feeds to the affected floor heater circuit shall be interrupted.
 - v). The ground fault type circuit shall remain latched in the disconnected mode until manually reset by means of a momentary reset button located in the HVAC control box.
 - vi). The fault trip must not be affected by control power loss or fluctuation.
 - vii). A tripped ground fault circuit shall be annunciated by means of an LED indicator on the ground fault detection device in the HVAC control box.
 - viii). The sensor device shall be designed such that it is not necessary to disconnect heater power leads to remove and replace the ground fault detection unit.
 - ix). A separable sensing coil or other approved method shall be provided to accomplish this requirement.

- x). Alternate methods of ground fault detection and protection may be submitted for consideration by Amtrak.

10.6 Ventilation

a). General

- i). The ventilation system for each car shall include, at a minimum, the following components and features:
 - (1) Exterior fresh air intakes with water eliminators and filter with a minimum of MERV 13, if it is deemed that air flow is compromised by using a MERV 13 filter, an alternative filter may be proposed.
 - (2) Electrically motorized automatic fresh air dampers.
 - (3) Disposable pleated-type fresh and return air filters with a minimum of MERV 13.
 - (4) Air distribution ducts
 - (5) Air diffusers and grilles
 - (6) Exhaust ducts
 - (7) Exhaust fans
 - (8) Emergency fan shutoff switches
- ii). The ventilation system shall provide a minimum positive carbody pressurization of 0.1 in. water gage (with full fresh air flow) above ambient exterior pressure with all exterior doors and windows closed and the toilet room and electric locker exhaust fans running, and the car operating at normal speeds.

b). Fresh Air Mixing

- i). Intake of filtered fresh air shall be regulated according to demand and shall be adequate to maintain positive interior pressurization under all operating conditions and a minimum of 0.1" w.g. while at standstill.
- ii). Fresh air shall enter the car through fresh air intakes and air filters and shall pass through ducts which include drains for condensation and water to be diverted to the outside of the car.
- iii). In addition, the fresh air exterior intakes shall be fitted with louvers or grilles that prevent ingress of water and snow.
- iv). Re-circulated air shall pass through grilles into a plenum chamber where it shall mix with the fresh air and pass to the HVAC unit blower.
- v). Fresh and re-circulated air shall be filtered at the HVAC units by disposable pleated-type filters.

- vi). The filters shall be located for ease of replacement from inside the vehicle via the return air grill and shall meet the requirements specified in Amtrak Specification 685 and be commercially available.
- c). Return Air Temperature Sensors
 - i). The Return Air Temperature Sensors should be installed in such way that they only measure the temperature of the re-circulated air, and not when later mixed with the fresh air.
- d). Evaporator Blower Fans
 - i). Ventilation of each car shall be provided by blower fans supplied as part of the HVAC units.
 - ii). The blower fans shall move the mixed air through the cooling and heating coils and force the conditioned air into the supply air ducts.
 - iii). The evaporator blower fans shall be sized to overcome the high external static pressure as determined by the Contractor.
 - iv). The blower shall be centrifugal type, directly driven from the motor shaft.
 - v). The motor shall be TEFC, class H insulation, resiliently mounted, and equipped with permanently lubricated sealed bearings.
 - vi). Use of variable speed motor controls for the blower and exhaust fans is permitted if it will lead to a more efficient and energy saving system.
- e). Air Ducts
 - i). The air ducts shall be sized to minimize noise from air velocity.
 - ii). The air ducting shall be free of any obstructions such as electrical wiring or piping.
 - iii). Ducts should be able to be cleaned using rotating brushes with vacuum system.
 - iv). Mounting of the air ducts to the carbody structure shall minimize noise and heat transfer across the joints.
- f). Insulation
 - i). Use of polyolefin insulation is prohibited including the use of any type of insulation inside the air ducts.
 - ii). Insulation shall be adequate to prevent condensation from occurring in or outside the duct under any operating conditions.
 - iii). Insulation shall comply with Amtrak Flame, Smoke and Toxicity Requirements, # 352.

g). Air Discharge

- i). The air diffusers shall be designed to deliver equalized airflow throughout the car and meet the temperature variation requirements specified.
- ii). The velocity of discharge air shall not exceed 100 feet per minute (fpm) measured 6 in. below the face of the diffusers.
- iii). Air delivery performance shall be verified during HVAC system proof-of-design testing. Refer to Chapter 20.
- iv). The diffusers shall be fixed on all vehicles, except for the car(s) designated for proof-of-design testing, where adjustable diffusers may be used and then permanently set following successful test.
- v). The total air flow from the evaporator blower fans on the HVAC units shall be determined by the Contractor to meet the interior requirements at the specified ambient temperatures but shall not be less than 70 cfm per foot of occupied car length.
- vi). The supply air shall be adequate to maintain positive interior pressurization under all operating conditions and a minimum of 0.1" w.g. while at standstill.

h). Baffle Plates

- i). Baffle plates shall be used to set the volumes of fresh and re-circulated air.
- ii). The baffle plates shall be fixed on all cars, except for the car(s) designated for testing, where adjustable baffle plates may be used and then permanently set following successful test.
- iii). Adjustment and balancing procedures shall be included in the final deliverables with the first batch of cars and identified in the maintenance manuals.

i). Toilet Room Exhaust Fans

- i). A forced exhaust fan vented to the exterior of the car shell shall be provided in each toilet room, exhausting away from any fresh air intake for a minimum 0.5 cfm/ft² to maximum 1 cfm/ft².
- ii). Toilet room exhaust shall, at all operating speeds, maintain a negative pressure in the toilet room at all times when activated, as compared to the rest of the car interior.
- iii). Another method of preventing toilet odors in the car may be proposed and approved by Amtrak.

j). Electric Locker Ventilation

- i). A forced exhaust flow shall be provided in the electric locker to assist in cooling the electrical equipment in the electrical locker.

- ii). The electric locker fans shall draw air from the car interior and exhaust it to the exterior.
- k). Controls
 - i). The temperature controls shall provide for ventilation with no heating or cooling when temperature conditions fall in the ventilation range shown for comfort requirements in Section 10.3.
 - ii). Ventilation detection and interlocking devices shall be provided and installed such that there shall be no overhead heat and/or cooling when absence of ventilation is detected.

10.7 Fresh Air Dampers

- a). The fresh air intakes shall be equipped with electrically power operated fresh air dampers that shall at a minimum provide two positions:
 - i). fully open
 - ii). fully closed
 - iii). adjustable stop for restricting.
- b). The dampers shall be controlled by the vehicle temperature control panel; the dampers shall be used to provide full fresh air into the vehicle under normal operating conditions.
- c). With temperatures outside the normal range, the dampers shall operate variably between open and closed to optimize fresh air quantity for the purpose of maintaining the required interior temperature while providing the maximum possible percentage of full fresh air.
- d). During layover and warm up/cool down, the dampers shall be fully closed.
- e). Alternate arrangements may be proposed to Amtrak for approval.
- f). The damper frame, blades and hardware shall be constructed of corrosion resistant material so they will last the life of the car with no attention other than inspection and cleaning at 8-year intervals.
- g). The drive motor shall be robust and readily available.
- h). The dampers shall incorporate a spring close feature so that they self-close upon loss of power.
- i). They shall also incorporate a position sensor to provide a feedback signal to the temperature control panel.
- j). Design of the damper unit shall keep the number of adjustments required to a minimum.
- k). Once settings are made, they shall be locked so they remain fixed for the life of the

damper.

10.8 Controls

a). General

- i). A microprocessor-based, integrated HVAC temperature control system shall be provided to monitor the inside and outside temperatures, and adjusts the system's cooling, and heating functions to maintain a comfortable inside temperature and humidity level throughout the range of environmental and climatic conditions of the car.
- ii). Activation of the HVAC system on each car shall be under the control of the train crew.
- iii). The system shall be designed to maintain the specified interior passenger area temperature and humidity and to also assure adequate interior ventilation.
- iv). The output of the microprocessor shall be short circuit protected and shall drive solid state and electromechanical relays and contactors which shall, in turn, control electrical power to the heater elements, motors and various control devices.
- v). The changeover between heating and cooling shall be automatic and, except for the reheat stage of overhead heat, shall preclude the simultaneous operation of heating and air conditioning.
- vi). The microprocessor application software shall permit Engineering Level maintenance personnel using on board touch screen display to modify temperature and pressure set points as well as various other parameters, such as timers
- vii). Measures shall be taken to prevent control algorithms that might cause contactor hunting.
- viii). Provisions shall be made to control, download, and monitor HVAC status information from a single point of access through intercar connections.
- ix). All HVAC sensor inputs, faults, and monitoring shall be available to the car's vehicle diagnostic system and shall be available to be accessed remotely.
- x). Heating and cooling shall be sufficiently capable of maintaining desired interior temperature near the lockout temperatures for the compressors or condenser fans with maximum solar loads.

b). Sensors

- i). A sufficient number of temperature and humidity sensors shall be provided to regulate heating and cooling in response to temperature changes inside and outside the vehicle.

- ii). Temperature sensors in the car body shall be located such that they reflect temperature without being influenced by external heat sources or solar radiation.
- iii). All sensor information shall be recorded by the controller and available to the vehicle monitoring system.
- iv). At a minimum, the following temperature sensors shall be required:
 - (1) Minimum of one interior temperature sensor located throughout the passenger seating area for layover heat.
 - (2) Return air sensor at each HVAC unit return air grille.
 - (3) Fresh air sensor at each HVAC unit fresh air inlet.
 - (4) Supply air sensor where each HVAC unit supplies the main duct.
 - (5) Freeze protection thermostat located in a position that accurately measures outside temperature. (May utilize a signal from the fresh air sensor).
 - (6) Evaporator coil sensors to detect ice build-up on the evaporator coils.
 - (7) Humidity sensor at each HVAC Unit (location TBD)
- c). Use of Controls
 - i). The temperature control system for each car shall be under the command of a rotary mode selector switch located in the switch locker and operated by the train crew.
 - ii). This switch shall determine the operating mode of each of the two HVAC systems and the heating system.
 - iii). The mode selector shall switch from AUTO/NORMAL to LAYOVER without cycling the HVAC through OFF.
 - iv). In the event an air conditioning compressor is in operation when it is commanded to shut down, the pump down cycle shall be initiated before the compressor(s) are shut down.
 - v). Positions and functions are as follows:

Figure 10-5: Temperature Control Positions

Name	Function
AUTO/NORMAL	Car HVAC and heating set up and provides the normal occupied car environment. All systems including freeze protection operate automatically.
LAYOVER	Used for car storage in winter to minimize energy consumption, yet still maintain interior temperature of 50°F. Only floor heat and freeze protection shall be available.
OFF	Used to shut off all car heating and cooling when car is being serviced or in storage. Does not disable the freeze protection system.

d). Status Display

- i). Each HVAC control panel shall include an indicator and monitor display which shall show the control logic state, unless other display options are reviewed and approved by Amtrak.
- ii). Indications shall be by means of suitably labeled Light Emitting Diodes (LEDs) and by an LCD screen, which shall display all microprocessor requests for heating or cooling from the zones controlled from that panel.
- iii). Fresh air temperature, supply air temperature, return air temperature, suction line pressure and discharge pressure shall be displayed for each HVAC unit.
- iv). Overload indicators and resets shall be available for use by the train crew without exposing the crew to hazardous voltages.
- v). The control system shall include the ability to download data using a laptop computer or a flash memory card that is loaded with the Contractor's HVAC diagnostic software.
- vi). The requirement to remotely monitor the system status, faults, etc. for the HVAC system is required as part of the base scope of work. The HVAC diagnostic software shall provide the following functionality:
 - (1) A controller that provides HVAC system status at a glance through remote viewing and has strong diagnostic features.
 - (2) This includes remote viewing of all sensor status, alerts, errors and relevant data.
 - (3) Monitor the HVAC system and provide the following:

- (a) Have the capability to test the HVAC system and temporarily override the control system.
 - (b) Log performance, all faults and download history.
 - (c) Have several levels of security to limit the access and controls of the system (crew, technician, programmer).
 - (d) Display HVAC system pressure and temperatures
 - (e) Display HVAC System current mode
 - (f) Display suction and discharge line temperatures
 - (g) Display ambient air, fresh air, supply and return air temperatures
 - (h) Display motor status and current of blower motor and condenser motor
 - (i) Display heater status and current
 - (j) Display humidity level
 - (k) Display fresh air damper position and status
 - (l) Forecast air filter replacement and condenser and evaporator coil cleaning through the use of differential pressure sensors
 - (m) Ability to record and indicate system faults
 - (n) Automatically calculate system superheat and subcooling
- (4) HVAC High Pressure and Low Pressure fault Condition
- (5) Have the capability to test the HVAC system and temporarily override the control system.
- (6) Log performance, all faults and download history.
- (7) Have several levels of security to limit the access and controls of the system (crew, technician, programmer).
- (8) Provide capability to diagnose failures down to the failed component. Details to be discussed during design review.
- vii). The control system shall include, at a minimum, the following components and features:
 - (1) Temperature sensors
 - (2) Motor starters
 - (3) Motor protective devices

- (4) The control method shall rely on a combination of the return air and fresh air temperature measurements.
 - (5) Diagnostics and test capabilities
 - (6) Heater switching devices
 - (7) Pressure transducers
- viii). The Contractor shall submit a temperature control schedule and a detailed description of operation for approval by Amtrak at the HVAC system design review. **[CDRL 10-05]**
 - (1) The temperature schedule shall be approved by Amtrak.
 - (2) In the temperature control schedule, control switch points shall be separated by at least one degree differential for rising and falling temperatures to prevent oscillation of operating modes.
 - (3) A Ventilation Mode should be present between the heating and cooling modes.
- e). Emergency Ventilation Cut-Out Temperature Measurements
 - i). The following control device functions shall be reviewed and approved by Amtrak and their functions will be monitored by the controller and their activation displayed, including any lockout criteria that is met:
 - (1) High Pressure Switch
 - (2) Low Pressure Switch
 - (3) Freeze Protection Temperature Sensor
 - (4) HVAC Emergency / Load Shed Operation
 - (5) Overheat Protection Devices
- f). Emergency Ventilation Cut-Out
 - i). A ventilation system isolation cut-out switches shall be provided on each car for use of the train crew.
 - ii). The emergency ventilation cut-out shall immediately shut down the HVAC system ventilation blowers on all HVAC units to prevent the circulation of smoke or fumes throughout the car in the event of an emergency.
 - iii). Operation of the ventilation cut-out shall also fully close the fresh air dampers.
 - iv). The switch arrangement and labeling shall be identical as that used on existing Amtrak cars and shall be approved by Amtrak during design review.

10.9 Accessibility and Maintainability

- a). Each HVAC units shall be designed to provide full accessibility where all the basic troubleshooting and running maintenance can be performed from inside the car without removing the equipment and without interference from other systems.
- b). All filter replacement shall be performed from inside of the car.
- c). Where necessary, the Contractor shall provide custom lifting eyes, slings, jigs or handles that allow safe removal and replacement of major components using Amtrak's existing maintenance facility and material handling equipment.
- d). Tapered guide pins or a suitable method shall be provided to guide the HVAC unit into its position.
- e). Quick connections shall be provided to the car air ducts and electrical connections.
 - i). The design should avoid using a special lifting fixture to remove HVAC units. If a fixture is required Amtrak approval is required.
- f). The installation and removal process, including removing and installing all mounting hardware, and electrical connections, shall not exceed one hour and shall be demonstrated for Amtrak approval before final approval of the final design review.
- g). At a minimum, the following components shall be a part of the unit and shall be easily accessible for servicing and replacement either through a hinged grille, which provides access to the return air plenum from the inside of the vehicle, or through an interior access door located in the intermediate level ceiling or alternate location:
 - i). Air filters
 - ii). Diagnostic test plug/connector for the PTE
 - iii). System fault and status LED's
 - iv). Return air sensors
 - v). Dampers
 - vi). Test switch, if provided
 - vii). All electric transducers and pressure controls
 - viii). Circuit breakers, relays, and contactors
 - ix). Refrigerant gauge ports
 - x). Liquid line sight glass
 - xi). Crankcase oil sight glass, if applicable.

- h). It is anticipated that the air filters and return air sensors shall be accessible via the return air plenum and the other components through interior access doors in the intermediate level ceiling or alternate location.
- i). All other components shall be easily accessible for servicing and replacement from within the equipment bay.

10.10 CDRLs

CDRL	Description	Due
CDRL 10-01	Detailed heating and cooling load analysis	30 days prior to PDR, on-going updates for each DR
CDRL 10-02	In-rush mitigation control scheme	30 days before IDR
CDRL 10-03	Leak and Charging procedure for Refrigeration System	30 days before IDR
CDRL 10-04	Fault detection and diagnostic features of heated floor panels	30 days before IDR
CDRL 10-05	Temperature Control Schedule	30 days before IDR

* End of Chapter 10 *

Amtrak Single Level Fleet Replacement

Technical Specification

11. Interiors

Revision 0

Table of Contents

Part I: General Requirements	11-3
11.1 Overview	11-3
11.2 General Requirements	11-3
11.3 Human Factors Study	11-4
11.4 Accessibility and Universal Design	11-5
11.5 Arrangement Flexibility and Modularity	11-5
11.6 Signage and Labels	11-6
11.7 Interior Noise Levels (Passenger Areas)	11-7
11.8 Vibration	11-8
11.9 Sanitary Design	11-8
11.10 Maintenance and Material Performance Expectations	11-9
11.11 Safety	11-10
Part II: Interior Components	11-12
11.12 Doors and Latches	11-12
11.13 Windows	11-12
11.14 Window Masks	11-13
11.15 Window Blinds	11-13
Part III: Storage Areas	11-14
11.16 Storage in Coach Areas	11-14
11.17 Trash and Recycling Storage	11-14
11.18 Emergency Equipment	11-16
11.19 Luggage Storage – General	11-17
11.20 Overhead Luggage Storage	11-20
11.21 Luggage Towers	11-21
Part IV: Integrated Electronics and Technology	11-23
11.22 Digital Displays	11-23
11.23 Electrical Locker and Panels	11-25
11.24 Outlets	11-26
Part V: Interior Structures	11-28
11.25 Bulkhead Walls	11-28
11.26 Ceilings	11-29
11.27 Flooring	11-31

11.28 Entrance Area (Vestibule).....	11-34
Part VI: Coach Areas	11-42
11.29 Interior Structures – Coach Specific.....	11-42
11.30 Seats – General Ergonomics	11-45
11.31 Standard Coach Seats (Standard Coach and Café/Lounge Cars)	11-46
11.32 Accessible Seating Spaces for Wheeled Mobility Users.....	11-61
11.33 Workstation tables.....	11-62
Part VII: Restrooms.....	11-64
11.34 Restrooms – General.....	11-64
11.35 Standard Toilet Room (STR).....	11-66
11.36 Accessible Toilet Room (ATR).....	11-74
11.37 Café/Lounge.....	11-85
Part XIII: CDRLs	11-91
11.38 CDRLs.....	11-91

Table of Figures

Figure 11-1: Trash and Recycling Quantities.....	11-16
Figure 11-2: Luggage Storage Key Features.....	11-19
Figure 11-4: Floor Covering Table	11-32
Figure 11-5: Key Features - Entrance Areas	11-37
Figure 11-6: Key Features - Coach Interior Structures	11-42
Figure 11-7: Key Features - Standard Coach Seats.....	11-49
Figure 11-7: Key Features – Café/Lounge Coach Seats	11-57
Figure 11-8: Key Features - Standard Toilet Room	11-67
Figure 11-9: Key Features - Accessible Toilet Room	11-76
Figure 11-10: Key Features – Café/Lounge.....	11-86

Part I: General Requirements

11.1 Overview

- a). This Chapter defines the interior design and configuration for each car type.
- b). All car types are single level with:
 - i). entry from station platforms through single leaf sliding side loading doors while using the folding steps at low level platforms.
 - ii). access between cars through single leaf sliding end doors.
- c). Accessibility
 - i). The accessibility areas of the cars will conform to ADA requirements as listed in 49 CFR 38, Americans with Disabilities Act (ADA) Accessibility Specification for Transportation Vehicles and 2010 ADA Standard as applicable.
- d). Compliance with preliminary design concepts included in the specification and attachments does not relieve the Contractor of all the other requirements within the specification.
- e). All car types shall be easily reconfigurable to another car type to meet Amtrak's evolving business needs over the life of the equipment. All components shall be modular in design to be easily replaced with a different configuration if needed.

11.2 General Requirements

- a). This Chapter describes the basic requirements for the interior configuration of all cars.
- b). Each car type shall meet or exceed all requirements for ADA accessibility and general seating arrangements that provide comfort and amenities such as electrical outlets, task lighting, and individual work trays or tables.
- c). The interior of the car shall be designed and constructed for maximum safety, comfort, convenience, and service to the passenger.
- d). The Contractor shall factor in safety, crashworthiness, materials and workmanship, FDA cleaning clearances, radii, and sanitary design.
- e). All mechanisms described below should be durable, free from jamming, and racking.
- f). All operable features intended for passengers, unless otherwise specified or approved by Amtrak, shall meet the ADA maximum force of 5 lbf to operate.
- g). The design should meet abuse, load, and crash criteria as described in CFR.
- h). Dimensions, position, configuration, comfort, and usability of all items and features will be subject to Amtrak approval during the mockup review.

CONFIDENTIAL — DO NOT DISTRIBUTE

- i). Walls, ceiling panels, and window masks shall be easily cleanable and designed and constructed to form a safe and attractive environment.
- j). Visible fasteners shall be minimized.
- k). All systems requiring maintenance shall be easily accessible and removable for cleaning and repair.
- l). Interior layouts shall be developed by the Contractor and submitted to Amtrak for review and approval during design review per the Design Review processes outlined in Chapter 3.
- m). Whenever possible, common components shall be used in all car types.
- n). Strength of all interior fittings and their attachment to the carbody shall meet APTA Standard SS-C&S-006-98 and 49 CFR Section 238.233.
- o). All interior or occupied areas shall have Emergency Lighting and LLEPM that leads to the primary exits.
 - i). These areas include non-seated areas restricted to crew members including the cafe area. See Chapter 13 for additional information.
- p). The interior clear height from the top of the floor to the ceiling shall be no less than 84" unless otherwise approved by Amtrak.

11.3 Human Factors Study

- a). As part of PDR, the Contractor shall submit for Amtrak review and acceptance a Human Factors Study Report. **[CDRL 11-01]**
- b). The report shall also address specific human factors for restrooms, including but not limited:
 - i). to accessible paths,
 - ii). aisle and door clearances accessible reach zones,
 - iii). wheeled mobility device accessible features,
 - iv). wheeled mobility device and leg clearances,
 - v). handrail heights and sizes,
 - vi). transfer positions to seats and toilets.
- c). The report shall also address all seating human factors for each seated position including but not limited to:
 - i). Recline
 - ii). Leg room

- d). The Human Factors Study Report shall validate the use of all features of the cars by a 95% US male and a 5% US female.
- e). Wheeled mobility device animations shall be included to validate accessible paths.

11.4 Accessibility and Universal Design

- a). Each car shall be fully compliant at the time of manufacture, with all rules and regulations of 49 CFR 38, Americans with Disabilities Act (ADA) Accessibility Specification for Transportation Vehicles and 2010 ADA Standard as applicable.
 - i). No part of this specification alters or changes those requirements.
- b). Review of the car's accessible features (including all drawings, calculations, and supplier information required to define the proposed installation) shall be conducted with Amtrak as part of the mockup review.
- c). Each car with accessible positions shall include accessible wheeled mobility device locations, which shall allow passengers using wheeled mobility devices to remain in their wheeled mobility devices while on board the car.
 - i). The number of dedicated accessible areas for wheeled mobility devices is determined by the car configuration, as described in Chapter 1.
 - ii). A storage area for an unoccupied, folded wheeled mobility device, 48 in. long by 20 in. wide and 40 in. high, in close proximity to the dedicated accessible area and to accessible seating, shall be provided on each car for each accessible space.
- d). Each coach which includes revenue seating with an accessible area for a wheeled mobility device shall also include an accessible toilet room with direct access via a 32" path from the accessible area to the accessible toilet room.
 - i). The toilet room door shall operate automatically and may operate manually in emergency situations and shall be of the sliding type.
 - ii). Requirements for the toilet and associated equipment are detailed in this Chapter.

11.5 Arrangement Flexibility and Modularity

- a). The basic car interior shall be standardized to the greatest extent possible and shall be capable of reconfiguration, upgrade, or replacement without disrupting adjacent interior elements of the car.
- b). All like components and all associated assemblies (e.g. floor panels, bulkheads, side wall & ceiling panels, etc.) and their spare parts shall be designed and manufactured to be identical/ interchangeable, both as individual parts and as sub-assemblies, throughout the entire car order production.
- c). All parts shall mount without modification. Replacement parts shall also be interchangeable.

- d). Easy accessibility shall be provided for all items that require periodic maintenance and/or may require replacement.
 - i). Access doors or panels shall be secured using approved captive fasteners or locks.
 - ii). It shall be possible to remove these parts without damage to the individual pieces or adjoining components.

11.6 Signage and Labels

- a). The Contractor shall equip each car with adequate signage to provide passengers and crew information about the amenities and safety-related features of the cars.
- b). The signage to be provided shall include, but is not limited to, the following:
 - i). Location of safety equipment
 - ii). Hazards such as high voltage or heat sources
 - iii). Operation of emergency exit equipment
 - iv). Operation of on-board equipment such as doors and door latches/locks
 - v). Amenities such as trash and recycling containers, potable drinking water, 120VAC outlet, etc.
 - vi). Toilet room amenities
 - vii). Seat numbers
 - viii). Capacities for storage locations such as luggage racks and overhead luggage bins
 - ix). Service-related signs for maintenance and inspection
 - x). Vehicle road number on both ends of the car
 - xi). Exterior signage for service points
- c). The interior and exterior signage shall conform to the latest revision of Amtrak Specification #697, National On-Board Signage Manual.
 - i). The artwork, material, location, and specifications for each sign shall be submitted to Amtrak for approval at the design review.
- d). Provisions shall be made for all seating locations to have a safety card stored at each location.
- e). A metallic American flag sign shall be installed in each entrance area of each car. The sign shall be light weight and corrosion free.
- f). Existing Amtrak signs, in accordance with Amtrak Specification #697, shall be

used where possible.

- i). Where new sign designs are required, the Contractor shall develop artwork per the Amtrak Onboard Signage Guidelines and submit to Amtrak for review and approval as part of IDR.
- ii). The Contractor will provide a signage application drawing for Customer approval identifying all signs and labels used on each car type, including text, as well as the mounting location.
- g). Emergency Signage and LLEPM shall be installed in accordance with APTA Standards APTA-PR-PS-S-006-23 Emergency Egress/Access Signage and LLEPM for Passenger Rail Equipment.
 - i). All HPPL signage shall be passive and shall not utilize electric components.
 - ii). The HPPL material shall be charged and shall maintain charge under all lighting conditions except Emergency.
 - iii). All HPPL shall have drawings for placement with specific part numbers.
- h). Additional signage guidance will be supplied at NTP.

11.7 Interior Noise Levels (Passenger Areas)

- a). Under all specific vehicle and operating conditions listed below, the interior noise levels on any car shall not exceed the sound levels below:
 - i). Vehicle Condition;
 - (1) Completely assembled car
 - (2) No passenger load
 - ii). Operating Conditions:
 - (1) Operating in any specified mode of acceleration, deceleration, or coasting at any speed up to 125 mph.
 - (2) On tangent, at-grade, ballast-and-tie track with clean, smooth continuous welded rail.
 - (3) All auxiliaries operating simultaneously at normal conditions.
 - iii). Measurement Location:
 - (1) Any and all points at least one foot from the ceiling, floor, end walls, or side walls.
 - iv). Maximum Sound Levels:
 - (1) 70 Decibels (Acoustic) (dBA) in seating areas.

(2) 75 dBA in entrance areas (referred to 0.0002 microbar).

- b). Compliance with this requirement shall be demonstrated using a Type 2 sound level meter as defined by ANSI Standard S1.4: American National Standard Specification for Sound Level Meters, using the slow meter scale.

11.8 Vibration

- a). All car equipment shall be designed to operate without damage or degradation of performance when subjected to vibration and shocks encountered during normal service.
- b). All newly designed equipment and auxiliaries mounted anywhere on any car, car body, or trucks shall not cause vertical or horizontal vibrations anywhere on the car floor, walls, ceiling panels, and seat frames in excess of:
 - i). 0.10 in. peak-to-peak amplitude,
 - ii). 0.01 acceleration due to gravity (g) peak acceleration for the frequency range from 5 Hertz (Hz) to 14 Hz, and
 - iii). 0.045 in. per second peak vibration velocity for the frequency range above 14 Hz.
- c). Carbody-mounted components shall be designed to withstand vibrations of not less than 0.2 g at frequencies up to 100 Hz and randomly oriented shock loads of 8 g longitudinal, 4 g vertical and 4 g lateral.
- d). Shock and vibration tests shall be conducted in accordance with IEC 61373 (1999) – Railway Application, Rolling Stock Equipment, Shock and Vibration Tests.

11.9 Sanitary Design

- a). Cleanability
 - i). The car interior and all materials shall be designed so that they do not soil, stain, or show dirt easily.
 - ii). Interior materials shall be easy to clean using few tools and little specialized equipment.
 - iii). Items such as HVAC grilles shall only require opening to access the ductwork during extensive periodic cleaning.
 - iv). The number of items that require removal for cleaning shall be kept to a minimum.
 - (1) Equipment seen by the passenger and crew shall be cleanable in daily service without removal.
 - (2) Those items that must be removable shall be easy to remove and replace, preferably without tools, with all like units being interchangeable.

- (3) Removable items shall employ captive fasteners of a type that will not deteriorate or degrade in effectiveness with use over the life of the car.
 - (4) If screws are used, they shall be easy to line up with the mating hole on the fixed part.
- b). Protection from Fluids
 - i). All floors and pipe connections, etc., shall be sealed internally to prevent liquids from leaking into the car sub-floor and insulation.
 - (1) This is to avoid sanitation and odor problems and minimize potential for sub-floor corrosion.
 - (2) Sealing design is subject to Amtrak approval.
- c). FDA Requirements
 - i). Interior design and installation shall meet all applicable requirements of FDA for water, waste, and general sanitation issues.

11.10 Maintenance and Material Performance Expectations

- a). Attachment Methods
 - i). Strength of all interior fittings and their attachment to the carbody shall meet APTA Standard PR-CS-S-006-98 and 49 CFR Part 238.233.
 - ii). Secondary structure shall be provided to securely anchor car interior items that are subject to significant loads, such as handrails, light fixtures, etc.
 - iii). In instances where FRP components are used, they shall be stiffened and reinforced appropriately with stainless steel, balsa panels or other materials as approved.
 - (1) Stiffening and reinforcing will be subject to approval by Amtrak for each application.
 - iv). All components shall be secured to the car auxiliary structure with machine screws, which engage stainless-steel tapping plates.
 - v). Floating nut assemblies may be used if they are part of a tapping plate assembly.
 - vi). Nut-inserts (Riv-nuts, Nut-serts, etc.) are not an acceptable alternative to tapping plates. Likewise, spring type mountings are not acceptable.
 - vii). Where components attach to car interior materials, such as FRP, mounting shall be coordinated so the appropriate provisions are incorporated into the design of those materials.
 - (1) When the component is mounted on FRP, the tapping plate shall be embedded deeply into the FRP behind the primary FRP wall and

completely glassed in using woven glass fabric and resin, so it never loosens for the life of the car.

- (2) Mounting holes can be incorporated into the panels to which the components are mounted or drilled in place using a template.
- (3) Match drilling using the component as a template is not acceptable.
- (4) Components should be mounted from the exposed side of the mounting surface so that the component can be removed for repair or replacement from the front.
- (5) Provisions are required to prevent squeaking between the component and mounting.

b). Access Panels

- i). Easy access shall be provided for all items that require periodic maintenance, defect repair or replacement.
- ii). Panels/ doors covering this equipment shall be hinged, where possible and fastened with approved captive fasteners in a manner that permits these activities.
- iii). Safety catches shall be provided for access panels/doors to prevent sudden or accidental deployment.
- iv). Window masks shall allow for easy window replacement.

c). Junction Boxes

- i). Junction boxes shall be located within electric lockers or hidden behind access panels. See Chapter 15 for additional information.

d). Time to Repair/ Replace

- i). All lowest replaceable units LRUs shall be replaceable in less than 30 minutes by a single maintenance worker. See Chapter 4 for additional information.

11.11 Safety

a). Fire Safety

- i). The builder shall provide a Fire Safety Analysis for Amtrak review and approval, in accordance with APTA RP-PS-005-00. See Chapters 19 and 25.
- ii). All interior materials shall meet the flammability and smoke emissions requirements of Amtrak Specification # 352 (which incorporates references to 49 CFR 238.103).

- iii). Test reports from an independent lab showing compliance with Amtrak Specification # 352 shall be provided in advance of related FAI's.
- b). Injury Prevention
 - i). The car interior shall be designed to provide a safe, comfortable, and convenient functional environment to the passengers, crew, and maintenance staff.
 - ii). Interior design shall integrate the car sidewall, transverse wall, window mask, ceiling, and other interior surfaces into a harmonious unit.
 - iii). Generously rounded edges and corners, to guard against personnel injury by passengers, crew, and maintenance staff shall be provided.
 - iv). The use of visible fasteners shall be kept to a minimum, and where used, be inconspicuous.
- c). Pinch Points
 - i). Gaps smaller than 1.5 inches, and larger than 0.5 inches shall be considered potential pinch points that shall be avoided to the maximum extent possible.
 - (1) Exceptions can be presented to Amtrak if the gap surface depth is less than 0.5 inches.
 - ii). The Contractor shall develop and submit a Pinch Point Gap Analysis **[CDRL 11-02]** document that identifies all potential pinch points and justifications.
 - (1) The analysis shall be submitted for Final Design Review FDR approval.

Part II: Interior Components

11.12 Doors and Latches

- a). Relevant information for doors and latches as they pertain to interiors is generally described below.
 - i). Further information for doors and latches can be found in Chapter 12.
- b). All interior doors shall be built of robust materials to withstand repeated use without deforming or losing adjustment.
- c). Doors, unless otherwise indicated as sliding doors, shall have a continuous piano hinge and shall open outward into the interior of the car unless specified otherwise.
- d). All latches and hinges shall be stainless steel piano hinges unless approved by Amtrak during the design review process.
- e). Access panel doors shall have stainless-steel piano hinges.
- f). Cabinet doors shall be supplied with lanyard or equivalent door limiting mechanism to ensure that no collisions occur between cabinet doors and other components of the train.
 - i). Doors with lanyards shall be limited to 130 degree opening as a default setting with minimal adjustment. Lanyards shall be removable without the use of special tools.
- g). Doors shall close securely without requiring the use of a key and shall remain closed without rattling or becoming loose during operation.
- h). As necessary for proper airflow in each car according to the HVAC design, doors shall have a grille located in the lower half of the door panel for air circulation.
- i). Electrical locker and utility locker doors shall have a release lever on the inside of the latch.
- j). Doors that have passenger safety equipment behind them shall use paddle latches with no locking mechanism. Please refer to Chapter 18 for more information regarding emergency equipment.
- k). Doors that cover PA handsets shall only have one latch or lock for access.

11.13 Windows

- a). Window size should be maximized with an equal pitch where possible.
- b). All seating positions and accessible spaces should have a view out of the window.
- c). See requirements of Chapter 6 and Chapter 19.

11.14 Window Masks

- a). The window masks shall be either Fiberglass Reinforced Plastic (FRP) or thermoformed plastic.
- b). The window edge should incorporate openings for heating vents at the window and shall not interfere with minimum accessible clearance requirements.
- c). Sidewall heat vents may be separate powder coated aluminum (as appropriate for the mask to window interface), or integral to the window mask.
- d). The window masks must not readily collect dust/dirt and shall be easy to clean without removal or special tools.
- e). Window masks shall be wrapped in a protective film in accordance with Chapter 19. Paint is prohibited.
- f). Panel construction shall allow for removal and recovering of the surface covering at overhaul without damage to the base material.
- g). Window masks shall allow for easy window replacement.

11.15 Window Blinds

- a). Window blinds shall be provided for all side windows.
- b). Blinds should cover the entirety of the window.
- c). Blinds shall be replaceable within a 30 min timespan.
- d). Side window blinds shall be provided with a handle on the lower edge that is easy to use and accessible. It shall move the blind with no racking or jamming and without exceeding 5 lbf. during operation.
- e). Blinds shall be stored in a valance so that they can easily be accessed for maintenance.
 - i). Where luggage racks are provided, the blinds may instead be stored behind the luggage rack.
- f). Operation
 - i). Coach side window blinds shall be operated manually by a passenger.

Part III: Storage Areas

11.16 Storage in Coach Areas

- a). Each storage location below shall integrate into the coach area in an inconspicuous manner and shall flow seamlessly with the aesthetic of the rest of the coach car.
- b). Each storage location shall be clearly labeled according to Amtrak Specification #697.
- c). Each storage location shall be easily opened and accessed by any passenger and the use of paddle latches or push-button latches is desired.
- d). Folded Wheeled Mobility Device storage spaces shall be dedicated for at least two devices per car for passengers wishing to transfer to another seat.
- e). Storage space for an evacuation chair shall be included. Please refer to Chapter 29.
- f). Emergency Equipment listed below shall have appropriate storage locations within the coach car. Please refer to Chapter 18 for more information regarding emergency equipment.
 - i). Trauma Kit and Stretcher
 - ii). AED
 - iii). First Aid Kits

11.17 Trash and Recycling Storage

- a). General:
 - i). Trash and Recycling Receptacles shall be provided on each car type in conspicuous locations to encourage passenger/crew use.
 - ii). Recycling and trash receptacles shall be provided on both ends of each car type as close as practical to restroom areas.
 - iii). The recycling and trash receptacles shall be either side-by-side in a row or directly across the aisle from one another.
 - iv). The recycling and trash receptacles shall meet all FDA and NSF requirements for trash containers and their materials.
 - v). To the extent possible, these receptacles will be designed to maximize trash capacity or at a minimum accommodate the Amtrak standard trash container, per Amtrak Drawing C-96-7591.
 - vi). The receptacles shall be boldly labeled with an intuitive icon for type of trash, in accordance with Amtrak Specification # 697.

- vii). The inside of each trash receptacle door shall be permanently labeled with the Amtrak AMMPS number of the container required for that space.
- viii). Each set of receptacles shall include two separate openings and respective bins:
 - (1) one for trash
 - (2) one for recyclables (cans, bottles, and newspapers)
- b). Material and Construction:
 - i). Trash and recycling locker door panels shall have melamine or factory-applied laminate.
 - (1) Alternatively, panels may be constructed of honeycomb or plymetal wall materials.
 - ii). The trash locker container access door shall be secured closed with a square lock.
 - iii). The trash locker door shall include a recessed grab handle to be used to pull the door open when unlatched.
 - iv). Visible hardware and fasteners shall be minimized to aid cleaning, reduce build-up of contaminants, and provide for pleasing aesthetics.
 - v). Recycling and trash receptacle lockers shall be of panel construction with substructure as appropriate to support components.
 - vi). The locker shall include appropriate brackets and/or guides, etc. to properly index the trash containers with the openings, and as required, to keep them upright.
 - (1) These devices shall be rounded, etc. to protect staff handling the containers or servicing the end door from injury.
 - vii). The locker enclosure with walls & door material will be fireproof or be lined with fire-resistant material.
 - viii). The locker shall use as few joints as possible in fabrication; they shall be permanently sealed against moisture and vermin.
 - ix). The locker shall be structurally sound and conform to requirements set out in 49 CFR 238.233.
- c). Cleanability:
 - i). The inside of the trash locker shall be easy to clean, with large 0.75 in radius sanitary corners and all joints sealed for good sanitation and to meet FDA requirements.

- ii). Visible hardware and fasteners should be minimized to aid cleaning, reduce build-up of contaminants, and provide for pleasing aesthetics.
- iii). Easy to clean trash guides shall be provided on the sides and back of the locker and on the inside of the locker door. The trash guides shall prevent trash and liquids from getting between the container and locker wall.
- iv). Horizontally accessed recycling and trash receptacles shall include a hinged self-closing door flap of a touch-free design that is as large as practical.
 - (1) This flap shall be as wide as possible.
 - (2) It shall be possible to open the trash flap by pushing against the vertical surface and further provide for opening without touching the vertical surface.
 - (3) If possible, the flap should be attached to the locker top surface rather than a door-within-a-door concept.
 - (4) Spring tension of a stainless-steel spring should prevent the door from swinging/ banging as a result of train motion.
 - (5) These flaps shall avoid trapping any hands or fingers.
- v). Vertically accessed recycling and trash receptacles shall have clear openings without flappers.
 - (1) Enclosure shall be constructed so as to not ignite, produce lingering char, or allow fire to spread to adjacent interior elements.
- d). Required Trash and Recycling Volumes
 - i). Figure 11-1 defines required trash and recycling capacity volumes in each section of the car:

Figure 11-1: Trash and Recycling Quantities

Section	Location	Type	Volume
Coach	Entrance Area	Trash and Recycling	7.5 cu ft
	General	Trash and Recycling	20 cu ft
	Accessible Toilet Room	Trash Only	2.25 cu ft
	Standard Toilet Room	Trash Only	2 cu ft
Café Lounge	Lounge	Trash and Recycling	20 cu ft
	Café	Trash and Recycling	20 cu ft

11.18 Emergency Equipment

- a). General
 - i). Emergency Equipment boxes shall be mounted on each end of the car.

- ii). These boxes shall contain, at a minimum:
 - (1) a fire extinguisher
 - (2) crowbar
 - (3) hammer
 - (4) snap lights
 - (5) first aid kit
- iii). Emergency equipment boxes shall not be locked and be mounted in an area easily accessible to all passengers in the event of an emergency.
- iv). The labels and gages for the fire extinguisher shall be visible and readable from either a seated or standing passenger in an aisle.
- v). Further information on these emergency equipment boxes can be found in Chapter 18.
- b). Material and Construction
 - i). Emergency equipment locker door panels shall have melamine or factory-applied laminate.
 - (1) Alternatively, panels may be constructed of honeycomb or plymetal wall materials.
- c). Cleanability
 - i). The inside of the emergency equipment locker shall be easy to clean, with large 0.75 in radius sanitary corners and all joints sealed for good sanitation and to meet FDA requirements.
 - ii). Visible hardware and fasteners should be minimized to aid cleaning, reduce build-up of contaminants, and provide for pleasing aesthetics.

11.19 Luggage Storage – General

- a). General
 - i). Luggage racks shall conform to 49 CFR 238.737.
 - ii). The Contractor shall factor in:
 - (1) Safety
 - (2) Crashworthiness, abuse, load, and crash criteria
 - (3) Materials and Workmanship
 - (4) FDA cleaning clearances

- (5) FDA cleaning radii
 - (6) Sanitary design
- iii). All mechanisms should be durable, free from jamming, and racking.
- iv). Dimensions, position, and usability will be subject to Amtrak approval during the mockup review.
- b). Cleanability
 - i). The inside of the luggage storage locations shall be easy to clean, with large 0.75 in radius sanitary corners and all joints sealed for good sanitation and to meet FDA requirements.
 - ii). Visible hardware and fasteners should be minimized to aid cleaning, reduce build-up of contaminants, and provide for pleasing aesthetics.
- c). Required Luggage Storage Volumes and Baggage Analysis
 - i). Baggage storage volumes shall comply with the requirements of this Specification.
 - ii). Luggage Tower
 - (1) Each coach car shall have two luggage towers located at one end of the car closest to the side loading door with sufficient capacity for all potential passenger's suitcases to the best extent possible.
 - (2) Luggage towers shall have a minimum width of 48" and shelf spacing shall maximize the storage of large and medium suitcases.
 - (3) Each passenger's suitcase shall be stored on the car they are travelling in.
 - (4) For calculation purposes, assume 50% of the suitcases are large and 50% are medium sized.
 - (5) Sizes
 - (a) Large suitcases measure 30" x 20" x 12"
 - (b) Medium suitcases measure 26" x 18" x 11"
 - iii). Overhead Luggage Rack Volume
 - (1) Each car shall have capacity for one carry on case per passenger to be stored.
 - (2) Each passenger's carry-on shall be stored on the car they are travelling in.
 - (3) Carry-on cases measure 22" x 14" x 9"

- iv). As part of PDR, the Contractor shall develop and provide an analysis of how the proposed car arrangements shall comply with the requirements of this specification. **[CDRL 11-03]**
- d). Key Features
 - i). Expected features for Luggage Storage areas are summarized in Figure 11-2 and detailed below.

Figure 11-2: Luggage Storage Key Features

Feature	Short Description	Qty
Trim Panels	Wall panel with provisions for mounting lighting, signage, etc.	NA
Roll Stop	Retaining bar for luggage	1 per shelf level
Kick Strips	Stainless steel strips	each exposed side
Solid Panel	HPL panel	NA
Upper Shelf	Shorter depth shelf	1
Protective Back Panel	Replaceable wear panel	depends on shelf quantity
Shelves	Full depth shelf	TBD
Bottom Shelf	Floor luggage storage for large bags	1
Lighting	Indirect lighting	1 per shelf level

- ii). Trim Panels
 - (1) Trim panels shall interface with side wall and ceiling with no gaps or dirt traps.
 - (2) Trim panels are made from HPL composite sandwiches.
- iii). Roll Stop
 - (1) Retaining bars or similar detail shall be provided on large shelving edges that prevent luggage from falling or rolling out.
- iv). Kick Strips
 - (1) Stainless steel kick strips at 9" high should be used on all exposed edges.
- v). Solid Panel
 - (1) A solid panel with HPL skin and no safety glass should be used when stacks are placed up against bulkheads.
- vi). Upper Shelf
 - (1) Upper shelf can be shallower for smaller bags and aid in passenger reach of luggage.

vii). Protective Back Panel

- (1) Replaceable trim panel that protects wall from scuffing shall be provided. Panel should be easy to replace.

viii). Shelves

- (1) Shelving with hard wearing finish shall be provided. Shelf should be easily replaceable, easy to clean, with no dirt traps.

ix). Bottom Shelf

- (1) The bottom shelf shall be deep enough for large suitcases. It shall have an easy clean surface, no dirt traps, and a soft back corner.

11.20 Overhead Luggage Storage

a). General

- i). Overhead luggage storage racks shall be provided above all coach seating.
- ii). Overhead luggage storage shall incorporate dividers to prevent excessive shifting/movement of luggage.
- iii). The luggage racks shall consist of modular units bolted to the sidewall and roof structure and extend the entire length of the passenger seating compartment.
- iv). The racks shall accommodate carry-on luggage of up to 14 in. x 9 in. x 22 in. in size and smaller personal items.
- v). Length of the racks shall match the window pitch so that the bin dividers are centered on the pillar between windows.
- vi). Design of the racks shall include as few obstructions as possible for manipulating luggage into and out of the rack.
- vii). The luggage bearing surface shall be durable and not require replacement or refurbishment for the life of the car.
- viii). The lower edge of the rack at the aisle shall incorporate a smooth convex radius to mitigate passengers bumping their heads against the underside of the luggage bin.
- ix). An easily reached continuous passenger handhold shall be provided facing the aisle way.

b). Strength and Attachment

- i). The rack structure and attachment to carbody structure shall have sufficient strength to support a load of 250 lbs., applied over a 10 in. by 10 in. area, midway between adjacent supports with a deflection not to exceed 0.25 in.

(including rack itself and its attachment to carbody) and without fracture or permanent deformation.

- ii). The load-bearing surface shall be inclined upward from the horizontal toward the center of the car at an angle of approximately three degrees.
- iii). The complete and fully loaded luggage rack and its attachment to the carbody shall be designed to resist loads, without failure, due to accelerations of 8g longitudinally 4g laterally and 4g vertically, acting on the mass of the luggage.
- iv). The contractor shall demonstrate the strength and luggage retention capability of the luggage racks during the design review.

c). Reading Lights

- i). Track-mounted reading light assemblies, as described in Chapter 13 may be mounted on the underside of the racks, with the entire installation arranged on the bottom side of the racks.
- ii). The design shall allow the light fixture units to be moved in small increments longitudinally along the luggage rack to allow it to be centered above each passenger seat pair, regardless of seat pitch.
- iii). The luggage rack shall be equipped with a wiring chase or equivalent that provides the flexibility in wiring to achieve this.
 - (1) Alternate arrangements may be proposed for Amtrak review.
 - (2) Reading lights shall only be mounted under the luggage racks in locations designated as accessible seating areas.

11.21 Luggage Towers

a). General

- i). Quantity and location of luggage towers shall be guided by the information presented in Chapter 1 as well as the compliance with the Baggage Analysis required in Section 11.19.

b). Materials and Construction

- i). A luggage tower shall be of robust stainless-steel construction and include shelves.
- ii). Bumper guards shall be mechanically attached to the wall panels within the luggage tower to prevent damage to walls or luggage.
- iii). The towers shall have sufficient strength to support a load of 250 lbs. midway between adjacent supports with a deflection not to exceed 0.25 in. and without permanent deformation.

- iv). The load-bearing surface shall not be less than 24 in. wide and shall be inclined upward from the horizontal toward the center of the car at an angle of approximately three degrees.
- c). Aesthetics
 - i). The towers shall have decorative graphics and patterns.
 - ii). Exact graphics, decals, opacity, etc. shall be determined with Amtrak during the design review process.
- d). Luggage Tower
 - i). Luggage towers should be built as a modular set of parts.
 - ii). Various lengths of luggage tower shall be allowed for within the same modular construction.
 - iii). Luggage towers should be integrated with the side wall and ceiling with no gaps or dirt traps between it and the adjoining body side panels.

Part IV: Integrated Electronics and Technology

11.22 Digital Displays

a). General

- i). Digital displays shall be provided.
- ii). Displays shall be capable of both displaying uniform content across multiple screens and displaying unique information.
 - (1) This should be adjustable by Amtrak employees who have access to software passwords for such activities.
- iii). See Chapters 14 and 26 for additional information and requirements for displays.
- iv). Please refer to Exhibit F for further guidance on screen placement.

b). Materials and Construction

- i). All display screens shall be rail rated and/or service proven.
- ii). Displays shall be integrated into an access panel for ease of maintenance and replaceability.
- iii). Behind each access panel should be provisions for electrical, diagnostics, and communications connections even if the display screen is only powered by the Contractor.
- iv). Displays shall be flush mounted unless otherwise agreed with Amtrak during IDR and Mockup Review.

c). Required Screen Quantities

- i). The required type and quantity of display screens in each section of the car is summarized in **Error! Reference source not found.** on page 11-30.

d). Screen Placement

i). General

- (1) Screens shall be located to ensure high visibility and legibility for passengers throughout the train.
- (2) The intent is to provide consistent access to passenger information without prescribing exact screen sizes, orientations, or positions.
- (3) Screen placement shall support dynamic wayfinding, real-time travel updates, and service information including advertising.
- (4) Please refer to CMF and suggested layout attachments for further information on screen placement and examples.

ii). Visibility Guidelines by Area

(1) Entrance Areas

- (a) Screens should be clearly visible upon entering and exiting the car.
- (b) Screens should be positioned to be readable from multiple angles.

(2) All Coach Cars

- (a) Screens should be positioned so that at least 75% of passengers have a clear line of sight from their seated position to at least one screen.
- (b) Where full visibility is restricted by luggage racks or partitions, multiple screens should be used to maintain coverage.
- (c) Content should remain legible from a seated position without obstruction from fittings or furniture.
- (d) Available bulkheads shall be used to maximize screen visibility across the car.
- (e) Screens shall be positioned to maintain adequate head clearance in walkways- avoiding any obstruction to passenger movement in low ceiling areas.
- (f) Seat reservation screens (Option) shall have a resolution comparable to a mobile phone in order to provide a clear display void of any pixilation which would result in screens appearing dated and pixelated. Details of the screen resolution and aspect ratio shall be discussed during design reviews.

(3) Food Service Areas

- (a) Screens used for digital menus, Food and Beverage Promotions, or service information must be readable from multiple positions including:
 - (i) While queuing (even when two or more people are in line)
 - (ii) Directly at the point of purchase
 - (iii) From seated dining positions

(4) Screen Format

- (a) Aspect ratio, orientation, and mounting should be selected to support clear visibility in each context.

- (b) All screens shall feature anti-glare treatments and meet accessibility standards for legibility, contrast, and resolution.

(5) Screen Selection and Placement

- (a) Amtrak reserves the right to modify screen placement or suggest screen selection changes during the design review process and mock up stages of the design.

11.23 Electrical Locker and Panels

- a). The car electric/ switch locker shall be located within the car interior.
- b). The car PA unit is located here, recessed into the wall.
- c). The locker shall have separate doors for crew operated equipment, and maintenance operated equipment. See Chapter 15.
- d). Locker walls shall be of melamine faced aluminum panel construction with substructure as appropriate to support components.
- e). Longitudinal walls facing into the entrance area shall be decorated with melamine or other factory-manufactured laminate material.
- f). The locker wall & door material shall be fireproof or be lined with fire-blocking material.
- g). The substructure shall be robust to support the numerous heavy electrical panels, etc. located within the locker.
- h). The door and frame shall be robust due to frequent use and rough treatment.
- i). The door lock shall be a coach key style lock with interior release latch.
- j). The electrical locker shall be positively pressurized by conditioned air as part of the HVAC system to prevent dust from entering and accumulating in the electrical locker.
- k). Air shall only be allowed to vent from the electrical locker through gaps and voids where dust may enter.
- l). There shall not be a vent or grille in the door to the electrical locker.
- m). The locker shall include a metal pocket or rack to hold the car defect report book, which is approximately 8.5 in. wide by 11 in. tall by 1 in. thick.
- n). The inside face of the electrical locker door shall have an identification sign listing the car number, car weight and freshwater capacity, and an 8.5 in. wide by 11 in. tall metal surface for an FDA inspection form and stickers.
- o). The surface must be smooth to allow pasting up maintenance forms i.e. extermination

- p). A train-level Central Diagnostic Unit control and display shall be included in the locker
- q). The electric locker door shall be labeled in compliance with Amtrak Specifications # 696 & # 697.
- r). When the door is opened, the locker service lights shall be illuminated by magnetic switches.
- s). The locker doors shall be hinged to open to not block aisleways/passageways when open.
- t). The passage side of the electric locker with the door shall contain all crew and emergency controls in one location to facilitate emergency preparedness and response.
- u). At a minimum the following components shall be located on the passage side of the electric locker:
 - i). B-end emergency fan switch
 - ii). B-end body end door cutout switch
 - iii). B-end conductors emergency brake valve (Note: exhaust of valve must not direct onto electrical equipment in the locker, so as to avoid blowing water onto it when valve is activated)
 - iv). Fire extinguisher enclosure (see Chapter 18)
 - v). Smoke Detector main display panel and controls, behind a transparent door, accessed with a coach key (see Chapter 25)
 - vi). Waste system status (see Chapter 17)
 - vii). System status indicator panel (See Chapter 10)
 - viii). All other crew operated emergency controls
 - ix). The electrical equipment and switch locker shall be located as appropriate near the end the car.
 - x). A small switch locker shall be incorporated into the electrical locker, containing just the essential lighting and other control switches needed by the train crew for car setup for consist operation.

11.24 Outlets

- a). General
 - i). Convenience outlets utilizing duplex receptacles as described in Chapter 15 shall be located throughout the interior.

- ii). A “120 Volts” label, in accordance with Amtrak Spec. # 697, shall be installed at each outlet location, 0.5 inch from the outlet.
- b). Passenger Convenience Outlets
 - i). Seat Outlets
 - (1) A duplex receptacle shall be provided for each seat, including those at tables, and all accessible locations in all car types. See the following sections for additional information:
 - (a) 11.31: Standard Coach Seats and Café/Lounge
 - ii). Table Outlets
 - (1) A duplex receptacle shall be installed on each side of each table, located such that the table or seat does not interfere with access to the outlet.
 - iii). Mirror Outlets
 - (1) A duplex receptacle shall be installed adjacent to each mirror. See the following sections for additional information:
 - (a) 11.35: Standard Toilet Room (STR)
 - (b) 11.36: Accessible Toilet Room (ATR)

Part V: Interior Structures

11.25 Bulkhead Walls

a). General

- i). Bulkhead walls at the end of each passenger seating area shall be constructed of melamine or HPL- faced aluminum panels for durability and to be pleasing to the passenger.
- ii). Any fiberglass material shall be covered with a high gloss gel coat. All seams will be sealed, using appropriate sealing materials.
- iii). Fasteners shall not protrude from the wall panels but countersunk to be flush with the wall panels.
- iv). Bulkheads dividing the car shall be constructed for durability. All joints shall be sealed, using appropriate sealing materials.
- v). Fasteners shall not extend from the wall panels but instead countersunk to be flush with the wall panels.
- vi). The bulkhead shall meet the structural strength required in APTA PR-CS-S-006-98.
- vii). Panels shall be machined smooth and free of sharp edges and burrs. Like panels shall be identical.
- viii). Edges and corners shall have generous radii. Finished surfaces shall be decorative laminate, Schneller G20002T or high-pressure laminate.
- ix). Amtrak shall reserve the right to choose material it deems appropriate for the application.
- x). Provision for textile wainscot panels or sections shall be included.
- xi). Panels shall include stainless-steel kick panels equal in height to the sidewall heater grills.
- xii). Kick panels shall wrap the edges of the passage/ aisle side edge of the panel.
- xiii). Bulkheads shall be designed so that decorative surfaces can be changed at overhaul without damaging the substrate.
- xiv). Alternate panel construction will be considered where appropriate.
- xv). To keep the number of fasteners low, service panels shall be kept as small as possible while still allowing access to the necessary items requiring access.
- xvi). The gaskets shall be protected from crushing through the use of metal-to-metal stops incorporated around the mounting fastener holes.

CONFIDENTIAL — DO NOT DISTRIBUTE

- xvii). There shall be one type of bulkhead wall on the car: bulkheads that include doors.

- (1) Bulkheads with Doors

- (a) Doors should be made from safety glass, have a minimal frame and an I/R sensor with a backup accessible touch button to open the door.

- b). Interchangeable Bulkhead Signage

- i). Contractor to provide a modular, easily replaceable/reconfigurable signage solution mounted on the bulkhead wall for the Standard Coach Car to be utilized as a Business Class Car enabling clear, consistent passenger information and flexible reconfiguration of car class designation.
 - (1) The signage shall be mounted on all bulkhead walls in the Standard Coach Car and shall be visible from the aisle clearly indicated the class of service while complying with Amtrak's branding and accessibility standards.
 - (2) The signage assembly shall be designed as a modular component that is interchangeable across all cars in the fleet using standardized captive fasteners or approved locking mechanisms, allowing for tool-less conversion from a Standard Coach Car to a Business Class Car designation.
 - (3) The sign panel shall be constructed of non-flammable, scratch-resistant and UV-stable materials suitable for high-traffic interior environments with permanently bonded or etched graphics to prevent peeling or fading over time.
 - (4) Signage shall comply with ADA requirements, including tactile lettering and Braille where applicable with placement and contrast meeting visibility standards for passengers with visual impairments.
 - (5) The sign shall be removable without damage to the bulkhead wall or adjacent components.

11.26 Ceilings

- a). Ceiling panels shall be designed and constructed and installed to allow easy individual removal for maintenance and repair of any components included in the ceiling design, such as air ducts.
- b). Ceiling panels shall be constructed of material that meets flame, smoke, toxicity, and structural standards, subject to Amtrak's approval.
- c). The ceilings shall be made of a wear resistant and easy to clean material, preferably coated metal sheets or HPL panels.
- d). Panels shall have a dense phenolic composite edge machined smooth and free of sharp edges and burrs or may employ imbedded aluminum trim.

CONFIDENTIAL — DO NOT DISTRIBUTE

- e). Alternatively, as appropriate, honeycomb aluminum panels may be used. Finished surfaces shall be decorative laminate, Schneller G20002T or Amtrak approved equivalent.
- f). Corners and edges shall be rounded.
- g). Panels should be self-trimming.
- h). Where trim extrusions are necessary between panels, their size should be minimized.
- i). The number of visible fasteners should be minimized.
- j). Piano hinged ceiling panels shall be designed, constructed, and installed to allow easy individual opening and closing to provide access for maintenance and repair of any components located above the ceiling, such as:
 - i). body end door operators and tracks,
 - ii). HVAC air ducts,
 - iii). lighting fixtures,
 - iv). PA speakers,
 - v). water piping,
 - vi). wiring, etc.
- k). These panels shall be hinged along one edge in such a way that they may be hung open or easily removed from the hinge.
- l). Ceiling panel size shall allow a single person to open/ close the panels safely, unaided.
- m). The panels shall be secured closed with Southco or equal draw-tight vice-action latches with indicators for the locked position.
- n). The driver required for the latch will be determined during the design phase.
- o). Each panel shall include a passive self-engaging safety catch to prevent accidental panel openings.
- p). These safety devices shall be stainless steel and be configured so as not to rattle in service. The safety latch shall be self-engaging when closing the panel.
- q). Panels shall be sealed against air leaks around their entire perimeter, with the seal on the stationary side of the joint.
- r). Any components that penetrate the ceiling shall form an air-tight joint to the ceiling to avoid dirt streaking.
- s). The seal on these items shall be on the component, rather than the ceiling panel.

- t). The method of securing the ceiling panel to the car structure shall ensure that panels cannot drop at all due to any car motion from coupling/ uncoupling as well as under all operating conditions at all authorized speeds on any FRA class of track.
- u). Hinged panels, which provide access of overhead equipment such as door operators, water heater, etc., shall be equipped with a limit switch so that when the panel is opened, the associated service lights shall be illuminated.
- v). Where the car ceiling panels form the bottom of the HVAC duct, they shall be hinged along one side to allow them to be easily opened for periodic duct cleaning.

11.27 Flooring

- a). Floor Covering
 - i). The car floor shall be equipped with a combination of carpeting and anti-slip flooring to provide an aesthetically pleasing and safe environment for the passenger.
 - ii). Safety and installation shall be foremost in the design.
 - iii). Carpeting is used not only for aesthetics, but also as a sound absorbent.
 - iv). All floor coverings shall be new.
 - v). The integration of the base floor material, carpeting, and restroom inserts shall be the subject of design review.
 - vi). Care shall be taken to ensure smooth transitions between flooring, carpeting, and transitions in doorways, restroom entrances, seat tracks, etc., to avoid tripping hazards.
 - vii). Generally, clamping thresholds should be used at these joints and longitudinal carpet-retaining tracks used to secure carpeting.
 - viii). Carpet-retaining track locations shall be coordinated with those of LLEPM tracks to ensure a smooth transition.
 - ix). Joints in the floor beneath the floor covering shall be smooth with no transmit bumps, ridges, and other irregularities through to the finished surface of the covering.
 - x). The builder shall provide an adhesive system suitable for railcar applications and be unaffected by the inherent flexing of vehicle interior color panels and temperature swings during train operation.
 - xi). The adhesive shall not degrade the flammability, smoke emissions, and toxicity characteristics of the carpet, composite flooring, or car substrate.
 - xii). The composite flooring, floor coverings, and their adhesive systems shall be able to withstand a wide variety of periodic and specialized stain removal cleaning typical for a passenger rail vehicle without any stretching,

puckering, rippling, fraying, pulling up, or other adverse effect to the surface appearance or function.

- xiii). Cleaning may occur daily and at least every 90 days using a carpet cleaning machine, hot water, and caustic or acid chemicals.
- xiv). Daily specialized spot cleaning will take place using chemical cleaners, scrubbing with brushes, and application of gum remover.
- xv). The base floor and floor coverings shall be installed in accordance with the best practices of the industry and OEM instructions.
- xvi). Floor coverings, their trim, and the installation of these materials shall result in a smooth and flat floor covering for the life of the floor covering. Coverings shall be removable at end-of-life with no damage to the underlying floor panels.
- xvii). Floor covering seams should be kept to a minimum and the plan for seam location shall be approved by Amtrak during the design review process.
- xviii). The carpet vendor shall provide detailed recommended cleaning instructions for the builder to include in the maintenance manual sets.
- xix). To the extent possible, floor coverings for each site shall have the same dimensions among all cars, or among like cars at a minimum, so materials can be cut to size outside of the car and be installed with minimal on-car trimming.
- xx). Repairing floor coverings is not allowed; instead, the covering must be replaced with new material up to the nearest seam. Any exceptions to this requirement will require approval from Amtrak on a case-by-case basis.
- xxi). Please refer to Figure 11-3 below for general outline of where each flooring type will be utilized:

Figure 11-3: Floor Covering Table

Location		Flooring Type
Coach Seating Areas	Aisle	High Traffic Carpet
	Under Seats	High Traffic Carpet
	Entrance area	Anti-Slip Flooring 1
Café/Lounge	Aisle	High Traffic Carpet
	Under Seats	High Traffic Carpet
	Entrance Area	Anti-Slip Flooring 1
	Café Queuing Area	Anti-Slip Flooring 2
	Café Crew Area	Anti-Slip Flooring 2
Restrooms		Anti-Slip Flooring 2

- b). Carpeting and Securement

- i). Carpet
 - (1) Heavy-duty commercial carpet shall be provided as indicated including seating areas.
 - (2) Carpet shall be designed for modular replacement.
 - (3) All areas of common design shall use template cut carpets. Linear carpets such as those used for aisles, shall likewise be of identical sizes within car types.
 - (4) All carpet shall be designed per Amtrak specification and shall be designed to provide maximum passenger comfort and safety as dictated by ergonomic requirements.
 - (5) The carpet shall be compliant with all applicable APTA and ADA guidelines.
- ii). Carpet Securement
 - (1) Generally, the aisle and hall carpet shall be mechanically secured to the floor using longitudinal carpet-retaining tracks along both sides of the center aisle and along the outside edges of the car.
 - (2) A cove shall be provided where the carpet meets the longitudinal wall for ease of cleaning.
 - (3) Clamping thresholds shall be used at transitions to rubber or composite flooring and metal moldings, as required, such as at bulkheads.
 - (4) The carpet-retaining tracks along the aisle may be incorporated in the tracks for LLEPM.
 - (5) The spacing between the carpet-retaining tracks, moldings, etc. shall be identical on all cars so that carpeting does not need to be trimmed to fit a specific car.
 - (6) If carpet must be glued into place at certain locations, these require Amtrak approval.
- c). Anti-Slip, Skid Resistant Flooring
 - i). Skid-resistant, waterproof composite floor covering, that has been tested and proven to meet ADA requirements, shall be used where indicated including passageways, restrooms, food service areas and other utility areas where carpet is not installed.
 - ii). The floor design must comply with 36 CFR Part 1192 Appendix I. and RVAAC VI Floor Surfaces recommendations.

- iii). The floor covering shall have an integral cove of 4 in. radius, where specified, for easy cleaning, and shall extend from 2 in. to 6 in. up the wall, depending upon application.
- iv). Transition strips shall be provided between composite flooring and carpeted areas.
- v). Transitions between flooring types shall produce level changes in flooring surfaces less than 0.25 in.
- vi). The trim strip between the wall lining and the floor covering shall be sealed to prevent harborage, accumulation of debris, or incursion of water and cleaning fluids.
- vii). Floors in entrance areas and end passageways shall have a 3 in. wide high-contrast visibility strip directly adjacent to door openings to delineate the door opening for visually impaired passengers.
- viii). The high-contrast strip at the side entry doors shall be made of high-performance photo-luminescent material so that it is integrated into the LLEPM system for exit pathway marking.
- ix). The LLEPM material and application shall comply with APTA Standard APTA-PR-PS-S-006-23 Emergency Egress/Access Signage and LLEPM for Passenger Rail Equipment and shall be embedded in the floor system.
- x). All flooring shall be installed using an adhesive system that is approved by the flooring manufacturer and Amtrak.

11.28 Entrance Area (Vestibule)

- a). General
 - i). Entrances for the cars shall have entrance doors on both sides of the car.
 - ii). Entrance areas shall include a 60" turning circle.
 - iii). All entrance areas shall be designed and constructed to form a safe and attractive environment.
 - iv). Visible fasteners shall be minimized.
 - v). Modularity shall be optimized during the design process.
 - vi). All mounted items in the area shall be secured to the module structure through the use of fully embedded tapping plates when pullout strength or expected weight is greater than 20 lbs.
 - (1) These are expected to last the life of the car without coming loose.
 - vii). Consistent features shall be maintained across entrance areas to the extent possible.

viii). Please refer to Exhibit F for further guidance.

b). Integrated Systems

i). HVAC

(1) Supply Air Diffusers

- (a) Conditioned air is delivered to the entry area via 2 supply air diffusers with adjustable air flow control.

(2) Exhaust Grille

- (a) Exhaust air is removed from the entry area via the exhaust air grille which is located at the upper portion of the module.

(3) Air Circulation Fans

- (a) Air circulation fans with controls shall be provided.
- (b) The purpose is to stir air and decrease the potential for temperature differential between the vestibule and passenger area.
- (c) The air circulation fans shall have manual adjustment of the airflow direction.

ii). Communications

(1) Speaker

- (a) PA speaker shall be located on the central ceiling panel.
- (b) The PA speaker shall have an associated mute button.
- (c) The speaker used in this location shall be identical to PA speakers used in other locations in the car for ease of maintenance and replacement.

(2) Passenger Emergency Intercom

- (a) Two (2) PEIs shall be located in every car as called out later in this section.
- (b) The intention of this button is to notify the conductor and flag the entire train that there is an onboard emergency.

(3) All communications equipment shall meet the requirements in Chapter 14.

iii). Electrical System

- (1) All electrical equipment in the entrance area shall meet the requirements in Chapter 15.
 - (2) Junction Box
 - (a) The junction box shall be located where practical and shall be presented during the design phase. It shall be easily accessible by the maintenance group.
- iv). Lighting System
 - (1) Lighting general information is shared in detail for each area. Detailed lighting information can be found in Chapter 13.
 - (2) Note that all lighting part numbers, manufacturers, and temperatures shall be proposed by the Contractor and approved at Amtrak after the lighting simulation during the design review process.
- v). Emergency Equipment
 - (1) Chapter 25 details emergency equipment requirements.
 - (2) Smoke Detector
 - (a) Smoke Detectors shall be mounted on the central ceiling panel.
 - (b) The smoke detector used in this location shall be identical to the smoke detectors used in other locations in the car for ease of maintenance and replacement.
- c). Security
 - i). Many items within the entrance area will need to be secured.
 - ii). The following items are identified with specific locking preferences:
 - (1) Crew access panels
 - (2) Boarding equipment such as ramps, transfer bridges, etc.
 - iii). Any other locking or security items will be discussed with Amtrak during design reviews.
- d). CMF
 - i). Wall Panels
 - (1) Sidewall Panels along the carshell wall shall be made from molded thermoplastic or melamine resin composite with an easy to clean surface finish.

- (2) Partition Walls shall be created from a composite structure such as aluminum honeycomb, melamine resin, or HPL skinned honeycomb panels.
 - (3) The finish of the wall and material of the outside skin shall meet all structural requirements for crashworthiness based on mounting and attached loads to the panel.
 - ii). Ceilings
 - (1) Ceiling shall be created from a composite structure such as aluminum honeycomb or HPL skinned honeycomb panels.
 - (2) The finish of the passenger facing side of the ceiling panel and material of the outside skin shall meet all structural requirements for crashworthiness based on mounting and attached loads to the panel.
 - (3) The finish of the material on the non-passenger facing side shall be coated such that there is no risk of corrosion from moisture from steam or humidity within the car.
 - iii). Flooring
 - (1) Flooring within the entrance area shall be made from high traffic anti-skid flooring. Please refer to Section 11.27 for details on this flooring type.
- e). Key Features
 - i). A comprehensive list of expected features in entrance areas is provided in Figure 11-4 and detailed below.
 - ii). In addition to these requirements, the Contractor shall factor in safety, crashworthiness, materials and workmanship, FDA cleaning clearances, radii, and sanitary design. All mechanisms described below should be durable, free from jamming, and racking. The design should meet abuse load and crash criteria. Dimensions, position, and usability will be subject to Amtrak approval during the mockup review.

Figure 11-4: Key Features - Entrance Areas

Feature	Short Description	Qty
Handholds	49 CFR 38.115 compliant handrails	4
Door Threshold	Anti-slip, color contrast, texturized flooring at door	2
Trash Bin	Trash bin with push flaps and access door	2
Panel Work	HPL panels and Tedlar style sidewall liners	NA
Passenger Information Screens	Digital display monitor (PIS/OTIS)	2
Control Panel Doors	Access panels with seamless features to panel work	NA

Kick Strips	9" stainless steel strips	NA
Storage for Step Stool	Storage location for step stool	1
Crew Door Control Panel	Exposed crew controls and buttons for doors	2
Electrical Control Panel	Maintenance storage location behind access panel	1
PEI	Emergency Alert system with intercom	1

iii). Handholds

- (1) Compliant handholds should be supplied on both sides of each door for low and high level loading heights, and at key access point along aisles.
- (2) Grab bar positioning will be subject to mockup testing and Amtrak approval.
- (3) Grab bar shall meet the requirements in 49 CFR 38.115. Handhold grab bars shall be made from stainless steel.

iv). Door Threshold

- (1) Door threshold should have a slip-free surface and a contrasting floor color to the main entrance area flooring to mark the threshold.

v). Trash Bin

- (1) Trash bins shall be provided with stainless steel push flaps.
- (2) Please refer to Section 11.17 for more information on trash and recycling requirements.

vi). Panel Work

- (1) Entrance areas should be designed to have well fitted clean panels with a high tolerance build to manage split lines and cabinet edging.
- (2) There should be no protruding equipment, snag point, or dirt traps.
- (3) All equipment storage cabinets should be accessible using a crew key with discreet locks.

vii). Hand Sanitizer Dispenser

- (1) An infrared hand sanitizer dispenser shall be installed in each car in the vestibule.
- (2) The dispenser shall provide a touchless and hygienic solution for dispensing hand sanitizer in public places.

- (3) Infrared Sensor
 - (a) The dispensers shall utilize advanced infrared sensor technology for touchless operation.
 - (b) The IR sensor shall have an adjustable sensor range to optimize detection distance.
 - (4) The dispenser shall accommodate a minimum of 1000 ml of hand sanitizer.
 - (5) The sanitizer reservoir shall be easily refillable without the use of tools.
 - (6) The dispensers shall be powered via hardwired connection.
 - (7) The dispensing volume shall be adjustable between 1.5 ml and 3.5 ml per application.
 - (8) The dispensers shall be constructed using durable and easy-to-clean materials suitable for high-traffic areas and compliant with all requirements of this specification.
 - (9) The dispenser shall have an LED indicator for low sanitizer levels.
 - (10) The dispensers shall be wall-mounted and shall allow for easy removal and replacement.
 - (11) Dispensers shall come filled with an unscented, hand sanitizer with a minimum alcohol content of 60%.
- viii). Passenger Information Screen (PIS/OTIS)
- (1) Display screens should be supplied on both sides of the interior vestibule door.
- ix). Control Panel Door
- (1) All equipment storage cabinets should be accessible using a crew key with discreet locks.
 - (2) These doors should use the same front panel as the other entrance area wall paneling.
- x). Kick Strip
- (1) Stainless steel kick strips at 9" high should be used in all entrance areas.
- xi). Trap Door and Folding Stairs
- (1) Stairs shall comply with ADA standards for riser, tread, nosing and handrails.

- (2) The rake of the stairs shall be maximized within these guidelines.
- (3) An additional lower handrail should also be included to assist children climbing the stairs, handrails should be free from snags.
- (4) See chapter 6 and 12 for details.

xii). Step Stool and Storage

- (1) A step stool shall be provided which aids in passenger boarding when not at a level platform. The step stool shall work at floor height at all platforms.
- (2) A storage location shall be labeled and located behind an access panel with a paddle latch for a step stool.

xiii). Wheeled Mobility Device Lift (Option)

- (1) As an option, a wheeled mobility device lift shall be mounted by doors on both sides of the train, where any passenger with disabilities may board.
- (2) The wheeled mobility device lift mounting shall not impede on passenger ingress or egress through the doorway.
- (3) Please refer to Chapter 6 and 12 for more information.
- (4) Crew door controls shall be exposed for ease of access and located on a panel near the entry and exit doors of the train. Please refer to Chapter 12 for more information.
- (5) Electrical control panels shall be located behind access panel doors that are operated using a square lock, or as otherwise approved by Amtrak.

xiv). PEI

- (1) Intercom and alert button shall be integrated into the sidewall for emergency notification and communication. Please refer to Chapter 14 for more information.

f). Lighting

- (1) All lighting shall be dimmable, with a fixed color temperature to be determined during design review and mockups. Color temperature shall be determined per light fixture and may not be the same temperature for all fixtures within the compartment.

ii). Lighting Types and Locations

- (1) Locations and sizes will be subject to review, user testing, and Amtrak approval.

- (2) LED Panel Spotlights (White Lights)
 - (a) Small circular LED light panels shall act as spotlights above the doors, along aisles, and in the vestibule.
 - (b) The frame for the spotlights shall be color matched to the ceiling.
 - (c) Light should enhance contrast for visibility and safety.
- (3) Step Lights
 - (a) Step lights should illuminate interior threshold during boarding.

Part VI: Coach Areas

11.29 Interior Structures – Coach Specific

a). Key Features

- i). A comprehensive list of expected features of the Coach Interior structures is provided in Figure 11-5 and described in detail below.

Figure 11-5: Key Features - Coach Interior Structures

Feature	Short Description	Qty
Windows	Windows in the side wall of the car	Qty determined by Contractor
Blinds	Blinds that cover windows	1 per window
Window Pillars	Structural member between windows	NA
Window Masks	Cover for window installation	NA
HVAC Gondola	HVAC air path through the center of the car	NA
Side Ceiling Panels	Lateral side ceiling panels along the curve from sidewall to ceiling panel	NA
Kick Strips	9" high stainless steel strips	NA
Side Rails	Decorative strip under windows to conceal lighting	NA
Lower Sidewall Panels	HPL panels and Tedlar style sidewall liners as described in Exhibit F	NA
Coat Hooks	Coat hooks that hold up to 25lbs	2 per seat row
Luggage Shelf	Overhead luggage rack	NA

ii). General

- (1) The Contractor shall factor in safety, crashworthiness, materials and workmanship, FDA cleaning clearances, radii, and sanitary design.
- (2) All mechanisms described below should be durable, free from jamming, and racking.
- (3) The design should meet abuse, load, and crash criteria outlined in CFR.

- (4) Dimensions, position, and usability will be subject to Amtrak approval during the mockup review.
- iii). Windows
 - (1) Windows shall be provided that meet the requirements of Section 11.13.
- iv). Window Blinds
 - (1) Side window blinds shall be provided that meet the requirements of Section 11.15.
- v). Window Pillars
 - (1) Window pillar width should be minimized.
- vi). Window Mask
 - (1) Window mask should minimize or mask glass corners to create an architectural aesthetic.
- vii). HVAC Gondola
 - (1) Gondola shall be designed to maximize headroom.
 - (2) Lighting washes both centrally into gondola and across side ceilings shall be provided.
 - (3) The gondola should terminate and transition to a separate lower ceiling section if any equipment or junction in the interior architecture prevents the gondola from completing a full uninterrupted run. Contractor shall present the solution at design review for review and approval.
 - (a) For example – where the ceiling moves around an ATR or STR.
 - (4) At these junctions, the gondola should terminate in a straight line with architecture that creates a visual ring at the termination point.
 - (5) The transition between ceiling profiles should be treated with clean and well considered intersections.
 - (6) These lower ceilings should have their own lighting light wells and HVAC vents.
- viii). Side Ceiling Panels
 - (1) These side ceiling panels shall be curved to create a smooth transition from the ceiling to the back of the overhead luggage racks.
- ix). Kick Strips
 - (1) Stainless steel kick strips at 9" high should be used in all coach areas.

x). Lower Sidewall Panels

- (1) Lower side wall panels shall be provided such that the trim panel has minimized thickness to take advantage of full width of the car body.
- (2) These should be designed to have well fitted clean panels with a high tolerance build to manage split lines and cabinet edging.
- (3) There should be no protruding equipment, snag point, or dirt traps.

xi). Coat Hooks

- (1) Coat hooks should be provided for each seated location, integrated with the luggage shelf and valance.
- (2) Hooks should be easy to move if seat positions or set pitch is changed in the future.
- (3) A solution where integrated coat hooks are provided in the back of the seat will also be considered and is subject to Amtrak approval during the design review process.

xii). Luggage Racks

- (1) Overhead Luggage Racks shall meet the requirements of:
 - (a) Section 11.19: Luggage Storage – General
 - (b) Section 11.20: Overhead Luggage Storage
- (2) The overhead luggage racks should be built in modules that align with window placements.
- (3) Split lines and module length should be consistent and to visually match the window module splits.
- (4) The overhead luggage racks shall be modular to create different length segments using extruded aluminum.
- (5) The following elements shall be included:
 - (a) Back Barrier – Back of rack should prevent bags from damaging side ceiling panels.
 - (b) Roll stop Nosing – Nosing of luggage rack should be suitable to secure bags with a 3" restraint bar to the best extent possible.
 - (c) Glass Panel – Glass panel construction from safety glass to allow passengers to see bag and let light through – frosted finish or laminated with decorative film or etching pattern. The glass panel shall have protective film applied in the event of a failure that will stop shattered glass from falling on passengers.

- (d) Module Dividers – Divider brackets to prevent bag slip – discreet design with no sharps, snags, or dirt traps.
 - (e) Blind Storage – Window blind storage should be easily accessible and discreetly hidden behind rack.
- b). Lighting Requirements
 - i). General
 - (1) To the best extent possible, all lighting shall be provided via indirect lighting unless otherwise approved by Amtrak.
 - (2) Lighting general information is shared in the points below.
 - (3) Standard Coach
 - (a) All lighting shall be dimmable, with a fixed color temperature to be determined during design review and mockups.
 - (i) Color temperature shall be determined per light fixture and may not be the same temperature for all fixtures within the compartment.
 - ii). Lighting Types and Locations
 - (1) Gondola Ceiling Lighting
 - (a) Gondola Ceiling Lighting shall wash light from the gondola across the side ceiling panels.
 - (2) LED Panel Spotlights (White Lights)
 - (a) In the case where spotlights are proposed, small circular LED light panels shall act as spotlights along aisles.
 - (b) The frame for the spotlights shall be color matched to the ceiling.
 - (3) Standard Coach ONLY
 - (a) Compartment lighting at a fixed temperature with indirect wash lighting under each seat or seat pair shall be provided as an option.

11.30 Seats – General Ergonomics

- a). Through the use of the CAESAR Database for Anthropometric Data, seat frame, cushion, and arm rests shall be designed and optimized to accommodate all passenger sizes from the 5th percentile female through the 95th percentile male in a full range of normal seating positions to the extent possible and as approved by Amtrak.
- b). A human factor specialist shall be involved in all stages of the design, testing, and

review process.

- i). A coach seat should provide initial comfort when first seated and then comfort over the length of passenger travel (minimum of 2 hours and maximum of 72hours).
 - (1) Café/Lounge Seating shall have a minimum of 2 hours and a maximum of 12 hours of comfort.
- ii). It should comfortably accommodate a variety of seating postures and provide comfort when seated posture changes.
- iii). Back and seat cushions shall both be custom contoured through pressure mapping analysis to minimize contact pressures through the widest possible range.
- iv). Lumbar support shall accommodate all passenger profiles to the extent possible.
- v). Sufficient knee space to allow for multiple seated positions for a 95th percentile male with no contact against the next seat backrest.
- vi). Test rigs shall be utilized to evaluate both the initial design properties and longevity of materials, including but not limited to deflection, stiffness, thickness, material wear, and appearance.
- vii). Deflection, stiffness, and thickness properties shall not decrease by more than 20% over the entire life of the cushion.
- viii). Wear and appearance deterioration shall be minimized to accommodate an 8-year design life. Further detail is provided in Chapter 18.

11.31 Standard Coach Seats (Standard Coach and Café/Lounge Cars)

a). Standard Coach Seats General

- i). A modular system shall be used for seating arrangements, so Amtrak can change seat spacing, add, or delete seats in the future. This shall be accomplished without having to make any changes to the car other than moving the seats. The Contractor will submit their proposal for approval during the design review process.
- ii). The standard coach seat is designed to work as pairs with four seats across the width of the train.
- iii). The seat should be optimized for both day and nighttime operations.
- iv). Features are included that aid a better night's sleep or support passengers on longer journeys by maximizing comfort and available passenger space.
- v). The minimum width of the seat between armrests should be 22" when arranged with a minimum aisle dimension of 22".

- vi). All seats must have a movable armrest.
 - vii). Braille and raised characters shall be posted at the seat's headrest edge.
 - viii). A single seat type may be required in smaller numbers to accommodate transfer seats, maximize capacity and fulfil requirements around accessible paths in the accessible coach car.
 - ix). Contractor is responsible for meeting all technical requirements for all seat types, including any potential single seat designs.
 - x). All seat types are expected to be included in the mockups.
 - xi). Please refer to Chapter 1 for information regarding quantity of this accommodation type desired.
- b). Standard Coach Seats Material
- i). Amtrak expects the following items to have a FST compliant vinyl surface unless otherwise approved during design review process:
 - (1) calf rest,
 - (2) seat pan,
 - (3) seat cushion,
 - (4) head rest,
 - (5) arm rests
 - ii). Amtrak expects the following items to have a metal brushed finish unless otherwise approved during design review process:
 - (1) control buttons,
 - (2) hand grabs,
 - (3) reading light,
 - (4) structure,
 - (5) pedestal
- c). Standard Coach Seats Attachment
- i). Passenger revenue seats must meet the performance requirements as defined in APTA Standard PR-CS-S-016-99, Standard for Passenger Seats in Passenger Rail Cars.
 - ii). This APTA Standard shall also be used as a design guideline.
 - iii). Seats shall be designed to provide maximum passenger comfort and safety.

- iv). The seats shall be mounted in standard adjustable seat-mounting track allowing for pedestal or pedestal wall mounting.
 - v). Mounting slots shall be included on the underside of the seat frame allowing for lateral adjustability so that the aisleway centerline and dimensions are consistent throughout the car with no misalignment or staggering.
 - vi). The seat attachment angle to the car floor shall optimize passenger knee room.
 - vii). HPPL signage shall be located either on the seat pedestal or seat frame.
 - viii). See Chapter 13 for additional details. HPPL shall not be placed on the floor to the best extent possible.
 - ix). Approved tamper-resistant means of connections to a subfloor cable duct for electrical supply and future audio/visual data lines shall be provided.
 - (1) These connections shall provide for ease of future changes in seat spacing.
 - x). Revenue seats shall be mounted in seat tracks on the floor and/or wall in all car types.
 - xi). Seat tracks shall be installed with Amtrak approval for all processes and drawings.
 - xii). Between seats, the wall and floor seat tracks shall be covered with a trim suitable for the application and as flush to the floor or wall panel as practical.
 - (1) Alternative floor and wall seat track installation locations shall be allowed as approved by the Customer.
 - xiii). Seats shall be mounted to the seat tracks in accordance with the strength and crashworthiness requirements of 49 CFR Section 238.233 (a) and APTA standard PR-CS-S-016-99.
- d). Standard Coach Seats Key Features
- i). A comprehensive list of expected features in this type of coach seat is provided in Figure 11-6 and detailed below.
 - ii). In addition to these requirements, the Contractor shall factor in safety, crashworthiness, materials and workmanship, FDA cleaning clearances, radii, and sanitary design.
 - iii). All mechanisms described below should be durable, free from jamming, and racking.
 - iv). The design should meet abuse load and crash criteria.
 - v). Dimensions, position, and usability will be subject to Amtrak approval during the mockup review.

- vi). Standard seat configuration will be all seats facing forward. The seat design shall be modular, so Amtrak can reconfigure the layout in the future.

Figure 11-6: Key Features - Standard Coach Seats

Feature	Short Description	Qty
Headrest Pillow	Adjustable portion of seat headrest	1
Privacy Wing	Protrusion on headrest to provide privacy	2
Hand Grab	49 CFR 38.115 compliant handrails	1
Reading Light	White light with adjustable lens and toggle switch	1
Seat Recline Mechanism	Sliding mechanism that attaches seat back to seat pan for recline	1
Calf Rest Pad	Cushioned pad for leg support	1
Seat Controls	Manual buttons that adjust seat configuration features	1
Folding Armrests	Arm rests that rotate upwards when stored	2
Flexible Net Pocket	Pocket at the base of the back of a seat for storage	1
On Seat Power	Outlets and USB integrated into the seat	2
Central Foot Pedestal	Support structure for a seat or pair of seats	1
Storage Strap	Small elastic band for retaining items	1
Fold Out Table	Table stored in the back of a seat	1
Cup Holders	Metal cup holder ring that folds flush with seatback	1
Device Holder	Small ledge for propping up a cell phone	1
Fold Out Footrest	Footrest that is stored in the back of a seat	1
Under Seat Lighting	Lighting shall be provided to illuminate the space under each seat	1

vii). Seat Dimensions

- (1) The following seat dimensions should be used as the basis for designing the seat.
- (2) Note that seat dimensions are subject to Amtrak approval during the design review and mock up review processes.
 - (a) Seat width- at least 22"
 - (b) Seat depth- at least 20"
 - (c) Highest point on seat pan (at knee bend) 19" from the ground

- (d) Natural seat recline angle when in upright position- 105 degrees as measured from passenger facing side of seatback to passenger facing side of seat cushion.
- (e) Seat pan recline – 5-7 degrees as measured from parallel to the floor.

viii). Headrest Pillow

- (1) Headrest pillow should be adjustable in height to comfortably accommodate the range from 5th percentile female to 95th percentile male seated heights.
- (2) It should have adjustable wings that fold outwards to adjust the width of the headrest while also providing lateral support for the head when the passenger is resting or sleeping in an upright seated position.

ix). Privacy Wing

- (1) Privacy wing on the seats should provide good separation between passengers at head level and be wide enough and high enough as not to impact shoulder width for taller passengers.

x). Hand Grab

- (1) Every aisle seat should have a compliant accessible grab for better access along the aisle.
- (2) Grab bar positioning will be subject to mockup testing and Amtrak approval.
- (3) Grab bar shall meet the requirements in 49 CFR 38.115.

xi). Reading Light

- (1) Seats should include a reading light that is positioned so as not to disturb neighbor during nighttime hours.
- (2) Passengers should be able to adjust the lighting angle to cast light over the shoulder and into the lap or at a position suitable to read a book at night.
- (3) Light intensity should have three settings.

xii). Seat Recline Mechanism

- (1) Seat recline mechanism should allow the seat pan to slide forwards so as not to burden the full recline onto the passenger behind in addition to reclining the seat back.
- (2) It should be easy to use by people of all abilities and shall not require more than 3 lbf to adjust or operate.

- (3) The mechanism should be durable and rattle free. It should be free from finger traps.

xiii). Calf Rest Pad

- (1) Calf-rests tilt up for optimal leg support and comfort. Angle and width to be optimized as part of a detailed human factors study.
- (2) The calf rest should be integral to the seat pan to avoid seat pinch.

xiv). Seat Controls

- (1) Seat controls for recline and leg rest should be located within easy reach of a customer – for example, on the inner side of the outside armrests.
- (2) It should be possible to control the seat back recline and the calf rest independently.
- (3) The seat controls should be intuitive, easy to use by people of all abilities, and shall require 3 lbf or less to operate.

xv). Folding Armrests

- (1) 2" wide armrest shall include a soft wrap around the top for comfort and a hard-wearing bottom wrap and side cap for durability.
- (2) Armrests should be included on both sides of the seat and in between a seat pair.
- (3) Armrest should fold flush or sub flush to the front surface of the seat back.

xvi). Flexible Net Pocket

- (1) A storage pocket should be provided on the back of the seat.
- (2) A semi-rigid frame with a net suitable for passengers to stow personal items or for Amtrak literature.
- (3) The net should be durable and allow a clear view of the items placed inside to aid quick and easy cleaning routines.
- (4) The design should allow for this element to be quickly and easily replaced on the train.

xvii). On-Seat Power

- (1) Two USB ports should be provided on the back of each of the seats.
- (2) Two duplex plug sockets should be located on the seat pedestal. Sockets should be shielded from spills from the table or cup holder.

xviii). Central Foot Pedestal

- (1) A central seat pedestal should be positioned to maximize foot clearance.
- (2) Interface with the floor should allow easy cleaning.

xix). Storage Strap

- (1) Behind the fold down table a ledge and elastic restraint band suitable to allow customers to simply store smart phones and other personal items behind table.
- (2) The band should be durable and easily replaceable.

xx). Fold Out Table

- (1) A fold out table should be provided on each seat back. The fold out tray table in all positions shall be operable with one hand using 5lbf or less.
- (2) The table shall have an independent pivot point so that its resting position will not be impacted by the recline of the seat in front.
- (3) The latch design should prevent accidental activation, and the table should be free from rattle when either stored or fully deployed.
- (4) The table should be able to extend forwards telescopically.
- (5) The usable surface should allow people to use a 15" laptop – even when the seat in front of the passenger is fully reclined.
- (6) The mechanism should be durable and rattle free.
- (7) It should not extend accidentally.
- (8) When the table is deployed it shall be able to support a 50 lbf point load on the end of the table without damage.

xxi). Cup Holders

- (1) A metal cup holder should be positioned on the back of the seat.
- (2) Cup holders should be placed in positions outside of knee and leg clearance and free from the movement of the seat.
- (3) The cupholder should be an open clasp design capable of storing and securing cups of various diameters.
- (4) It should be designed to prevent passing passengers getting snagged.

xxii). Device Holder

- (1) A fold out ledge with clip should allow the secure mounting of passengers' personal devices.
- (2) The clip should be sprung and adjustable so different sizes can be securely kept in place including a typical tablet and/or a smartphone.
- (3) The angle should be set so it is usable in both recline and upright positions.
- (4) The latch should be designed in such a way to prevent accidental activation.

xxiii). Fold out Footrest

- (1) A fold out adjustable footrest should be provided.
- (2) There should be three set positions and the footrest should have a degree of angle adjustment.
- (3) The size and positions should be defined by a detailed human factors study.

xxiv). Under Seat Lighting

- (1) Lighting shall be provided to illuminate the space under each seat.

e). Standard Coach Seats Functional Elements

i). Seat Recline of 20 degrees

- (1) Recline features
 - (a) When seats are fully reclined there shall be at least 7" of knee clearance for a 95th percentile male between the back of the seat in front of the passenger and his knees.
 - (b) The recline features shall be operated manually:
 - (i) The seatback shall recline
 - (ii) The seatpan shall slide forward
 - (iii) The calf rest shall extend forward to raise the legs
 - (iv) The footrest shall be able to be folded out

ii). Seat Rotation (OPTION)

- (1) As an option, Amtrak shall be able to elect to have a manual rotation feature for each of the seats in standard coach.
- (2) If option is exercised, the seats shall all be installed facing the same direction on both sides of the aisle.

- (3) Seats should have the capability to rotate at the end of the line so that all seats are facing the opposite direction.
 - (4) This rotation would be manually performed by Amtrak staff.
 - (5) Each seat bench should be able to be rotated in less than 30 seconds and shall lock in place.
 - (6) A visual indicator of the seat being properly secured shall be provided.
 - (7) Any seat not fully locked into place shall send an alert to the conductor for inspection.
 - (8) The controller shall report alerts and faults to the car diagnostic system. See Chapter 24 for additional information.
- f). Standard Coach Seats - Emergency Window Access
 - i). Seats shall not obstruct emergency windows and, to the extent possible, shall be arranged to optimize passenger access to window views.
- g). Standard Coach Seats CMF
 - i). Please refer to Exhibit F for further information.
 - ii). All colors, cushions, fabrics, and appearance shall be as directed by Amtrak. All revenue passenger seats shall share the same common design appearance.
 - iii). Individual components shall be interchangeable wherever possible.
 - iv). They shall have a profile that is free of sharp corners and edges.
 - v). All seat coverings shall use synthetic leather.
 - vi). Arm rests, if upholstered, shall use the same covering as the seats.
 - vii). Final construction of the cushions including sewing and fire blocking shall be subject to the approval of Amtrak.
- h). Café/Lounge Car Seats General
 - i). A modular system shall be used for seating arrangements, so Amtrak can change seat spacing, add, or delete seats in the future. This shall be accomplished without having to make any changes to the car other than moving the seats. The Contractor will submit their proposal for approval during the design review process.
 - ii). The Café/Lounge car seat is designed to work as pairs with four seats across the width of the train with the exception being the single seats in the Café/Lounge car.

- iii). Generally, the passenger fixed seats shall be arranged to face the center of the car, with a worktable provided at the center facing pair of seats. The minimum distance between the two facing seats bottom cushion faces shall be 1 ft 11 8 in in the non-reclined position.
- iv). All passenger revenue seating locations in all car types shall use a fixed (non-rotating) reclining passenger seat. The predominant revenue seating arrangement shall be a central aisle with a 2 plus 2 seating configuration with a minimum seat pitch 36 inches.
- v). A double coach or business class seat shall provide enough width that two seated, co-located 95th percentile males will not contact elbows or shoulders when seated centered in the seat in a relaxed position. (SCR-134)
- vi). Amtrak currently utilizes a 20" wide cushion with a 2" gap between.
- vii). All seats must have a movable armrest. Seat design and arm rest size must provide equivalent or improved customer space, to be approved during design review.
- viii). Braille and raised characters shall be posted at the seat's headrest edge.
- ix). A single seat type may be required in smaller numbers to accommodate transfer seats, maximize capacity and fulfil requirements around accessible paths in the accessible coach car.
- x). Contractor is responsible for meeting all technical requirements for all seat types, including any potential single seat designs.
- xi). All seat types are expected to be included in the mockups.
- xii). Please refer to Chapter 1 for information regarding quantity of this accommodation type desired.
- xiii). Additional specifics regarding seats, seat pitch, seat fabrics and other details shall be discussed during Design Review. The seat attachment angle to the car floor shall optimize passenger knee room
- i). Café/Lounge Car Seats Material
 - i). Amtrak expects the following items to have a FST compliant vinyl surface unless otherwise approved during design review process:
 - (1) calf rest,
 - (2) seat pan,
 - (3) seat cushion,
 - (4) head rest,
 - (5) arm rests

- ii). Amtrak expects the following items to have a metal brushed finish unless otherwise approved during design review process:
 - (1) control buttons,
 - (2) hand grabs,
 - (3) reading light,
 - (4) structure,
 - (5) pedestal
- j). Café/Lounge Car Seats Attachment
 - i). Passenger revenue seats must meet the performance requirements as defined in APTA Standard PR-CS-S-016-99, Standard for Passenger Seats in Passenger Rail Cars.
 - ii). This APTA Standard shall also be used as a design guideline.
 - iii). Seats shall be designed to provide maximum passenger comfort and safety.
 - iv). The seats shall be mounted in standard adjustable seat-mounting track allowing for pedestal or pedestal wall mounting.
 - v). Mounting slots shall be included on the underside of the seat frame allowing for lateral adjustability so that the aisleway centerline and dimensions are consistent throughout the car with no misalignment or staggering.
 - vi). The seat attachment angle to the car floor shall optimize passenger knee room.
 - vii). HPPL signage shall be located either on the seat pedestal or seat frame.
 - viii). See Chapter 13 for additional details. HPPL shall not be placed on the floor to the best extent possible.
 - ix). Approved tamper-resistant means of connections to a subfloor cable duct for electrical supply and future audio/visual data lines shall be provided.
 - (1) These connections shall provide for ease of future changes in seat spacing.
 - x). Revenue seats shall be mounted in seat tracks on the floor and/or wall in all car types.
 - xi). Seat tracks shall be installed with Amtrak approval for all processes and drawings.
 - xii). Between seats, the wall and floor seat tracks shall be covered with a trim suitable for the application and as flush to the floor or wall panel as practical.

- (1) Alternative floor and wall seat track installation locations shall be allowed as approved by the Customer.
- xiii). Seats shall be mounted to the seat tracks in accordance with the strength and crashworthiness requirements of 49 CFR Section 238.233 (a) and APTA standard PR-CS-S-016-99.
- k). Café/Lounge Car Seats Key Features
 - i). A comprehensive list of expected features in this type of coach seat is provided in Figure 11-6 and detailed below.
 - ii). In addition to these requirements, the Contractor shall factor in safety, crashworthiness, materials and workmanship, FDA cleaning clearances, radii, and sanitary design.
 - iii). All mechanisms described below should be durable, free from jamming, and racking.
 - iv). The design should meet abuse load and crash criteria.
 - v). Dimensions, position, and usability will be subject to Amtrak approval during the mockup review.

Figure 11-7: Key Features – Café/Lounge Coach Seats

Feature	Short Description	Qty
Hand Grab	49 CFR 38.115 compliant handrails	1
Reading Light	White light with adjustable lens and toggle switch	1
Seat Recline Mechanism	Sliding mechanism that attaches seat back to seat pan for recline	1
Seat Controls	Manual buttons that adjust seat configuration features	1
Folding Armrests	Arm rests that rotate upwards when stored	2
Flexible Net Pocket	Pocket at the base of the back of a seat for storage of a safety card	1
On Seat Power	Outlets and USB integrated into the seat	2
Central Foot Pedestal	Support structure for a seat or pair of seats	1
Fold Out Table	Table stored in the back of a seat	1
Cup Holders	Metal cup holder ring that folds flush with seatback	1
Fold Out Footrest	Footrest that is stored in the back of a seat	1

- vi). Seat Dimensions
 - (1) The following seat dimensions should be used as the basis for designing the seat.

- (2) Note that seat dimensions are subject to Amtrak approval during the design review and mock up review processes.

- (a) Seat width- at least 20"

vii). Hand Grab

- (1) Every aisle seat should have a compliant accessible grab for better access along the aisle.
- (2) Grab bar positioning will be subject to mockup testing and Amtrak approval.
- (3) Grab bar shall meet the requirements in 49 CFR 38.115.

viii). Reading Light

- (1) Seats should include a reading light that is positioned so as not to disturb neighbor during nighttime hours.
- (2) Passengers should be able to adjust the lighting angle to cast light over the shoulder and into the lap or at a position suitable to read a book at night.
- (3) Light intensity should have three settings.

ix). Seat Recline Mechanism

- (1) Seat recline mechanism should allow the seat pan to slide forwards so as not to burden the full recline onto the passenger behind in addition to reclining the seat back.
- (2) It should be easy to use by people of all abilities and shall not require more than 3 lbf to adjust or operate.
- (3) The mechanism should be durable and rattle free. It should be free from finger traps.

x). Seat Controls

- (1) Seat controls for recline and leg rest should be located within easy reach of a customer – for example, on the inner side of the outside armrests.
- (2) It should be possible to control the seat back recline and the calf rest independently.
- (3) The seat controls should be intuitive, easy to use by people of all abilities, and shall require 3 lbf or less to operate.

xi). Folding Armrests

- (1) 2" wide armrest shall include a soft wrap around the top for comfort and a hard-wearing bottom wrap and side cap for durability.
- (2) Armrests should be included on both sides of the seat and in between a seat pair.
- (3) Armrest should fold flush or sub flush to the front surface of the seat back.

xii). Flexible Net Pocket

- (1) A storage pocket should be provided on the back of the seat.
- (2) A semi-rigid frame with a net suitable for passengers to stow personal items or for Amtrak literature.
- (3) The net should be durable and allow a clear view of the items placed inside to aid quick and easy cleaning routines.
- (4) The design should allow for this element to be quickly and easily replaced on the train.

xiii). On-Seat Power

- (1) Two USB-C ports should be provided on the back of each of the seats.
- (2) Two duplex plug sockets should be located on the seat pedestal. Sockets should be shielded from spills from the table or cup holder.

xiv). Central Foot Pedestal

- (1) A central seat pedestal should be positioned to maximize foot clearance.
- (2) Interface with the floor should allow easy cleaning.

xv). Fold Out Table

- (1) A fold out table should be provided on each seat back. The fold out tray table in all positions shall be operable with one hand using 5lbf or less.
- (2) The table shall have an independent pivot point so that its resting position will not be impacted by the recline of the seat in front.
- (3) The latch design should prevent accidental activation, and the table should be free from rattle when either stored or fully deployed.
- (4) The table should be able to extend forwards telescopically.
- (5) The usable surface should allow people to use a 15" laptop – even when the seat in front of the passenger is fully reclined.

- (6) The mechanism should be durable and rattle free.
- (7) It should not extend accidentally.
- (8) When the table is deployed it shall be able to support a 50 lbf point load on the end of the table without damage.

xvi). Cup Holders

- (1) A metal cup holder should be positioned on the back of the seat.
- (2) Cup holders should be placed in positions outside of knee and leg clearance and free from the movement of the seat.
- (3) The cupholder should be an open clasp design capable of storing and securing cups of various diameters.
- (4) It should be designed to prevent passing passengers getting snagged.

xvii). Fold out Footrest

- (1) A fold out adjustable footrest should be provided.
- (2) There should be three set positions and the footrest should have a degree of angle adjustment.
- (3) The size and positions should be defined by a detailed human factors study.

l). Café/Lounge Car Seats Functional Elements

i). Seat Recline of 20 degrees

- (1) Recline features
 - (a) When seats are fully reclined there shall be at least 7" of knee clearance for a 95th percentile male between the back of the seat in front of the passenger and his knees.
 - (b) The recline features shall be operated manually:
 - (i) The seatback shall recline
 - (ii) The seatpan shall slide forward
 - (iii) The footrest shall be able to be folded out

m). Café/Lounge Car Seats Emergency Window Access

- i). Seats shall not obstruct emergency windows and, to the extent possible, shall be arranged to optimize passenger access to window views.

n). Café/Lounge Car Seats CMF

- i). Please refer to Exhibit F for further information.
- ii). All seat coverings shall use synthetic leather. Arm rests, if upholstered, shall use the same covering as the seats.
- iii). All colors, cushions, fabrics and appearance shall be as directed by Amtrak. All revenue passenger seats shall share the same common design appearance. Individual components shall be interchangeable wherever possible.

11.32 Accessible Seating Spaces for Wheeled Mobility Users

- a). Passengers who wish to transfer from wheeled mobility device
 - i). Designated transfer seat positions shall be reserved for passengers who wish to transfer from their wheeled mobility devices into a standard coach seat.
 - ii). Each transfer seat shall be of identical design and appearance to the other passenger seats.
- b). Passengers who wish to remain in wheeled mobility device
 - i). Designated spaces shall be reserved for passengers who wish to remain in their wheeled mobility device.
 - ii). Each designated space shall include the features described for a seated standard coach passenger. This includes the following features:
 - (1) Reading Light
 - (a) Seating spaces should include a reading light that is positioned so as not to disturb neighbor during nighttime hours.
 - (b) Passengers should be able to adjust the lighting angle to cast light over the shoulder and into the lap or at a position suitable to read a book at night.
 - (c) Light intensity should have three settings.
 - (2) Flexible Net Pocket
 - (a) A storage pocket should be provided adjacent to the seating space.
 - (b) A semi-rigid frame with a net suitable for passengers to store personal items or for Amtrak literature.
 - (c) The net should be durable and allow a clear view of the items placed inside to aid quick and easy cleaning routines.
 - (d) The design should allow for this element to be quickly and easily replaced on the train.

(3) Seat Power

- (a) Two USB ports should be provided adjacent to each of the seats.
- (b) Two duplex plug sockets should be accessible by a seated passenger. Sockets should be shielded from spills from the table or cup holder.

(4) Cup Holders

- (a) A fold out metal cup holder at each seating space should be deployed and positioned within easy reach of the passenger.
- (b) Cup holders should store in a position free from the movement of the seat and outside of knee and leg room.
- (c) The cupholder should be capable of storing and securing cups of various diameters.
- (d) It should be designed to prevent passing passengers getting snagged.

(5) Device Holder

- (a) A fold out ledge with clip should allow the secure mounting of passengers' personal devices.
- (b) The clip should be sprung and adjustable so different sizes can be securely kept in place including a typical tablet and/or a smart phone.
- (c) The angle should be set so it is usable in both recline and upright positions.
- (d) The latch should be designed in such a way to prevent accidental activation.

(6) Adjustable Workstation Table

- (a) ADA compliant and adjustable height workstation table shall be provided for all wheeled mobility spaces.
- c). For accessible seating in café/lounge seating areas, a café/lounge seat shall face a small fixed table with an RVAAC accessible space reserved on the other side of the table.

11.33 Workstation tables

- a). Workstation tables shall be provided for each location where a passenger can ride while staying in their wheeled mobility device, at every seating location in the Café/Lounge car.
- b). Workstation tables shall be adjustable in height from 27" to 32" from the floor at all

accessible seating locations.

- c). Energy absorption features shall be built into the tables and/or its attachments such that human injury criteria for the 50th percentile HIII male ATDs are not exceeded during dynamic sled testing, per the requirements specified in APTA Standard PR-CS-S-018-13, Section 5.2.1, modified for testing with a workstation table installed.
- d). The table must meet the performance requirements specified in Section 5.2.1.3 of APTA Standard PR-CS-S-018-13.
- e). The table must not become detached from its mountings and the ATDs must remain compartmentalized between the table and the launch seat.
- f). Workstation tables shall be attached to the carbody via the wall seat track and to the floor seat track.
- g). Workstation tables shall support a 50lbf point load at the edge of the table without damage. The tabletop shall have a high-pressure laminate top surface and smooth edge that is free of sharp edges and burrs.
- h). The top shall have a raised perimeter to retain spilled liquids.
- i). Workstation tabletop dimensions shall have a width that approximately matches the width of the seat assemblies.
- j). All workstation tables shall have a safety card holder installed for ease of access for passengers.

Part VII: Restrooms

11.34 Restrooms – General

a). General

- i). Restrooms shall comply with water and waste system equipment requirements detailed in Chapter 15.
- ii). The highest levels of winterization protection in the design of the toilet room shall be provided.
- iii). Accessibility requirements for labeling in the restroom from Chapter 26 shall be followed. Please also reference signage from Section 11.6.
- iv). All parts of the toilet room and associated water and waste piping shall have complete maintenance access provided to all components.
- v). All toilet room fixtures, dispensers and appliances shall be constructed in accordance with the requirements of the US Public Health Service and 21 CFR Part 1250 requirements and ATR shall meet the ADA requirements of 49 CFR Part 38.123.
- vi). Complete details of the toilet room, including maintainability analysis and winterization details, shall be presented for Amtrak approval during design review, and they shall be included in the interior mock-ups.

b). Floor Pan

- i). The floor pan of the toilet room modules shall be FRP with 1.5 in. minimum radii corners to eliminate the accumulation of debris and aid in cleaning.
 - (1) A stainless-steel overflow pan shall be provided under the toilet and water connections.
 - (2) A waterproof rubber flooring covering which reduces noise and resists accumulation of odors shall be provided.
 - (3) The purpose is to prevent fluids from wicking beneath the toilet room flooring, both for hygiene and to prevent degradation of the subflooring materials.
 - (4) This pan shall be watertight and have raised edges of at least 4 in. in height. The pan's exposed edges shall be folded for safety and to provide stiffness.
 - (5) The floor pan shall be installed over the subfloor of the car, and the perimeter of the pan shall be fully sealed to prevent moisture from seeping under the pan.

- (6) Attachment points to secure the floor pan to the subfloor shall be in the sides, rather than the bottom surface, and be watertight. The floor pan joint at the door opening shall be waterproof to the subfloor.
 - (7) Floor penetrations shall be avoided, when possible, but where required, sealed to make the joint waterproof and with an appropriate material to prevent flame propagation from underfloor flame sources.
- c). Floor Covering
 - i). A seam-free, skid-resistant rubber floor covering, solid surface material, or approved coating shall be used in the toilet room floor area.
 - ii). Color and pattern selection shall be approved by Amtrak.
 - (1) The floor covering shall be coved a minimum 4 in. up the sidewalls to form the inside scuff/kick plate.
 - (2) The edges shall be sealed to form a watertight seal.
- d). Drainage
 - i). A provision shall be provided for a floor drain in the toilet room pan that shall be reviewed with Amtrak during Design Review.
 - (1) The floor shall be properly sloped toward the drain, preferably located near the toilet and an intumescent device shall be utilized to seal the drain in case of a fire, or alternate approved design.
- e). Attachment Strength of Fittings
 - (1) The fittings in toilet rooms shall meet the attachment strength requirements defined in 49 CFR Part 238.233.
- f). CMF
 - i). Please refer to Exhibit F for further information.
 - ii). Wall Panels
 - (1) Sidewall Panels along the carshell wall shall be made from molded thermoplastic or thermoset material with an easy to clean surface finish.
 - (2) Partition Walls shall be created from a composite structure such as aluminum honeycomb or HPL skinned honeycomb panels.
 - (3) The finish of the wall and material of the outside skin shall meet all structural requirements for crashworthiness based on mounting and attached loads to the panel.
 - iii). Ceiling

- (1) Ceiling shall be created from a composite structure such as aluminum honeycomb or HPL skinned honeycomb panels.
 - (2) The finish of the passenger facing side of the ceiling panel and material of the outside skin shall meet all structural requirements for crashworthiness based on mounting and attached loads to the panel.
 - (3) The finish of the material on the non-passenger facing side shall be coated such that there is no risk of corrosion from moisture from steam or humidity within the car.
- iv). Flooring
- (1) Flooring within the restroom area shall be made from rubber flooring with a friction, no-slip texture.
 - (2) Flooring will be durable to withstand spills, leaks, and all methods of cleaning. Flooring shall also not become frequently damaged or worn.
 - (3) Flooring shall have enough give to prevent fatigue from standing.

11.35 Standard Toilet Room (STR)

a). General

- i). The STR shall have the ability to be used in two orientations.
- ii). A modular design that allows different door positions should provide flexibility for the layout of the interior architecture.
- iii). The orientation should always prioritize seats and passenger accommodation numbers where possible, while providing options for better aisle access in other instances.
- iv). To the extent possible equipment, parts, and features in the STR shall be identical to equipment, parts, and features in the ATR.
- v). The intent of this clause is to minimize spares and maintenance techniques.

b). Key Features

- i). A comprehensive list of expected features in the Standard Toilet room is provided in Figure 11-8 and described in detail below.
- ii). Detailed functional requirements for each feature is listed below. In addition to these requirements, the Contractor shall factor in safety, crashworthiness, materials and workmanship, FDA cleaning clearances, radii, and sanitary design.

Figure 11-8: Key Features - Standard Toilet Room

Feature	Short Description	Qty
Restroom Door	Sliding door for entrance into STR	1
Toilet	Assembly including toilet bowl, shroud, and overflow pan	1
Toilet Seat	Assembly including lid and seat for toilet	1
Toilet Flush	Push button flush and automatic flush mechanisms	1
Toilet Paper Dispenser	Protective location for dispensing toilet paper	1
Toilet Seat Cover Dispenser	Protective location for dispensing seat covers	1
Sanitary Waste	Storage location for used feminine hygiene products	1
Sharps Bin	Storage location for used needles and other medical waste	1
Sink	Solid surface sink counter and basin	1
Hand Dryer	Automatic hand dryer and paper towel dispenser	1
Vanity Mirror	Mirror for passenger to look while washing hands	1
Trash	Storage for restroom related trash	1
Grab Handles	49 CFR 38.115 compliant handrails	1
Baby Changing Table	Fold out table for infant diaper care	1
Crew Storage	Locker with square key for dedicated crew storage	1
Coat Hooks	Coat hooks that hold up to 25lbs	2
PEI- Intercom only	Speaker for emergency conversations	1
Emergency Call Button	Buttons in accessible locations that activate PEI	2
Exhaust	Adjustable exhaust grille	1

iii). Restroom Door

- (1) The door should be sealed to prevent leaking water escaping into the internal space of the car.
- (2) The door should lock from the inside, with an indicator on the outside showing the door lock status.

- (3) The clear width door opening shall be a minimum of 24".
- (4) The door shall be of lightweight construction, consistent with durability and be secured with stainless-steel hinges.
- (5) The door shall be free from resonance and rattles when in the closed position when the train is in motion at any permissible speed.
- (6) The door frame and attachment of the keeper shall be sufficiently rigid so that it does not flex when the door closes, even if it is slammed; the intention is that this interface does not deteriorate over the life of the car.
- (7) Likewise, interior door construction shall incorporate interior stiffening in the area where the lock/ latch is attached to the door, so that the fasteners securing it to the leaf have a solid surface on which to clamp.
- (8) The door latch, with a handle on both sides of the door, shall engage automatically when the door moves towards a closed position, but the lock requires definite action to engage.
- (9) The door shall remain in the fully closed position at any permissible train speed.
- (10) The lock shall be operable, in an emergency, from the outside with a standard Amtrak coach key.
- (11) An instruction, in accordance with Amtrak Specification # 697, located on the interior side of the door, shall provide lock operating instructions.

iv). Toilet

- (1) An elongated toilet, complete with toilet bowl assembly, shroud, and overflow pan shall be provided in the restroom.
- (2) Toilet Bowl Assembly
 - (a) A toilet stand with shroud assembly shall be located in the toilet room. Each restroom shall be equipped with a toilet bowl assembly, encased in the toilet shroud.
- (3) Toilet Shroud
 - (a) The shape of the toilet shroud housing shall locate the toilet seat ergonomically for ease of use and comfort.
 - (b) Sufficient foot room shall be provided.
 - (c) When seated, the user's legs shall not contact the shroud.

- (d) The toilet shroud shall be constructed of FRP with gel coat color to match the restroom shell or of stainless steel, with brushed finish or approved alternate.
- (4) Toilet Overflow Pan
 - (a) The toilet bowl assembly shall be mounted on a stainless-steel overflow pan, which shall contain flooding should the toilet outlet become blocked or system leak.
 - (b) The overflow pan shall be watertight with raised edges of ~2 inches height, have the attachment points exterior to the pan, have all exposed edges folded for safety and to provide stiffness, and be equipped with an overflow tube.
- v). Toilet Seat
 - (1) A standard toilet seat and toilet lid shall be provided.
 - (2) Toilet seat and seat lid should have soft close mechanisms.
 - (3) A white toilet seat with lid, meeting Amtrak Specification # 352, shall be provided.
 - (4) The toilet seat and cover shall be constructed of reinforced fiberglass or approved alternate.
 - (5) The lid and seat shall be stable in the up position regardless of train motion, including braking, to prevent it from slamming down suddenly against the shroud.
- vi). Toilet Flush Mechanism
 - (1) A two-button push flush shall be located on the back wall of the restroom above the toilet.
 - (2) This shall provide standard and eco flush features for the passenger.
 - (3) The flush mechanism shall also incorporate an automatic flushing feature when the passenger is done using the toilet.
- vii). Toilet Paper Dispenser
 - (1) A toilet paper dispenser shall be provided adjacent to the toilet.
 - (2) This dispenser shall protect the toilet paper from getting wet.
- viii). Toilet Seat Cover Dispenser
 - (1) A dispenser for paper toilet seat covers should be located by the toilet.

ix). Sanitary Waste Disposal

- (1) A sanitary waste bin shall be provided to the right of the toilet complete with modesty flap. The minimum volume for this bin shall be 7 gallons.

x). Sharps Bin

- (1) Provision for a sharps bin should be provided within the room.
- (2) The size, position, and method of removal of sharps should be agreed and instructed by Amtrak.

xi). Sink

(1) General

- (a) A solid surface sink with hot and cold water faucet shall be provided for passengers.
- (b) The sink countertop shall be made from solid surface material and shall include a marine edge, 6" backsplash, and $\frac{3}{4}$ " radius for cleanability.
- (c) Note that all sink countertops shall be sloped toward the basin and drain.

(2) Sink Basin

- (a) The sink basin shall have minimum internal dimensions of 18" width x 10" length x 5" depth.
- (b) The sink shall have a 1/2 to 1 gallon capacity and be equipped with an overflow.
- (c) The sink shall be drained through a nominal 1-1/4" diameter drain.

(3) Faucet

- (a) The faucet shall be mounted behind the sink.
- (b) The faucet shall use IR sensor to control water dispensing.
- (c) Water flow from the faucet shall be aligned directly over the drain to not splash the user and/or countertop.
- (d) Faucet shall be hardwired for power with a battery backup.

(4) Soap Dispenser

- (a) An automatic liquid soap dispenser which will accept a Celeste Industries liquid soap refill shall be installed and shall be located adjacent to the mirror.

- (b) Power for the soap dispenser shall be hardwired with a battery backup.
- (5) 120V Outlet
 - (a) A duplex 120VAC GFCI receptacle shall be located on a panel adjacent the sink, preferably located to keep it dry from splashes from the sink.
- xii). Hand Dryer
 - (1) A high velocity motion-activated hand dryer and a paper towel holder shall be mounted on the wall of near the sink in an easily accessible location.
- xiii). Vanity Mirror
 - (1) A large 41.5" x 23" mirror shall be positioned in front of the sink. The mirror can be split into two sections as necessary.
- xiv). Trash
 - (1) A trash bin shall be provided under the sink with push flap cover.
 - (2) The minimum volume of trash for this receptacle shall be 2 cu ft.
 - (3) The trash flap for this receptacle shall be a minimum of 10" x 10".
- xv). Grab Handles
 - (1) Stainless-steel grab bars shall be provided on one side of the restroom to allow passengers to steady themselves against train motion.
 - (2) Bars shall be directly secured to car secondary structure or module structure.
 - (3) These bars shall be anti-slip grab bars in accordance with Subpart F of 49 CFR Part 38.123 (a) (3) shall be provided for passengers to utilize while using the facility.
- xvi). Baby Changing Table
 - (1) A baby changing table should be provided.
 - (2) The changing table should be easy to deploy and stow with an intuitive handle. The table shall include a strap to ensure passengers with limited reach can operate the table.
 - (3) The mechanism should be durable, free from jamming and racking.
 - (4) The design should meet abuse loads.
 - (5) It should have a soft opening mechanism.

xvii). Crew Storage

- (1) A crew storage cabinet shall be provided at high elevations in the restroom for storage of restroom and cleaning supplies.

xviii). Coat Hooks

- (1) Two coat hooks shall be provided on the partition wall. Coat hooks shall be capable of supporting up to 25lbs each.

xix). Emergency Call Button

- (1) Two waterproof Emergency Call Buttons shall interface with the Passenger Emergency Intercom (PEI) in the toilet room.
- (2) The Emergency Call Buttons are providing better access for passengers if they are not able to reach the PEI unit.
 - (a) The Emergency Call buttons shall have illuminated and audible indications when actuated.
 - (b) One Emergency Call button shall be located within easy reach while seated on the toilet and not easily confused with the flush button or other controls.
 - (c) A second button located within 12 inches from the floor or otherwise reachable for someone who has fallen.
 - (d) Placement of the buttons is subject to approval during design review.
- (3) The PEI in the toilet room shall interface with the Emergency Call Buttons.
 - (a) The PEI and Emergency Call button arrangement, including the interfaces used between them, must maintain the same safety level and a standalone PEI.
 - (b) The PEI and Emergency Call Buttons must remain functional under any toilet module degraded mode condition.
 - (c) See Chapter 14 for additional details.

xx). Exhaust

- (1) An exhaust grille shall be provided in the ceiling.
- (2) Negative pressure in the restroom shall be provided by the HVAC system.

c). Additional Equipment Requirements

i). HVAC

- (1) Supply Air Diffusers
 - (a) Conditioned air is delivered to the room via 2 supply air diffusers.
- (2) Exhaust Grille
 - (a) Exhaust air is removed from the room via the exhaust air grille.
- ii). Outlet
 - (1) Outlet to be provided within crew storage cabinet for maintenance and cleaning access.
- iii). Lighting
 - (1) General
 - (a) Lighting general information is shared in the points below.
 - (b) Detailed lighting information can be found in Chapter 13.
 - (c) All lighting part numbers, manufacturers, and temperatures shall be proposed by the Contractor and approved at Amtrak after the lighting simulation during the design review process.
 - (d) All lighting shall be dimmable, with a fixed color temperature to be determined during design review and mockups.
 - (i) Color temperature shall be determined per light fixture and may not be the same temperature for all fixtures within the compartment.
 - (2) Lighting Types and Locations
 - (a) Main Ceiling Light (White Light)
 - (i) A large rectangular LED panel in the ceiling provides the main source of light for the room.
 - (b) Compartment Light
 - (i) Floor Lights
 - 1. Lights shall be provided as indirect lighting that spills out across the floor under the sink counter.
 - (ii) Sink Lights
 - 1. A wash light should be used to light the sink area indirectly.
 - 2. This light shall only be activated when the door to the restroom is locked.

(iii) Mirror Light

1. A LED light shall illuminate the mirror around the boarder.
2. This light shall only be activated when the door to the restroom is locked.

iv). Communications

(1) Speaker

- (a) PA speaker shall be located on the central ceiling panel.
 - (b) The speaker used in this location shall be identical to PA speakers used in other locations in the car for ease of maintenance and replacement.
- (2) All communications equipment shall meet the requirements in Chapter 14.

v). Emergency Equipment

(1) Smoke Detector

- (a) Smoke Detectors shall be mounted on the central ceiling panel.
- (b) The smoke detector used in this location shall be identical to the smoke detectors used in other locations in the car for ease of maintenance and replacement.

vi). Security

- (1) Many items within the restroom area will need to be secured.
- (2) The following items are identified with specific locking preferences:
 - (a) Restroom Door Locking Mechanism
- (3) Any other locking or security items will be discussed with Amtrak during design reviews.

11.36 Accessible Toilet Room (ATR)

a). General

- i). All features shall be reached by a person sitting in a wheeled mobility device unless otherwise listed in this section.
- ii). Dimensions and anthropomorphic data shall be taken from the Americans with Disabilities Act.
- iii). Additionally, the ATR shall conform with 49 CFR 38.123.

- iv). To the extent possible equipment, parts, and features in the ATR shall be identical to equipment, parts, and features in the STR.
 - v). The intent of this clause is to minimize spares and maintenance techniques.
- b). Key Features
 - i). A comprehensive list of expected features in Accessible Toilet Rooms is provided in Figure 11-9 and described in detail below.
 - ii). In addition to these requirements, the Contractor shall factor in safety, crashworthiness, materials and workmanship, FDA cleaning clearances, radii, and sanitary design.

Figure 11-9: Key Features - Accessible Toilet Room

Feature	Short Description	Qty
Restroom Door	Curved and automatic door for ATR	1
Toilet	Assembly including toilet bowl, shroud, and overflow pan	1
Toilet Seat	Assembly including lid and seat for toilet	1
Toilet Flush	Push button flush and automatic flush mechanisms	1
Toilet Paper Dispenser	Protective location for dispensing toilet paper	1
Toilet Seat Cover Dispenser	Protective location for dispensing seat covers	1
Sanitary Waste	Storage location for used feminine hygiene products	1
Sharps Bin	Storage location for used needles and other medical waste	1
Sink	Solid surface sink counter and basin	1
Hand Dryer	Automatic hand dryer and paper towel dispenser	1
Vanity Mirror	Mirror for passenger to look while washing hands	1
Trash	Storage for restroom related trash	1
Grab Handles	49 CFR 38.115 compliant handrails	1
Baby Changing Table	Fold out table for infant diaper care	1
Crew Storage	Locker with square key for dedicated crew storage	1
Coat Hooks	Coat hooks that hold up to 25lbs	2
PEI – Intercom only	Speaker for emergency conversations	1
Emergency Call Button	Buttons in accessible locations that activate PEI	2
Exhaust	Adjustable exhaust grille	1

iii). Restroom Door

- (1) The door should be a curved automatic sliding door.
- (2) The door should be sealed to prevent water escaping into the internal space of the car.
- (3) The door should lock from the inside, with an indicator on the outside showing the door lock status.
- (4) The restroom door shall also be able to operate in a manual mode in the event of power loss or malfunction so that the restroom is not put out of service due to door operation failure.

- (5) The clear width door opening shall be a minimum of 44".
- (6) The door shall be of lightweight construction.
- (7) The door shall be free from resonance and rattles when in the closed position when the train is in motion at any permissible speed.
- (8) The door frame and attachment of the keeper shall be sufficiently rigid so that it does not flex when the door closes.
- (9) The intention is that this interface does not deteriorate over the life of the car.
- (10) Likewise, interior door construction shall incorporate interior stiffening in the area where the lock/ latch is attached to the door, so that the fasteners securing it to the leaf have a solid surface on which to clamp.
- (11) The door latch, with a handle on both sides of the door, shall engage automatically when the door moves towards a closed position, but the lock requires definite action to engage.
- (12) The door shall remain in the fully closed position at any permissible train speed.
- (13) The lock shall be operable, in an emergency, from the outside with a standard Amtrak coach key.
- (14) An instruction, in accordance with Amtrak Specification # 697, located on the interior side of the door, shall provide lock operating instructions.

iv). Toilet

- (1) General
 - (a) An elongated toilet, complete with toilet bowl assembly, shroud, and overflow pan shall be provided in the restroom.
- (2) Toilet Bowl Assembly
 - (a) A toilet stand with shroud assembly shall be located in the toilet room. Each restroom shall be equipped with a toilet bowl assembly, encased in the toilet shroud.
- (3) Toilet Shroud
 - (a) The shape of the toilet shroud housing shall locate the toilet seat ergonomically for ease of use and comfort.
 - (b) Sufficient foot room shall be provided.
 - (c) When seated, the user's legs shall not contact the shroud.

- (d) The form of the toilet should be floating or undercut at the bottom to maximize wheeled mobility device clearance.
 - (e) The toilet shroud shall be constructed of FRP with gel coat color to match the restroom shell or of stainless steel, with brushed finish or approved alternate.
 - (4) Toilet Overflow Pan
 - (a) The construction of the toilet in this room prevents a separate toilet overflow pan.
 - (b) Therefore, the entire ATR will be treated as an overflow pan in terms of preventative measures for water damage.
 - (c) The floor pan features described above are critical in this module.
- v). Toilet Seat
 - (1) A standard toilet seat and toilet lid shall be provided. Toilet seat and seat lid should have soft close mechanisms.
 - (2) A white toilet seat with lid, meeting Amtrak Specification # 352, shall be provided.
 - (3) The toilet seat and cover shall be constructed of reinforced fiberglass or approved alternate.
 - (4) The lid and seat shall be stable in the up position regardless of train motion, including braking, to prevent it from slamming down suddenly against the shroud.
- vi). Toilet Flush Mechanism
 - (1) A two-button push flush shall be located on the back wall of the restroom above the toilet.
 - (2) This shall provide standard and eco flush features for the passenger.
 - (3) The toilet flush buttons shall be mounted no more than 44" from the floor.
 - (4) The flush mechanism shall also incorporate an automatic flushing feature when the passenger is done using the toilet.
- vii). Toilet Paper Dispenser
 - (1) A toilet paper dispenser shall be provided adjacent to the toilet. This dispenser shall protect the toilet paper from getting wet.
- viii). Toilet Seat Cover Dispenser

- (1) A dispenser for paper toilet seat covers should be located by the toilet.
- ix). Sanitary Waste Disposal
 - (1) A sanitary waste bin shall be provided to the right of the toilet complete with modesty flap.
 - (2) The minimum volume for this bin shall be 0.25 cu ft.
- x). Sharps Bin
 - (1) Provision for a sharps bin should be provided within the restroom.
 - (2) The size, position, and method of removal of sharps should be agreed and instructed by Amtrak.
- xi). Sink
 - (1) General
 - (a) A solid surface sink with hot and cold water faucet shall be provided for passengers.
 - (b) The sink countertop shall be made from solid surface material and shall include a marine edge, 6" backsplash, and $\frac{3}{4}$ " radius for cleanability.
 - (c) The sink countertop shall be approximately 32" from the floor and no more than 34" from the floor.
 - (d) Note that all sink countertops shall be sloped toward the basin and drain.
 - (2) Sink Basin
 - (a) The sink basin shall have minimum internal dimensions of 11" width x 16" length x 5" depth.
 - (b) The sink shall have a 1/2 to 1 gallon capacity and be equipped with an overflow.
 - (c) The sink shall be drained through a nominal 1-1/4" diameter drain.
 - (3) Faucet
 - (a) The faucet shall be mounted behind the sink. The faucet shall use IR sensor to control water dispensing. Water flow shall be aligned directly over the drain and shall be directed into the sink and not splash the user.
 - (4) Soap Dispenser

- (a) An automatic liquid soap dispenser which will accept a Celeste Industries liquid soap refill shall be installed and shall be located adjacent to the mirror.
 - (b) Power for the soap dispenser shall be hardwired with a battery backup.
- (5) 120V Outlet
 - (a) A duplex 120VAC GFCI receptacle shall be located on a panel adjacent the sink, preferably located to keep it dry from splashes from the sink.
- xii). Hand Dryer
 - (1) A high velocity motion-activated hand dryer and a paper towel holder shall be mounted on the wall of near the sink in an easily accessible location.
- xiii). Vanity Mirror
 - (1) A large mirror shall be positioned in front of the sink at an angle that allows both standing and sitting passengers to use adequately.
- xiv). Trash
 - (1) A trash bin shall be provided under the sink with push flap cover.
 - (2) The minimum volume of trash for this receptacle shall be 2.25 cu ft.
 - (3) The trash flap for this receptacle shall be a minimum of 10" x 10".
- xv). Grab Handles
 - (1) Stainless-steel grab bars shall be provided on one side of the restroom to allow passengers to steady themselves against train motion.
 - (2) Bars shall be directly secured to car secondary structure or module structure.
 - (3) These bars shall be anti-slip grab bars in accordance with Subpart F of 49 CFR Part 38.123 (a) (3) shall be provided for passengers to utilize while using the facility.
- xvi). Baby Changing Table
 - (1) A baby changing table should be provided.
 - (2) The changing table should be easy to deploy and stow with an intuitive handle. The table shall include a strap to ensure passengers with limited reach can operate the table.
 - (3) The mechanism should be durable, free from jamming and racking.

- (4) The design should meet abuse loads.
- (5) It should have a soft opening mechanism.

xvii). Crew Storage

- (1) A crew storage cabinet shall be provided at high elevations in the restroom for storage of restroom and cleaning supplies.

xviii). Coat Hooks

- (1) Two coat hooks shall be provided on the partition wall.
- (2) Coat hooks shall be capable of supporting up to 25lbs each.
- (3) These hooks are identical to the towel hooks provided in the sleeper cabin.
- (4) Hooks shall be positioned in accessible reach locations.

xix). Emergency Call Button

- (1) Two waterproof Emergency Call Buttons shall interface with the Passenger Emergency Intercom (PEI) in the toilet room.
- (2) The Emergency Call Buttons are providing better access for passengers if they are not able to reach the PEI unit.
 - (a) The Emergency Call buttons shall have illuminated and audible indications when actuated.
 - (b) One Emergency Call button shall be located within easy reach while seated on the toilet and not easily confused with the flush button or other controls
 - (c) A second button located within 12 inches from the floor or otherwise reachable for someone who has fallen.
 - (d) Placement of the buttons is subject to approval during design review.
- (3) The PEI in the toilet room shall interface with the Emergency Call Buttons.
 - (a) The PEI and Emergency Call button arrangement, including the interfaces used between them, must maintain the same safety level and a standalone PEI.
 - (b) The PEI and Emergency Call Buttons must remain functional under any toilet module degraded mode condition.
 - (c) See Chapter 14 for additional details.

xx). Exhaust

- (1) An exhaust grille shall be provided in the ceiling. Negative pressure in the restroom shall be provided by the HVAC system.

c). Accessibility Features

i). 44" Curved Toilet Door

- (1) Access to the room will be subject to review and mockup user testing. Restroom door should be an automatic sliding door.

ii). Handrail Locations

(1) Horizontal Handrails

- (a) ADA compliant horizontal handrails positioned to assist transfer through the restroom shall be provided.
- (b) The handrail should be positioned to provide maximum access and support for passengers.
 - (i) Adjacent to sink
 - (ii) On the wall behind toilet
 - (iii) Along the stationary curved wall.

(2) Vertical Handrails

- (a) ADA compliant vertical handrails positioned to assist transfer through the restroom shall be provided.
- (b) The handrail should be positioned to provide maximum access and support for passengers.
 - (i) Adjacent to the toilet
 - (ii) On the wall near the door and baby changing table.

iii). Control Buttons

(1) Room Door

- (a) The controls for the room door must be ADA compliant in position, size, and configuration.
 - (i) Door Open/Close
 - (ii) Door Lock
- (b) The buttons should be easy and intuitive to use.

- (c) An accessible manual lock should be included with an indicator to show lock condition.
 - (d) The control buttons shall be located 12" minimum from the inside corner.
 - (e) The buttons should have visual and haptic feedback. Dimensions, position, and usability will be subject to Amtrak approval during mockup review.
 - (i) Note this review will include the disability community input.
 - iv). 60" Turning Circle
 - (1) Center of room
 - (a) A clear 60" turning circle should be provided inside the room.
 - v). Accessible Space for wheeled mobility devices
 - (1) A clear accessible space of 59" x 32" shall be provided for use of the sink and associated features.
 - (2) A clear accessible space of 59" x 32" shall be provided for use of the baby changing table, side transfer to toilet, and seat covers.
- d). Additional Equipment Requirements
 - i). HVAC
 - (1) Supply air diffusers
 - (a) Conditioned air is delivered to the room via 2 supply air diffusers.
 - (2) Exhaust grille
 - (a) Exhaust air is removed from the room via the exhaust air grille.
 - ii). Outlet
 - (1) Outlet to be provided within crew storage cabinet for maintenance and cleaning access.
 - iii). Lighting
 - (1) General
 - (a) Lighting general information is shared in the points below. Detailed lighting information can be found in Chapter 13.
 - (b) Note that all lighting part numbers, manufacturers, and temperatures shall be proposed by the Contractor and approved

at Amtrak after the lighting simulation during the design review process.

- (c) All lighting shall be dimmable, with a fixed color temperature to be determined during design review and mockups.
 - (i) Color temperature shall be determined per light fixture and may not be the same temperature for all fixtures within the compartment.

(2) Lighting Types and Locations

(a) Main Ceiling Light (White Light)

- (i) A large circular LED panel in the ceiling provides the main source of light for the room.

(b) Compartment Light

(i) Floor Lights

- 1. Lights shall be provided as indirect lighting that spills out across the floor under the sink counter.

(ii) Sink Light

- 1. A wash light should be used to light the sink area indirectly.
- 2. This light shall only be activated when the door to the restroom is locked.

(iii) Mirror Light

- 1. A rounded LED light shall illuminate the mirror around the boarder.
- 2. This light shall only be activated when the door to the restroom is locked.

e). Communications

i). Speaker

- (1) PA speaker shall be located on the central ceiling panel.
- (2) The speaker used in this location shall be identical to PA speakers used in other locations in the car for ease of maintenance and replacement.
- (3) All communications equipment shall meet the requirements in Chapter 14.

- f). Emergency Equipment
 - i). Smoke Detector
 - (1) Smoke Detectors shall be mounted on the central ceiling panel.
 - (2) The smoke detector used in this location shall be identical to the smoke detectors used in other locations in the cars for ease of maintenance and replacement.
- g). Security
 - i). Many items within the restroom area will need to be secured.
 - ii). The following items are identified with specific locking preferences:
 - (1) Restroom Door Locking Mechanism
 - iii). Any other locking or security items will be discussed with Amtrak during design reviews.

11.37 Café/Lounge

- a). General
 - i). The Café/Lounge shall include all of the elements listed in this Chapter; however, the arrangement of these elements can be modified by the Contractor to best meet the design requirements for the car as a whole.
 - ii). The Contractor shall provide the optimal general arrangement to Amtrak for review and approval for the Café/Lounge car.
- b). Key Features
 - i). A comprehensive list of expected features in the Lounge is provided in Figure 11-10 and described in detail below.
 - (1) Detailed functional requirements for each feature are listed below.
 - (2) In addition to these requirements, the Contractor shall factor in safety, crashworthiness, materials and workmanship, FDA cleaning clearances, radii, and sanitary design.
 - (3) All mechanisms described below should be durable, free from jamming, and racking.
 - (4) The design should meet abuse, load, and crash criteria.
 - (5) Dimensions, position, and usability will be subject to Amtrak approval during the mockup review.
 - (6) At least one (1) drain shall be provided inside the Café area to eliminate standing water from daily operations and cleaning.

- ii). Please refer to Chapter 16 for information regarding the food service modules and appliances to be placed within the Café/Lounge.
- iii). The following features shall be incorporated into the Café/Lounge:
 - (1) Digital Menus shall be included. Please refer to Section 11.22 Digital Displays for further information on placement.
 - (2) Qty 3 shall be provided in addition to PIS screens.
 - (3) One menu display shall be located near the point of sale.
 - (4) One menu display shall be located along the aisle side of the Café/Lounge.
 - (5) One menu display shall be located perpendicular to the aisle on the wall where the service counter ends.
 - (6) Recessed Handrail
 - (7) A recessed handrail shall be incorporated into the wall for the outside of the coach café. This handrail shall meet the requirements in 49 CFR 38.115.

Figure 11-10: Key Features – Café/Lounge

Feature	Short Description	Qty
Folded Wheeled mobility device Storage	Open storage location for wheeled mobility devices	2
RVAAC Accessible Space	Location for someone using a wheeled mobility device to dine and remain using device	2
Accessible Path	32" continuous aisle through the car for ADA regulated aisle	1
60" Turning Circle	60" diameter turning circle for accessibility	3
Windows	Includes emergency egress features	Qty to be determined by Contractor
Blinds	Light filtering blind	1 per window
Side Rail	Decorative strip under windows to conceal lighting	As needed
Lower Sidewall Panel	HPL panels and Tedlar style sidewall liners	As needed
Kick Strips	9" high stainless steel strips	As needed
Handholds	Meets grab bar requirements in 49 CFR 38.115.	As needed

Window Pillars	Structural member between windows	As needed
HVAC Gondola	HVAC air path through the center of the car	1
Coach Seating (2x1) with worktables	Repeatable and modular seating.	38 seats
Conductor's Office		1
Power Outlets	Duplex outlets with USB	One per seat
Trash/Recycling Receptacles		5

- iv). Fixed worktables shall be provided for each non-accessible seat. For detailed specifications, refer to section 11.33.
- v). Coach seats shall be a 2x1 configuration with a 32" wide aisle. For detailed specifications, refer to 11.30.
- vi). Folded Wheeled Mobility Device Storage
 - (1) A storage space for one folded wheeled mobility device shall be located at each end of the Café/Lounge car for passengers wishing to transfer to another seat.
- vii). Accessible Path
 - (1) The Café/Lounge car should be fully accessible end to end.
 - (2) There should be a 32" wide accessible path from end to end in the Café/Lounge.
 - (3) Where a 90° turn is required across the car, the aisle should be 44" wide.
- viii). 60" Turning Circle
 - (1) There should be a 60" accessible turning space at each end of the Café/Lounge and at the counter POS location.
- ix). Window
 - (1) Windows shall be provided that meet the requirements of Section 11.13.
- x). Blinds
 - (1) Side window blinds shall be provided that meet the requirements of Section 11.15.

xi). Side Rails

- (1) Side rails under each window shall include a tideline.

xii). Lower Sidewall Panels

- (1) Lower side wall panels shall be provided such that the trim panel has minimized thickness to take advantage of full width of the car body.
- (2) These should be designed to have well fitted clean panels with a high tolerance build to manage split lines and cabinet edging.
- (3) There should be no protruding equipment, snag point, or dirt traps.

xiii). Kick Strips

- (1) Stainless steel kick strips at 9" high should be used in all coach areas.

xiv). Hand Grab

- (1) Where possible, a compliant accessible grab for passenger navigation shall be available.
- (2) Grab bar positioning will be subject to mockup testing and Amtrak approval. Grab bar shall meet the requirements in 49 CFR 38.115.

xv). Window Pillar

- (1) Window pillar width should be minimized.

xvi). HVAC Gondola

- (1) Lighting washes both centrally into gondola and across side ceilings shall be provided.
- (2) The gondola should terminate and transition to a separate lower ceiling section if any equipment or junction in the interior architecture prevents the gondola from completing a full uninterrupted run.
- (3) At these junctions the gondola should terminate in a straight line with architecture that creates a visual ring at the termination point.
- (4) The transition between ceiling profiles should be treated with clean and well considered intersections.
- (5) These lower ceilings should have their own lighting light wells and HVAC vents.

xvii). Outlets

- (1) Duplex outlets with two USB sockets shall be provided for each seat or seat pair in the café/lounge.

- (2) The outlets shall be located in easy reach of people while seated.

xviii). Trash Bin

- (1) Trash bins shall be provided with stainless steel push flaps.
- (2) Please refer to section 11.17 for more information on trash and recycling requirements.

xix). Conductor Office

- (1) Conductor office location shall be centrally located in the café/lounge Car.
- (2) A conductor's office modular seating area with a workstation for one and/or two person(s) enclosed with full height wall and pocket door with window shall be provided for train crew to use as office space.
- (3) The seat(s) shall be identical to the coach seat supplied for passengers unless otherwise approved by Amtrak.
- (4) A pair of duplex electrical outlets and USB ports shall be provided for the crew to use for charging of radios, cell phones and other equipment.
- (5) A PA, crew IC and OTIS control station shall be provided in accordance with the requirements of Chapter 14.
- (6) An overhead luggage bin may be included, fitted with a standard coach key lock.
- (7) The conductor office module shall be reviewed and approved by Amtrak during Design Review.

c). CMF

- i). Please refer to Chapter 19 and Exhibit F for further information.

ii). Wall Panels

- (1) Sidewall Panels along the carshell wall shall be made from molded thermoplastic with an easy to clean surface finish.
- (2) Partition Walls shall be created from a composite structure such as aluminum honeycomb or HPL skinned honeycomb panels.
- (3) The finish of the wall and material of the outside skin shall meet all structural requirements for crashworthiness based on mounting and attached loads to the panel.

iii). Ceiling

- (1) Ceiling shall be created from a composite structure such as aluminum honeycomb or HPL skinned honeycomb panels.
 - (2) The finish of the passenger facing side of the ceiling panel and material of the outside skin shall meet all structural requirements for crashworthiness based on mounting and attached loads to the panel.
 - (3) The finish of the material on the non-passenger facing side shall be coated such that there is no risk of corrosion from moisture from steam or humidity within the car.
- iv). Flooring
- (1) Flooring within the Café/Lounge area shall be anti-slip flooring as listed in Section 11.27.
 - (2) Flooring shall be durable to withstand spills, leaks, and all methods of cleaning. Flooring shall also not become frequently damaged or worn.
 - (3) Flooring shall have enough give to prevent fatigue from standing.
- v). Lighting
- (1) General
 - (a) Detailed lighting information can be found in Section 13, Lighting System.
 - (b) Note that all lighting part numbers, manufacturers, and temperatures shall be proposed by the Contractor and approved at Amtrak after the lighting simulation during the design review process.
 - (c) Ceiling lighting shall match the ceiling lighting in the coach cars.
 - (d) A digital controller shall be provided allowing for crew to adjust the brightness of the lighting in the car.
 - (2) Featured Lighting
 - (a) Strip lighting
 - (b) LED Spotlights
 - (i) Spotlights cast down light on top of the service counter.
 1. Note this is additional from the lighting required by Chapter 16 Food Service.
 - (c) Wash Light
 - (i) A wash light for the counter shall be included in the café.

Part XIII: CDRLs

11.38 CDRLs

CDRL	Description	Due
CDRL 11-01	Human Factors Study Report	30 days prior to PDR
CDRL 11-02	Pinch Point Gap Analysis	30 days prior to FDR
CDRL 11-03	Luggage and Baggage Analysis	30 days prior to PDR

* End of Chapter 11 *

Amtrak Single Level Fleet Replacement

Technical Specification

12. Door Systems

Revision 0

Table of Contents

12.1	Overview	12-2
12.2	General Requirements	12-2
12.3	Powered Side Entrance Doors	12-5
12.4	Powered Carbody End Doors and Vestibule End Door	12-19
12.5	Trap Door and Folding Step	12-28
12.6	Automatic Sliding Restroom Door	12-31
12.7	CDRLs	12-33

12.1 Overview

- a). The Amtrak Single Level Fleet shall be equipped with electrically controlled power operated side entrance doors, carbody end doors, a vestibule door, a trap door and folding steps.
 - i). As an option, Contractor shall provide technical solutions for gap fillers and on-board mobility lifts. The requirements for the lifts are outlined in Chapter 6 while the requirements for the gap filler are outlined in this Chapter.
- b). The side entrance doors shall be located on the B-end of the car and designed to accommodate a portable ramp, and passenger boarding from high level (48") and low level (8" and 15") station platforms.
- c). The Contractor's design for the entire door system must comply with the latest requirements of 49 CFR Part 37, 49 CFR Part 38, 49 CFR Part 238, EN50155, APTA PR-CS-S-012-02, and APTA Standard PR-M-S-18-10.
- d). The door system shall operate over the entire range of operational, climatic, and track conditions identified in the Amtrak Specification 963. The door control relays, and associated panels shall meet Amtrak Specification 528.
 - i). Low level station platforms may be either below Top of Rail, at Top of Rail, 8 inches above Top of Rail and 61 inches from centerline of track, or 15 inches above Top of Rail and 64 inches from centerline of track.
 - (1) Mitigations for minimizing the gap between the door threshold and station platform shall be performed to the maximum extent possible.
 - ii). Many of the at or below TOR platforms are controlled by freight railroads who will protect their clearances. Careful consideration must be provided for these platforms as well.

12.2 General Requirements

- a). Design Objectives
 - i). Door systems have a demonstrated history of complexity and inconsistent performance that can affect the operation of passenger service and hinder maintenance and repairs. In order to maximize safety, system functionality and equipment availability, while minimizing the potential for degraded service or system performance, the side and end door systems shall be specified, designed and manufactured with an emphasis on addressing the following areas of concern:
 - (1) Unsafe conditions for passengers or crew members;
 - (2) Train delays from malfunctioning side door equipment;
 - (3) Poor system reliability in adverse operational and environmental conditions;

- (4) Accumulation of dust and dirt that affects system performance and causes failures;
 - (5) System complexity that increases the time and effort required for troubleshooting and repairs; and
 - (6) Requirement for frequent adjustment and component replacement.
 - ii). The door systems shall be designed with great attention to details so that it is safe, very reliable, requires little maintenance, is easy to service, has support parts available and will have a long service life.
- b). Design Requirements
- i). The door system shall be designed and constructed so that no single point malfunction of door system components shall create an unsafe condition.
 - ii). Door system failures shall be detectable through the following means:
 - (1) Failure to complete the door closed summary circuit and therefore prevent the locomotive from developing traction power (when a door panel is not fully closed and latched, or mechanically locked in the closed position and isolated electronically.
 - (2) Use of indicator lights that signal when a door is not confirmed closed and latched; and
 - (3) An indicator that signals when a door has been locked manually and isolated electrically.
 - iii). All controls, locks and latches, as well as door emergency access covers identified in this Chapter shall use the standard Amtrak coach key (coach key), per Amtrak Drawing B-144 (J.L. Howard Part No. 2555).
 - iv). Environmental Considerations
 - (1) When closed, the doors shall provide a weatherproof seal under all car operating conditions.
 - (2) Neither drafts, nor air noises shall be detectable from the closed door over the full range of operating speeds of the vehicle, on all specified classes of track.
 - (3) The doors shall operate as specified over the entire range of all operational, climatic and track climatic conditions identified in Amtrak Specification 963.
 - (4) None of the electrical components, such as limit switches, shall be directly exposed to the weather, even with the door open.
 - (5) Climatic and environmental conditions, such as dust, snow or heat, shall not be a cause of door system failures.

- v). The door equipment mounting and internal fasteners shall be such that once adjustments are made and locked, they will not need to be re-adjusted until equipment overhaul or replacement.
- vi). Fasteners
 - (1) Fasteners shall be metric.
 - (2) Jam nuts, lock washers, nylock nuts or equivalent fasteners shall be used to secure door equipment.
 - (3) Fastening aids, such as Loctite or equivalent products, shall not be permitted, unless specifically approved by Amtrak.
- vii). Maintainability
 - (1) All door mechanisms, including but not limited to tracks, operators, wiring to door panels, stops, limit switches and controls shall be accessible by opening hinged access panels on the inside of the car.
 - (2) No special tools will be required to open such panels, nor will any equipment have to be disconnected or removed to gain access.
 - (3) Access shall be provided from inside the car to all points necessary for inspection, service, installation or removal.
 - (4) All door system equipment shall be installed in such a manner so as to be:
 - (a) readily accessible to maintenance personnel with minimal effort
 - (b) readily available from the exposed side of the door operator
 - (c) able to be adjusted and maintained by a single person.
- viii). Interchangeability
 - (1) All door equipment of like function and the same hand shall be interchangeable without requiring modification.
 - (2) All component mounting holes for all door hardware shall be jig-drilled by the manufacturer.
 - (3) Mounting holes on the car shall also be jig- drilled.
 - (4) Door operators, door tracks and thresholds shall have their mounting positions controlled through suitable jigs/fixtures so as to ensure the correct physical relationship between carbody, door track, door pocket and operator.
 - (5) All door operators, tracks, hangers, linkages, brackets, obstruction sensing and electrical fittings shall be manufactured or supplied by one subcontractor.

- ix). Door panels shall be fully insulated against thermal and sound transmission and grounded per APTA Standard SS-E-005-98.
- x). A Portable Test Unit connection and software will be provided to aid in troubleshooting and provide system diagnostics.
- xi). Door controllers shall report alerts and fault information to the car diagnostic system.

12.3 Powered Side Entrance Doors

a). General

- i). Trainline-controlled, power operated stainless steel side entrance plug or pocket doors shall be provided for each car type.
- ii). Side entrance doors with a stepwell and trap door shall be installed at the B-end of the car.
- iii). A door control panel shall be installed adjacent to each exterior side door and shall have both local door and trainline controls.
- iv). Side entrance doors shall provide an opening width of at least 36".
- v). A weatherproof coach key switch, complete with seal over key opening and detent latch, shall be provided adjacent to the side doors on each side of all cars to allow crew to open or close the adjacent door leaves to enter or exit the car.
- vi). Each car shall be equipped with two (2) inside body end doors.
- vii). A minimum number of door panel types shall be used for each car type.
- viii). Hand-operated latches and handles shall provide clearance for operation by a gloved hand.
- ix). All doors shall be solidly mounted, of lightweight construction, vibration free, open or close positively, and not rattle or make noise in service.
- x). It is preferred that the design of the exterior doors of each car type shall be a flat panel, where possible. The panel shall meet the materials and workmanship requirements and shall have fully interchangeable components.

b). Side Door Controls and Operation

- i). The side door controls for each car type shall include the following features:
 - (1) Trainline control at 74 Volts Direct Current (VDC) via 27-point communication trainline cable, in compliance with Amtrak Drawing A-63-7676-1.

- (2) The side doors shall be operated from a local door control panel or via trainline OPEN or CLOSE commands from another location or train.
- (3) Side doors shall not prohibit egress in an emergency situation or in the event of HEP power loss or air loss.
- (4) A local maintenance on/off switch shall be provided per doorway to de-energize the local door circuits and motor during maintenance and/or troubleshooting.
- (5) Interchangeability
 - (a) The DCU shall automatically detect the car type and location in which it is installed.
 - (b) The door system software shall be unified throughout all DCUs, so no additional manual configuration is needed when it is installed/replaced.
- (6) Relay-based logic and discrete trainlines shall be provided for the issuing of control commands to the doors.
- (7) Discrete trainlines shall also be used to monitor the door closed and locked status, and provide the required indications to the train crew.
- (8) Safety Considerations
 - (a) The door control system shall incorporate logic that shall meet the requirements of EN 50126 SIL 3 so that no unsafe condition will be created:
 - (i) through normal operation of the door system, or
 - (ii) due to a failure of door system equipment or components.
 - (b) Door control system shall be able to tolerate two separate grounds anywhere in the train in the door circuits and not have an unintended door opening.
 - (c) Control system design shall be fault tolerant to prevent unintended door openings.
- (9) Each door leaf shall be provided with a position sensor to detect that the door is fully closed and that it is mechanically latched.
- (10) Zero Speed Protection
 - (a) The zero-speed protection from wheel slide control unit on each car shall include all of the following:
 - (i) Door control panel system deactivation if not at zero-speed.

- (ii) Removal of power from door operator's door OPEN function if not at zero speed.
 - (iii) Door CLOSE command automatically issued in both directions on left and right door close trainlines when car motion is detected.
 - (b) Zero-speed signal supplied by the wheel slide control unit shall be required in order to issue an OPEN command to the side doors.
 - (i) Conversely, the absence of a zero speed signal shall prohibit the issuance of an OPEN command to the side doors.
- (11) Traction Interlock
 - (a) Traction interlock shall be provided, with door closed indication, that prevents the locomotive from developing tractive effort if any side door is not fully closed and latched, or mechanically locked and electrically isolated.
 - (i) There is no interlock between the door closed summary circuit and the brake system.
- (12) Obstruction detection with over current and a sensitive edge on each door leaf meeting the requirements of APTA Standard SS-M-18-10.
- (13) Emergency Releases
 - (a) Manual emergency release for each door leaf from inside the car, with frangible cover.
 - (b) Exterior emergency release for each door leaf, fully enclosed behind a weatherproof cover.
- (14) Mechanical lock which can be engaged manually with a coach key from inside the car which allows the on-board crew to secure the door leaf closed and isolate the door operator electrically.
- (15) All door control system signal and indicator lights shall use approved long life, high intensity Light Emitting Diode (LED) or LED arrays lamps having a rated life of at least 100,000 hours.
- (16) Audible signal, on or near the door header at each side door opening at the same rate as the blue ADA indicator light.
 - (a) Tone and volume of audible signal to be submitted to the Amtrak for approval during design review. **[CDRL 12-01]**

c). Side Door Operator and Linkage

i). General

- (1) The side doors shall employ electric, electro-pneumatic or linear-induction operators, one per door leaf.
- (2) Doors shall be operated from the nominal 74VDC car battery system but shall operate normally over the full voltage range from normal Head End Power (HEP).
 - (a) The motor and controls shall reliably be compliant to EN50155, and shall operate without damage and without affecting the reliability and serviceable life of the operator.
 - (b) The Contractor shall provide an engineering analysis to verify door operators will operate over this voltage range without damage to components. **[CDRL 12-02]**

ii). Locking Mechanism

- (1) The operator shall include an over-center or equivalent locking mechanism so that a door which is closed will remain closed and latched upon loss of electrical or pneumatic power, regardless of car vibration.
- (2) The door operators shall include a local mechanical cutout which allows the on-board crew to deactivate and isolate a door operator by locking the door.

iii). Opening and Closing Forces

- (1) The drive mechanism shall be designed to minimize torque applied to door panels during operation.
- (2) The operator and linkage for each panel shall be arranged so the maximum force required to manually move a door panel shall not exceed 30 pounds of force (lbf) at mid-point of travel.
- (3) The doors shall open or close successfully with no greater than a 60 lbf applied perpendicular to the interior door surface at a height of 56 in. above the floor, throughout the entire opening cycle, and through the closing cycle until 5 in. before the fully closed position.

iv). Dampening and Door Motion

- (1) The door motion shall be smooth and free of shock and impact.
- (2) The door operator shall decelerate the door leaves at each extremity, to preclude slamming or rebound, and bring them to rest gently at the extremity of door leaf travel.

- (3) Damping shall be provided at the ends of travel of the door panel in both the opening and closing directions.
- (4) The door operator motion shall be smooth and free of shock and impact and shall be capable of holding the door, without oscillation, in either an open or closed position with the car on all configurations of track as specified in Amtrak Specification 963.
- (5) Door leaf travel shall be easily adjustable, with provisions, to set open and close positions.
- v). Limit Switches and Proximity Sensors
 - (1) All limit switches and proximity sensors used in the operator shall be hermetically sealed and shall be easily replaceable.
 - (2) All limit switches and proximity sensors shall be precision units that are positively and precisely located so they may be replaced without the need for mechanism adjustment.
- vi). Opening and Closing Times
 - (1) Door opening and closing times shall be independently adjustable and shall be initially set at:
 - (a) Opening: 3 ($\pm$ 0.5) seconds
 - (b) Closing: 3 ($\pm$ 0.5) seconds
 - (2) If sliding plug doors are used, the operating timing shall be defined as follows:
 - (a) Opening: 4.0 seconds – Adjustable 4.0 to 8.0 ($\pm$ 0.5) seconds
 - (b) Closing: 4.0 seconds – Adjustable 4.0 to 8.0 ($\pm$ 0.5) seconds
 - (3) The opening and closing values shall be independently adjustable by the Portable Test Unit.
- vii). Protection from Damage
 - (1) Operator design shall be such that a mechanical or electrical failure shall not result in subsequent damage to other equipment.
 - (2) The door motor shall be suitably protected from the surrounding environment and be of a sealed design.
- viii). Interchangeability
 - (1) All door operator motors shall be interchangeable from one door position to another, or between all doors of the same hand (right-hand and left-hand).

d). Side Door Panel Construction

- i). The side entrance door panel shall be constructed of stainless steel with a honeycomb core.
- ii). Doors shall be of an adequate thickness for the intended service, which means they shall be resistant to damage from impacts with roadside debris such as rocks, as well as resist being bent from misuse, attempted operation with the door stuck, or a mechanical malfunction.
- iii). In addition, when supported at both ends, the door leaf shall sustain a concentrated load of 250 lbs applied at the center of the front face, over an area of 4 in², at 90° to the plane of the panel, without deflecting more than 0.25 in., nor shall the panel take a permanent set.
- iv). All door panel joints and edges shall be sealed against moisture.
- v). Stainless steel reinforcements shall be provided at attachment points.
- vi). Structure used to secure the door leaf to the door hanger shall last the life of the car, without fatigue cracks or similar failure, even if the door operator malfunctions and slams the door leaf repeatedly.
- vii). Epoxy used in door panel construction shall be waterproof.
- viii). All internal door leaf wiring and sensitive edge shall be run through internally routed conduit.
- ix). The exterior surface of the door panel shall match that of the exterior of the car body.
- x). The sensitive edge and door mounted weather seals shall be part of the door panel assembly.
- xi). Door panels shall be insulated against thermal and sound transmission.
- xii). Door panels shall be welded in accordance with all applicable AWS requirements.

e). Door Panel Windows

- i). Each door panel shall have window openings formed to accept FRA Part 223 compliant glazing.
- ii). The door window frame shall be an integral part of the door structure and shall be capable of retaining the window in the door opening when subjected to the impact applicable to the window location described in 49 CFR Part 223.
- iii). The window and its glazing shall not extend beyond the outer surface of the door.

- iv). All door windows shall be retained in the door frame by use of a rubber extrusion and zip strip combination which will allow installation/removal of the glazing from inside of the door.
- f). Side Door Obstruction Detection
 - i). Each door leaf shall be equipped with an obstruction detection system. The system should include over current detection and a sensitive edge.
 - ii). Should the door close against an obstruction, the obstruction detection system shall immediately initiate the door opening cycle.
 - iii). The force required to activate the system shall not exceed 20 lbf.
 - iv). The sensitivity of the obstruction detection system shall conform to APTA Standard SS-M-18-10.
 - v). The design of the obstruction detection system shall not allow the door to oscillate if no obstruction is present.
 - vi). The doors shall not close and latch to permit a closed-door indication if an obstruction is detected.
 - vii). Deflection of the sensitive edge shall have no effect on the door control system after the door has closed and locked.
 - viii). Soft elastomer edges shall be designed to permit the withdrawal of an obstruction that could be undetected between a closed side door and its mating edge
 - ix). The design of the obstruction detection system shall be subject to Amtrak approval during design review.
 - x). The Contractor shall provide a detailed assessment of the obstruction detection system as proposed, including theory of system operation, proven service history, reliability and maintainability, compliance with applicable regulations and standards, and safety analysis.
- g). Overhead Door Track
 - i). Door leaves shall be suspended from an overhead door track.
 - ii). The track and door hanger assembly shall have minimum service life of 25 years.
 - iii). The door track/hanger shall not require lubrication over its life.
 - iv). The load bearing surface of the door track shall be convex, so as to be self-cleaning from buildup of dust.
 - v). The door track shall employ rollers with sealed, permanently lubricated bearings or other roller design that does not require lubrication.

- vi). The overhead door track and rollers shall not be affected by environmental conditions, including the accumulation of dust.
 - vii). The door hanger and door track shall be able to resist, without damage or permanent deformation, a force of 200 lbf applied perpendicularly at the center of the door panel, both in inward and outward directions.
 - viii). The rollers shall be secured to the hanger assembly with a mechanism, both to adjust for level as well as control vertical free-play between the hanger assembly and door track.
 - ix). Door leaf adjustment shall allow the space between the nosing seal to be made constant from the top to the bottom of the leaf.
 - x). The amount of track-to-roller free-play shall prevent the trailing edge roller from lifting on the track if the door leaf strikes an obstruction down low while closing.
 - xi). Adjustment of free-play clearances shall be easily done using standard tools.
 - xii). The track itself and mounting to carbody (not the door-to-hanger connection) shall be adjustable to accommodate both carbody and door leaf tolerances, including both height and plumb.
 - xiii). Sliding plug doors with linear bearings may be used, provided that the linear bearings are of a service proven design and do not require lubrication more frequently than annually.
- h). Bottom Door Guides and Thresholds
- i). A door guide with corresponding threshold shall be provided at the bottom of the door.
 - ii). Adjustable wear strips, if provided, shall be easily replaceable without removing or readjusting the door panel.
 - iii). The bottom guide arrangement shall be designed not to collect dirt and debris and to ensure a low friction operation with no binding or rattling.
 - iv). The thresholds shall be compliant with ADA requirements.
 - v). The door guide/threshold shall form part of the door weather seal and shall incorporate drain holes to carry off water to the underside of the car.
 - vi). The threshold and drain and their sealing to the carbody shall ensure that water or other fluids do not seep underneath and cause deterioration of flooring, its substructure or insulation.
 - vii). Easy access shall be provided to the door guide/threshold for cleaning and maintenance.
 - viii). The guide shall be adjustable to accommodate both carbody and door leaf tolerances.

- ix). Any part of the door guide system subject to wear shall be easily replaceable without removing the door panels.
- i). Freeze Protection
 - i). Freeze protection system shall be provided at each side entrance door and shall be with sufficient capacity to prevent ice formation in the door pockets, bottom door guide, thresholds, vestibule steps, and trap door.
 - ii). All heaters shall be 120 VAC and shall be activated by the car freeze protection circuit at ambient temperatures of 40 degrees F or below.
 - iii). The design of the system shall be included in the door system design review and shall be subject to Amtrak design review and approval.
- j). Weather Seal
 - i). Amtrak will operate the cars at 125 mph throughout the continental United States.
 - ii). The very high operating speeds of the cars combined with frequent winter exposure to snow, freezing rain and ice, as well as heavy rain conditions, makes it of extreme importance that exceptionally high levels of weather sealing be applied to the door systems.
 - (1) The leading edge of the door panel shall interlock with the adjacent door panel (if present) to form a weatherproof seal.
 - (2) The door opening, including the interior and exterior sides and top, shall be equipped with a flexible weather seal.
 - (3) The rear edge of the leaf shall be equipped with a batten that positively engages the door seal when the door is fully closed, including the radius at the top of the door opening.
 - (4) This combination shall create a dust and weatherproof seal (see Chapter 20 for test requirements).
 - iii). The seal shall be attached to the door frame with sufficient clearance so as to prevent chafing against the leaf as it moves, yet ensure every door leaf seals on every car, despite the combination of all manufacturing tolerances.
 - iv). The top of the opening shall also be equipped with a weather seal.
 - v). The interface between the bottom of the door and the threshold shall form a weather seal.
 - vi). Seal design shall also limit the entrance of dust and snow into the door pocket when the door is open.
 - vii). Adjustments to keep the seal system weather tight shall not be required more often than annually.

k). Emergency Releases

- i). Manual interior and exterior emergency releases shall be provided to allow each side door panel to be opened manually in emergency situations.
- ii). The emergency release handle shall be red and be simple for individuals to understand and operate.
- iii). Activating the emergency release handle shall: remove power from the door motor, release the door mechanical lock (if locked) and disengage the door over-center locking mechanism and separate the door panels by at least one inch so that the door leaf may be manually opened.
- iv). Using the emergency release, the force to disengage the door operator and to move the door leaf shall not exceed 30 lbf external per APTA Standard SS-C&S-012-02.
- v). The exterior emergency release handle shall be located on the car side, near the door it releases, behind a weatherproof cover.
- vi). At least one release shall be provided for each door opening that permits the opening of both door leaves.
- vii). The cover shall allow access in an emergency and be able to be sealed and locked for securing car when not occupied.
- viii). Operating instructions shall be provided on or near the cover.
- ix). An interior emergency release handle shall be located adjacent to each door leaf, behind an easily replaceable, transparent frangible weatherproof cover.
- x). To allow crew access to the release emergency release without breaking the frangible material, such as when the car has no power, the cover frame shall be hinged and equipped with a coach key release.
- xi). Opening the frame will also allow the frangible material to be easily replaced.
- xii). The inside handle, once actuated, shall remain in the actuated position.
- xiii). Operating instructions for the emergency door release mechanism shall be installed near the emergency release, per the location and illumination requirements of 49 CFR Part 238.
- xiv). It shall be possible for emergency personnel to manually open the side doors from outside the car with the car resting on its side, by using only tools normally carried by such personnel.
- xv). This shall be demonstrated with an exterior door and frame assembly in the horizontal position, using actual production components.
- xvi). It shall be assumed that no damage exists to the door, door frame or operating mechanism.

- xvii). If a cable system is employed between the external release handle and door operator, it shall be run within a conduit to allow it to be replaced easily, without major car disassembly.
- xviii). Appropriate labels shall be provided with operating instructions at convenient locations, consistent with APTA Standard SS-PS-002-98.
- l). Door Control Panel
 - i). A stainless steel watertight door control panel shall be provided for the train crew to control all the side doors on its respective side of the train.
 - ii). The control panel shall be activated with a coach key, with the key removable only in the OFF position.
 - iii). Indicator lights on the panel shall employ socket-mounted LED technology.
 - iv). A button shall be provided at the door control panel for the Conductor's signal buzzer.
 - v). In addition to trainline operation, the side doors shall be equipped with a trainline/local coach key switch panel which allows the crew to select whether an adjacent door will open in response to trainline OPEN commands, or only on a local basis.
 - vi). Positions shall be labeled TRAINLINE/LOCAL (9 o'clock position) and LOCAL ONLY (6 o'clock position).
 - (1) The coach key shall be removable from either position.
 - vii). With the switch in the LOCAL ONLY position, the connection from the door open trainline is interrupted, so that the affected doors only open upon an OPEN command from the door control panel-local or the crew access switch adjacent to those doors and shall not open in response to a trainline OPEN command from another door control panel.
 - viii). When in the TRAINLINE/LOCAL position, the side doors at this location shall open either upon a trainline OPEN command from another door control panel, or from the adjacent door control panel-local or exterior crew access switch.
 - ix). In either position, the doors will close upon a CLOSE command from the door control panel-local, or from a trainline CLOSE command.
- m). Crew Key Switches
 - i). The crew switch shall be three-position, spring return to center, with key capture in open and closed positions on the exterior of the car.
 - ii). The crew switches shall not be connected in parallel and shall have separate inputs to the DCU so lower and upper crew switches can be configured independently.

- iii). Rotating the key to the left shall open the doors, and to the right shall close the doors.
- iv). The crew key switch shall be arranged so that when the key is removed, the door shall remain in the last position commanded.
- v). Trainline commands shall take precedence over local commands.
- vi). If a door is opened with the local crew key switch, it shall be possible to close it by trainline control.
- vii). Switches within the assembly shall be weatherproof.
- n). Door Cutout and Mechanical Lock
 - i). A positive mechanical lock function shall be provided for each passenger side door leaf, or pair of side door leaves if door operation uses synchronized door panels, to deactivate power from that door operator and to secure the leaf in the fully closed position.
 - ii). This lock shall be operated from inside the car only, by a coach key. The door closed and lock loop shall only be bypassed when the door leaf is fully closed, and the mechanical lock fully engaged.
 - iii). The emergency release function shall still be available for a locked-out door, but if the release is used, the door panel locked sensing function shall be reactivated.
 - iv). If the emergency release has been activated while the mechanical lock was in the locked-out position, the design of the keeper shall allow the lock bolt to re-engage automatically when the door leaf is again closed (so as to not ram the edge of the keeper with the bolt).
 - v). Engagement of the lock bolt shall be sufficient to provide positive panel locking under all conditions.
 - vi). It shall not be possible to withdraw the key unless the lock bolt is fully engaged or fully unlocked.
- o). Door Status Indicators and Alarms
 - i). Audible and visual warnings that comply with the requirements of 49 CFR Parts 37 and 38 shall be provided at each doorway and shall be activated prior to door closing.
 - ii). Activation of the warnings shall precede the initiation of door closing by approximately 3 seconds.
 - iii). The warnings shall alert passengers inside and outside the car on the side of the car at which the doors are open.
 - iv). Exterior Door Open Indicators

- (1) A red exterior LED type door open indication shall be provided on each side of the car at each entrance doorway (see Chapter 11).
 - (2) Both lights adjacent to an individual vestibule (one on each side of the car) shall be extinguished when all doors at that entrance vestibule (both sides of car) are closed and locked.
 - (3) The indicators shall be bright and visible at a distance of 1870 ft, on tangent track, bright enough to be visible in bright direct sunlight and shall be visible to crewmembers in vestibules and in the operating cabs of locomotives when looking down the side of the train from either direction.
- v). Interior ADA Door Closing Indicators and Alarms
- (1) To warn hearing impaired passengers that the doors are about to close, red LED interior door closing warning lights shall be provided in the door header at each side entrance door.
 - (a) These lights shall be triggered via the door controls to provide a flashing indication, upon initiation of the door “close” command, and continue to flash until the door begins to close.
 - (b) The flashing rate of the indicator shall be approximately 2.0 Hz.
 - (2) To warn passengers that the doors are about to close, an interior door closing warning audio alarm shall be provided in the door header at each side entrance door.
 - (a) The door closing warning audio alarms shall be triggered by the door controls.
 - (b) The door closing warning alarm shall start to sound upon the initiation of the door CLOSE command and continue to sound until the door begins to close.
 - (c) The audio alarm shall be pulsing audio shall develop a sound level of 88 +/-2 decibels (dB) at 5 ft 6 in. above the center of the door threshold, with a frequency of 3000 Hz.
 - (3) An interior door closing interlock with Public Address (PA) system to initiate “doors closing” message shall be provided. See Chapter 14.
 - (4) When the door closed trainline is activated, a 3 second warning of the above visual and audio devices will be given at each entrance area before the doors begin to close.
- vi). Interior Door Status Indicators
- (1) Each door leaf shall be equipped with a yellow LED indicator light mounted in the ceiling panel over each door leaf. This indicator shall display the status of the door leaf:

- (a) On continuously: Door leaf is open or is not confirmed closed and latched.
 - (b) Flashing (1 Hz): Door leaf is locked manually with the mortise lock and isolated from the door control circuit and the door closed summary circuit.
 - (c) Off: Door panel is confirmed closed and latched, but not locked with the mortise lock.
- p). Design Safety Validation
 - i). The Contractor shall conduct a hazard analysis and a Failure Mode and Effects Criticality Analysis (FMECA) for hardware and a Fault Tree Analysis (FTA) for the entire side door system as necessary to demonstrate that the safety requirements of the system are met under all operating conditions.
 - ii). This analysis shall be performed for an individual car of each type and for a train consisting of cars from the same build lot. This shall include:
 - (1) logic,
 - (2) interlocks,
 - (3) mechanical mechanisms,
 - (4) indicators,
 - (5) bypasses,
 - (6) cutouts and
 - (7) controls.
 - iii). The analysis shall be submitted to Amtrak for review and acceptance as part of the Design Review process. **[CDRL 12-03]**
- q). Door Pocket
 - i). If pocket doors are provided, the door pocket will accommodate the door leaf while the door is open.
 - ii). The bottom of the door pocket shall be lined with corrosion resistant material to prevent deterioration of car structure and flooring.
 - iii). The bottom of the door pocket shall also incorporate a pan designed to drain water out of the pocket area through a tube to the underside of the car.
 - iv). The drain shall be easily accessible for cleaning and shall be equipped with a backflow preventer to keep dust and moisture from blowing into the pocket.
 - v). It shall be designed to ensure that water does not seep underneath and cause deterioration of flooring, its substructure or insulation.

- r). Door Markings
 - i). Door positions shall be numbered in accordance with Figure 12-1.
 - ii). In addition, each door shall be labeled for emergency egress in accordance with APTA Standard SS-PS-002-98, Rev 2.
 - iii). Signage shall be installed on each door leaf that describes the procedure for opening the doors in the event of an emergency.
 - iv). This signage shall conform to the requirements of APTA Standard SS-PS-002-98 and 49 CFR Part 238.
 - v). Signage shall also be provided above each door leaf or pair of door leaves, adjacent to the yellow door status LED indicator, that states that the door leaf is inoperative or out of service when the yellow light is flashing.
 - vi). The proposed artwork, material, color, size, location and adhesive for these signs shall be submitted for Amtrak approval during the design review process. **[CDRL 12-04]**

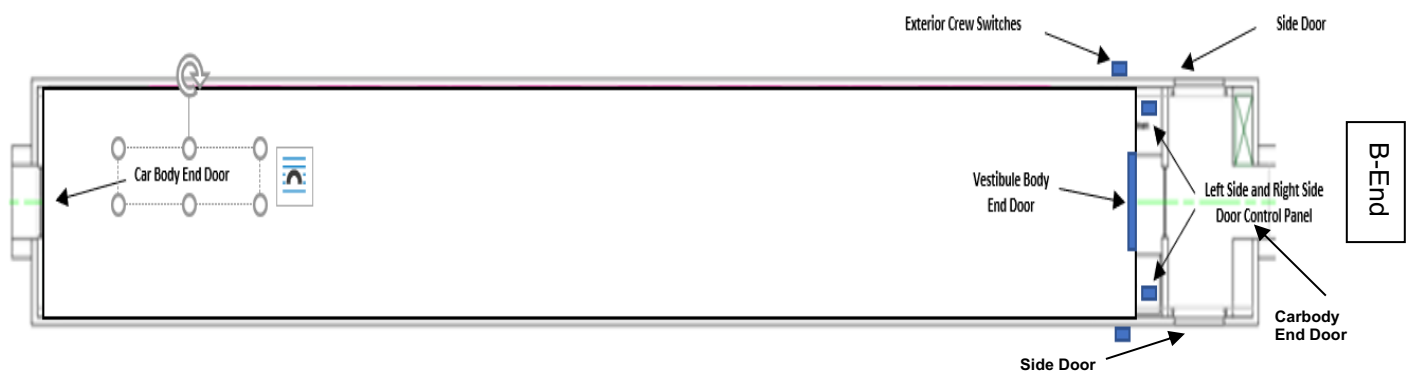


Figure 12-1: Door Positions

12.4 Powered Carbody End Doors and Vestibule End Door

- a). General
 - i). Carbody End Door
 - (1) A weathertight lockable sliding pocket powered doors with a manually operated override shall be provided at the ends of each car.
 - (2) The end door shall have a minimum footprint within the passenger area, pressure sealed, and mechanically lockable.
 - (3) A minimum 32 in. "clear passage" shall be provided through the doorway when the end door is fully opened.
 - (4) If applicable, carbody end doors shall have a removable window and kick panel in compliance with 49 CFR 238.112.

- (5) The door shall be constructed from stainless steel with a stainless steel honeycomb core and shall be equipped with an FRA Type 1 window.
- (6) The door shall be weatherproof and compliant with the requirements of 49 CFR 238.209.
- (7) The door shall be of an adequate thickness for the intended service, which means it shall be resistant to minor wayside impact damage, as well as resist being bent from misuse.
- (8) In addition, when supported at both ends, the door shall sustain a concentrated load of 200 lbs applied at the center of the front face over an area of 4 sq.in., at 90° to the plane of the panel without deflecting more than 0.25 in. nor shall the panel take a permanent set.
- (9) The door shall be recessed from the front surface of the vehicle, so as to shield it from possible impacts.
- (10) A safety end gate shall be provided to prevent passage through the collision post opening when the door is open on the end of the train or single car. A mechanism to secure the gate in the extended and retracted position without rattling shall be provided. In either the retracted or extended position, the gate shall not interfere with the clear path or devices like the handbrake.

ii). Vestibule Door

- (1) An electrically powered sliding door shall be located at the vestibule to isolate the car interior.
- (2) A minimum 32 in. "clear passage" shall be provided through the doorway when the door is fully opened.
- (3) If applicable, the vestibule doors shall have a removable window and kick panel in compliance with 49CFR238.112.
- (4) Each door leaf shall incorporate a service-proven obstruction sensing system.
- (5) No door closing warning shall be given.

b). Door Controls

i). Carbody End Door

- (1) Body end door controls shall include the following features:
 - (a) A kick plate, and push buttons shall be installed on both sides of the body end door for passenger activation, and

- (b) A three (3) position toggle switch shall be provided with three distinct modes of end door operation, NORMAL, DOOR OPEN, and MANUAL.
 - (i) The switch shall be mounted to a stainless-steel faceplate with engraved lettering and a red switch guard which shall fully close only when the switch is in NORMAL position.
- (2) In NORMAL mode:
 - (a) The end door shall automatically open fully within 2.5 ($\pm$ 0.5) seconds after the proximity sensor or push button is activated. However, this opening time shall be adjustable and will be validated through the design review process.
 - (b) The end door shall remain open for 8 to 15 seconds, then automatically close. However, the closing time shall be adjustable and will be validated through the design review process.
 - (c) All parameter settings and door timings shall be easily adjustable by PTU.
- (3) In DOOR OPEN mode:
 - (a) The end door will automatically open and remain open.
- (4) In MANUAL mode:
 - (a) Electrical power shall be removed from the end door operator.
 - (b) The force to open or close the doors manually shall not exceed 20 lbs.
 - (c) The door shall be held in either the open or closed position with the vehicle subjected to track super elevation up to 7 in. (178 mm).
- ii). Vestibule Door
 - (1) Each interior passenger area door shall be passenger operated on each side by both a ceiling mounted infrared proximity sensor, side door frame mounted push button, and a kick plate electrical switch.
 - (a) The proximity sensor shall have an adjustable detection range, suitable for the railroad environment and shall not open the door for typical nearby passenger movements (such as accessing nearby luggage racks, etc.) when doorway passage is not intended.
 - (b) It shall easily permit future adjustments in sensitivity and detection zone by Amtrak.

- (c) Details must be submitted for approval by Amtrak.
 - (d) Approved LED back lighted push plate switches shall be used.
 - (e) The switches shall be back lighted when the door operator is in Normal mode.
 - (2) A backup local manual control shall be provided.
 - (3) Each door operator shall have a local electronic control unit which controls the door operation, that is self-checking and provides fault identification information.
 - (4) The control unit, as part of its self-diagnosing capability, shall provide performance degradation diagnostics to identify components approaching possible failure. These features shall be accessible via the PTU.
 - (a) Should the car level diagnostics option be executed, the above features shall be communicated to the CDU and shall be accessible remotely.
 - (5) Each door operator shall include a maintenance switch which will remove power from the motor to prevent operation while maintenance work is in process.
 - (a) All functions will be available, including diagnostics.
 - (6) The door equipment mounting and internal fasteners shall be such that once adjustments are made, and locked, they need not be disturbed until equipment overhaul or replacement.
 - (7) Access shall be provided from inside the vestibule to all points necessary for service, installation or removal of powered doors and operating apparatus.
- c). Door Lock
- i). Car Body End Door
 - (1) The car body end door shall be equipped with a robust and service proven door lock that shall be lockable from inside the car, using a crew key.
 - (2) The door shall not be lockable from the exterior side of the car.
 - (3) A separately operated safety override shall be provided to unlock the door from inside or outside the car in the event of an emergency.
 - (4) When the door is in the locked condition and the lock override is used, the door will return to the locked position when closed.

- (5) The arrangement provided for locking the end door shall be approved by Amtrak.

d). Door Operator

i). Power Requirements

- (1) The door operator and controls shall operate from nominal 74VDC car battery system.
- (2) The door operator and controls shall operate normally over the entire voltage range of charging down to load shed without damage and without affecting the reliability and serviceable life of the operator.

ii). Opening and Closing Forces

- (1) The drive mechanism shall be designed to minimize torque applied to the door panel during operation.
- (2) The operator and linkage for the doors shall be arranged so the maximum force required to manually move a door panel with power removed shall not exceed 20 lbs.
- (3) The door shall open or close successfully with no more than a 60 lbf applied perpendicular to the interior door surface at a height of 56 in., throughout the entire opening and closing cycle.

iii). Dampening and Door Motion

- (1) The door operator shall preclude slamming or rebound and shall bring it to rest gently at the extremity of door leaf travel.
- (2) The door motion shall be smooth and free of shock and impact.
- (3) Damping shall be provided at the ends of travel of the door panel in both the opening and closing directions.
- (4) In the opening direction damping shall preclude the door leaf from contacting the mechanical door stop.
- (5) Door leaf travel shall be easily adjustable through a single adjustment point to set open and close positions.

iv). Door Holding and Locking Capability

- (1) The operator shall be capable of holding the door, without oscillation, in either an open or closed position with the car in service.
- (2) Also, the operator shall include an over-center mechanism so that a door will remain in the open or closed position upon loss of power.

v). Protection from Damage

- (1) Operator design shall be such that a mechanical or electrical failure shall not result in subsequent damage to other equipment.
 - (a) For example, if the operator linkage to the leaf comes loose, it shall not be possible for the operator to damage itself from over-travel of the mechanism.
- (2) The door operator and drive motor shall be protected from damage created by in-service conditions.
- (3) Stall protection will be provided to prevent operator or control damage or degradation should a leaf be immobilized.
 - (a) When the problem is corrected, the operator will return to full functionality without a manual reset.
 - (b) Thermal cutouts shall not be used for motor protection.
- vi). Limit Switches and Proximity Sensors
 - (1) All limit switches and proximity sensors used in the operator shall be hermetically sealed and easily replaceable.
 - (2) All limit switches and proximity sensors shall be precision units that are positively and precisely located so they may be replaced without the need for mechanism adjustment.
- vii). Opening and Closing Times
 - (1) Door opening and closing times shall be independently adjustable and shall be initially set with DC bus voltage with HEP on, at:
 - (a) Opening: 2.5 ($\pm$ 0.5) seconds
 - (b) Closing: 3.0 ($\pm$ 0.5) seconds
- viii). Door motor control and timing function shall be incorporated on the operator unit.
- ix). Reliability
 - (1) The door operator shall require adjustments no more frequently than every 460 days.
 - (2) The door motor and operator assembly shall be suitable for operation without component replacement between heavy overhaul periods of at least eight years.
 - (3) The door motor shall be a sealed design and suitably protected from the surrounding environment.
- x). Interchangeability

- (1) All door operator motors shall be interchangeable from one door position to another.
- e). Door Panel Construction
 - i). Doors shall be constructed of stainless steel and have a honeycomb core.
 - ii). In addition, when supported at both ends, the door leaf shall sustain a concentrated load of 250 lbs applied at the center of the front face, applied over 4 sq.in. at 90° to the plane of the panel, without deflecting more than 0.25 in. nor shall the panel take a permanent set.
 - iii). Door panels shall be equipped for emergency escape per 49 CFR Part 238.112.
 - iv). All door panel joints and edges shall be sealed against moisture.
 - v). Stainless steel reinforcements shall be provided at attachment points.
 - vi). Structure used to secure the door leaf to the door hanger shall ensure it lasts the life of the car, without fatigue cracks or similar failure, even if the door operator malfunctions and slams the door leaf repeatedly.
 - vii). A hand-hold recess shall be provided on both sides of the door panel to allow manual opening of the door from the inside and outside, with the operator deactivated.
 - viii). Cutouts shall be provided on the inside and outside panels for the two push and kick plates and associated wiring.
 - ix). All internal door leaf wiring and sensitive edge tubing shall be run through internally routed conduit.
 - x). Each door panel shall have window openings formed to accept FRA Part 223 Type II compliant glazing.
 - xi). The door window frame shall be an integral part of the door structure and shall be capable of retaining the window in the door opening when subjected to the impact applicable to the window location described in 49 CFR Part 223.
 - xii). The glazing and its mounting system shall not extend beyond the outer surface of the door.
 - xiii). Door panels shall be fully insulated against thermal and sound transmission and grounded per APTA Standard SS-E-005-98.
 - xiv). Door panels shall not rattle or vibrate.
- f). Obstruction Detection

- i). Each door leaf shall be equipped with a service-proven obstruction detection system. The system should include over current detection and a sensitive edge.
 - ii). Should the door close against an obstruction, the obstruction detection system shall immediately initiate the door opening cycle.
 - iii). The force required to activate the system shall not exceed 20 lbf.
 - iv). The sensitivity of the obstruction detection system shall conform to APTA Standard SS-M-18-10.
 - v). The design of the obstruction detection system shall not allow the door to oscillate if no obstruction is present.
 - vi). The design of the obstruction detection system shall be subject to Amtrak acceptance during design review.
 - vii). The Contractor shall provide a detailed assessment of the obstruction detection system as proposed, including theory of system operation, proven service history, reliability and maintainability, compliance with applicable regulations and standards, and safety analysis.
- g). Overhead Door Track
- i). Door leaves shall be suspended from an overhead door track.
 - ii). The track and door hanger assembly shall have minimum service life of 25 years.
 - iii). The track shall be convex with the curve on top, so as to be self-cleaning from buildup of dust.
 - iv). The door track shall employ concave rollers, with sealed, permanently lubricated bearings.
 - v). The overhead door track and rollers shall not be affected by environmental conditions, including the accumulation of dust.
 - vi). The door hanger and track shall be able to resist without damage or permanent deformation a force of 200-lbf applied perpendicular at the center of the door panel both in either the inward or outward directions.
 - vii). The rollers shall be secured to the hanger assembly with a mechanism, both to adjust for level as well as control vertical free-play between the hanger assembly and door track.
 - viii). Door leaf adjustment shall allow the space between the nosing seal to be made constant from the top to the bottom of the leaf.
 - ix). The amount of track-to-roller free-play shall prevent the trailing edge roller from lifting on the track if the door leaf strikes an obstruction down low while closing.

- x). Adjustment of free-play clearances shall be easily done using standard tools.
- xi). The track itself and mounting to carbody (not the door-to-hanger connection) shall be adjustable to accommodate both carbody and door leaf tolerances, including both height and plumb.
- xii). The door track and hanger shall not require lubrication over its life.
- h). Bottom Door Guides and Thresholds
 - i). A door guide with corresponding threshold shall be provided at the bottom of the door.
 - ii). Wear strips, if provided, shall be easily replaceable without removing or readjusting the door panel.
 - iii). The bottom guide arrangement shall ensure operation with no binding or rattling.
 - iv). The door guide/threshold shall form part of the door weather seal and shall incorporate drain holes to carry off water to the underside the car.
 - v). The threshold and drain and their sealing to the carbody shall ensure water or other fluids do not enter the equipment room, nor do they seep underneath and cause deterioration of flooring, its substructure or insulation.
 - vi). Easy access shall be provided to the door guide/threshold for cleaning and maintenance.
 - vii). The guide shall be adjustable to accommodate both carbody and door leaf tolerances.
 - viii). The bottom guide shall not require adjustments more often than every 360 days.
- i). Weather Seal
 - i). The leading edge of the door panel shall interlock with the door frame to form a weatherproof seal.
 - ii). The interior and exterior of the door opening, including any curves at the top, shall be equipped with a flexible weather seal.
 - iii). The rear edge of the leaf shall be equipped with a batten that positively engages the door seal when the door is fully closed, including any radius at the top of the door opening.
 - iv). This combination shall affect a dust- and weatherproof seal.
 - v). The seal shall be attached to the door frame with sufficient clearance so as to prevent chafing against the leaf as it moves, yet ensure every door

leaf seals on every car, despite the combination of all manufacturing tolerances.

- vi). The interface between the bottom of the door and the threshold shall form a weatherproof seal.
- vii). When door is manually locked a seal shall prevent air infiltration.
- viii). Seal design shall also limit the entrance of dust and snow into the door pocket when the door is open.
- ix). The entire door seal arrangement shall be demonstrated during the design review process to provide an effective door seal under all operating conditions and is subject to Amtrak acceptance.
- j). Door Pocket (If provided)
 - i). The door pocket will accommodate the door leaf while the door is open.
 - ii). Since the bottom of the carbody end door pocket is a wet area, it shall be lined with corrosion resistant material to prevent deterioration of car structure and flooring.
 - iii). This pan shall be designed to drain water out of the pocket area through a tube to the underside of the car.
 - iv). It shall be designed to ensure that water does not seep underneath and cause deterioration of flooring, its substructure or insulation, nor does not it freeze in the drain.
 - v). The drain shall be easily accessible for cleaning and shall be equipped with a backflow preventer to keep dust and moisture from blowing into the pocket.

12.5 Trap Door and Folding Step

a). General

- i). Each side of the vestibule shall be equipped with a modular trap door and folding step assembly for safe boarding and discharging of passengers at both low and high level platform stations.
 - (1) The design shall meet the requirements of the clearance diagram per D-05-1355.
 - (2) The trap door and folding steps shall be compliant with all aspects of ADA requirements.
- ii). The module shall be complete with mounting holes so that it can be applied to the car vestibule floor from the top as a complete assembly or removed intact for major repairs.
- iii). Amtrak will work with the Builder to identify J.L. Howard Hardware suitable for this application.

- iv). See Chapter 20 for testing requirements.
- b). Design/Construction
 - i). Folding Stairs
 - (1) The folding stair shall consist of four (4) steps, with the lowest step located 17 inches above top of rail.
 - (2) Tread depth shall be 9.50 inches and riser shall be 8.50 inches maximum.
 - (3) Open risers shall not be permitted.
 - ii). Trap Door and Threshold
 - (1) The trap door when closed shall form an integral floor with no relative gradient between the vestibule floor and the trap door.
 - (2) A rubber bumper shall be provided to cushion the stop when the trap door is raised to the open position.
 - (3) The trap door shall be provided with latches to retain the trap door horizontal in the closed position and vertical in the raised position without rattling using corrosion-resistant railroad proven hardware.
 - (4) Neither the latch nor the trap door shall encroach into ADA accessible clear opening.
 - (5) Threshold of the trap door shall be ADA compliant.
 - iii). Handles
 - (1) The underside of the trap door shall be provided with an inverted N-shape grab handle to aid passenger egress/ingress when the trap is open.
 - (2) In addition, a handle shall be provided to aid in lifting the door and in pulling the door from its vertical position.
 - iv). Safety
 - (1) The trap door and folding step assembly shall be designed to minimize pinch points.
 - (2) Trap doors, either open or closed, shall be free of sharp edges and corners, burrs, nicks and gouges.
- c). Environmental Considerations
 - i). The outer edge must be designed to ensure the side entrance door seal is watertight.

- ii). The trap door when closed shall form a water-tight seal with the adjacent side entrance door.
 - iii). Threshold of the trap door shall have provision for protective heat system to prevent ice-build up.
 - iv). Trap door latches shall be ice breaking type.
 - v). The folding steps shall be designed to prevent buildup of ice and snow from forming that would prevent the folding steps from operating or make them unsafe to use. Drain holes shall also be provided at the back of each tread.
- d). Operation
- i). The trap door and step operating mechanism shall be designed so that the trap door can be opened or closed with a maximum force of 25 pounds at any point in travel.
 - ii). It shall be an assembled module mechanically linked such that moving the trap door controls the movement of the folding steps.
 - iii). When the slam latch is released, the door shall rise 4 to 5 inches, thus requiring the operator to manually work the trap door to its extreme position.
 - iv). When the step is being lowered, the mechanism shall be damped so it cannot fall freely.
- e). Materials
- i). The modular trap door and folding step assembly shall be constructed of stainless steel and shall not corrode during the life of the car despite the frequent use of salt for thawing, operating in seashore air, salt spray from operating near highways and grade crossings, etc.
 - ii). The threshold and surfaces subject to foot traffic shall be of a non-skid material as defined by the ADA.
 - iii). The top surface of the trap door shall be an approved non-skid synthetic floor covering surrounded with stainless steel protected edges.
 - (1) The synthetic floor shall be the same as the fixed floor in the vestibule.
 - iv). Treads shall be constructed of approved anti-slip material.
 - v). Non-skid surfaces shall retain their non-skid rating in wet and dry conditions and shall retain their coefficient of friction for minimum of five years.
 - vi). Wearable non-skid components shall not be permanently affixed to the car.
- f). Markings

- i). Periphery of the trap door and folding steps shall be highlighted by two (2) inch federal yellow stripes that are integral to the trap door and have high corrosion-resistance and wear-life.
- ii). Reflective tape shall be applied to all step risers.
- iii). Contrasting step edging shall be applied in a manner which makes the tread detectable whether ascending or descending stairs.

12.6 Automatic Sliding Restroom Door

- a). A powered sliding pocket door with lock. The lock shall be operable from the outside with a standard Amtrak Conductor coach key
- b). A minimum 32 in. "clear passage" shall be provided through the doorway when the door is fully opened.
- c). All controls, switches and amenities readily accessible and operable by passengers with disabilities.
- d). The door leaf shall incorporate a service-proven obstruction sensing system.
- e). An LED indicator light REST ROOM OCCUPIED on the outside of the restroom, and a LED indicator light DOOR IS LOCKED WHEN LIT on the inside of the restroom, activated when the door is locked (see Chapter 11).
- f). A decal shall provide door lock operation instructions.
- g). In the event that the door operator is in fault, the door shall be operational in manual mode to open, close, and lock.
- h). The door operator shall include a maintenance switch which will remove power from the motor to prevent operation while maintenance work is in process.
 - i). All functions will be available, including diagnostics.
- i). The door equipment mounting and internal fasteners shall be such that once adjustments are made, and locked, they need not be disturbed until equipment overhaul or replacement.
- j). Access shall be provided to all points necessary for service, installation or removal of the powered door and operating apparatus.
- k). The door operator and controls shall operate from nominal 74VDC car battery system.
- l). The door operator and controls shall operate normally over the entire voltage range of charging down to load shed without damage and without affecting the reliability and serviceable life of the operator.
- m). The drive mechanism shall be designed to minimize torque applied to the door panel during operation.

- n). The operator and linkage for the doors shall be arranged so the maximum force required to manually move a door panel with power removed shall not exceed 20 lbs.
- o). The door operator shall preclude slamming or rebound and shall bring it to rest gently at the extremity of door leaf travel.
- p). The door motion shall be smooth and free of shock and impact.
- q). Damping shall be provided at the ends of travel of the door panel in both the opening and closing directions.
- r). In the opening direction damping shall preclude the door leaf from contacting the mechanical door stop.
- s). Door leaf travel shall be easily adjustable through a single adjustment point to set open and close positions.
- t). Opening and Closing Times
 - i). Door opening and closing times shall be independently adjustable and shall be initially set with DC bus voltage with HEP on, at:
 - (1) Opening: 2.5 ($\pm$ 0.5) seconds
 - (2) Closing: 3.0 ($\pm$ 0.5) seconds
 - ii). Door motor control and timing function shall be incorporated on the operator unit.
- u). Reliability
 - i). The door operator shall require adjustments no more frequently than every 460 days.
 - ii). The door motor and operator assembly shall be suitable for operation without component replacement between heavy overhaul periods of at least eight years.
 - iii). The door motor shall be a sealed design and suitably protected from the surrounding environment.
- v). Overhead Door Track
 - i). Door leaves shall be suspended from an overhead door track.
 - ii). The track and door hanger assembly shall have minimum service life of 25 years.
 - iii). The track shall be convex with the curve on top, so as to be self-cleaning from buildup of dust.

- iv). The door track shall employ concave rollers, with sealed, permanently lubricated bearings.
- v). The overhead door track and rollers shall not be affected by environmental conditions, including the accumulation of dust.
- vi). The door hanger and track shall be able to resist without damage or permanent deformation a force of 200-lbf applied perpendicular at the center of the door panel both in either the inward or outward directions.
- vii). The rollers shall be secured to the hanger assembly with a mechanism, both to adjust for level as well as control vertical free-play between the hanger assembly and door track.
- viii). Door leaf adjustment shall allow the space between the nosing seal to be made constant from the top to the bottom of the leaf.
- ix). The amount of track-to-roller free-play shall prevent the trailing edge roller from lifting on the track if the door leaf strikes an obstruction down low while closing.
- x). Adjustment of free-play clearances shall be easily done using standard tools.
- xi). The track itself and mounting to carbody (not the door-to-hanger connection) shall be adjustable to accommodate both carbody and door leaf tolerances, including both height and plumb.
- xii). The door track and hanger shall not require lubrication over its life.
- w). Bottom Door Guides and Thresholds
 - i). A door guide with corresponding threshold shall be provided at the bottom of the door.
 - ii). Wear strips, if provided, shall be easily replaceable without removing or readjusting the door panel.
 - iii). The bottom guide arrangement shall ensure operation with no binding or rattling.

12.7 CDRLs

CDRL	Description	Due
CDRL 12-01	Tone and Volume of Audible Signal	30 days prior to PDR
CDRL 12-02	Engineering analysis of side door operator's ability to operate over full HEP voltage range without damage.	30 days prior to IDR
CDRL 12-03	Side Door System Failure Mode and Effects Criticality Analysis (FMECA) and Fault Tree Analysis (FTA)	30 days prior to IDR
CDRL 12-04	Proposed door signage samples, location and adhesive	30 days prior to IDR

* End of Chapter 12 *

Amtrak Single Level Fleet Replacement

Technical Specification

13. Lighting System

Revision 0

Table of Contents

13.1	Overview	13-1
13.2	General Requirements	13-2
13.3	Lighting Plan	13-3
13.4	Interior Lighting Levels	13-4
13.5	Interior Lighting Modes.....	13-5
13.6	Interior Lighting Requirements	13-7
13.7	Interior Backlighting.....	13-12
13.8	Exterior Lighting Requirements.....	13-12
13.9	Lighting Component Requirements.....	13-14
13.10	Housings, Lenses and Diffusers	13-16
13.11	Controls	13-18
13.12	LLEPM and HPPL Emergency Signage.....	13-19
13.13	Minimum Illumination Levels	13-19
13.14	CDRLs.....	13-21

Table of Figures

Figure 13-1: Feature Light Fixtures.....	13-4
Figure 13-2: Minimum Illumination Levels	13-20

13.1 Overview

- a). This Chapter describes the interior and exterior lighting system that shall be provided on all car types.
- b). The lighting system as designed shall enhance the appeal of interior furnishings and create a comfortable and pleasant atmosphere while providing for maximum passenger and crewmember safety.
- c). Normal and emergency lighting shall conform to the requirements of all applicable APTA standards and FRA regulations.
- d). Automatic load shedding of certain lights shall take place when the Head End Power (HEP) supply is interrupted, and the battery voltage drops to certain levels.
- e). All lighting equipment shall meet the requirements of Chapters 15 and 20, the voltage swing requirements of Amtrak Specification 429, and the environmental requirements of Amtrak Specification 963.
- f). Lighting system components shall not cause radio frequency interference (RFI) to any car or operations systems.
- g). The lighting system shall provide six modes of interior lighting: normal, quiet car, night, standby, emergency and cleaning.
- h). Interior and exterior lighting, as well as indicator lights, shall be provided by Light Emitting Diodes (LEDs) and will be supplied by the low voltage DC system
- i). Other state of the art lighting technology may be proposed to Amtrak for review and acceptance.
- j). Elements of this lighting system will be available for use as the standby lighting.
- k). Fluorescent, Incandescent and Halogen lights shall not be used except as specified.
- l). For lighting requirements in the food service areas of the Cafe/Lounge cars, see Chapter 16.
- m). The Contractor shall prepare and submit an interior and exterior lighting plan **[CDRL 13-01]** for Amtrak review and acceptance during the design review. The plan shall describe the type of lighting to be used in all applications, including:
 - i). fixture type,
 - ii). voltage and color temperature,
 - iii). illumination levels at specified locations for all lighting modes, and
 - iv). compliance with emergency lighting and signage regulations and standards.

13.2 General Requirements

- a). Fixtures installed in the interior within 3 ft. of a doorway that can be exposed to weather when the door is open, shall be watertight to IP55 or better.
- b). Fixtures installed on the vehicle exterior shall be watertight to IP56 or better.
- c). Car interior lighting shall provide adequate and convenient illumination under all ambient lighting conditions from complete darkness to bright sunlight.
- d). Lighting in all locations shall be arranged to minimize shadows, avoid glare and excessive brightness ratios.
- e). Lighting shall be appropriate for the application, easily maintainable and compliant with all regulations and standards, including this specification.
- f). Luminaires of differing voltages shall not share the same base design, and luminaires shall not be interchangeable between fixtures with differing voltages.
- g). Commonality and standardization of components between fixtures should be used wherever possible.
- h). Unless otherwise specified, the interior lighting shall be based on the latest guidelines of all of the following:
 - i). the Illuminating Engineering Society (IES) of North America
 - ii). the requirements of the American Public Transportation Association (APTA) standards:
 - (1) PR-E-RP-002-98: Wiring of Passenger Equipment
 - (2) PR-E-RP-012-99: Normal Lighting System Design for Passenger Cars
 - (3) PR-E-S-013-99: Emergency Lighting System Design for Passenger Cars
 - (4) PR-PS-S-006-23: Emergency Egress/Access Signage and Low-Location Exit Path Markings (LLEPM).
- i). All lighting components shall have prior experience in North American transit, commuter rail or intercity passenger rail application.
- j). All lighting sources shall be suitable for rough duty service found in the railroad environment throughout North America.
- k). At its sole discretion, Amtrak may accept other components based upon provided shock and vibration test results, and EMC interference analysis.
- l). The Contractor shall provide drawings of the lighting arrangement of each vehicle type, and the location and quantity of each lighting fixture, switch, control, and luminary type.

- m). All luminaires used in all fixtures shall be readily available through a U.S. distributor and available from multiple sources.
- n). All luminaires must be replaceable without replacing the entire fixture or requiring specialty tools, except where approved by Amtrak.
- o). All controllers shall report alerts and fault information to the car diagnostic system if applicable.
- p). The design and all components of the lighting system shall be submitted for review and acceptance by Amtrak during Design Review.
- q). All materials and workmanship shall comply with Chapter 19.
- r). The lighting fixture housing or socket shall not be used as a ground return for any other electrical circuits.
- s). Lighting fixture and consumable types shall be consolidated as much as practical.

13.3 Lighting Plan

- a). Design Review
 - i). The Contractor shall provide drawings of the lighting arrangement of each car type for Amtrak review and acceptance during Design Review. Outline drawings shall be submitted at PDR and updated for FDR submittal. **[CDRL 13-02]**
 - ii). Fixtures providing standby and/or emergency lighting shall be identified at Preliminary Design Review. **[CDRL 13-03]**
 - iii). The location of each lighting fixture, circuit breaker size and location, switch, control, luminary type, color, luminance value (in footcandles) and quantity shall be clearly identified at Intermediate Design Review and updated for FDR submittal. **[CDRL 13-04]**
 - iv). Required charging light levels for photo luminescent (HPPL) emergency exit signage and Low Location Exit Pathway Markings (LLEPM) components will be identified during Design Review and validated during qualification testing. **[CDRL 13-05]**
 - v). Physical examples of each lighting fixture shall be provided for Amtrak review and approval at the Final Design Review. **[CDRL 13-06]**
 - vi). Lighting fixtures shall not be a source of Electromagnetic Interference (EMI) and shall be included in the Electromagnetic Compatibility (EMC) plan required by APTA Standard PR-E-S-010-98. See Chapter 20.
 - vii). The Contractor shall provide certification to Amtrak that the car's lighting system meets all standards and regulations **[CDRL 13-07]**
- b). Additional Feature Lighting Fixtures

- i). In addition to light fixtures required to meet standards and regulations, the following light fixture types shall be integrated into the interior and food service areas. See Chapter 11 and Chapter 16 for additional information.

Figure 13-1: Feature Light Fixtures

Area	Type	Location
Luggage Storage	Indirect	Under Shelf
Luggage Storage Coach	Reading Light	Overhead track
Entrance Area	Panel Spotlight	Ceiling
Entrance Area	Step lights	Threshold
Coach	Gondola Wash	Ceiling
Coach	Panel Spotlight	Ceiling
Standard Coach only	Compartment	Under seat
STR Standard Toilet Room	Panel Spotlight	Ceiling
STR Standard Toilet Room	Compartment	Floor Light
STR Standard Toilet Room	Compartment	Sink Light
STR Standard Toilet Room	Compartment	Mirror Light
ATR Accessible Toilet Room	Panel Spotlight	Ceiling
ATR Accessible Toilet Room	Compartment	Floor Light
ATR Accessible Toilet Room	Compartment	Sink Light
ATR Accessible Toilet Room	Compartment	Mirror Light
Café Lounge	Gondola Wash	Ceiling
Café Lounge	Panel Spotlight	Ceiling
Café Lounge	Strip Lights	Shelf Lighting
Café Lounge	Feature spotlight	Service Counter
Café Lounge	Wash	Counter Wash

13.4 Interior Lighting Levels

- a). Lighting Standards

- i). All light level measurements shall be made in accordance with the minimum standards defined by the following APTA standards:
 - (1) PR-E-RP-012-99: Normal Lighting System Design for Passenger Cars
 - (2) PR-E-S-013-99: Emergency Lighting System Design for Passenger Cars
 - (3) PR-PS-S-006-23: Emergency Egress/Access Signage and Low-Location Exit Path Markings (LLEPM)
- ii). Where lighting levels in Figure 13-2 differ from APTA PR-E-RP-012-99, the requirements indicated in Figure 13-2 shall be used.
- b). Lighting Color Temperatures
 - i). The lighting color for all white interior luminaires throughout the car shall be in the range of 3000°K to 4100°K, +/- 500°K between any lights, and accepted by Amtrak. LED luminaires shall have a color rendering index (CRI) of at least 80, with the same color consistency and color stability.
 - ii). The Contractor is to provide a suggested light color plan for Amtrak's review and approval during the preliminary design review. **[CDRL 13-08]**
- c). Minimum Lighting Illumination
 - i). The minimum spatial average of illumination shall be at the points listed in Figure 13-2, and shall meet the minimum value(s), measured in foot-candles, with all lights on and at the rated voltage when the equipment is new.

13.5 Interior Lighting Modes

- a). Mode Control
 - i). See Section 13.11 for Control Description.
- b). Normal Lighting Mode
 - i). Normal lighting mode shall be available when the car is operating from a Head End Power source.
 - ii). All lighting fixtures and elements intended for use while the car is in revenue service shall be available during normal lighting mode.
 - iii). Minimum illumination levels for normal lighting mode are shown in Figure 13-2.
- c). Quiet Car Mode
 - i). Normal lighting mode in the car shall be arranged to allow the level of lighting to be reduced for passenger comfort during early morning and late evening operation, while maintaining sufficient lighting for passenger and crew safety, and compliance with standards and regulations.

- ii). This reduced light level, referred to as “Quiet Car” mode, may use any combination of lighting elements so long as minimum light levels are maintained at “Standby” illumination levels throughout the car, and all light fixtures operating during quiet car mode remain powered at all times.
 - iii). A dedicated, clearly labeled switch in the electric locker shall permit operating personnel to easily select either normal lighting or quiet car mode lighting.
 - iv). Minimum illumination levels for quiet car mode are shown in Figure 13-2 under the “Quiet Car” column.
 - v). The Contractor shall carefully design the lighting fixtures and their controls to permit the Quiet Car lighting mode to have a minimum of glare and annoyance to sleeping passengers, especially those seated adjacent to the aisle.
 - vi). Light reflections and glare from bright metal body end doors shall be minimized.
- d). Night Lighting Mode
- i). Night lighting shall only provide minimal illumination to aisleways to allow safe passenger movement and not disturb seated passengers from resting.
 - ii). Night lighting mode shall not negatively impact the light intensity levels of all food and beverage service locations. All FDA light intensity level requirements for food preparation counters, sinks, and workspaces shall be maintained by shelf lighting alone. See Chapters 11 and 16 for additional information.
 - iii). The selection of lights being powered in this mode will be determined during design review when the lighting arrangement concepts are drafted.
- e). Standby Lighting Mode
- i). Standby lighting is that which is available when the cars have lost 480VAC Head End Power (HEP), but the car battery has not yet discharged to load shed.
 - ii). This lighting mode is intended to keep sufficient lighting operational for a period of at least 90 minutes so that short term loss of HEP will not affect the passengers’ ability to safely move throughout the cars.
 - iii). Minimum illumination levels for Standby mode are shown in Figure 13-2.
- f). Emergency Lighting Mode
- i). Emergency Lighting mode is that which is available after load shed has occurred. See Chapter 15 for load shed details.
 - (1) This lighting provides passenger orientation and sufficient light levels for passengers to move about safely within the car and if necessary, to find the nearest safe exit point.

- (2) It is especially important in trap steps, aisles, vestibules and enclosed spaces, such as toilet rooms.
- ii). Emergency Lighting mode shall operate by hardware only. Software control of emergency light mode or intensity levels is prohibited.
- iii). Emergency Light Intensity shall be met using the L70 end of life cycle light output levels.
- iv). Once the low voltage system reaches a pre-determined low-voltage threshold, all standby lighting is extinguished and emergency lighting shall illuminate.
- v). This lighting system may use dedicated fixtures, may provide a reduced level of illumination from the normal lighting system, or may use some but not all of the normal lighting fixtures.
- vi). The emergency lighting system shall be powered by independent power sources for a minimum of 90 minutes as defined in APTA Standard PR-E-S-013-99.
- vii). End-of-life self-diagnostic and test functions shall be included with the emergency lighting system.
- viii). Emergency lighting shall comply with 49 CFR Part 238.115 and APTA Standard PR-E-S-013-99.
- ix). Energy storage components, batteries or capacitors must have all contacts and terminals covered to prevent shorting during storage or installation, and easily changed out using a connector.
- x). Energy storage components shall be common between all fixtures whenever possible.
- xi). The Contractor shall submit an Emergency Lighting Plan to Amtrak for review and acceptance during Design Review **[CDRL 13-09]**.
 - (1) The Emergency Lighting Plan shall describe and illustrate the emergency lighting system, including location, type and design of all lighting fixtures and the level of illumination that shall be provided at all points as identified in APTA Standard PR-E-S-013-99.
- xii). The Contractor shall demonstrate compliance with emergency lighting requirements and shall provide to Amtrak written certification of compliance. **[CDRL 13-10]**
- g). Cleaning Mode
 - i). Cleaning Mode is a temporary mode that increases the interior light intensity to 30 foot candles to facilitate cleaning. See Section 13.11.b). for additional details.

13.6 Interior Lighting Requirements

a). Passenger Area

i). General

- (1) The following describes the individual lighting fixture applications and specifications for all passenger areas of the car.
- (2) Light fixtures in toilet room ceiling, vestibule ceiling and hallway ceiling shall be identical units if possible.

ii). Main Ceiling

- (1) Longitudinal rows of lights shall provide the primary lighting for the revenue seating areas of all car types, and the passenger area of the food service car.
- (2) Indirect lighting shall be the source of illumination to meet minimum illumination levels.
- (3) Other arrangements can be proposed but are subject to Amtrak review and acceptance.
- (4) These LED fixtures provide the main light source to the car and provide lighting to the aisle as well as general lighting to the seating areas.
- (5) The fixtures shall be trough-construction units, mounted end-to-end. They shall be equipped with terminal blocks or connectors, as accepted by Amtrak, wired in parallel fixture-to-fixture, including all bus wiring for the entire fixture string for normal, quiet car, night and standby modes.

b). Reading Lights

i). General

- (1) Reading lights shall be white LEDs powered by 74 VDC, 24 VDC or other approved DC voltage.
- (2) They shall be mounted such that illumination requirements are achieved. Each reading light shall have an on/off switch.
- (3) Reading lights shall have a maximum light intensity of 20 foot-candles when measured at a seated passenger's lap. Light intensity shall be passenger adjustable by either a dimmer switch or an integrated on/off/dimmer switch.
- (4) Reading light orientation shall be passenger adjustable within a limited range, and beam dispersion to prevent disturbing adjacent passengers.

ii). Reading Lights for Main Passenger Seating

- (1) Individual reading lights built into each revenue seat or overhead shall be provided.

c). Vestibules and other Non-Seating Areas

i). Flush-mounted overhead light fixtures

- (1) Overhead lighting fixtures in vestibules and non-seating areas shall be proposed to be aesthetically appealing rather than an industrial type fixture.
- (2) Flush-mounted overhead light fixtures with LED light elements shall be provided in the following locations for the purposes of commonality and interchangeability:
 - (a) End passageway
 - (i) The end passageway light(s) shall be a weatherproof, sealed light unit mounted overhead adjacent to the diaphragms on all car types.
 - (ii) The unit shall cast adequate light throughout the passageway area including handholds, door panel, walkway surface, signage and handbrake.
 - (b) Ceiling at side entry doors
 - (i) Flush-mounted lighted ceiling panel fixtures shall provide overhead light to the areas adjacent to the side entry doors and adjacent station platform.
 - (ii) The lighted panel assembly shall provide indirect lighting towards the center of the panel.
 - (iii) The same fixture shall be used at all side entrance locations, including service vestibules in the food service and lounge cars.

d). Toilet Rooms

i). Toilet ceiling and mirror

- (1) Light fixtures shall be mounted on the ceiling of each toilet room to provide general lighting to the toilet room.
- (2) Care shall be taken to provide good color rendition for cosmetic makeup application and other personal grooming purposes.
- (3) Lighted mirror designs shall be presented in the toilet rooms during design review.
 - (a) A concept for a rounded LED light that illuminates the mirror around the boarder shall be presented at Preliminary Design Review and updated for approval at Final Design Review.

- (b) A concept for a backlit mirror shall be presented at Preliminary Design Review and updated for approval at Final Design Review.
 - (c) The mirror light shall only be activated when the door to the restroom is locked. It shall be off when the door is unlocked to raise awareness to the passenger.
 - (4) The lighting fixtures shall be provided as part of the toilet module.
 - (5) Toilet room occupied/out of service sign
 - (6) There shall be a toilet occupied/out of service light fixture associated with each shared toilet room.
 - (7) The toilet occupied/out of service light fixture shall be mounted on the toilet room exterior wall, adjacent to the toilet room door for all toilet rooms.
 - (8) This light shall consist of a two-light LED fixture with a sign containing text and/or a pictorial symbol which provides indication as to when the toilet room door is locked (occupied) and a second light that provides indication that the toilet room is “out of service” (when the toilet system is not functioning) as per Chapter 17.
 - (9) Lights shall be on when the toilet is occupied or out of service and shall be extinguished when the toilet is available for use. These LEDs shall be yellow.
 - (10) Artwork for the labels shall be submitted to Amtrak for review and acceptance during the design review. **[CDRL 13-11]**
 - (11) An indicator shall be provided inside the toilet room, adjacent to the door, that illuminates when the door is locked (parallel with the toilet occupied indicator outside the toilet room).
 - (12) This indicator shall be labeled “Door locked” when light is on.
 - (13) Concept for indicator can be incorporated into the door open button; however, Amtrak will review and provide approval during design reviews.
 - (14) The Contractor shall reduce the light level in the toilet room, which changes to full brilliance when the toilet room door is properly locked.
- e). Service and Utility Rooms
- i). Electric/Utility locker(s)
 - (1) All electric/utility lockers shall be illuminated by a minimum of one overhead light, controlled by an automatic door open magnetic switch that turns on the light when the door is opened.

- (2) For the purposes of this chapter, storage lockers, and storage cabinets shall be considered utility lockers.
 - (3) The light fixture(s) shall be protected by a clear shatterproof glass or polycarbonate lens, or other suitable protection, and shall not be vulnerable to damage during normal maintenance activities.
 - (4) Lights shall be operable during all lighting modes.
 - (5) The lights shall be so located as to provide general illumination within the locker, provide sufficient illumination to read any signage within the room, and be readily accessible for replacement.
- ii). Utility/Equipment Rooms and Closets
 - (1) For utility rooms adequate lighting shall be provided for all potential maintenance activities in the space.
 - (2) Lights shall only turn on when the magnetic proximity switch detects the door or access panel is open. The lights shall turn on if there is a proximity switch failure.
 - (3) General lighting shall measure 20 foot-candles at the floor.
 - (4) Sufficient lighting shall be provided to illuminate all signage to 20 foot-candles.
 - (5) Any other areas that are called out for running repair maintenance tasks shall have sufficient lighting in the general area of 20 foot-candles at the floor.
- f). Food Service Areas (Café)
 - i). Lighting requirements for the food service areas and seating areas are described in Chapter 11 and 16, except as noted.
 - ii). Food service areas are considered occupied areas and must have emergency lighting and emergency signage.
 - iii). Under-shelf spot or strip lights are preferred in the Café to localize the high light intensity and not impact the adjacent passenger interior areas.
 - iv). The Café must not depend on main interior car lighting as there are minimal lights on during quiet and night modes of operation.
 - v). Food preparation and serving areas shall meet the requirements of FDA Food Code 2022, Section 6-303 Lighting.
 - (1) All food preparation surfaces shall measure 50 foot-candles along the entire counter.
 - (2) Hand wash sinks shall measure 20 foot-candles at the center of the sink.

(3) Inside the Café area shall measure 20 foot-candles at the floor.

13.7 Interior Backlighting

- a). At a minimum, backlighting will be expected on all mirrors, displays and logos unless otherwise directed by Amtrak.

13.8 Exterior Lighting Requirements

a). Standards

- i). All exterior lighting components shall meet the environmental conditions specified in Amtrak Specification 963.
- ii). All exterior lights shall be rated IP56 or greater.

b). Marker Lights

- i). All cars shall have two red marker lights at both ends.
- ii). The marker lights shall be LED with thermostat-controlled heating elements to protect against frosting, or be recessed behind heated cover, and shall meet FRA requirements in 49 CFR Part 221.
- iii). If LEDs with heating elements are used, the condition of the heating system must be readily determined by simple visual inspection so that there is no risk of the marker visibility being diminished or obliterated.
- iv). Failure of the heating system will be considered a failure of the marker itself.
- v). The marker lights shall be operable during all lighting modes operating off main car battery.
- vi). The marker lights will be controlled by a crew-operated switch in the car electric locker.

c). Platform Lights

- i). Each side door opening shall have a station platform light(s) that will illuminate the platform area adjacent to that door opening when those doors are opened.
- ii). These lights shall be mounted flush into the carshell or the threshold area and not protrude beyond the side of the carbody.
- iii). The lights shall be aimed downward so as to not shine directly into the eyes of passengers or crew standing on the platform or in the vestibule of the car and shall be mounted in an impact-resistant and waterproof housing.
- iv). The platform lights shall illuminate when any door panel in the adjacent door opening is opened, either by command from the door control system, by use of the emergency door release or by a local manual switch of a manual door.

- v). The platform lights shall remain off when the door panels are closed.
 - vi). Low level station platforms shall be illuminated to the requirements of Figure 13-2, which exceeds 49 CFR Part 38 and APTA recommended practice.
 - vii). The platform lights shall also be a part of the emergency lighting system and shall conform to APTA Standard PR-E-S-013-99.
- d). Step Lights
- i). The trap steps on each side door shall be illuminated to the requirements of Figure 13-2, which exceeds 49 CFR Part 38 and APTA recommended practice.
- e). Exterior Indicator Lights
- i). Each exterior indicator light shall be visible from both ends of the train of up to ten (10) car train length.
 - (1) Assemblies shall be designed to avoid false positive light indications from direct sunlight.
 - (2) Lens assembly shall be designed to avoid snow and ice buildup, either by shape of the assembly or by use of heated lenses.
 - ii). Each car shall be equipped with exterior door open indicator lights, one per side door.
 - (1) These indicators shall be red LEDs and shall be located on the exterior of the car above and adjacent to the door, so that the status of each side door is visible to the Engineer when viewed down the side of the train.
 - (2) The indicators shall display a red indication when any door in the adjacent vestibule is open (i.e., not closed and latched) and shall be dark when all doors in that vestibule area are closed and latched.
 - (3) A small ceiling mounted indicator light, located in the side door vestibule adjacent to each door, shall also illuminate when the adjacent door is not fully closed and latched, as an aid to the train crew.
 - iii). Each car shall be equipped with two exterior brake indicator light units, one on each side of the car, as per Chapter 9.
 - (1) Mechanical brake indicators may be used as an alternate to the indicator lights, if there is a brake status display elsewhere for the crew.
 - (2) Brake indicator light units shall use green, yellow, and flashing yellow LEDs.
 - (3) All indicator light assemblies shall be visible from both the front and the rear of the train, be able to withstand car washer brushes, and be located clear of any roof drains or gutters.

- (4) The indicator lens material shall be polycarbonate.

13.9 Lighting Component Requirements

a). Light Emitting Diode (LED) Lighting

- i). LED fixtures shall conform to the requirements of the *Energy Policy Act of 2005* or more recent requirements. The correlated white color temperature throughout the car shall be in the range of 3000°K to 4100°K, +/- 500°K between any lights, and accepted by Amtrak. Fixed color temperature accent lights shall be reviewed and accepted during design review.
- ii). Where practical, the LED lighting should be supplied from the DC system and be available in both Normal and Standby lighting modes.
- iii). All fixtures shall be dust and moisture resistant and shall be arranged to facilitate replacement of the LED luminaire from the passenger compartment.
 - (1) Luminaires shall be removable without special hardware after removing only the hinged lens if they are not replaced as a whole.
- iv). An LED driver designed to ensure proper operation of the LEDs shall be mounted on the LED assembly.
- v). LED assemblies shall be connected via interlocking, self-polarizing and modular connectors accessible when the light fixture is opened. Connectors and jumper wires shall be white in color to minimize visible dark spots behind lenses.
- vi). Power supplies shall comply with the requirements of Chapters 4, 15 and 20.
- vii). LEDs used in passenger area overhead lighting shall be mounted on replaceable boards installed in the light fixture.
 - (1) Boards shall be connected to the fixture by screws and shall be plug-connected electrically for easy replacement.
 - (2) The LEDs shall be sized and spaced so that the failure of up to three LEDs on an individual board shall not create an appearance of a dark area on the fixture. This dark area may be driven by the number of LEDs in series within the array, depending on the design.
- viii). LED lighting shall be sized to provide the level of lighting as outlined in Figure 13-2.
- ix). Changeable LED luminaires are preferred, and LED lighting may be dedicated to its fixture where the design is necessary.
- x). Using common LED/Driver boards is preferred whenever possible. The number of different boards shall be minimized.
- xi). White LED luminaires shall have lumen maintenance of 70 percent (L70) for a minimum of 120,000 hours as measured per the Illuminating Engineering

Society of North America (IESNA) standard LM-79-08, Electrical and Photometric Measurements of Solid-State Lighting Products.

- xii). All minimum lighting levels per APTA shall be maintained at the end of the 120,000-hour period.
 - xiii). The Contractor shall propose designs that include automated scenarios to address the known reduced light output as components age.
 - xiv). As Amtrak passengers occupy cars for extended periods, simply increasing the initial light output with no age compensation to address end of life degradation is not acceptable.
 - xv). LED luminaires shall be provided with sufficient heat sinks capable of keeping LED junctions and associated electronics below 125°F, regardless of summer ambient temperature and continuous operation.
- b). Independent Power Source
- i). General
 - (1) There shall be two independent power sources on each car to provide maximum emergency lighting availability on each car.
 - (2) Each power source shall be at least 20 feet apart from each other to avoid a single point failure in case of a catastrophic accident that could disable all emergency lighting on the car.
 - (3) Lighting fixtures shall alternate power sources over the entire length of the car to maximize availability of emergency lighting according to 49 CFR 238.115(b)(1) equivalent level of safety.
 - (a) It is acceptable to exceed the APTA specified distance between independent power source and the light fixtures that it powers as long as the 49 CFR 238.115(b)(1) equivalent level of safety is achieved with the overall arrangement.
 - (4) Independent Power Sources shall have their own dedicated equipment enclosure for improved maintainability.
 - (5) Independent Power Source risks must be included in the hazard analysis at Intermediate Design Phase.
 - (6) There shall be power source charge level indications to quickly show emergency lighting readiness to operations inspectors and maintainers preparing cars for passenger service.
 - (7) Power source charge level shall be reported on both the lighting power source enclosure with status LEDs, and the car network to the diagnostic system.
 - (8) Self-test functions of the independent power sources shall consider time required to function test the controller, validate power source

CONFIDENTIAL — DO NOT DISTRIBUTE

capacity, and display to the maintainer estimated time for self-test completion.

- (9) It shall be possible to self-test power sources either one at a time, or both simultaneously to minimize test duration for maintenance personnel.

ii). Battery-Based Power Source

- (1) Batteries shall comply with all requirements in APTA PR-E-S-013-99.
- (2) Battery and Battery Management Charging System can be combined into the same enclosure, but they cannot be combined with other lighting controls that have longer periodic maintenance intervals.
- (3) There shall be deep discharge protection for the battery.
- (4) Battery Management System failures and battery venting risks must be considered when designing the initial equipment enclosures at Intermediate Design Phase.

iii). Capacitor-Based Power Source

- (1) The required emergency lighting that has an alternate back-up to the vehicle batteries may be supplied by capacitor-based lighting.
- (2) The capacitors must be rated for a minimum of 500,000 charge cycles.
- (3) Capacitor terminals shall be covered to protect shorting and shall be connected to fixtures through connectors.
- (4) The capacitor-based power source for emergency lighting shall have a label located on the side of the unit exposed for service that includes the following information:
 - (a) OEM name and address
 - (b) OEM part number — revision/modification level and date
 - (c) Date of manufacture
 - (d) Unit serial number
 - (e) Voltage and capacity rating

13.10 Housings, Lenses and Diffusers

a). General

- i). The overhead light assembly shall be designed for luminary replacement from below. The hinged light lens shall swing down allowing easy luminary replacement.

- ii). No material shall suffer any loss of performance when exposed to environmental conditions specified in Amtrak Specification 963 or exhibit degradation of properties (including color) under long-term exposure to ultraviolet light.
 - iii). Lighting fixtures shall have lenses designed to aid in light distribution, prevent glare, permit easy luminary cleaning and facilitate luminary replacement.
 - iv). Fixtures equipped with lenses shall have a one-piece polycarbonate lens, either clear or translucent white, uniform in color and smooth on the exposed side, which will provide the specified intensity of illumination on the reading plane, while diffusing the light to illuminate adjacent wall and ceiling surfaces, increasing the overall brightness level in the interior of the car.
 - (1) The lens shall be mounted on a hinged bezel and shall be secured with captive fasteners.
 - v). The lenses shall project light with an even brightness without patterns and shall have a smooth surface on all sides and edges that are open to the passenger seating area to avoid injury.
 - vi). Tamper-proof fasteners shall retain door to the housing.
 - vii). A neoprene foam gasket around the lens assembly shall make the joining of door and reflector dust-resistant and rattle free.
 - viii). The diffuser lens shall be removable for replacement.
 - ix). The lenses shall be easily replaceable without having to disassemble the light fixture and shall be made of an approved Ultraviolet (UV)-stabilized polycarbonate and meet the Flammability, Smoke Emission and Toxicity requirements specified in Chapter 19.
- b). Apparent Light versus Illumination:
- i). The primary function of lighting fixtures is to provide controlled illumination for the safety, convenience and comfort of the passengers and train crew.
 - ii). Lighting fixtures produce illuminating and apparent light.
 - (1) Illuminating light projects or otherwise illuminates objects and areas. The illumination levels for those areas are defined within the specification according to the activities of those areas or other specific needs.
 - (2) Apparent light is the illumination that the passenger or crew person sees of the fixture itself.
 - (3) Lighting fixtures used for normal lighting (non-emergency) in continuously occupied passenger and crew spaces shall be designed so that the apparent light is unobtrusive to passengers. This is especially critical when cars are in Quiet Car Mode.

- (4) Fixtures shall be lensed and baffled to prevent the apparent light from being annoying or distracting to passengers and crew.
- iii). Lighting shall be designed to eliminate reflected glare beyond the intended illumination zone.
- iv). All fixtures in continuously occupied passenger and crew spaces must be shown during design review to not have normal direct view of the light source (LED array) or diffuser.

13.11 Controls

a). Lighting Control Human Interface General

- i). All lighting controls shall operate on an individual car basis, under the control of the train crew.
- ii). Amtrak accepted method of easily providing various levels of interior car illumination by the train crew shall be provided.
- iii). The car lighting controls shall be located in the switch locker located within the electric locker.

b). Lighting Control Override Switch

- i). Each car shall have a manual lighting control override switch with positions for Quiet, Night, Auto, and Cleaning as described in Section 13.5.
- ii). Cleaning mode position shall be momentary, and all other positions shall be maintained.
- iii). Cleaning mode shall have a software parameter time setting adjustable by Amtrak.
- iv). An additional reading light test switch or feature shall be provided such that all reading lights in a car can be turned on and off at once from the central controls.
- v). Controls and switches designated for crew operation shall be located on electrical panels separate from devices designated for maintenance operation such as circuit breakers. See Chapter 15 Electrical Panels for additional requirements.
- vi). All lighting shall be circuit breaker protected. Lights identified for on/off control shall have an on/off switch in addition to the circuit breaker. Controls shall be housed in the electric locker, except as listed below, where local controls shall be provided:
 - (1) Each reading light shall have an on/off switch located adjacent to the reading light.
 - (2) Each reading light at an accessible seating location shall have an on/off switch located in accordance with the requirements of ADA.

- (3) Electric and Utility lockers shall have automatic light magnetic proximity switches located inside the locker adjacent to the entry door.

Selected lighting circuits in the food service area shall have on/off switches. See Chapter 16 for details.

13.12 LLEPM and HPPL Emergency Signage

- a). General

- i). A low-level exit path floor marking system shall be installed in the car in compliance with APTA Standard PR-PS-S-006-23 Emergency Egress/Access Signage and Low-Location Exit Path Markings (LLEPM).
- ii). The system shall operate in conjunction with the emergency lighting system. Details shall be submitted to Amtrak for approval during design review.
[CDRL 13-12]

13.13 Minimum Illumination Levels

- a). Light levels shall be reviewed and finalized during design review.

Figure 13-2: Minimum Illumination Levels

Area	APTA REF	Measured At	Illumination Levels in Foot-Candles			
			APTA LEVELS	Normal Lighting	Quiet Car Lighting	Standby Lighting
General Overhead	6.3	45 plain	20	10	5	5
Reading Lights	6.3	45 plain	20	20	20	20
Aisleway Lighting	5.5	Floor	5	5	5	5
Vestibules, Steps	5.1	Floor Threshold	5	10	10	5
Low-Station Platform	5.1	Perpendicular to Threshold 3 feet away at each step height	2	5	5	5
End Passageway / Diaphragm	5.1 / 5.4	Floor	5	10	10	5
Toilet Room	5.6	Mirror	30	30	30	10
Toilet Room	5.6	Area	15	15	15	10
Food Service Area	10.3	Table Area	15	15	15	5
Passenger Service Counter Area	10.3	Counter	20	20	20	10
All Food and Beverage Displays		Each shelf		20	20	5
All Food Preparation Areas (FDA Food Code 2022 section 6-303)		Counter		50	50	5
Electric Locker	5.7	All signage		20	20	5
Utility Closet	5.8	Floor, Shelves		5	5	5
Luggage Rack Tower	11.3	At aisle on Floor	5	10	5	5

13.14 CDRLs

CDRL	Description	Due
CDRL 13-01	Interior and Exterior Lighting Plan	30 days prior to Lighting PDR
CDRL 13-02	Drawing of lighting arrangement for each car type	30 days prior to Lighting IDR
CDRL 13-03	Identification of standby and/or emergency lighting fixtures	30 days prior to Lighting PDR
CDRL 13-04	Details of lighting fixtures, luminaries, circuit breakers, controls and switches.	30 days prior to Lighting IDR
CDRL 13-05	Required charging light levels for HPPL and HPPL Emergency markings	30 days prior to Lighting IDR
CDRL 13-06	Physical examples of each lighting fixture	At FDR
CDRL 13-07	Certification to Amtrak that the car's lighting system meets all standards and regulations	30 days prior to Conditional Acceptance
CDRL 13-08	Suggested Light Color Plan	30 days prior to Lighting PDR
CDRL 13-09	Emergency Lighting Plan	30 days prior to Lighting IDR
CDRL 13-10	Demonstration and Written Certification of Compliance for Emergency Lighting	30 days prior to Complete car FAI
CDRL 13-11	Toilet Room artwork for labels	30 days prior to Lighting PDR
CDRL 13-12	LLEPM and HPPL Emergency signage details, including integration	30 days prior to Lighting IDR

* End of Section 13 *

Amtrak Single Level Fleet Replacement

Technical Specification

14. Communication System

Revision 0

Table of Contents

14.1	Overview	14-1
14.2	General Requirements	14-2
14.3	Public Address/Intercom (PA/IC) System	14-6
14.4	OTIS Capability	14-12
14.5	OTIS Requirements	14-17
14.6	Provision for Wireless Internet	14-34
14.7	Information Technology and Architecture	14-48
14.8	Ethernet Train Backbone (ETB) (Option) and Ethernet Car Network (ECN)	14-52
14.9	Electromagnetic Interference	14-56
14.10	CDRLs.....	14-57

14.1 Overview

a). System Manufacturer

- i). This chapter describes the system requirements for the on-board communication system to be provided on each car of the supplied fleet.
- ii). Amtrak is in-process of defining Televic LiveCoM Suite or progeny as their enterprise-wide supplier of choice for all on-board communication systems.
- iii). The contractor shall deliver a Televic or as an option, a comparable system that complies with the requirements of this specification. The contractor shall provide both solutions for Amtrak to evaluate.

b). System Composition

- i). The communication system consists of:
 - (1) Public Address / Intercom (PA/IC) system, including
 - (a) Public Address Speakers
 - (b) Public Address Amplifiers
 - (c) Attendant call system
 - (d) Passenger Emergency Intercoms
 - (e) PA/IC Control Stations
 - (2) Onboard Train Information System (OTIS)
 - (3) A reservation display system (including seat, compartments, and other passenger reservable areas) – Option
 - (4) A video surveillance system – Option
 - (5) Ethernet Train Backbone (ETB) – Option
 - (6) Ethernet Car Network (ECN)

c). System Functionality

- i). These systems have discrete functions that are extensively integrated to provide a comprehensive communication system within each car and (if ETB option exercised) between the car and other cars in the assembled consist. Each car shall operate independently in the situations where interoperability with the legacy fleet is required. New cars shall be interoperable with the existing legacy equipment, providing the full existing functionality of the legacy equipment when connected in consist on either, as well as both ends of contiguous sets of new cars. In addition to maintenance of existing functions of the legacy equipment via 27-pin trainline connections, the new cars shall be capable of receiving and transmitting all analog audio functions implemented

on the legacy fleet, as well as receiving, transmitting, and displaying attendant calls between the new fleet and legacy fleet. The Contractor shall prepare and implement an interoperability plan and demonstrate required interoperability with each identified fleet of legacy equipment.

- ii). Where practical, this design shall be based on modern state of the art technologies. It shall be built with an extensible architecture that shall both interface with systems that may already be in use in any existing rolling stock and in Amtrak's existing wayside environment, as well as support on-board systems, rolling stock, and wayside systems that may be added in the future.
- iii). The communications system shall comply with the requirements of APTA Standard PR-PS-S-001-98 and all applicable federal and state regulations.
 - (1) In the event APTA standard couplers, air brake hoses, or passenger car Head End Power/Communications/locomotive MU control electrical trainlines are used inter-car, the connections must meet all applicable AAR, APTA, and Amtrak standards.
- iv). The car's ECN shall be capable of multiple functions such as for destination sign and announcement control, diagnostics, video surveillance data transmission and download, and real-time health monitoring of on-board systems and components.
- v). The consist ECN shall facilitate data transfer between the on-board systems of the car and train and wayside communication systems through 4G and 5G multi-modem, multi-carrier routers implemented as the Data Communication System (DCS).
 - (1) If ETB option is exercised the contractor shall utilize the ETB and ECN to facilitate the aforementioned data transfer.
 - (a) The contractor shall identify cost savings by proposing alternate architectures.
- vi). Consist Length
 - (1) Consists are typically configured up to 1,530 ft in length excluding locomotives.
 - (2) All car functions shall operate per the standards of this specification within this length range.
 - (3) Trainline functions may operate at reduced levels at lengths greater than 1,530 ft based on an Amtrak approved technical justification that includes revised limits.

14.2 General Requirements

a). General

- i). The OTIS/PIS shall provide the passengers with both visual, audible, and digital information as configured and programmed by Amtrak such as the train

CONFIDENTIAL — DO NOT DISTRIBUTE

destination, present station, next station, pre-set messages, train consist arrangement, car and consist information, emergency messages and visual graphics, including advertising.

- ii). The information shall be provided through the interior and exterior signs, through interior and exterior speakers, through the inductive audio loop system, through Bluetooth LE Auracast broadcasts (option), and through other digital networked connections as required by Amtrak.
 - iii). The OTIS/PIS shall be a fully automated system, with the capability for overrides and adjustments by train crew and Amtrak wayside operations.
 - iv). Once the system is activated, through the selection of a pre-programmed route by train crew or an Amtrak wayside operation, it will automatically establish train location through the Global Positioning System (GPS) and sequentially display and announce the upcoming stations at programmed locations.
 - v). The system shall receive speed signals from the Ethernet Car Network to facilitate continued operation during times when GPS is not available and shall be capable of receiving train crew input to resynchronize train location.
 - vi). As an option, the OTIS/PIS shall support carborne Internet Service Provider (ISP) for Private Internet connectivity via a multi-modem multi-carrier 4G and 5G mobile access router, an Ethernet Train Backbone (ETB) between cars, and provisions for a Passenger Wi-Fi system in each car.
 - vii). The network and software architecture, design, and configuration of the equipment identified in this section shall be extensible by Amtrak, facilitating the addition or replacement of additional vehicle switches and end devices throughout the life of the vehicle through exposed APIs implemented at each device supplied as a part of these requirements which facilitate the interaction with Contractor supplied communication components.
- b). EMI/EMC Design Requirements
- i). The design and installation of the communications system shall ensure that it functions as intended, without interference to or from any other electronic equipment on the cars.
 - ii). It shall comply with the requirements of the Federal Communications Commission (FCC) for Class A radiation standards, the requirements of APTA Standard PR-E-S-010-98 and Chapter 19 for materials and workmanship.
- c). Fault Tolerance and Recovery
- i). The car and train level components of the system shall be fault tolerant, so that failure of one item shall not impair normal operation of the remainder of the system, and that any single point of failure does not result in good cause to remove the train from continued revenue service.

- ii). To accomplish this, it is expected that multiple communications controllers will be required per train, and that multiple PA Amplifiers will be required per car, and that diagnostic information will be available through multiple controllers.
 - iii). The Contractor shall identify the fault tolerance capabilities, recovery time, and user interaction required to maintain system operation. **[CDRL 14-01]**
 - iv). Momentary Head End Power (HEP) power outages shall not cause the system to require any reset, and upon the loss of power for any reason while executing a journey, the system shall return to its previous route and location without re-programming or reconfiguration by train staff.
- d). Public Address/Intercom (PA/IC) System Component Locations
- i). PA / IC control stations shall be located at least in the following areas, to be confirmed based on proposed car design and layout:
 - (1) At least one located in each car
 - (2) One located at each crew area, including:
 - (a) Conductor's office (if equipped), paired with a control terminal
 - (3) Located at each serving counter area
 - (4) One located at each boarding area, paired with a passenger accessible control terminal
 - ii). Speakers shall be provided throughout all cars.
 - iii). Speaker zones shall be located in the following areas of each car:
 - (1) Interior public passenger areas
 - (2) Exterior "left" zone
 - (3) Exterior "right" zone
 - iv). IP Based PA amplifier
 - (1) A minimum of two shall be provided in each car to provide redundancy of audible broadcasts.
 - v). Inductive Loop Amplifier
 - (1) Inductive loop amplifiers shall be provided on each car to provide passengers with assistive listening devices in passenger areas access to public PA announcements for that car.
 - vi). Interface to OTIS system
 - (1) The PA / IC system shall be controlled through OTIS Control Units throughout the train.

- vii). Interface to analog trainlines
 - (1) Each car's Public Address / Intercom shall support interface to analog trainlines.
- viii). Interface to Ethernet Train Backbone
 - (1) Each car shall interface with a redundant Ethernet Train Backbone to support the functions of the Communication system and its components.
- e). OTIS System Components
 - i). The Contractor shall provide the following equipment:
 - (1) Exterior destination signs; (all cars)
 - (2) Interior graphical displays; (all cars)
 - (3) Interior graphical displays with integrated control terminal; (all cars)
 - (4) OTIS Control Unit (OCU); (all cars)
 - (5) Data Communication System (DCS); (all cars)
 - (6) GPS; (all cars)
 - (7) Interface to Ethernet Train Backbone
 - ii). Some consolidation of functions may occur between PA and OTIS but the combined system must meet the requirements herein.
- f). Cellular Telephones
 - i). The Contractor shall ensure that mobile cellular telephones can operate reliably inside all cars within each car, under all on-board equipment operating conditions and at all locations along the Amtrak operating system, provided that the necessary external facilities have been installed by others.
 - ii). The Contractor shall include appropriate considerations taken as a part of the carbody design and/or window design to limit the impacts on cellular reception inside the vehicles from car construction, and from electrical and electronic equipment integrated into the vehicle.
 - iii). At PDR, the Contractor shall submit for Amtrak approval a plan for minimizing the attenuation based on car construction, such as using etched window coatings in vehicle glazing, RF transparent car-body components, or other approved approach.
 - iv). The Contractor shall submit a plan identifying the approach to reducing the attenuation of the carbody, on-board equipment, and glazing impact on cellular telephone reception to Amtrak for review and approval prior to PDR.
[CDRL 14-02]

14.3 Public Address/Intercom (PA/IC) System

a). Public Address (PA) System General Requirements

- i). Each car shall be equipped with a fully digital, IP Ethernet based PA system.
 - (1) Contractor shall provide alternate proposals to the use of IP Ethernet based system. Contractor shall determine cost effectiveness of options and present them to Amtrak for review.
- ii). The system shall permit the train crew to provide a manual PA announcement to the passengers and allow it to be directed to loudspeakers on only the local car interior, to the interior of all cars and/or to the exterior speakers of all cars.
- iii). The PA system shall also provide a means for a train crewmember to communicate by voice in an emergency situation to persons in the immediate vicinity of the car.
- iv). The PA system shall provide Amtrak's Consolidated National Operations Center (CNOC) with the capability to control the Public Address System, including making audio, visual, video and graphical announcements for emergencies, service disruptions, and otherwise as commanded by authorized Amtrak personnel.
- v). PA Amplifier Requirements
 - (1) Each PA amplifier shall have power supplied directly from the car low voltage battery circuit and protected by a dedicated circuit breaker.
 - (2) The PA amplifier shall interface with the OCU and with the control terminal over the DTL and drive the car speakers whenever audio messages are generated.
 - (3) The PA amplifier shall have a power output capacity sufficient to drive all the speakers on the car at the nominal speaker output power plus 25% spare capacity. The same PA amplifier unit model shall be installed on all car types.
 - (4) The PA system (from the input to the microphone to the output of the interior speakers) shall have a 90% intelligibility rating when tested according to ANSI Standard S3.2-1989 (R1999) and shall have the following performance characteristics for all modes of operation, including manual and automated digitized announcements:
 - (a) Frequency Response: $\pm 5\text{dB}$ from 250 Hz to 8 kHz
 - (b) Total Harmonic Distortion: Less than 1%
 - (c) Hum or Buzz: Signal-to-noise ratio greater than 40dB
 - (5) The PA amplifier shall incorporate a volume control adjustable only with the use of the Portable Test Unit (PTU) and through administrative

access provided via the wayside systems. The sound level from the car's speakers shall be uniform within $\pm 5\text{dB}$ at all passenger locations.

- (6) The PA amplifier shall be a programmable amplifier.
 - (7) The PA system shall have a Day/Night mode. The Day mode will be in normal operation. The Night mode will decrease the output by 8db. This mode should be able to be triggered by PA Control Panels, OCU, and car control terminals.
 - (8) The PA amplifier unit shall incorporate at a minimum, the following indicators on the front panel (alternate designs may be presented for Amtrak approval):
 - (a) On-Off LED – indicates when device is ON and power is present
 - (b) Fault indicator LED – indicates when a fault has occurred with PA Amplifier operation
- vi). PA and intercom systems shall be provided with sufficient battery capacity to provide for a minimum of 90 minutes of operation following loss of HEP. See Chapter 15.
- (1) Intermittent communication shall be considered equivalent to continuous communication during the last 15 minutes of the 90-minute minimum period for the purposes of Direct Current (DC) load budget calculations.

b). PA/IC Control Station Functional Requirements

- i). Each PA/IC Control Station shall be IP/Ethernet based.
- ii). Each PA/IC Control Station shall be powered via PoE via the Ethernet Car Network.
- iii). Each PA/IC Control Station shall allow the selection of audio zones, to be proposed at PDR and approved by Amtrak. Zones shall include, at a minimum:
 - (1) Exterior Left side
 - (2) Exterior Right side
 - (3) Interior
 - (4) Interior – local car
 - (5) Interior – Override
 - (6) All speakers
 - (7) Other specific channels as configured by Amtrak onboard staff (such as, Rail and Trails, or other secondary audio programming channels).

- iv). Each PA/IC Control Station shall be equipped with a handset.
- v). PA/IC Control Station Handset Requirements
 - (1) Handsets shall be equipped with a push-to-talk switch.
 - (2) The handset cord shall be equipped with an adequate strain relief fitting where it is attached to the handset.
 - (3) A handset holder shall be provided with each handset for storage when not in use.
 - (4) Each Handset should be attached to the PA Control Station the standard Amtrak microphone and handset connector plugs (p/n 10623456) to facilitate quick replacement when damaged.
- c). Interior and exterior speakers
 - i). Each vehicle shall be equipped with a sufficient number of speakers located throughout the interior of the car to provide a uniform audio level throughout each passenger compartment.
 - ii). The interior speakers shall be installed for replacement from the front, and sufficient length shall be provided in the wiring for this purpose.
 - iii). Each vehicle shall also be equipped with weatherproof exterior speakers installed on the exterior of the car sides, one speaker near each set of doors to enable the broadcasting of messages to passengers on the platform from the PA system from within the car.
 - iv). The speakers shall be phased so that when the primary is connected to the distribution network, all speaker cones shall move in the same direction at the same time.
 - v). The exterior speakers shall be fully weatherproof, mounted behind a strong, replaceable stainless-steel grille resistant to thrown objects and be immune to the chemicals and detergents normally used during vehicle washing.
 - vi). There shall be no feedback between car speakers and the control station handset when the public address system is in use.
 - vii). Speakers housed in private passenger compartments shall include a means for a passenger to control the volume on non-overridden audio announcements.
 - viii). Through the content management tool, individual announcements shall be marked as normal messages or override messages – such that routine station announcements could be muted, but special messages indicating critical information will play at a normal volume despite individual volume control.
 - ix). Through the PA/IC Control station, train staff shall be able to select the type of manual announcement.

d). Inductive Loop (Option)

- i). Each car shall be equipped with an audio inductive loop antenna and transmitter system, to allow receipt of announcements by passengers wearing hearing aids.
- ii). The system shall be integrated with the OTIS and PA systems to broadcast interior public messages that are broadcasted in the area of the inductive loop.
- iii). The system shall be ruggedized for the railroad environment and shall be a high output current design (no less than 10 Amps RMS), feature a high frequency gain potentiometer, feature metal loss correction, operate on vehicle nominal DC voltage, and include status LEDs for status information.
- iv). The solution shall meet all appropriate certifications for both Rail and Hearing Loop technology including, but not limited to EN-50155, EN-50121-3-2, EN-45545-HL2, IEC-60118-4, and IEC-62489.
- v). The solution design and implementation plan should align to BS-7594 or EN-303-348 and testing should be completed to verify that:
 - (1) Background magnetic noise is minimized.
 - (2) Magnetic Field is strong enough to provide full car coverage while minimizing interference with RF on the train (Wi-Fi, Mobile Voice and Data, etc.).
 - (3) Frequency Response is appropriate to T-Switch capable equipment.
- vi). The inductive loop shall cover all areas of the passenger compartments.

e). Bluetooth LE Broadcast (Option)

- i). Each car shall be equipped with the capability to broadcast audio and pertinent passenger train information via Bluetooth based transmitters.
- ii). All interior messages shall be broadcast via Bluetooth Auracast technology on a primary channel.
- iii). The OTIS system shall be programmable with alternative audio tracks – synchronized to be played back based on train position - that shall be broadcast on additional Auracast channels.
- iv). These additional program channels may be used to provide additional translations for audio announcements, or scenic commentary.
- v). Additional live PA audio channels shall be made available via Auracast when configured by onboard train staff to facilitate secondary live channels for specific programming, such as to enable receiving Amtrak's Rails & Trails programming throughout the train.

- vi). Bluetooth LE data channels shall enable broadcasting of a selection of triggers of passenger announcements to facilitate applications running on passenger devices to receive train information via the Passenger network, and relay information displayed on the interior displays.
 - vii). The Bluetooth LE broadcasts in each car shall enable beacon technology to facilitate micro-location within a train consist and train car. Amtrak shall have the capability to adjust beacon messaging. The contractor shall demonstrate that enough beacons have been implemented in each car and on each level to provide positioning within 8 feet when using triangulation techniques on consumer handsets.
- f). Two-way crew intercommunications (intercom)
- i). The crew intercom (IC) system shall be designed to allow the crew to communicate with other personnel on the train.
 - ii). For IC communications between crew members within the train consist, the IC mode must be selected on the PA/IC Control Station.
 - iii). To signal other crew members that an IC call has been requested, the PA/IC Control Station should give visual and audio feedback until another handset has been connected to IC by lifting it off the receiver and selecting IC mode.
 - iv). Audio and visual messaging indication through the interior passenger compartment speakers and interior messaging signs shall be capable of displaying and alerting train crew to a waiting intercom request through configurable means available to Amtrak.
 - v). At PA/IC Control Stations with adjacent Control Terminals, it shall be possible for train crew to communicate with specific IC stations, with IC stations on specific cars, or with specific connected crew app users.
 - vi). The intercom communication on a train shall support one to one and party line communications between PA/IC Control Stations and crew app users.
- g). Passenger Emergency Intercom (PEI)
- i). Cars shall be equipped with a passenger emergency intercom system that conforms to 49 CFR Section 238.121 and provides a means for passengers and crew members to communicate by voice with each other in an emergency situation.
 - ii). At least two PEI stations that are accessible to passengers without using a tool shall be located on each vehicle with one located on each end of the car.
 - iii). The location of each PEI station intended for passenger use shall be conspicuously marked with luminescent material and legible and understandable operating instructions shall be posted at or near each such intercom. Instructions shall include indication that the calls may be recorded.

- iv). PEIs shall trigger event recording on the NVR in order to mark the section of video recordings (if equipped) relevant to the PEI call.
- v). Amtrak, through a configurable setting, shall be provided the ability to enable or disable the NVR recording of the two-way audio calls synchronized with the video of the closest camera (if equipped) to the PEI.
- vi). PEIs shall be configurable by Amtrak, such that calls may be routed and answered by one or more call center locations that are not on the train, given there is sufficient bandwidth available from the Data Communication System. The PEI configuration shall include whether the calls simultaneously ring to the onboard staff or to the wayside, to the onboard staff only, to the wayside only, or to the wayside only if the onboard staff do not answer within a predefined time limit.
- vii). PEI calls shall be configurable to be annunciated by PA tone, through crew-app notification, and on the display screens, control terminal displays, crew control panels, and remotely. The annunciation shall be configurable to include car number, road number, relative position in train based on display location, and location in the vehicle.
- viii). A duress button shall be placed in publicly accessible restroom, which shall provide a similar indication as a PEI as described above.
- ix). PEIs shall be full duplex.
- h). Attendant Call System
 - i). Status of the attendant call (including pending call, answered call, and call on hold) shall be indicated through visual and audible means at the location requesting the call. The audible means, including sound and repetition, shall be configurable by Amtrak.
 - ii). When an attendant call is answered, the call button shall indicate the call has been answered, and a dedicated microphone “on” indicator shall be illuminated in the calling compartment. Microphone circuitry shall ensure the “on” indicator is illuminated any time the microphone is listening and include a means for passengers to mute the microphone.
 - iii). Attendant call LED indicators on the exterior of the compartments with pending attendant call requests shall be illuminated.
 - (1) This may be implemented through the use of a dedicated indicator on the reservation display system for the compartment.
 - iv). The system shall be capable of handling multiple attendant call requests, indicating the number, order, and location of all pending calls.
 - v). Status of attendant calls shall be made available on the Control Terminals, through the crew app, and to Amtrak systems on the wayside.

- vi). Attendant calls shall be selectable and answerable by PA/IC Control Units, through the crew app, or by Amtrak systems on the wayside.
- vii). Public restrooms shall have a one-way attendant call request without audio capability for the purpose of indicating when a restroom requires staff attention.
- viii). Each Control Terminal, and through APIs provided by the OTIS, each Crew App Instance, shall include the capability to configure the attendant call system to:
 - (1) select one or more compartments, lifts, and cars to receive calls for that station.
 - (2) silence all attendant calls for that station.
 - (3) Compartments or lifts that are not manually assigned to one station shall ring all stations.
 - (4) Unanswered attendant calls shall ring through to other stations after an Amtrak configurable period of time.
- i). PA Wiring
 - i). PA/IC Control Stations and PEIs shall be connected to the Otis Control Unit (OCU) via the Ethernet Car Network (ECN).
 - ii). The preferred method of powering PA/IC Controllers and PEIs is via PoE, alternative arrangement shall be submitted for approval by Amtrak.
 - iii). The OCU should be able to communicate between cars using an analog trainline.
 - (1) If ETB is exercised, the OCU should be able to communicate between cars using the Ethernet Train Backbone. The OCU shall also include an analog fallback that interfaces with the analog trainline.

14.4 OTIS Capability

- a). General Requirements
 - i). The OTIS shall be capable of full graphic, template, and video display including advertising through the interior signs.
 - (1) The OTIS shall provide the passengers with both visual and audible information such as:
 - (a) the train destination
 - (b) the car number
 - (c) the consist arrangement, including current car and coupled cars in a graphical format showing train layout and amenities.

- (d) present station
 - (e) next station
 - (f) dynamic route map
 - (g) pre-set messages
 - (h) emergency messages
 - (i) visual graphics
 - (j) advertising
 - (k) Time and date
 - (l) Current speed
- ii). The information shall be presented through the interior and exterior signs and the PA system as configured by Amtrak.
- iii). Configuration of the OTIS graphical displays shall be through a template system that shall support the use of:
 - (1) All vehicle diagnostic network variables (such as consist arrangement, system status, and speed).
 - (2) Communication system variables (such as present station, route, a location information).
 - (3) External feeds supporting ground-side integration capabilities for content and data so that information from Amtrak enterprise data sources may be delivered from the wayside via the Data Communication System, stored onboard, and displayed on the train information displays.
- iv). The OTIS shall be a fully automated system, with manual override feature. Once the system is activated, it will automatically establish train location through the Global Positioning System (GPS) and sequentially display and announce the upcoming stations at programmed locations.
- v). It is the Contractor's responsibility to supply equipment capable of operation in the rail environment consistent with Amtrak Specification 963 and EN 50155:2021.
 - (1) All individual components used in the fabrication of the equipment shall meet or exceed the requirements of the above standards.
- vi). The Contractor shall submit documentation and calculations for all individual components, and for the system as a whole for review and approval by Amtrak at the Preliminary Design Review (PDR) to demonstrate the conformance to the requirements in this technical specification and referenced standards. **[CDRL 14-03]**

- vii). The equipment shall meet the requirements of IEEE Standard 1477 and all FRA, AAR and ADA applicable rules, regulations and guidelines.
- viii). The PA function of the carborne OTIS system shall utilize only digital communication signals between OTIS equipped cars but be able to generate and receive analog audio signals from other cars as specified.
- ix). OTIS Equipment Power Requirements
 - (1) All carborne OTIS equipment shall be powered from the car's DC power supply.
 - (2) All equipment shall function normally and provide the specified performance for all supply voltage variations as required by EN50155 and based on the DC power supply design.
 - (3) Partial shutdown after load shed/drop of the equipment is acceptable, followed by automatic restarting as the voltage returns to the specified levels.
 - (4) No permanent damage shall be caused to the equipment following these conditions. See Chapter 13 for load shed/drop schedule.
 - (5) All carborne OTIS equipment shall be protected from damage from a polarity reversal of the voltage supply, and power supply shutdown and immediate reapplications.
 - (6) All carborne OTIS equipment shall have integral power conversion and conditioning. External power supplies are not acceptable.
 - (7) All carborne OTIS equipment shall be protected by external dedicated circuit breakers located on the car low voltage control panel.
 - (8) The circuit breakers shall be sized to protect the smallest size wire directly connected to the protected circuit.
 - (9) Fuses shall not be accepted either outside or inside the equipment.
 - (10) Internal circuit protection shall not be used, but if unavoidable must be a re-settable type of circuit protection approved by Amtrak.
 - (11) All low voltage power supply inputs shall be isolated from ground.
 - (12) All supply inputs shall be adequately filtered to minimize current and voltage ripple.
 - (13) All equipment enclosures and shock-mounted equipment shall be grounded in accordance with APTA Standard PR-E-S-005-98.
- x). OTIS Equipment Connectors
 - (1) All equipment shall be connected to the Ethernet Car Network via M12 connectors.

- (2) All connectors shall be located in the front of the equipment or other easily accessible locations for quick connection and disconnection.
 - (3) All connectors of the same type and size, with the exception of Ethernet M12 connectors, shall be keyed to avoid insertion into the incorrect location.
 - (4) Connectors shall be identified in accordance with the schematic designation. All connector types shall be submitted to Amtrak for approval prior to preliminary design review.
- xi). OTIS Equipment Maintainability
- (1) Removal and installation of any component shall not require the removal of any other equipment.
 - (2) Replacement of any Communication system component of the same type shall not require manual re-configuration. This shall be implemented through car-side coding connectors, dynamic assignment of IP addressing from car network switches, or other method approved by Amtrak.
 - (3) The enclosure mounting attachments shall be accessible for easy installation and replacement of the unit.
 - (4) Whenever enclosures are supported by their mounting attachments, threaded studs and self-locking nuts shall be used to facilitate their installation.
 - (5) All onboard equipment shall be housed in dust tight enclosures no less than IP54.
 - (6) Heat generating equipment shall have suitable heat sinks located on external surfaces of the enclosures and be cooled by natural airflow.
 - (a) Cooling fans are not acceptable.
- xii). OTIS Off-Board Customer Experience Simulation (Option)
- (1) A fully featured off-board customer experience simulation lab shall be provided to simulate all aspects of the journey. See Section 26 for specific requirements for the physical test lab specification.
- xiii). OTIS Journey Logging
- (1) A comprehensive set of logs shall be captured on each car and be collected and organized per consist for each journey initiated by Amtrak crew or systems.
 - (2) The log shall include the set of system inputs and triggers received by the on-board systems necessary to recreate system performance in the OTIS Off-Board Customer Experience Simulation lab for the purpose of

troubleshooting a journey configuration, further content development, and other uses.

- (3) The log shall include a summary of system operations and outputs, including actions taken per display screen, audio announcements made per car and per audio zone, and general status of communication equipment.
- (4) The system shall be capable of maintaining journey logs for a minimum of 30 days.
- (5) Log offload shall be enabled through the DCS based on as-demand and/or on a scheduled basis as configured by Amtrak.

b). System Operation

- i). The OTIS system shall automatically identify all cars by their car number and their location in the consist as soon as the train is formed, and power is applied.
- ii). The OTIS system shall determine the train location with the use of the GPS receiver, with fallback to tachometer received via the Ethernet Car Network.
- iii). The system shall self-report faults and errors in real-time over the air, and issues reporting and logging shall be automatic and feed into Amtrak systems. Additional diagnostic requirements can be found in Chapter 24.
- iv). System operation shall be a simple, clearly intuitive operation for the train crew.
 - (1) This shall include the commands necessary to initially establish the system operation at start of trip, making revisions during the trip (such as adding station stops, skipping station stops, special messages, food service advisory messages and so forth) and the conclusion of a trip.
 - (2) Such actions should be easily performed in a simple way without the need to refer to instruction lists.
 - (3) Any manual mode PA announcement by the train crew shall override any automatic announcement which may be taking place.
- v). The system shall be configured to easily allow the train crew to designate one or more cars as a "Quiet Car". This information shall be displayed on the car interior and exterior sign displays, and permit adjustment of audio announcements to a lowered level, as well as other features to be selected by Amtrak.
- vi). It shall be easily possible for the train crew to designate a car on a local car basis to be a deadhead car (out of service) and provide suitable interior and exterior sign messages.
- vii). Trip Operation

- (1) To establish the initial operation of the system at the start of a trip, the system shall use the train number and provide a means to confirm origin and destination.
 - (2) The associated content database entry for that train number will automatically establish the destination sign displays and the automated station announcements.
 - (3) The system shall permit programming flexibility to not make some or all destination sign displays (which may differ from the exterior and interior sign displays) or not make some or all automatic announcements.
 - (4) Such conditions may be encountered on late evening/overnight trains or on an individual "Quiet Car". At end of trip, a means shall be provided to automatically clear all displays after a programmable display of the last arrival / standing message.
- viii). The system shall take into consideration the length of trip for Long Distance operations and shall reliably operate across two days without manual or automatic reboots or train crew interaction.

14.5 OTIS Requirements

a). Display Signs

i). General Requirements

- (1) Sign Performance Requirements
 - (a) Signs shall be clearly readable in all ambient light conditions including total darkness and direct sunlight.
 - (b) The minimum viewing angle shall be 160° and readable at a distance of at least 115 ft for exterior and 45 ft for interior signs.
 - (c) The display shall have a high contrast ratio and have an automatic LED luminosity control for different levels of ambient light conditions.
- (2) LED dimming shall also be activated automatically by the OCU, to reduce low voltage supply consumption and extend backlight life, in case of car battery charging failure or during train layover.
- (3) All signs shall resume normal operation following supply power interruptions. No abnormal sign behavior shall follow any supply power interruption and reapplication.
- (4) The signs shall be housed in a dust-proof enclosure with a polycarbonate non-glare display faceplate with anti-graffiti resistant film applied, at each end of each car.

- (5) Signs shall have a self-diagnostic testing capability and provide fault condition information to the OCU, including sign location and type of fault.
 - (6) OTIS shall monitor the uptime, availability, and performance of each individual sign, and provide reports and logs through onboard PTU and wayside interfaces.
 - (7) The sign unit, upon the insertion of the car wiring connectors, shall automatically recognize its own location in the car, through special coding in the car-side connector pins.
- ii). Interior Display Requirements
- (1) Interior display screens shall be located to ensure high visibility and legibility for passengers throughout the train. The intent is to provide consistent access to passenger information without prescribing exact screen sizes, orientations, or positions. Screen placement should support dynamic wayfinding, real-time travel updates, and service information, including advertising (e.g. Travel Media Network).
 - (2) Screen Format: Aspect ratio, orientation, and mounting should be selected to support clear visibility in each context. All screens shall feature anti-glare treatments and meet accessibility standards for legibility, contrast, and resolution.
 - (3) Interior signs shall be sufficiently sized to maximize display area in the identified locations and be 4K displays with a resolution of 3840x2160 pixels. They shall be capable of:
 - (a) Audiovisual automatic announcements that include information such as present station, next station, route map, and arrival times.
 - (b) Text displays that may include time and date, train number, destination, and on-time and delay information.
 - (c) Special messages received from the onboard personnel and/or triggered from the wayside.
 - (d) Animated graphic displays, including entertainment, advertising, and content driven by wayside feeds configured by Amtrak.
 - (e) Reservation information for specific areas of the train.
 - (f) Menu options in café areas.
 - (g) Other requirements as defined in this section and in TS section 26.
 - (4) The displays shall utilize the maximum available space and maximize the sign display area, with minimal bezels or unused screen area.

- (5) Displays shall include ambient light sensors and be configured for auto-dimming.
 - (6) The signs shall meet all applicable The Americans with Disabilities Act (ADA) regulations and requirements, and the ADA Accessibility Guidelines (ADAAG) for Transportation Vehicles, including Subpart F.
 - (7) The signs shall be mounted in a tamper-proof anti-theft enclosure with tamper-proof fasteners.
- iii). Interior Display Types
- (1) Vestibule Screens
 - (a) Screens shall be clearly visible upon entering or exiting the car, positioned to be readable from multiple angles.
 - (2) Ceiling-mounted wide aspect displays
 - (a) Two ceiling-mounted wide aspect ratio (16:9) signs shall be installed in aisle ways where possible.
 - (3) Coach car displays
 - (a) Screens shall be positioned such that at least 75% of passengers have a clear line of sight from their seated position. Where full visibility is restricted by luggage racks or partitions, multiple screens should be used to maintain coverage. Content should remain legible from a seated position, without obstruction from fittings or furniture. Use available bulkheads to maximize screen visibility across the car. Position screens to maintain adequate head clearance in walkways, avoiding any obstruction to passenger movement in low-ceiling areas.
 - (4) Alternative displays in passenger compartment
 - (a) Where ceiling mounted wide aspect ratio displays are not practical, the contractor shall propose alternative display types such that each seated passenger has the ability to view a high resolution graphical display screen from their seated position in all coach areas.
 - (b) Interior graphical display screens shall be located at each café area to display digital menu options, Food & Beverage promotions or service information and other information as configured by Amtrak. Screens must be readable from multiple positions, including:
 - (c) While queuing (even when two or more people are in line)
 - (d) Directly at the point of purchase
 - (e) From seated positions in the Cafe/Lounge car

CONFIDENTIAL — DO NOT DISTRIBUTE

(f)

iv). Exterior Sign Requirements (Base)

- (1) An interchangeable display sign shall be provided on each side of the vehicle to indicate car number, car type, and service type.
- (2) Signs must be removable without damage to the sign or car should the car type or service type be modified post delivery.
- (3) Sign and mounting assemblies shall provide a service life for the sign to protect against weather, vibration, ultra violet rays, etc.
- (4) Special attention shall be given to ensure that the exterior sign does not appear interchangeable or temporary.
- (5) As Amtrak envisions that the Standard Coach will be utilized as a Business Class car on some routes especially on the Northeast Corridor, designs for this interchangeable display sign shall be presented at each stage of the design review process for Amtrak review and approval.
 - (a) A business class signifier shall be developed to accommodate this expected change in service type as well as the base car types.

v). Exterior Display Sign Requirements (Option)

vi).

- (1) As an option, an alternative exterior display sign shall be proposed. Exterior display sign shall be provided on each side of each vehicle to provide clear indication to passengers boarding relevant information about the train, car type, and amenities of the car. Alternatives may be presented for Amtrak review and approval.
- (2) Exterior display signs shall have a 16:9 aspect ratio and be oriented in a landscape fashion.
- (3) Exterior sign messages shall be configurable, and be capable of displaying train number, car number, car type, service type, destination, and other messages as programmed by Amtrak with fixed, paged, and scrolling text.
- (4) The exterior signs shall be full-color LED matrix (red/green/blue), high resolution and high brightness (1,300 nits minimum), with full multi-colored text and graphical capabilities.
- (5) Final selection of exterior sign capabilities, including pixel dot pitch, shall be reviewed and approved during Design Review.
- (6) All LED modules shall be controlled to extend LED life for a service life of no less than 12 years.

CONFIDENTIAL — DO NOT DISTRIBUTE

- (7) The signs shall be installed and supported to prevent any rattling, dust infiltration or movement of the sign itself.
- (8) The sign support shall allow for sign tilting to allow cleaning of the glass behind the sign.
- (9) Exterior sign glazing must meet FRA type 2 projectile resistance, unless installed on the outside of the carshell.
- (10) The exterior signs shall be designed to prevent fog and condensation and shall be resistant to any dust ingress or short periods of immersion in water.

b). OTIS Control Unit

- i). The OTIS Control Unit (OCU) shall control all interior and exterior signs on that car for visual messages and provide digital input to the PA amplifier for audio announcements.
- ii). The OCU shall monitor the signs and PA status for fault diagnostics and shall communicate with all other OCUs in a car over the trainline to verify their car systems status.
- iii). The OCU shall be a microprocessor-controlled device, have an open architecture and allow expansion for communication and interface with additional other systems including the car's central diagnostic unit.
- iv). In addition to the ports required for this expandability, at least one spare port shall be provided on each switch.
- v). The OCU microprocessor usage shall not be greater than 60% of the available processor capacity.
- vi). The Contractor shall provide all the software needed to operate the OCU. Message capability shall include, but not be limited to the following:
 - (1) Standard station stops
 - (2) Advertising messages, including audit logs of advertising playback
 - (3) Public service messages
 - (4) Unique messages, including car specific messaging and car number messaging (for ticketing).
 - (5) Emergency messages
- vii). The OCU-stored data shall be divided in several files, following their specific function, and stored in non-volatile memory.
 - (1) Modifications to the OCU-stored data shall be achieved by changes only to the parts affected, to minimize the transmission time.

- viii). Back-up batteries shall not be used.
- ix). Where removal of the chip is required for reprogramming, memory chips shall be made to easily upgrade and replace.
- x). The OCU microprocessor control shall re-initialize automatically and safely at power up, and/or following loss of supply power.
- xi). All OCU inputs and outputs shall be galvanically isolated from the external circuits. Shorting or opening of any of the inputs or outputs shall not result in any damage to the internal circuitry of the OCU.
- xii). The OCU shall have a specific port for connection to a PTU.
- xiii). All fault, diagnostic, status, and log information on the OCU shall be made available to the car's central diagnostic unit for remote access.
- xiv). All OCUs shall be directly interchangeable and capable of performing the same functions without the need for re-programming or re-configuration.
- xv). All data communication between the train's OCUs shall be through the ETB (if option exercised).
- xvi). The OCU shall also contain a bi-directional analog interface module that utilizes the 27-pin COMM trainline as a fallback or when interfacing with legacy equipment.
- xvii). The OCU should output per APTA PR-E-RP-017-99 maintaining compatibility with legacy equipment.
- xviii). The OCU should also be able to receive signals from legacy cars and locomotives via the 27-pin COMM and convert them for transmission along the trainline to the remaining OCUs in the cars.
- xix). The OCU shall have a self-diagnostic capability and store faults occurring in the OCU and in the other controlled systems, such as the signs and the PA amplifier.
- xx). The OCU shall have on a clearly visible location, separate from the display, a multicolor LED indicator providing indication of the car OTIS/PIS status.

Table 14-1 OTIS/PIS status Indicator

LED indicator	OTIS / PIS status
Green	Normal
Yellow	Fault
Red	Failure

- (1) The yellow indication shows that the system is working at a diminished performance, and that investigation, reset or repair is required, but the train may remain in service.

c). OCU Diagnostic Capabilities

- i). Faults shall be recorded with reference data including:
 - (1) car number
 - (2) time
 - (3) date
 - (4) location
 - (5) consist arrangement
 - (6) train number
 - (7) Other reference data defined by Amtrak at design review.
- ii). The fault memory shall store at least 100,000 faults in a first-in, first-out sequence.
- iii). The self-diagnostic system in the OTIS shall be capable of identifying the faulty component down to the replaceable unit and indicate the electronic module which requires replacement.
- iv). All subsystem signals, including all system hardware inputs and outputs (whether they are used or not), and software variables that impact the functionality of the system shall be transmitted to the CDU for viewing and recording in data monitoring systems.
- v). This information shall be stored in non-volatile memory locally and be transmitted for recording within the fault log in the CDU.
- vi). The diagnostic capabilities, including the list of signals, list of faults, and demonstration.

d). Reservation Display System

- i). A comprehensive reservation display system shall be provided that is controlled by the OTIS.
- ii). The system shall be capable of displaying Amtrak configured reservation information at each passenger position on the train, including:
 - (1) Coach Seats
 - (2) Mobility Positions
- iii). The system shall be capable of displaying both availability of seats as well as reservation information in a clear to read, high-resolution, TFT LCD based displays.

- (1) Reservation displays shall be configurable on a per-location, per-car, and per-train basis based on pre-loaded templates that are configurable by Amtrak.
 - (2) Displays shall be full-color graphical displays.
 - (3) The displays shall be capable of displaying a line of text, minimum 30 characters long, for each passenger position in the train. Displays shall support smooth scrolling for messages that exceed the maximum text line size.
 - (4) Display size, capabilities, and resolution shall be based upon the location in which they are used, including the distance from the position of a passenger standing in the car aisle adjacent to the display. Displays shall be a minimum of 480x224 pixels of resolution, with a display area of 275x75x25mm. Amtrak will entertain smaller than required displays as proposed by carbuilders which will be subject to Amtrak approval.
 - (5) Display dimming shall be coordinated with interior passenger information signs and interior lighting status.
- iv). Discrete RGB LED indicators shall be provided to indicate status for each reserved location. The indicator shall be capable of being configurable by Amtrak to display a variety of colors based on the exposed Seat reservation API, and shall be initially configured to show:
- (1) Reservation status, including:
 - (a) Reserved (red)
 - (b) Open (green)
 - (c) reserved at a further point in the trip (yellow)
 - (2) Ticket lift status (orange, until a lift has been performed by an Amtrak conductor, or the customer has checked-in, in which case it will show reservation status).
- v). The system shall be capable of receiving near-real-time updates on a seat-by-seat basis at all points of a trip via secure API from ground.
- vi). The reservation display system screen installation shall be reconfigurable to match seat pitch and location and shall be approved during Design Review.
- vii). Reservation displays shall be supplied at all seats and areas which may be reserved by passengers, such as handicap accessible locations and bike storage areas.
- viii). In addition to the use of discrete reservation displays, Amtrak is open to supplier proposals which use alternative technologies, such as transversely mounted ultra-stretched TFT LCD displays at the ceiling to wall transitions, to functionally replace several reservation displays with one device.

- e). Video Surveillance System (Option)
 - i). Amtrak currently utilizes Genetec for surveillance video management throughout its enterprise, and the Contractor shall be responsible for supporting the integration of the onboard video surveillance system shall with the existing wayside systems in use at Amtrak. Regardless of whether the option is exercised, the Contractor shall provide provisions for future installation of a video surveillance system.
 - ii). Data storage and system functionality shall be separate from any cab video systems unless approved by Amtrak.
 - iii). The integration with the Enterprise VSS shall include:
 - (1) System shall allow wayside users to view and manage the onboard video from the enterprise VSS platform.
 - (2) Video shall be remotely accessible using the Data Communication System (DCS).
 - (3) System should support automated connection to a Wi-Fi network, 4G/5G cellular (when Wi-Fi is not available) and automated off-boarding of video to a ground-side repository.
 - (4) System shall have access to live videos from a dedicated camera stream configured for remote viewing.
 - iv). The Contractor shall supply a Genetec based onboard digital video surveillance system.
 - v). The video surveillance system shall monitor and record data acquired from multiple onboard camera sources that shall be arranged to maximize the coverage of the vehicle and its operations.
 - vi). Each onboard camera shall include the following capabilities:
 - (1) have day and night capabilities with performance down to at least 0.1 lux.
 - (2) provide high quality color video.
 - (3) Cameras shall comply with EN50155, EN45545, and NFPA130.
 - (4) Camera housing shall meet IP66, IP67, and IK10 ratings.
 - (5) Cameras shall have electronic image stabilization built-in.
 - (6) Cameras shall include invisible IR LED built-in.
 - (7) The Cameras shall have adjustable resolution of at least 1080p.
 - (8) The Camera connector shall comply with 14.8e).

- (9) Frame rates adjustable up to thirty (30) frames per second.
- (10) The cameras shall natively support encoding in H.264 and H.265 video compression.
- (11) Model AXIS P3935-LR M12 Network Camera preferred.

vii). VSS Power Requirements

- (1) The system shall operate continuously off the low voltage power supply system and be backed up by car battery as a vital load.
- (2) Prior to the loss of low-voltage power (e.g., due to load shed or train shutdown), the Genetec NVR shall be configured to safely shut down.
 - (a) This may be implemented using a dedicated uninterruptable power supply for the NVR, or
 - (b) through software means such that sufficient time is provided to the NVR to safely shutdown the system prior to load shed or vehicle shutdown from being triggered by a vehicle.

viii). Camera Locations

- (1) A minimum of four (4) interior cameras shall be placed throughout each car to facilitate recognition of passengers and/or luggage onboard the rail vehicle.
- (2) One camera shall be mounted in each lower-level vestibule with 360-degree coverage of the vestibule, lifts, stairways, and side doorways.
- (3) No less than two cameras shall be mounted in each passenger seating area of each car.
 - (a) Cameras mounted in the passenger seating area shall be facing in opposing directions with overlapping viewing zones to maximize coverage.
- (4) No less than two cameras shall be mounted in each baggage area of each utility car.
 - (a) Cameras mounted in the passenger seating area shall be facing in opposing directions with overlapping viewing zones to maximize coverage.
- (5) Cameras shall be mounted to provide coverage of hallways and loading areas.
- (6) Each food service location, including cafe shall be covered by a minimum of two (2) cameras.

- (7) Camera installation and arrangement shall support identification based on the IEC EN62676-4:2015 International Standard of a minimum of 250 PPM (pixels per meter) or higher to identify individuals.
- (8) The Contractor shall be responsible for submitting a coverage plan identifying the location, viewing angle, and details of the camera arrangement and capabilities to Amtrak for approval.
- ix). Each camera shall deliver compressed video in real time to the Genetec based NVR. All video cameras provided shall have a proven history of reliable operation on rail vehicles.
- x). The surveillance system shall commence recording data when the car is powered on, and continue recording until the car is powered off, unless otherwise directed by the Engineer.
- xi). NVR Requirements (Option)
 - (1) The NVR shall be configured with sufficient solid state storage to capture a minimum of 90 days of full car video storage high-quality onboard transportation scenes at 1920x1080p resolution at a minimum of 15 fps continuous recording in each car before overwriting.
 - (2) The NVR shall be capable of incorporating telemetry data and other metadata received from onboard systems including CDU, the subsystems that report to the CDU, as well as the OTIS.
 - (3) Metadata recorded by the NVR, to be made available when viewing, searching, and downloading video shall include:
 - (a) Synchronized date and time as other network components
 - (b) Global Position System (GPS) Location
 - (c) Consist speed
 - (d) Route information, including current trip, train number, most recent station location, next station location, location along the alignment
 - (e) Local car number for each camera stream
 - (f) Consist layout
 - (g) Signals required for the triggers identified in the following section
 - (4) Functionality shall exist to tag and persist segments of video beyond the 90 day limit based on specific train events or triggers.
 - (5) Tagged segments shall be capable of recording no less than 5 minutes prior to and 10 minutes following the trigger or event and be configured to apply to cameras relevant to the triggered event.

- (6) Triggers shall include, but not be limited to:
 - (a) Passenger Emergency Intercom request
 - (b) Door Emergency Egress / Ingress
 - (c) Door obstruction detection
 - (d) Emergency brake event (above zero speed)
 - (e) Penalty brake event (above zero speed)
 - (7) Using on-board intelligence, the system shall be capable of selectively off-boarding only the video content that is determined to be relevant, and not ambient video, to the Enterprise VSS Platform.
 - (a) Through this method, it shall be possible to limit the off-loading of video to prevent car interior from an overnight in a yard with no passengers or staff onboard.
 - (8) The system shall automatically overwrite non-tagged video after 90 days has elapsed.
 - (9) In the instance of the failure of a single NVR, a mechanism shall be implemented to facilitate the failover of cameras video archiving to an alternative NVR, such that failure of any single component of the Video Surveillance System does not impair all video recording on a car.
- xii). Chain of Custody Requirements
- (1) If equipped, the surveillance system shall utilize methods and system controls to ensure chain of custody of all collected video and associated data from camera to ground.
 - (2) All acquired data shall be written, stored, and encrypted.
 - (3) All data shall reside on the rail vehicle on one or more solid state drives (SSD) that are designed and applied for the purpose of mobile data acquisition and storage.
 - (4) All storage shall be locked via a secure key to prevent access yet shall be easily removeable and replaceable to facilitate use as evidence.
 - (5) Data from the video surveillance system shall be available for real-time access for authorized personnel.
 - (6) An audit trail of personnel accessing the data shall be maintained on both the on-train VMS and within the wayside software (including video download, live view, and configuration).
- xiii). Recording failures or system failures shall result in an alert available through the Control Terminal, CDU, and to Amtrak's Enterprise VSS Platform (Genetec Security Center Platform).

- xiv). All components supplied as a part of this contract, including Video Surveillance System cameras and NVRs, shall be compliant with the requirements of the National Defense Authorization Act.
- xv). No equipment or services found on the Covered List as maintained by the FCC's Public Safety and Homeland Security Bureau as outlined in Section 1.50002 of the FCC's rules, and as directed by the Secure Networks Act, shall be supplied as a part of this contract.
- xvi). The Contractor shall submit a comprehensive architecture and design package for review and approval. **[CDRL 14-04]**
 - (1) This submission shall include proposed camera layout, proposed calculation of retention, NVR software features and capabilities, redundancy capabilities, and details of integration between the on-board VSS and Amtrak's wayside Genetec installation.
- f). Control Terminal (Option)
 - i). Each car shall be equipped with control terminals adjacent to each of the PA/IC control stations.
 - ii). Control Terminals shall be implemented as a high-resolution touchscreen display, and be multi-purpose devices that meet the requirements of the passenger graphical displays.
 - iii). The Control Terminal shall be a high-resolution touchscreen display
 - (1) Screen size shall be a minimum of 15" in crew rest areas and conductor's office and
 - (2) At passenger boarding areas, the screen size, orientation, and look shall match the vestibule displays and be a minimum of 30" with 16:9 aspect ratio. When not in use by Amtrak crew, the display shall revert to a graphical information display.
 - iv). In cars with a conductor's office, the control terminal shall be located in that office.
 - v). The control terminal shall be the main HMI for between the operator and the car functions, including providing access to the diagnostic information contained on the CDU, as well as control of the OCU and communication system functionality of the train.
 - vi). The Control Terminal shall implement the following functions:
 - (1) Allow train crew to input train number to configure the OTIS systems
 - (2) Initiate system and route start-up
 - (3) Trigger pre-programmed message selection and initiation

- (4) Record and triggering of custom public address announcements that include a text component through an onscreen keyboard and editable speech-to-text and text-to-speech mechanisms.
- (5) Control and adjustment of the reservation display system
 - (a) Modification of seat assignments / booking status
- (6) live and recorded video surveillance review
- (7) train formation display
- (8) local display for fault annunciation
- (9) Initiate system tests and verification
- vii). The control terminal shall:
 - (1) Be of rugged heavy-duty construction.
 - (2) Include a projected capacitive touchscreen.
 - (3) Provide a high-resolution visual display, 1920x1080 minimum.
 - (4) The front panel shall have no exposed fasteners.
 - (5) The display shall be readable in both direct sunlight and total darkness.
 - (6) The display shall include auto-dimming features.
 - (7) The display shall be LCD with LED backlight and adjustable contrast and backlight intensity.
 - (8) Have a front-bezel rated to IP65.
- viii). Control terminals shall implement a screen locking functionality utilizing personal identification and pin code. Access to enter ID and pin information shall be obscured, and pin and ID entry position shall move with each use. ID and pin validity shall be maintainable by routine updates by Amtrak through integrations with wayside systems.
- ix). When the display is electronically locked, the display shall act as an additional OTIS graphical display and be capable of being configured by Amtrak to display electronic messages, route information as per the requirements of 14.4a).
 - (1) Displays located in the crew rest areas shall be configured to turn off the display upon activation of the electronic lock.
- x). The control terminal shall be menu-driven for all the functions and the key legends shall correspond to the functions being performed.

- xi). Data storage, if included in the control terminal, shall be via non-volatile solid-state memory.
- xii). OTIS System Test Capability
 - (1) Through each control terminal, and through the PTU, a system self-test shall be possible to facilitate quick one-person confirmation of system functionality of all OTIS components throughout a coupled consist.
 - (2) The self-test shall include options for train crew to perform:
 - (a) Automated verification that each PEI works, including microphone and speaker transmission.
 - (b) Automated verification that individual PA Amplifiers and the speakers zones the power are functional.
 - (c) Automated verification that each hearing loop has continuity, and that current is flowing when audio is sent to the hearing loop amplifier.
 - (d) Automated verification that all displays, including graphical displays, accessibility displays, exterior displays, and seat reservation displays are connected and addressable.
 - (e) Automated verification that all electronic locks are online and responsive.
 - (f) Automated verification that all control units are addressable and functioning, including Control Terminals and Passenger Compartment Control Units.
 - (g) Automated verification that the NVR is communicating, and that all storage and cameras are operating.
 - (h) Guided verification of other system elements, such as display screens via a test pattern, physical buttons through a circle-check, and cameras via on-screen display.
 - (3) At the conclusion of the self-test, a report shall be recorded and displayed on screen that indicates the systems tested and the results of the test.
 - (4) Results shall be available to Amtrak Enterprise Systems via the Data Communication System.
 - (5) The contractor shall submit documentation defining the capabilities of the self-test functions for approval. **[CDRL 14-05]**
- g). Data Communication System (DCS)
 - i). The Data Communication System (DCS) shall incorporate all the data transmission radios necessary to support the train to wayside communication

as a part of the onboard systems, including communication required as a part of any system requiring offboard communication, including the OTIS / PIS / communications systems, the video surveillance system, the diagnostic systems, and bogie/carbody monitoring systems.

- ii). To minimize the use of disparate communication systems requiring additional roof space, systems requiring dedicated wireless access outside the use of an integrated Data Communication System shall be submitted to Amtrak for review and approval.
- iii). The DCS shall allow for data transmission between the onboard systems and wayside software provided by the Contractor, as well as support Amtrak's requirements as it relates to existing and future Amtrak system servers.
- iv). The DCS shall automatically utilize and aggregate all available communication links throughout the train so that the highest data transfer capability is available for any train location.
- v). DCS Antennas
 - (1) Antennas used for the DCS shall meet the requirements of Amtrak Specification 963.
 - (2) Each antenna shall support 4x4 cellular MIMO supporting frequencies from 600Mhz to 4200MHz (US cellular operator bands) and GPS/GNSS, and 2x2 Wi-Fi 6e frequencies from 2400 to 2495 MHz and 5170 to 7125MHz.
 - (3) Two antennas shall be provided on each car for use by that cars DCS router.
- vi). DCS Router
 - (1) A DCS router shall be installed on each car to provide access to cellular and Wi-Fi infrastructure.
 - (2) Each DCS router shall provide two DCS modems to support redundant connections to major carrier networks.
 - (3) The DCS modems shall be 5G capable with automatic fallback to Cat-20 4G LTE.
 - (4) The device shall be approved for use on all major carrier networks including Verizon, AT&T, and T-Mobile.
 - (5) Shall be connected to the Ethernet Car Network whose connection speed is to be determined.
- vii). In conjunction with wayside software, the Data Communication System shall facilitate aggregation of all available DCS Router channels throughout the consist to maximize the available bandwidth to onboard applications, and to provide resiliency and redundancy in the event of any carrier, modem, router, or antenna failure, or in instances of limited signal coverage.

CONFIDENTIAL — DO NOT DISTRIBUTE

- viii). The Data Communication System, in conjunction with on-board subsystems and wayside software supplied by the Contractor, shall provide:
 - (1) Transfer of consist monitoring and diagnostic data from the train to the wayside.
 - (2) Transfer of train status information from the train to the wayside.
 - (3) Remote troubleshooting of car systems.
 - (4) Transfer of content database updates from the wayside to the train, including:
 - (a) Content
 - (b) Schedule
 - (c) Informational Messages
 - (d) Editorial content
 - (e) Dynamic content (e.g., based on feeds)
 - (5) Transfer of software updates from the wayside to the train (for controlled installation on the train).
 - (6) Transfer of wayside initiated manual announcements (audio, text, graphical, and video) messages from the wayside to the train.
 - (7) Transfer the trigger of train wide pre-defined public and special message to the communication system.
 - (8) Transfer of recorded or real time video from the video surveillance system as configured by Amtrak's Enterprise VSS Platform.
 - (9) Transfer of logs from the graphical displays, audio playback, and other OTIS performance indications.
- ix). The DCS system components, including the 4G/5G and WiFi modem and antenna shall be designed in such a way to facilitate future upgrades which will occur throughout the life of the vehicle.
- x). The Contractor shall provide a document to Amtrak identifying the standard interface which would allow the integration of a replacement or additional DCS communications channels. **[CDRL 14-06]**
- h). Global Positioning System (GPS)
 - i). The OTIS shall utilize a Global Positioning System (GPS) for the determination of the train location and the triggering of automatic station announcements and station display.

- ii). The GPS receiver shall be a stand-alone unit or integrated into the DCS, powered by a dedicated power supply on each car and shall be capable of accuracy within 16ft.
- iii). The OCU shall use the GPS for all location events. It shall not use wayside transponders or wheel rotation to determine the traveled distance when GPS is available.
- iv). Door open signals shall be capable of triggering specified announcements as configured by Amtrak.
- v). Whenever loss of GPS signal is experienced, the OCU shall maintain position via dead reckoning, and automatically re-establish train location once the GPS signal is again available.
- vi). When the OCU loses GPS, all sign functions shall continue to be displayed. All OCUs shall be equipped with GPS.
- vii). The antennas used for the DCS shall meet the requirements of Amtrak Specification 963.

14.6 Provision for Wireless Internet

a). General

- i). The Contractor shall procure and install the infrastructure required to support a wireless network with a 10Gbps (per channel) Ethernet car bus.
- ii). The scope of the requirements for this solution includes exterior and interior wireless and Wi-Fi antennas, exterior cellular antenna cabling, interior antenna cabling, data cabling, power cabling, a dedicated redundant Train Line, and defined locations for equipment installation.
- iii). This Wireless Internet infrastructure is based on modular design for rapid component installation and simplified maintenance and serviceability. The design of the Provision for Wireless Internet shall be submitted for Amtrak review and approval throughout the design review. **[CDRL 14-07]**

b). Wireless Internet Components

- i). MAR and AP Hardware Provisions
 - (1) All cars will supply a wireless Internet feed to the consist, distributed from the Mobile Access Router (MAR) over a DTL dedicated for passenger wireless internet to the rest of the consist.
 - (2) Additionally, all cars will provide Wi-Fi access to passengers and crew inside the car using multiple Access Points.
 - (3) All cars will include MAR hardware, AP hardware, and associated components.

- (4) All cars shall include provisions and support for the following components:
 - (a) Two (2) MAR mounting locations (device names are MAR 1 and MAR 2)
 - (b) Two (2) Access Point (AP) mounting locations (AP names are AP1 and AP2)
 - (c) Two (2) Switch mounting locations (Switch names are SWITCH1 and SWITCH2)
 - (d) Seven (7) 4x4 multiple-input multiple-output (MIMO) exterior antennas; two (2) antennas of the seven also support GPS and Wi-Fi capabilities. (Antenna names are ANT1, ANT2, ANT3...ANT7. Port names are P1, P2, P3, P4, WIFI 1, WIFI 2, and GPS). Each antenna location will also provide an ethernet connecting via M12x-coded connectors using the cable specification in (c) which lead to the switch locations.
 - (e) Three (3) Active 4x4 multiple-input multiple-output (MIMO) exterior antennas; these connect via M12x-coded connectors using the cable specification in (c). (Antenna names are AANT1, AANT2, AANT3.)
 - (f) Four (4) 6x6 MIMO interior ceiling antennas for passenger connections. (Antenna names are PLAN1, PLAN2, PLAN3, and PLAN 4. Port names are P1, P2, P3,...P6.)
 - (g) Four (4) DTL bulk-head locations (two (2) on each end) (DTL connector name is DTLA1 or DTLA2 and DTLB1 or DTLB2 for A-end and B-end, left and right respectively. Port names are P1 and P4 for each DTL location. Each DTL umbilical shall house two (2) 10Gbps ethernet cables within their housing specifically for the Wireless Internet solution.
 - (h) Ethernet, RF, and power cabling to support the equipment.
- ii). Train to Ground / Satellite Provisions
 - (1) In addition to the hardware found in all cars, cars shall include additional hardware to facilitate connection with a future Train-to-Ground (T2G) or Satellite connection.
 - (a) These cars shall include the following in addition to the requirements for MAR and AP Hardware:
 - (i) One (1) Train-to-Ground (T2G) Radio mounting location (T2G Radio name is T2G)

- (ii) One (1) Satellite radio mounting location (Satellite radio name is SAT) with 10Gbps M12 X-Coded ethernet connectivity; 2 cables connecting to the switch location.
- (iii) Power connections which support Starlink Tile:
 - 1. Starlink Tile Antenna Input Voltage: 49VDC Input Current: 7.2A maximum Power Consumption: 360W Maximum See SpaceX drawing 06658000-102 for Antenna RF keep out zone requirements.
 - 2. Starlink Power Supply Unit The Starlink Power Supply accepts standard aircraft AC power of 115VAC, 50-60 Hz and 400Hz. For aircraft without an AC power supply, the system can be powered using a 500W DC-AC inverter. Input Voltage: 115VAC Input Frequency: 50-60Hz or 400Hz Power Consumption: 400W Maximum (includes antenna power).

c). Ethernet Cabling Requirements

i). Cable and Connector Design Requirements

- (1) CAT-7 rail-approved Ethernet copper cabling supporting 10Gbps throughput shall be utilized for all Ethernet cabling required to support the Provisions for Wireless Internet.
- (2) All CAT-7 cabling shall be terminated with 8-pin M12 X-coded Male connectors.
- (3) The Contractor shall submit the cable and connector selection as well as the location of all cable terminations for approval by Amtrak.
- (4) Cabling shall conform to the requirements of section 18.24.
- (5) Cabling and equipment installation shall conform to EN50155:2017 rail standards.
- (6) The DTL shall connect the consist, and this cabling shall support a fault-tolerant ring network.

ii). Cable Test Requirements

- (1) After installation on each car, each Ethernet channel shall be certified to ISO/IEC 11801-1 – Class F for each copper cable.
- (2) Test results shall confirm channel suitability for IEEE 802.3an-2006 10GBASE-T for each copper channel.
- (3) The Contractor shall submit the test procedure to Amtrak for review and approval.

- (4) The certification results for each cable shall be submitted to Amtrak as part of the vehicle history book.

iii). Cable Labeling Requirements

- (1) All Ethernet cabling shall be labeled clearly on both ends of the wire, observable with less than 90° of cable rotation. The Wireless Internet naming convention for Ethernet and Fiber leads is:
 - (a) Prefix = Contractor cable number (as the Contractor convention requires)
 - (b) Underscore = use the '_' character between the prefix and origin
 - (c) Origin = <SWITCH1 or SWITCH2> (port name not required)
 - (d) Destination = <-device name> with <-port name;' when applicable> (see 12.6.1 for component and related port names)
- (2) For example, the label on the Ethernet cable which terminates at one end to Switch #1 and the other to MAR#1 reads as:

Xxxxx-xxxx_SWITCH1-MAR1

- (3) An Ethernet cable coming from Switch #2 does not require a port name on the label at the origin or destination; this example label terminates at AP#1 and is marked:

Xxxxx-xxxx_SWITCH2-AP1

- (4) An Ethernet or fiber cable coming from Switch #2 does not require a port name on the label at the origin; this example label terminates at left-side DTL on the A-end at the Ethernet cable on port 4 it is marked:

Xxxxx-xxxx_SWITCH2-DTLA1-P4

d). Exterior Antennas and Cabling

i). RF Exterior Antenna Design Requirements

- (1) The Contractor shall establish ten **(10)** flat (0° relative to the roofline angle) antenna mounting locations atop each car, with line-of-sight to both sides of the vehicle.
- (2) The antenna elevation, not the roofline must be the catenary/structure envelope limit, not the roofline of the vehicles.
- (3) Where Wi-Fi mobile Access Routers or train-to-ground, wayside, or satellite transceivers are to be installed, Amtrak requires a modular antenna mounting design using an interface plate in-between the train and the antenna allowing Amtrak to deploy or change antennas for the solution in all areas where antennas are used.

- (4) Each interface plate shall support 10 kg (22 Lbs.), except for satellite antenna locations where the mounting plate shall support up to 25 kg (55 Lbs.). With antennas spaced no less than 600mm (24") apart, the antenna locations shall support an antenna of:
 - (a) Cellular and T2G/Wayside Antennas
 - (i) Five (5) Huber+Sunher SENCITY® Rail MIMO+ 4x4 Antenna (passive); 90mm x 508.7mm x 411.7mm (Height x Width x Depth).
 - (ii) Two (2) Huber+Sunher SENCITY® Rail MULTI 7-Port Antenna (passive); 84mm x 380mm x 439.5mm (Height x Width x Depth).
 - (iii) Three (3) Huber+Sunher SENCITY® Rail Active Rooftop (active); 84mm x 380mm x 439.5mm (Height x Width x Depth).
 - (b) Satellite Antennas – 900mm L x 900mm W x 200mm H (36" L x 36" W x 8" H)
- (5) Amtrak shall inform the Contractor of the make and model of the exterior antenna and provide a template with the bolt pattern and cable port dimensions. Contractor shall procure and install all antennas.
- (6) The Contractor shall provide the diagrams of the antenna locations and the bolt hardware specification for Amtrak review and approval. **[CDRL 14-08]**
- ii). RF Rooftop Exterior Cable Design Requirements:
 - (1) A total of thirty-four (34) single-length (home-run) RF cables shall be installed between antenna locations and the MAR1 location.
 - (2) Intermediate RF connectors shall not be used. RF cables shall be at least one-half inch (1/2"; commonly referred to as "400" antenna cabling) in diameter.
 - (3) The cables shall support frequencies between 600MHz and 7125GHz.
 - (4) Contractor shall install forty (40) cables connecting eight (8) 4x4 MIMO exterior cellular antennas (antennas #1 through #10) to the MAR1 location.
 - (5) Exterior antennas #1 and #8 support Wi-Fi and GPS in addition to 4x4 MIMO, and the Contractor shall provide cabling for GPS (one cable each) and Wi-Fi (two cables each) to antenna #1 and #8 from the MAR1 location.
 - (6) The location of all cable terminations shall be provided to Amtrak for an approval.

iii). RF Rooftop Exterior Cable Testing Requirements

- (1) Contractor shall test Cellular RF cables across cellular channels from 617MHz to 3.98GHz (the 4x4 MIMO array cables). Wi-Fi rooftop RF cables shall be tested from 2400 – 2483MHz and 5150 – 7125MHz. GPS cables shall be tested from 1164 MHz to 1610 MHz.
- (2) All VSWR results shall be 1.4 or less. All cable runs shall be tested when the cables are installed. GPS antennas will not be swept, but a load shall be used to test the installed GPS antenna cables. All VSWR results will be provided to Amtrak for approval.
- (3) Contractor shall measure the insertion loss of all forty-six (46) RF cables. The insertion loss for each cable shall not exceed 2dB.
- (4) Contractor shall test for return loss and distance-to-fault (DTF) for thirty-four (34) RF cables after they are attached to exterior cellular and Wi-Fi antennas. The return loss value shall not exceed 13.7dB (VSWR 1.52).
- (5) Contractor shall measure return loss values for the two (2) RF cables connected to GPS antennas with 50 ohm load only (no antenna). The insertion loss for each cable shall not exceed 2dB.
- (6) Contractor shall confirm GPS/GNSS functionality from the MAR-end of the GPS cables by running a GPS program that validates GPS satellite signal strength, angles, acquisition, and counts.
- (7) Contractor shall submit all test results to Amtrak for an approval. The test results for each cable shall be submitted to Amtrak as part of the vehicle history book.

iv). RF Rooftop Exterior Antenna and Cable Labeling Requirements

- (1) All exterior antenna cabling shall be labeled clearly on both ends of the wire, observable with less than 90° of cable rotation.
- (2) The Wireless Internet naming convention for the exterior antenna cables is:
 - (a) Prefix = Contractor cable number (as the Contractor convention requires)
 - (b) Underscore = use the '_' character between the prefix and origin
 - (c) Origin = MAR1 (port name not required)
 - (d) Destination = <-antenna name> with <-port name; when applicable> (see 12.6.1 for antenna and related port names)
- (3) For example, the label on the antenna cable which terminates at one end to MAR #1 and the other to exterior antenna 1 at the 4th cellular port shall read:

Xxxxx-xxxx_MAR1-ANT1-P4

- (4) An antenna cable connecting MAR #1 and terminates at exterior antenna 6 Wi-Fi port 2 and is marked:

Xxxxx-xxxx_MAR1-ANT6-WIFI2

- (5) Based on the previous example for MAR #1, a cable connected to the GPS port of antenna 10 is marked:

Xxxxx-xxxx_MAR1-ANT8-GPS

e). Interior Ceiling Antennas and Cabling – Passenger LAN (PLAN)

i). Interior Antenna Design Requirements

- (1) Contractor shall mount a minimum of four (4) Huber & Suhner 1399.35.0020 Sencity® Rail Omni-SR 6x6 MIMO Antennas (PLAN antenna) on the ceiling within each car.
- (2) The Wi-Fi system (APs with PLAN antennas) shall provide RSSI coverage of –65dBm for 95% of the passenger and crew occupying areas in each car, including the restrooms.
- (3) With AP conducted power at 30dBm, RSSI shall measure less than -72dBm at 30 feet into the next car.
- (4) Contractor shall conduct an RF propagation study to demonstrate the expected Wi-Fi coverage within the train car and the RF leakage to the adjacent cars with AP conducted power at 30dBm (any IEEE 802.11ac Wave 2 or ax AP with four or more antenna leads may be used for the study). The location of all cable terminations shall be provided to Amtrak for an approval. **[CDRL 14-09]**

ii). Interior Ceiling Cabling Design Requirements

- (1) RF cables connecting the APs and PLAN antennas shall be at least one-quarter inch (1/4-inch; commonly referred to as “240” antenna cabling) in diameter and shall not exceed three meters (3m) in length.
- (2) Contractor shall terminate RF cables with QMA-Male connectors on the antenna-facing side and connect the cables with PLAN antennas.
- (3) AP #1 connects to PLAN antenna 1 and 2, and AP #2 connects to PLAN antenna 3 and 4.
- (4) Amtrak shall inform Contractor on connector type required on AP-end of the cable termination at a later date.

iii). Interior Ceiling Antennas and Cabling Testing Requirements

- (1) All PLAN antennas and cables shall be tested across Wi-Fi frequency bands between 2400 – 2483MHz and 5150 – 7125MHz.

CONFIDENTIAL — DO NOT DISTRIBUTE

- (2) Contractor shall measure the insertion loss of PLAN RF cables, and loss value shall not exceed 2dB.
- (3) Contractor shall measure return loss and DTF with PLAN cables attached to antennas. The return loss value shall not exceed 13dB (VSWR 1.6).
- (4) Contractor shall provide test all results to Amtrak for approval. The test results for each cable shall be submitted to Amtrak as part of the vehicle history book.

iv). Interior Ceiling Antennas and Cabling Labeling Requirements

- (1) All PLAN antenna cabling shall be labeled clearly on both ends of the wire, observable with less than 90° of cable rotation. The Wireless Internet naming convention for PLAN cables is:
 - (a) Prefix = Contractor cable number (as the Contractor convention requires)
 - (b) Underscore = use the '_' character between the prefix and origin
 - (c) Origin = AP1 or AP2 (port name not required)
 - (d) Destination = <-PLAN antenna name> with <-port name> (see 12.6.1 for antenna and related port names)
- (2) For example, the label on the PLAN antenna cable connecting AP #1 and PLAN antenna 1 at port 4 shall read:

Xxxxx-xxxx_AP1-PLAN1-P4
- (3) A PLAN cable connecting AP #2 to PLAN antenna 4 port 2 and is marked:

Xxxxx-xxxx_AP2-ANT4-P2

v). Interior Antenna Cutsheet

- (1) The cutsheet for the Huber & Suhner 1399.35.0020 antenna is linked here:

https://www.mouser.com/datasheet/2/829/HUBER_2bSUHNER_1399_35_0020_SeriesDataSheet-2581677.pdf

f). Power and Wiring

i). Wireless Internet Power Requirements

- (1) Sufficient power shall be provided to all components via WAGO or NEMA blocks (screw-type blocks supporting ring or fork connectors or friction connectors supporting tinned wiring between 12AWG and 18AWG are acceptable) for each equipment location.

- (2) Contractor shall provide a Wireless Internet circuit of no less than 650w per car, connected to a single 10-amp circuit breaker. The location of all cable termination shall be provided to Amtrak for an approval.
- (3) Contractor shall provide sense power cabling to MAR locations to support post-run delay timer implementations (not required if located in load-shed circuit).
- (4) In the event of 480V Head End Power (HEP) loss, power to all MAR locations shall remain by use of car side battery power.
- (5) Ground post locations and 300mm (12") straps shall be provided and identified with easily visible green indicators to attach at each equipment mounting location.
- (6) Amtrak shall provide leads connecting equipment to the WAGO or NEMA block at each equipment location.

ii). Power Wire Labeling Requirements

- (1) Wiring labels for power leads shall state their origin and destination on both ends of the wire and both sides of the label.
- (2) All power wiring shall be labeled clearly on both ends of the wire, observable with less than 90° of cable rotation. In the case of paired or multi-conductor power wires, one label per conductor is required. The Wireless Internet naming convention for power cables is:
 - (a) Prefix = Contractor cable number (as the Contractor convention requires)
 - (b) Underscore = use the '_' character between the prefix and origin
 - (c) Origin = BRKR or SENSE or <device name> (port name not required; see 12.6.1 for component names)
 - (d) Source Voltage = voltage (if present; voltages exist from origin breaker or sense, but no voltage from MAR1, just pos or neg)
Destination = <device name> (port name not required; see 12.6.1 for component names)
- (3) For example, the label on the 72V power cable and the negative lead from the Wireless Internet circuit breaker to MAR1 WAGO block is respectively marked:

Xxxxx-xxxx_BRKR-72V-MAR1

Xxxxx-xxxx_BRKR-NEG-MAR1

- (4) A positive and a negative power cable coming from MAR1 to the AP2 WAGO block would read respectively as:

Xxxxx-xxxx_MAR1-POS-AP2

Xxxxx-xxxx_MAR1-NEG-AP2

g). Equipment Locations

i). General Requirements

- (1) Contractor shall provide a volume of space for each piece of Wireless Internet equipment as identified in 12.6.1.
- (2) Each equipment location shall have one Ethernet link routed to the equipment location from each switch location; a total of two (2) Ethernet cables, labeled as described in c).iii).
- (3) The location of all equipment shall be provided to Amtrak for an approval.

ii). T2G Router/Mobile Access Router (MAR) locations

- (1) Contractor shall provide a volume of space for two (2) T2G/MAR routers (including cable bend radius) in each car:
 - (a) T2G Router/MAR = 400 mm W x 320 mm L x 255 mm H (16" W x 12 5/8" L x 10" H)
- (2) The two MAR positions shall be located within 300mm (12") of each other. Exterior antenna cabling (see 12.6.3.1) shall be routed to within 450mm (18") of the MAR locations.
- (3) The location shall be accessible with a stepladder and locked behind a common keyed trapdoor, hinged panel, or in a cabinet.
- (4) Components shall be serviceable/removable from that location without removing train components/panels.
- (5) Load bearing specification per mounting position shall support 20 kg (44 Lbs.) and use no less than four (4) bolts.
- (6) Contractor shall provide the volume dimensions and train fixture bolt hole patterns.
- (7) A mounting plate/tray/bracket supplied by Amtrak shall be used to mount equipment into the cars; safe lifting or removal of this equipment should be a one-person task and there shall be enough access space for two persons to work there simultaneously.

iii). T2G Radio and Satellite Locations

- (1) Contractor shall provide a volume of space for a T2G radio (T2G) and a satellite radio (SAT) in each end car as defined in 14.6b).ii).
 - (a) T2G Radio - 300mm W x 200 mm L x 100mm H (12" W x 8" L x 4" H)

- (b) SAT Radio - 355mm W x 430 mm L x 152mm H (14" W x 17" L x 6" H)
 - (2) This space is for future use.
 - (3) Contractor shall install only power and Ethernet cabling to this location.
 - (4) T2G radios and satellite modems shall be placed in the ceiling within 2 meters of roof space not currently populated by antennas, facilitating future antenna installation.
 - (5) The location shall be accessible with a stepladder and locked behind a common keyed trapdoor or in a cabinet.
 - (6) Components shall be serviceable/removable from that location without removing train components/panels.
 - (7) Load bearing specification per mounting position shall support 10kg (22 lbs.) and use no less than 4 bolts.
 - (8) Contractor shall provide the volume dimensions and train fixture bolt hole patterns.
 - (9) A mounting plate/tray/bracket supplied by Amtrak shall be used to mount equipment into the cars; safe lifting or removal of this equipment should be a one-person task and there shall be enough access space for two persons to work there simultaneously.
- iv). AP Locations
- (1) Contractor shall provide a volume of space in the ceiling for two (2) AP radios in each car:
 - (a) AP - 273 mm W x 300 mm L x 100 mm H (10 ¾" W x 12" L x 4" H)
 - (2) The location shall be accessible with a stepladder and locked behind a common keyed trapdoor or in a cabinet.
 - (3) Components shall be serviceable/removable from that location without removing train components/panels.
 - (4) Load bearing specification per mounting position shall support 10kg (22 lbs.) and use no less than 4 bolts.
 - (5) Contractor shall provide the volume dimensions and train fixture bolt hole patterns.
 - (6) A mounting plate/tray/bracket supplied by Amtrak shall be used to mount equipment into the cars; safe mounting or removal of this equipment should be a one-person task.

v). Switch Locations

CONFIDENTIAL — DO NOT DISTRIBUTE

- (1) Contractor shall provide a volume of space for switches that support two (2) switches (including cable bend radius) in each MAR Car:
 - (a) Switch - 300mm W x 430mm L x 255mm H (12" W x 17" L x 10" H)
- (2) The location shall be accessible with a stepladder and locked behind a common keyed trapdoor or in a cabinet.
- (3) Components shall be serviceable/removable from that location without removing train components/panels.
- (4) Load bearing specification per mounting position shall support 10kg (22 lbs.) and use no less than 4 bolts.
- (5) Contractor shall provide the volume dimensions and train fixture bolt hole patterns.
- (6) A mounting plate/tray/bracket supplied by Amtrak shall be used to mount equipment into the cars; safe lifting or removal of this equipment should be a one-person task and there shall be enough access space for two persons to work there simultaneously.

Table 14-2 Equipment/Spacing Dimension References

#	Equipment	Qty	Location	Required Dimension	Remark
1	MAR	2	Interior	15" W x 12 ⁵ / ₈ " L x 10" H	Volume Space
2	AP	2	Interior	10 ³ / ₄ " W x 12" L x 4" H	Volume Space
3	Switch	2	Interior	12" W x 17" L x 10" H	Volume Space
4	T2G Radio	1	Interior	12" W x 8" L x 4" H	Volume Space (for future use)
5	SAT Radio	1	Interior	14" W x 17" L x 6" H	Volume Space (for future use)
6	T2G/SAT Antennas	1	Roof	36" L x 36" W x 12" H	Volume Space (for future use)
7	Exterior Passive Antennas	7	Roof	18 ³ / ₈ " L x 14 ¹ / ₂ " W x 8" H	Equipment
8	Exterior Active Antennas	7	Roof	18 ³ / ₈ " L x 14 ¹ / ₂ " W x 8" H	Equipment
9	Ceiling Antennas	4	Ceiling	TBD	Equipment

h). Regulatory and Quality Validation

- i). The Contractor shall provide manufacturer cut sheets/datasheets for all cabling and equipment in consideration for this infrastructure design which includes the following specifications:

- (1) Dimensions,

- (2) Weight,
 - (3) Environmental (operating temperature/storage temperature/IP rating),
 - (4) Material Type,
 - (5) detailed RF parameters (operating frequency, insertion loss, and return loss) and
 - (6) Compliance/Regulatory.
- ii). If the manufacturer does not provide the data requested in their spec sheets, the Contractor shall seek the missing data from the manufacturer.
- i). Modular Mounting Design
 - i). Amtrak requires a modular mounting solution for all Wireless Internet equipment to facilitate rapid installation and removal.
 - ii). The Contractor shall provide the load capacity, mounting dimensions, hardware specification, and train fixture bolt hole patterns for all MAR, T2G radio, SAT modem, AP, antenna (exterior and interior), and Switch spaces.
 - iii). Amtrak shall affix components to plates/trays/brackets based on these measurements and apply these fixtures at the time of installation.
- j). Test Requirements
 - i). Contractor shall provide all test procedures/reports of the Contractor and Subcontractor tests for an approval.
 - ii). All test results shall be provided with each vehicle history book prior to the conditional acceptance.
 - iii). Additionally, both routine and qualification tests by the Contractor during or after the production shall be witnessed by Amtrak.
 - iv). Sub-contractor Testing:
 - (1) Specifications of the RF cable(s) in use including applicable mechanical, electrical and regulatory information.
 - (2) "Birth certificates" of the RF cables with run length, return and insertion loss measurements between 617MHz and 7125MHz shall be conducted if cables are pre-assembled outside of the contractor facility.
 - (a) If cables are assembled by the contractor, cable measurements shall be provided from post-installation testing described in 1.5.3.1. and "Birth Certificates" are not required, as all cable(s) not passing specifications, and rejected by Amtrak will be remanufactured on-site by the contractor.
 - v). Contractor/Production Testing (as a Routine Test):

- (1) Continuity, Megger and Hi-pot shall be performed on all power wires.
- (2) All Ethernet cables shall be certified to ISO/IEC 11801-1 - Class F (CAT7) with an appropriate cable certifier (Ex. Fluke DSX series).
- (3) All Fiber cables shall be certified to ISO/IEC 11801-1 – OM3.
- (4) RF Cable Analyzer (time and frequency domain reflectometer (Ex. Anritsu Sitemaster Series, Keysite Fieldfox Series, or Bird Sitehawk SK series)) shall be utilized to perform on all RF Cables as stated in below conditions. (See Table 14-3 for criteria)
 - (a) Condition 1: Without connecting to Antennas, measure and verify the 'return loss' and 'insertion loss':
 - (i) MAR to Roof-mount Cellular Antennas
 - (ii) MAR to PLAN/Wi-Fi Antennas
 - (iii) MAR and GPS Antennas
 - (b) Condition 2: After connecting the connectors to Roof-mounted Cellular and PLAN/Wi-Fi Antennas, measure and verify the 'return loss' and 'distance-to-fault (DTF)'. DTF parameters (speed of propagation, insertion loss, etc.) shall be programmed into cable analyzer to ensure accurate DTF measurements.
 - (i) MAR to Roof-mount Cellular Antennas
 - (ii) MAR to PLAN/WiFi Antennas
 - (c) Condition 3: After connecting the connectors to Roof-mounted GPS Antennas, measure and verify the GPS satellite signal strength, angles, acquisition and counts as well as GPS/GNSS functionality. These shall be measured/confirmed by connecting the portable GPS receiver to MAR-end of the GPS cable and running the GPS program. Note that detailed pass/fail criteria and designated GPS program for Condition 3 will be provided during the design review.

Table 14-3 RF Cable Criteria

Frequency (MHz)	Measurement Granularity (no. of points)	Type of Antenna Connection
617 to 894	>3000	Cellular
1710 to 2700	>3000	Cellular
3300-3980	>3000	Cellular
2400-2483	>3000	PLAN/WiFi
5150-7125	>3000	PLAN/WiFi

1164-1610	>3000	GPS

14.7 Information Technology and Architecture

a). Overview

- i). Amtrak views real-time data from the cars a critical component of understanding and monitoring and proactively addressing safety issues, and meeting customer expectations.
- ii). The ability to understand the health of cars in real-time is a critical component to ensure Amtrak can address safety, mechanical, operational, and customer service needs as the cars are in service.
- iii). All information technology hardware, software, and data shall fully comply with the Amtrak Digital Technology requirements identified in TS Section 26.

b). Digital Architecture

- i). The Contractor shall provide detailed architectural and design documentation for all digital assets and systems either on train or ground, including Information, Application, Networking, and Security.
- ii). For software, platforms or systems operated on Amtrak's behalf, provide a high-level description of the environment, certifications, and incident response model as well example of Service Level Agreements and Operating Level Agreements for those managed systems.

c). Data: Sharing and Analysis

- i). The Contractor shall indicate what data is created from systems, either on the vehicle or on the wayside in order to support the vehicles.
- ii). All data generated as a part of the operation or support of the Amtrak equipment shall be made available and accessible for Amtrak use/reuse.
- iii). Data dictionaries, interpreters, and tools suitable for automated batch processing to open formats shall be provided to Amtrak such that the full fidelity of all data is accessible by Amtrak personnel and digital systems.
- iv). The Contractor shall also indicate any ownership or legal restrictions on data generated on Amtrak trains.
- v). The Contractor shall describe any digital models used to support predictive or conditional maintenance and whether those models are available for Amtrak use.

d). Security Architecture

- i). In addition to security requirements defined in Section 28, the Contractor shall provide detailed documentation for policies, processes, systems and tools

utilized to secure all digital assets, systems, and networks either on the equipment or on ground.

- ii). This documentation shall include audits and certifications completed by third parties to show compliance with Industry Standards.
 - iii). The Contractor shall indicate the type of COTS and OEM software being provided, including embedded systems, aboard the car, and the processes and mechanisms used to ensure all software is kept up-to-date and safe from a cybersecurity perspective.
 - iv). Security locks shall be used to protect communication equipment from unauthorized access. Square keys shall not be considered as an appropriate measure of security to prevent unauthorized access.
 - v). Network devices shall not be installed in lavatory compartments, or other areas that are not subject to video surveillance.
 - vi). Access to the network shall require authentication, and the network shall be designed with security network zoning principles per IEC 62443 and TS 50701
- e). Train Control Systems, IOT and Data
- i). The Contractor shall indicate the types of onboard sensors and devices used to generate data to support either real-time or analytical data.
 - ii). The Contractor shall indicate if they have integrated external data such as Track Wayside Detectors into their management and analytics solutions.
 - iii). The Contractor shall indicate whether a GPS signal can be sent in real time to Amtrak to support accurate car movement for Amtrak customer channels and operational needs.
- f). Onboard Train Information System (OTIS)
- i). The Contractor shall provide detailed application and design documentation for all Onboard Train Information Systems deployed to communicate with passengers and employees including deployment, integration, information, and security requirements for all ground systems.
 - ii). This documentation shall include how content is created, managed, distributed and controlled.
 - iii). The Contractor shall indicate types of signage onboard the train, indicate Amtrak's ability to affect the digital signage, and whether digital signage has been provided to support Food Service sales.
- g). ADA Compliance for All Passenger Information/Interaction Systems
- i). All Onboard Information Systems shall comply with the latest ADA standards at time of delivery and detailed documentation shall be provided to verify compliance as well as ongoing support and maintenance.

h). Data Integration

- i). Integration and data sharing are a critical component of success in ensuring Amtrak can deliver services safely and successfully to its customers.
- ii). The Contractor shall identify how they have integrated data from railcar to customer.
- iii). The Contractor shall provide application descriptions and high-level design/integration documents for ground systems that will integrate with Amtrak.
- iv). These documents must include deployment, integration, information, and security requirements for all car and ground systems.
- v). The Contractor shall indicate if they have integrated with platforms such as SAP, Maximo, Kronos and Adobe Experience Manager.

i). Software Updates, Training, and Licensing

- i). The Contractor shall indicate how any software that is part of car and support equipment will be updated, including processes used to ensure software flaws, bugs, and obsolescence are mitigated.
- ii). For all software, the Contractor shall indicate if training is necessary, and any training required.
- iii). The Contractor shall indicate the type of license used for all software provided (perpetual/subscription).
- iv). The Contractor shall indicate how Amtrak will retain the right to use and provide updates to software in the event the Contractor or software is purchased by a different entity.

j). Safety Data Collection and Sharing

- i). The Contractor shall provide detailed application and design documentation for all systems utilized in the collection and distribution of Safety related information, including Operational Telemetry, Video and other communications required to monitor and manage Safety Systems and processes.
- ii). The Contractor shall indicate whether this information is available in real-time and how data will be made available to Amtrak.

k). IT Systems to Support Maintenance

- i). The Contractor shall describe the Ground Systems recommended or required to support the operation, maintenance and repair of the cars.

l). Interface with Passenger and Crew Applications

- i). The Contractor shall provide on-board APIs that facilitate secure access to communication system functions that enable the development of handheld device applications that interface with or receive information from the onboard communication system.
- ii). The on-board APIs shall be secure, with credentials and API keys configurable to support many users, with different authorizations.
- iii). The intended use for on-board APIs include:
 - (1) Crew applications, which, through the Contractor supplied API, shall be capable of the command and control of the communication system functions including:
 - (a) Setting and adjusting routes
 - (b) Making manual PA announcements (including graphics visual, text, and audio)
 - (c) Selecting pre-loaded special messages to play
 - (d) Answering PEI calls
 - (e) Making and receiving intercom calls, including general calls, calls to specific intercom clients, and call to specific cars
 - (f) Answering Attendant Call requests, resetting attendant calls, and configuring the attendant call functionality
 - (g) Configuring the reservation display system
 - (h) Viewing system, car, and train status and diagnostic information
 - (i) and other system functions identified by Amtrak during the design review process.
 - (2) Passenger applications, which, through the Contractor supplied secured API, shall support:
 - (a) The capability to display and playback onboard announcements and current train.
 - (b) The capability to display route information.
 - (c) The capability to display the consist configuration, individual car amenities, and current location in a car and train.
 - (d) and other communication system features identified by Amtrak during the design review process.
 - (3) The method of communication and control shall be secure, with configuration and security considerations identified during the design review.

14.8 Ethernet Train Backbone (ETB) (Option) and Ethernet Car Network (ECN)

a). General

- i). The ETB (if option exercised) is used to control and transmit communication information throughout a passenger train consists of between 2 and 22 vehicles and locomotives.
- ii). The ETB (if option exercised) shall carry information along multiple paths between adjacent vehicles.
- iii). The ETB (if option exercised) is designed to have no less than 1 Gbps of bandwidth when using the wired network for purpose of managing the traffic across the network.
- iv). All cabling and connectors used for the ETB (if option exercised) shall support speeds of 10 Gbps.
- v). The IP addressing scheme of all onboard IP networks shall be based on EN 61735. The IP addressing scheme, and a list of all IP devices shall be submitted for review and approval by Amtrak. **[CDRL 14-10]**
- vi). The Contractor shall provide a description of the ETB (if option exercised) and ECN control and architecture for Amtrak review and approval. The description shall include details of the data network protocols, fault tolerance, degraded operating modes, redundancy arbitration, and a description of network initialization and configuration. **[CDRL 14-11]**

b). Equipment

- i). The network architecture, network protocols, and all interfaces between all network components located on or off the car shall be non-proprietary. The use of proprietary protocols is prohibited.
- ii). Network Interface Control Documents shall be submitted for Amtrak review and approval for all onboard and wayside interfaces between any two software executables. **[CDRL 14-12]**
- iii). The ETB (if option exercised) equipment is required to provide a high availability of the overall train network, so the system shall ensure that failure of a single active component or power failure within one vehicle shall not interrupt the ETB functionality for the remainder of the train.
- iv). The ETB shall remain operational on battery power while in Standby operation.
- v). All hardware should be adapted from PRIIA 305-919.
- vi). All IP Switches shall be managed, and shall support:
 - (1) Ethernet Frame Switching as per IEEE 802.1D
 - (2) Quality of Service as per IEEE 802.1Q

- (3) Virtual Local Area Network as per IEEE 802.1Q
 - (4) Link Layer Discovery Protocol as per IEEE 802.1AB
 - (5) Switches shall provide sufficient buffering and queuing capability to avoid network bottlenecks.
- c). Ethernet Train Backbone (ETB) Switches (if option exercised)
- i). At least two managed railway grade Layer 3 Ethernet Train Backbone switches shall be installed in each end of the vehicle for the ETB OTIS, PA Communications, car diagnostic systems, and other operations-critical systems use.
 - ii). The switches shall incorporate bypass contacts to be capable of allowing the Ethernet signals from adjacent vehicles and switches to pass through them when they fail or lose power.
 - iii). The Contractor shall provide ETB switches that manage link redundancy and maintain network communications in the event of a link failure.
 - iv). The switches shall conform to the requirements of EN61375-2-5:2014.
 - v). Ethernet switches shall be mounted inside at each end of the vehicle near the locations where the jumper receptacle cables enter the vehicle, or at a location approved by Amtrak.
 - vi). One additional pair of switches, supplied by Amtrak as a part of the passenger wireless internet system, will be utilized for the passenger Wi-Fi and Entertainment system.
 - vii). Ethernet Train Backbone switches shall communicate successfully with other ETB nodes without limitation as to the sequence or orientation within the train, and without a requirement for manual configuration.
- d). Ethernet Car Network Switches
- i). Ethernet Car Network switches shall be connected to each other through a Gigabit speed fault tolerant ring topology to form the Ethernet Car Network (ECN).
 - ii). The ECN shall be connected to the ETB (if option exercised) switches through redundant Gigabit speed links.
 - iii). When ECN nodes are replaced, the network system shall automatically identify the replacement equipment, and its communication links. Replacement of any subsystem controller or network switch shall not require any manual configuration of the controller or switch.
- e). Cabling and Connectors

- i). Eight Cat 6A Ethernet cables are installed within a direct conduit along the length of the vehicle to connect the switches at each end of the vehicle together.
 - ii). Details shall be provided during design review.
 - iii). The Ethernet terminations on both Ethernet switches and on the ends of the cable receptacles shall be fitted with four-way M12 connectors utilizing D-Coding for fast Ethernet and eight-way X-Coded for Gigabit or 10 Gigabit Ethernet.
- f). System Interconnection
 - i). The car ETB (if option exercised) shall at a minimum include eight category 6A cable end-to-end.
 - ii). Wi-Fi and Passenger entertainment systems defined in TS 12.6 shall utilize switches and cabling as defined in that section.
 - iii). The passenger WiFi and Entertainment system shall be connected end-to-end utilizing at a minimum four dedicated Ethernet cables of the Ethernet Train Backbone.
 - iv). All remaining car systems including OCUs, PA Control Panels, OTIS displays, system controllers and other devices shall utilize this network.
 - v). Devices involved in the PA system shall have cables routed directly to the network switches.
- g). ETB External Hardware (if option exercised)
 - i). The components of the exterior vehicle-to-vehicle network are the fixed receptacles, receptacle housings, bulkhead connectors and jumper cables.
 - ii). Each car shall have one ETB header located on each corner.
- h). Bulkhead Connectors
 - i). Each Fixed Receptacle will be pre-wired with two category 6A cables.
 - ii). Each of the category 6A cables shall be terminated with an eight-way X-Coded bulkhead M12 connector.
 - iii). Cables shall be routed in such a way that they are protected from EMI.
 - iv). The Fixed Receptacle shall be secured to the vehicle to ensure that the Ethernet Jumper attaches at an angle of approximately 15 degrees from vertical.
 - v). The center line of the fixed receptacle mounting junction box shall be 60 in. from TOR and 31.25 in. outward from the vehicle longitudinal center line.
 - vi). Alterations to this placement must be approved by Amtrak.

- vii). For car-to-car interfaces Position 1 of each bulkhead shall be connected to the nearest Wi-Fi and Entertainment switch.
- viii). Position 3 of each bulkhead shall be connected to the nearest car system switch.
- ix). Positions 2 and 4 of the bulkheads shall remain empty for future expansion.
- i). Jumper Cables
 - i). For car-to-car interfaces each jumper shall be composed of four Category 6A or Category 7 cables and shall be long enough to support a car-to-car connection while the car is tuning at the greatest angle of turn the vehicle is rated for.
 - ii). Each cable will provide bandwidth that is at least 10 Gbps.
 - iii). Each end of the jumper cable is designed to allow free movement, with a horizontal 270-degree arc of the mating face, in relation to the cable jumper to prevent excessive force on the jumper either when being mated to the vehicle or during normal vehicle movement.
 - iv). The jumper pulling failure force should be no greater than 100kg-ft which shall be less than the strength of the attachment of the receptacle housing to the carbody.
- j). Integration and Fault Tolerance Testing
 - i). The contractor shall perform a Network Interface Card (NIC) test for each end station and each switch to verify compliance with IEEE standards.
 - ii). The Contractor shall perform a complete network integration test of all train subsystems, including transmission through jumper cables, to pre-qualify the proposed architecture of networks before vehicle implementation.
 - (1) This test shall consist of a simulated train with all train switches, actual cable and cable length, pins, and connectors that will be used on the vehicles.
 - (2) All intelligent system controls connected to the on-board networks shall be the actual units for one car of each type.
 - (3) The tests shall verify that all protocols, datasets, and messages used on all networks correspond to the Network Interface Control Document and the specific signal, message, and dataset documentation provided for each network.
 - (4) At the time of the integration tests, the Contractor shall demonstrate the fault tolerance of all networks by simulating all possible faults.
 - iii). Amtrak shall have the option of witnessing the tests.

- iv). The test procedure **[CDRL 14-13]** and results **[CDRL 14-14]** shall be submitted to Amtrak for review and approval.
- k). Protocol Analyzer
 - i). The Contractor shall provide a laptop-based Protocol Analyzer for Amtrak use to perform real-time monitoring of network activity on all networks provided under this contract. The Protocol Analyzer shall have the capability of:
 - (1) Displaying data in engineering units.
 - (2) Setting of capture filters to limit the recording of telegrams and network packets to only the ones that are targeted.
 - (3) Providing a visualization of the protocol stack in adjustable levels of detail.
 - (4) Developing and displaying statistical reports on traffic, errors, protocol types, etc.
 - (5) The Contractor shall submit for Amtrak review and approval the capabilities of the Protocol Analyzer for each Network. **[CDRL 14-15]**

14.9 Electromagnetic Interference

- a). General EMI / EMC Requirements
 - i). All carborne supplied equipment and its wiring shall be electromagnetically compatible and have no negative impact on, nor suffer from a negative impact from the use of:
 - (a) All other components on the cars
 - (b) All components of the communication system
 - (c) Operational electronics used by crewmembers, including radios, wireless ticketing devices and others
 - (d) Consumer electronics used by passengers, including cell phones, computers, radios and others
 - (e) Wayside equipment including signaling systems
 - ii). The Contractor shall develop an Electromagnetic Compatibility (EMC) control plan, which shall describe the methodology used to measure control and mitigate all the Electromagnetic Interference (EMI) emissions by the supplied equipment.
 - iii). The Electromagnetic Compatibility Control Plan shall be submitted to Amtrak as part of the PDR for the communication system. **[CDRL 14-16]**

14.10 CDRLs

CDRL	Description	Due
CDRL 14-01	The Contractor shall identify the fault tolerance capabilities, recovery time, and user interaction required to maintain system operation.	30 days prior to PDR
CDRL 14-02	Plan identifying the approach to reducing the attenuation of the carbody, on-board equipment, and glazing impact on cellular telephone reception	30 days prior to PDR
CDRL 14-03	Documentation and calculations for all individual components, and for the system as a whole, demonstrating the conformance to the requirements in this technical specification and referenced standards.	30 days prior to PDR
CDRL 14-04	Comprehensive architecture and design package	30 days prior to PDR
CDRL 14-05	Documentation defining the capabilities of the OTIS self-test functions	30 days prior to PDR
CDRL 14-06	Document identifying the standard interface which would allow the integration of a replacement or additional DCS communications channels	30 days prior to PDR
CDRL 14-07	Design of the Provision for Wireless Internet	30 days prior to PDR
CDRL 14-08	Diagrams of the antenna locations and the bolt hardware specification	30 days prior to IDR
CDRL 14-09	RF propagation study	30 days prior to IDR
CDRL 14-10	The IP addressing scheme, and a list of all IP devices shall be submitted for review and approval by Amtrak.	30 days prior to PDR
CDRL 14-11	Description of the ETB (if option is exercised) and ECN control and architecture	30 days prior to PDR
CDRL 14-12	Network Interface Control Documents	30 days prior to IDR
CDRL 14-13	Integration and Fault Tolerance Testing Procedure	30 days prior to IDR
CDRL 14-14	Integration and Fault Tolerance Testing Results	30 days prior to FDR
CDRL 14-15	Capabilities of the Protocol Analyzer for each Network	30 days prior to PDR
CDRL 14-16	Electromagnetic Compatibility (EMC) Control plan	30 days prior to PDR

* End of Chapter 14*

Amtrak Single Level Fleet Replacement

Technical Specification

15. Electrical System

Revision 0

Table of Contents

15.1	Overview	15-1
15.2	General Requirements	15-1
15.3	Trainline Systems for Communication and Multiple Unit Wiring	15-3
15.4	Digital Networks	15-6
15.5	480 VAC Head End Power (HEP) Trainline System	15-10
15.6	480VAC Power Distribution.....	15-12
15.7	120VAC Power Distribution.....	15-14
15.8	Battery Charger.....	15-16
15.9	Battery System.....	15-20
15.10	DC Power Distribution System.....	15-24
15.11	Electrical Panels.....	15-25
15.12	Spare Conduit	15-27
15.13	Car Location Identifiers for All Subsystems	15-27
15.14	Integrated Schematics	15-27
15.15	CDRLs.....	15-33

Table of Tables

Table 15-1: Communication Trainline Pin Assignments	15-28
Table 15-2: Multiple Unit (MU) Trainline Pin Assignments	15-30
Table 15-3: Power Phase Matrix.....	15-31

15.1 Overview

- a). This Chapter describes the major electrical power distribution and control systems required for the car and locomotive-to-car power and signal trainline circuits.
- b). The locomotive-to-car systems include 480V Head End Power (HEP), trainline, 27-point door control/communications and 27-point locomotive control trainlines (MU).
- c). Alternative inter-car trainline connection arrangements can be proposed for review and approval.
- d). The car systems may include:
 - i). 480 Volt Alternating Current (VAC) HEP trainline and power distribution,
 - ii). 208VAC power distribution,
 - iii). 120VAC power distribution,
 - iv). 74 VDC Low Voltage Power Supply (LVPS) power distribution,
 - v). battery,
 - vi). 27-pin trainlines for car-to-car multiple unit (MU) and communications (COMM), and
 - vii). electrical locker circuit breaker panels.
- e). It is intended that all cars be configured with these standard trainlines or an agreed upon alternative design to permit flexibility in length and interchangeability of cars especially with legacy fleet.
- f). Cars may be configured in train consists up to 1,530 ft in length. All car functions shall operate per the standards of this specification within this train length range.
- g). Trainline functions may operate at reduced levels (tolerance to be approved by Amtrak) at consist lengths greater than 1,530 ft (due to trainline voltage drop).
- h). The maximum power consumption for a 10-car consist shall not exceed 1000 kW under worst case conditions or cause the ALC-42 HEP to trigger self-protection. For calculation purposes, a train consist shall include one diner, one café/lounge, , and any eight car combination of sleepers or passenger seating car types. An additional 100 kW of overload is available for an undefined short period of time on cold equipment, but any use of this margin requires Contractor to demonstrate at Contractor's cost.
- i). All references to digital trainline DTL and Ethernet Car Backbone (ETB) shall be considered provisions unless Ethernet Car Backbone (ETB) option TS 15.4.c is exercised.

15.2 General Requirements

- a). Hotel power to the cars shall be provided through trainline cables from an external

CONFIDENTIAL — DO NOT DISTRIBUTE

480VAC, 3-phase, 60 Hertz (Hz) source not located on the vehicles.

- b). The system shall be designed for normal operation using power supplied by a locomotive HEP source, or from a wayside 480VAC power source that can have a tolerance up to -15% to +10%. See 15.5 for additional phase imbalance requirements.
- c). Each car shall be equipped with 27-point locomotive control (MU), 27-point communication (COMM), and digital (DTL) trainline receptacles connected at each end of the car. Receptacles shall be arranged so that existing legacy jumper cables can be used to couple a new car to a legacy car and meet all dynamic clearances defined in Chapter 1.
- d). All trainline wires shall run the entire length of each car and be connected from end-end.
- e). Cars shall be connected using standard jumpers.
- f). If car level diagnostics option is executed, the primary communication trainline within the car shall be one or more IP Ethernet based network(s).
- g). All electrical systems and components utilized on the cars shall be electromagnetically compatible with other electrical systems and components, including but not limited to:
 - i). crew radio,
 - ii). digital train line,
 - iii). ECP cabling (see Chapter 9 for additional information),
 - iv). on-board train information system,
 - v). on-board lighting,
 - vi). passenger wireless devices and
 - vii). laptop computers.
- h). The electrical power distribution and all subsystem equipment shall be in accordance with all applicable FRA regulations, APTA standards (including but not limited to PR-E-RP-002-98, PR-E-RP-004-98, PR-E-S-005-98, PR-E-RP-007-98, PR-E-RP-009-98), IEC/EN railway standards (including but not limited to EN 50155, EN 50121-3-2, IEC 62597, EN 45502, and associated referenced standards), IEEE standards including IEEE Standard 16-2020 or latest version, and other recommended practices and industry standards.
 - i). In the event APTA standard couplers, air brake hoses, or passenger car Head End Power/Communications/locomotive MU control electrical trainlines are used inter-car, the connections must meet all applicable AAR, APTA, and Amtrak standards.
- i). All materials and workmanship shall comply with Chapter 19.

- j). Terminal blocks, connectors, and other car wiring devices shall be accessible for inspection, troubleshooting and re-terminating. There shall be no equipment blocking access that must be disassembled or removed.
- k). Terminal blocks and connectors shall not be located on the floor.
- l). As a supplement to APTA PR-E-RP-002-98 pertaining to wiring of passenger equipment:
 - i). Underminated wire connections to terminal blocks are prohibited.
 - ii). All terminal blocks where the manufacturer states that terminals can be used with or without ferrules, all wires shall use crimp-type ferrules unless otherwise approved by Amtrak.
 - iii). Flexible conduit located exterior to the carbody shall be liquid-tight flexible metal conduit. Non-metallic conduit exterior to the carbody is prohibited.
 - iv). Non-metallic conduit shall not be used unless approved by Amtrak before Final Design Review.
- m). Ribbon cable connections are prohibited.
- n). Underframe junction box, conduit, cabling, and other equipment shall be adequately protected from debris strikes, snow and ice while traveling forward or reverse.
- o). Any non-metallic enclosures or components located in the underframe shall be minimized. If used, they shall have additional stainless steel debris shields that will not accumulate debris, snow or ice while traveling forward or reverse.
- p). If car level diagnostics option is executed, all power supplies, controllers, motors, and other electronic devices shall report fault information to the car diagnostic system. Microprocessor-based devices shall communicate via the Ethernet Car Network to the car diagnostic system. Simple, non-microprocessor-based devices shall provide health and fault status via discrete outputs to the car diagnostic system, or Amtrak approved alternative.

15.3 Trainline Systems for Communication and Multiple Unit Wiring

- a). General
 - i). Locomotive-to-car communication for MU and COMM shall be provided by 27-point plugs and receptacles.
 - 1) Trainline communication shall be possible with legacy fleet for interoperability.
 - ii). The trainline system shall be compatible in function with APTA Recommended Practice PR-E-RP-017-99.
 - iii). The 27-point COMM, 27-point MU, DTL, and 480VAC HEP trainline control circuits shall each be run in separate conduits or wire trays.

CONFIDENTIAL — DO NOT DISTRIBUTE

b). Communication Trainline

- i). The COMM trainline provides car-to-locomotive and car-to-car connections for systems such as door control, door closed summary circuit, public address, passenger information and brake status lights.
- ii). Trainline pin assignments are shown in APTA PR-E-RP-017-99. See Table 15.1.
- iii). The primary communication trainline within the car shall be the digital trainline. When coupled with legacy equipment, the train consist shall automatically provide relevant functionality using the legacy COMM communication connections.

c). End of Train Functions

- i). To provide end of train circuit information, depending upon the train consist configuration, at the end cars of the train, a jumper cable may be connected between the right side COMM receptacle and an adjacent white dummy COMM receptacle, to provide end-of-train detection for on-board systems.
- ii). Looping relays shall be provided for each car to establish "end of train" for the four communication trainline circuits (#19, #20, #23 and #26).
 - (1) The looping relay shall be energized when the 27-pin COMM jumper is connected between the COMM receptacle and the adjacent dummy receptacle.
 - (2) Alternate methods may be proposed to Amtrak for approval.
- iii). The DTL system shall be capable of establishing end-of-train functionality to be used in place of the COMM dummy functionality for train summary circuits in the future.
 - (1) The DTL system shall be capable of handling all existing COMM functions that are not safety-relevant.

d). Multiple Unit (MU) Trainline

- i). In push-pull operation, locomotive control functions shall be transmitted through the cars from the locomotive by means of a standard AAR MU trainline.
- ii). A single MU jumper cable (commonly 71 in. long) shall be used between the locomotive and the adjacent end car using the trainline pin assignments shown in Table 15-2.
- iii). All MU trainline receptacles and functions shall conform to APTA PR-E-RP-017-99.
- iv). Each MU trainline wire shall be pass-through, uninterrupted from end to end. There shall be no switching or disconnect device that can open the MU trainlines.

e). Trainline System Application to Vehicles

- i). Two digital trainline receptacles shall be installed on each end of each car in accordance with PRIIA Specification 305-919.
- ii). In addition, two sets of COMM and MU receptacles shall be installed on each end of all cars, one on each side of coupler pocket per APTA Recommended Practice RP-E-017-99.
- iii). One MU and one COMM 27-point jumper cable shall be connected between the car and the locomotive.
- iv). One or more dummy COMM receptacles may be required at the end of each car to ensure compliance with section 15.3.
- v). Alternative locations for these receptacles may be proposed to Amtrak for approval.
- vi). The plate to which receptacles and jumper flanges are mounted shall be designed to resist a 500-pound force, without deforming, produced by pulling the locked jumper (with the receptacle cover locked down utilizing a rubber-O ring type retainer) out of the receptacle.
- vii). There shall be no interference that restricts the receptacle cover from being fully opened to allow insertion or withdrawal of jumpers.
- viii). Under all operating conditions, a minimum of 2 in. clearance for the trainline cables shall be provided between trainline jumpers and the carbody and all appliances including air hoses, couplers, uncoupling levers and other equipment.
- ix). Each car shall be delivered with one loose jumper cable of each type for each connection that would need to be made.

f). Trainline Junction Boxes

- i). Separate stainless steel weatherproof junction or switch boxes shall be provided at each end of each car for the communication (both DTL and COMM) and MU trainline systems.
- ii). Trainline junction boxes shall be located behind the F-end truck or other Amtrak approved protected location.
- iii). The inside of any exterior-mounted box shall be powder coated with an insulating paint or varnish.
- iv). All wires shall be terminated using Amtrak approved termination method mounted onto terminal blocks in the junction boxes.
- v). Trainline junction boxes shall be located where they are shielded from roadbed debris and car system liquid drains.

- vi). All trainline junction boxes shall be weatherproof to NEMA4 requirements or IP56 if located on the exterior.

15.4 Digital Networks

a). General

- i). Ethernet/IP (Internet Protocol) shall be the medium of communications between systems (HVAC, LVPS/BC, doors, communications system components, event recorder, cameras, brake system, etc.) inside a car and between cars that make up a train consist.
- ii). A Car Ethernet Network, based on IEC 61375-3-4, shall provide communication for the devices / sub-systems within the car. It should provide programmable real time data monitoring information.
- iii). If the option is exercised, an Ethernet Train Backbone, based on IEC 61375-2-5, shall be provided for communication between vehicles in the train.

b). Car Ethernet Network

- i). The primary communication method between on-board microprocessor controlled subsystems is to be via a Car Ethernet Network. All systems and subsystems on-board the vehicle are to be connected by way of a Car Ethernet Network.
- ii). The Contractor shall provide a list of all IP devices on the Car Ethernet Network and Ethernet Backbone (if option exercised). The IP addressing scheme, to be approved by the Project Manager, shall be based on ENI EC 61375.
- iii). The network design of the Car Ethernet Network and Ethernet Backbone (if option exercised) shall be non-proprietary. The network design should include protocols, such as those defined by TCN Open TRDP, that facilitate the addition and subtraction of components without requiring modifications to on-board software configuration items.
- iv). The Contractor shall provide a description of the Car Ethernet Network control and architecture to the Project Manager for review and approval. This description shall include detail on the data network protocols, fault tolerance, degraded operating modes, redundancy arbitration, error detection, and a description of network initialization and configuration.
- v). All networks (including the ETB) shall be based on the seven (7) layer open systems interconnection (OSI) model. Full documentation of each layer for each network shall be provided in a network interface control document to be submitted prior to the preliminary design review. The document shall be updated with all changes through testing and the end of the warranty period.
[CDRL 15-01]
- vi). Subsystem monitoring and control within the car shall be primarily by means of the Car Ethernet Network with minimal use of discrete control wires for

non safety-related functions. Systems controlled (non safety-related functions) and/or monitored by the Car Ethernet Network shall, at a minimum, include the following:

- (1) Door System
 - (2) HVAC System
 - (3) Brake System
 - (4) LVPS/BC System
 - (5) Lighting System
 - (6) PA Amplifiers
 - (7) Signs
 - (8) PEIU
 - (9) Communication System Components
 - (10) TWC Gateway
 - (11) Water and Waste System
 - (12) Monitoring and Diagnostics System
 - (13) Maintenance Display Units
- vii). The Contractor shall perform a network interface card (NIC) test of each networked device to verify compliance with IEEE standards.
- viii). When nodes on the network are replaced using parts supplied by the Contractor or equipment supplier, the network system shall automatically identify the replacement equipment and its communication links. Replacement of networked subsystem controllers shall not require any configuration of the controller or vehicle switches.
- ix). For the purposes of network maintainability and diagnostics, full per interface statistics of each network connected device shall be available via PTE, on-board diagnostic screen and wayside diagnostic system. The interface statistics shall include, at a minimum, packets transmitted, received, transmitted errors (broken down by type), received errors (broken down by type), packet types (unicast, multicast, broadcast, etc.), as well as interface connection duration, speed, and resets. The counters shall be capable of being reset on a per-interface basis via PTE, on-board diagnostic screen and wayside diagnostic system.
- x). The PTE Ethernet port shall be located in an electrical locker in each car. Location to be determined during design reviews. A device shall provide the display of the network statistics showing an overview of the activities of the

devices connected to the network and indicate issues such as interfaces which have a high number of errors and resets.

- xi). The Contractor shall test to ensure each Car Ethernet Network channel link satisfies the complete Cabling Transmission Performance and Test Requirements of TIA/EIA 568-B.2, utilizing a device that meets the accuracy requirements of a Level III tester. Tests shall be performed each time a cable is replaced or re-terminated through test and warranty. Test results shall be recorded by the Contractor and provided to the Project Manager in a spreadsheet format for each car.
 - xii). The network diagnostic capabilities shall be submitted to the Project Manager for review and approval.
 - xiii). All software configuration items installed on any network connected device shall be maintained by an onboard controller to facilitate component replacements. A report of expected and current onboard software versions shall be accessible through the PTE, onboard diagnostic system, and wayside diagnostic systems. A software update command using a copy available on the update controller shall be available to maintainers when the report indicates that an expected version of a software configuration item is in conflict with the installed version on the network device.
- c). Ethernet Car Backbone (ETB) – OPTION
- i). General
 - (1) Communication between cars shall be implemented via a Gigabit Ethernet Train Backbone based on IEC 61375-2-5 that provides high speed trainline communication between cars, and between the cars and the wayside.
 - (2) The Contractor shall provide a description of the Ethernet Train Backbone control and architecture to the Project Manager for review and approval. This description shall include detail on the data network protocols, fault tolerance, degraded operating modes, redundancy arbitration, error detection, and a description of network initialization and configuration.
 - (3) An Ethernet Train Backbone Node (ETBN) shall be provided on all cars to provide routing between the ETB and the Car Ethernet Network. Each ETBN shall be implemented to provide link redundancy.
 - (4) The ETB configuration, receptacles, and jumpers shall be implemented. Two Category 6A or Category 7 cables (one in use, one for future provision) shall be run from the ETB receptacles to the location of the Ethernet Train Backbone Node.
 - (5) The ETB shall provide and support communication of data required to perform the following functions:

- (a) Recognition of the train consist, including vehicle order, orientation, and number within the consist
 - (b) Automatic reconfiguration of the network when cars are coupled or uncoupled
 - (c) Car monitoring and diagnostics
 - (d) Train-to-wayside (TWC) data transfer
 - (e) Transfer of data needed from/by other ETB capable cars or locomotives in the consist
 - (f) Remote PTE/PTU access to Car Ethernet Network attached devices
 - (6) The ETB shall support all of the diagnostic and monitoring functions of the monitoring and diagnostic system.
 - (7) The cars shall be capable of operating in a consist with between 2 and 22 vehicles.
 - (8) The Contractor shall test to ensure each Ethernet Car Backbone channel link satisfies the complete Cabling Transmission Performance and Test Requirements of TIA/EI 568-C.1 for Category 6A (CAT6A) cables and the 1000BASE-T link transmission performance requirements specified in IEEE Std 802.3. Tests shall be performed as per TIA/EIA 568-B.2, utilizing a device that meets the accuracy requirements of a Level IIIe tester. Tests shall be performed each time a cable is replaced or re-terminated through test and warranty. Test results shall be recorded by the Contractor and provided to the Project Manager in a spreadsheet format for each car.
- d). Interoperability
- i). The ETB, and systems utilizing the ETB and Car Ethernet Network for communication, shall be designed for interoperability with future fleets without requiring configuration or software changes (that are not affected by the defined ETB interface).
 - ii). The vehicle specific definition of faults, alarms, screen and screen layouts, display panels, vehicle status, and vehicle network capabilities shall be transmitted by each vehicle via the ETB. The transmission of these data items shall enable future fleets to be integrated without modification to the vehicle's software. It is anticipated that this will be accomplished utilizing a stack of technologies including service discovery protocols such as zeroconf, application protocols such as HTTP, markup languages such as XML or HTML, and scripting languages such as JavaScript.
 - iii). The technologies utilized shall be non-proprietary and fully defined by the Contractor to enable future fleets to add displays to the monitoring and diagnostic display, as well as allow access to the monitoring, diagnostic, and

status information of the vehicle to the displays integrated on future fleets. This shall allow future fleets, including locomotives coach cars, and cab cars, display information on the maintenance display and driver display of the vehicles purchased under this contract without requiring modifications to software installed on this fleet of coach cars.

- iv). Details of the interoperability shall be submitted with the Network Interface Control Document.
- v). Optionally, to facilitate development and integration of current and future fleets into the ETB network, the Contractor shall supply a PC based network simulator software package which provides the capability to simulate ETB and Car Ethernet Network communication.

15.5 480 VAC Head End Power (HEP) Trainline System

a). General

- i). HEP will be provided from the source to the car through receptacles and jumpers at standard locations on each end of the car and on both sides of the coupler, in accordance with APTA Recommended Practice PR-E-RP-016-99.
 - (1) Total should be 4 connectors (two male, two female) on each end of the car able to conduct 1600 Amps combined or 400 Amps each.
- ii). In addition to the three main power conductors, the HEP cabling shall also include three control wires to provide locomotive trainline complete information (indicating all cabling from car to car is in place), and a car-to-car carbody ground bond.
 - (1) HEP circuit assignments shall be in accordance with Amtrak Specification 963.

iii). Load Balancing

- (1) The loads between phases shall be balanced so that the load on one phase will not exceed more than 5% of the load on either of the other two phases.
- (2) The delta phase current between any phases shall always remain under 90A total for the train consist to prevent locomotive HEP shutdown faults. For calculation purposes, a train consist shall include one diner, one café/lounge, and any eight car combination of sleepers or passenger seating car types coupled to a single locomotive.
- (3) Load balancing shall take into account each car type and operational loadings including maximum heating, partial heating, maximum cooling, partial cooling, re-heat and ventilation only modes.

- iv). All HEP cabling shall be arranged and routed to minimize EMI emissions using techniques including trefoil arrangements, shielding, and other strategies.
- b). Receptacles and Jumpers
 - i). Jumper Cables
 - (1) Both ends of the car shall be equipped with two jumper cables utilizing the latest fabrication techniques and two receptacles with housings, per APTA Recommended Practice PR-E-RP-016-99 and APTA Recommended Practice PR-E-RP-018-99.
 - (2) Components shall be in accordance with Amtrak Specification 223 and Amtrak drawing D-12-7191, and include 480VAC jumpers, 480VAC receptacles, and 480VAC receptacle housing.
 - (3) The HEP jumpers shall be of adequate length to reach from the end sheet to the car junction box.
 - (4) No portion of the HEP cables shall hang down to within 5 in. of the top of rail (vertically) when connected to an adjacent car on straight, level track.
 - (5) No portion of the cable shall pass below top of rail when navigating a 250 ft. radius turn.
 - ii). HEP Receptacles
 - (1) The receptacles shall be mounted with a downward slope of approximately 15° to provide drainage.
 - (2) Receptacles and fixed jumper flanges shall be mounted to the carbody with stainless steel bolts.
 - (3) All HEP receptacles shall be labeled with appropriate danger 480V warnings, in accordance with Amtrak Specification 696.
 - (4) Receptacle Mounting Plate
 - (a) The plate to which the receptacles and fixed jumper flanges are mounted shall be reinforced to resist, without bending, a 500 lb. force produced from pulling the locked jumper out of the receptacle, such as by an unintended uncoupling.
 - (b) They shall consist of a short length of stainless steel tubing with a stainless steel crossbar at the bottom, of a diameter to accept the 480V plug body, yet prevent it from sliding through.
 - (c) The holster shall be sloped steeply downward to allow any moisture which has accumulated in the plug to drain.
 - iii). HEP Trainline Junction Box

- (1) The trainline junction box shall be located at the transition bulkhead or if there is no transition bulkhead, beyond the adjacent truck.
- (2) This shall be accomplished without requiring connectors, splices or intermediate terminals.

c). Wiring and Connections

- i). The 3-phase HEP trainline power cables per APTA Recommended Practices PR-E-RP-002-98 and PR-E-RP-009-98, with 1600 amp capacity, shall be routed along the length of the car.
- ii). The wire used in the trainline power cables shall be 4/0 as specified in APTA Recommended Practice PR-E-RP-016-99.
- iii). The voltage drop due to the impedance of the power trainline at the extreme end of the train consist shall be minimized under the train's heaviest load.
- iv). The HEP cables may run between junction boxes of each car in a protected wire race.
- v). All cables shall be enclosed in rigid galvanized steel conduit or trays, where possible, and shall be supported by heavy duty stainless steel conduit straps equipped with vibration resistant material at intervals not to exceed 48 in.
- vi). All cables not able to be installed in rigid galvanized steel conduit shall be protected from debris strikes and will be supported by suitable cleats at appropriate intervals not exceeding 24 in.
- vii). Spare COMM and MU trainline wires shall be identified in the junction boxes.

d). Power Junction Boxes

- i). An HEP trainline junction box shall be located at each end of the cars, where the jumpers and leads from the receptacles on the end sheet shall be terminated and connected to the trainline cables.

15.6 480VAC Power Distribution

a). General

- i). The 480VAC power is distributed within the cars utilizing switch and circuit breaker panels located in the electrical and/or equipment lockers accessible from the car interior.
- ii). 480VAC power shall be controlled and fed to all loads through this distribution system.

- b). Each 480VAC circuit breaker auxiliary contact shall be monitored by the diagnostic system if car level diagnostics option is executed.

c). Main HEP Circuit Breaker:

- i). One main circuit breaker shall be provided in the electrical locker to allow isolation of each car from the 480VAC trainline systems.
- ii). The main 480VAC circuit breaker auxiliary contact shall be monitored by the diagnostic system by a dedicated I/O if car level diagnostics option is executed.
- d). Power Transformers
 - i). All transformers shall be of a dry type, convection cooled, and in accordance with Amtrak Drawing D-65-7449, revision D, unless otherwise approved.
 - ii). All transformers shall have delta primary windings.
 - iii). All inputs and outputs shall be circuit breaker protected with suitable circuit breaker discrimination to avoid unnecessary loss of equipment functionality under load fault conditions.
 - iv). At a minimum, the following types of transformers shall be provided at a minimum on all car types:
 - (1) 480/120VAC transformers to provide 120VAC service with GFCI functionality.
 - (2) 3-phase 480/208-120VAC, delta-wye, to provide 120-208VAC, 3-phase service with a grounded neutral.
 - v). If the contractor can demonstrate that the 120VAC service, with acceptably stable voltage, with GFCI functionality may be provided from a tertiary winding from the 3-phase transformer, then the contractor may propose this arrangement at preliminary design review.
 - vi). Additional provisions shall be made for food service cars.
 - vii). All transformers shall be located inside the electrical lockers or under car in equipment boxes if necessary.
 - (1) If under the car, transformers shall be sealed to NEMA 4 unless it is located in an IP56 water sealed container.
 - viii). The Contractor shall demonstrate, by calculation, that there is sufficient ventilation to prevent transformer failure and/or damage resulting from excessive heat buildup during all operating conditions.
 - ix). Transformers shall be derated at least 10% for current, or other appropriate approved factor, based upon duty cycle.
 - x). Transformers shall be thermally rated such that their life expectancy shall exceed that of the vehicles when operated at full load and at specified maximum ambient temperatures.
 - xi). Maximum ambient temperatures shall include in the analysis increases in temperature above vehicle external ambient temperature in the transformer

mounting locations, transformer efficiency losses, and heat generated from other equipment adjacent to the transformers.

- xii). Calculations shall be provided to demonstrate that the transformers provided have sufficient capacity to supply their intended loads with 15% capacity reserved for future use and will have an expected lifetime exceeding that of the vehicle. **[CDRL 15-02]**

15.7 120VAC Power Distribution

a). General

- i). The 120VAC power shall be distributed within the car utilizing 480/120VAC step down transformers, and switch and circuit breaker panels located in the electrical equipment lockers accessible from the car interior.
 - (1) Power shall be controlled and fed to all 120VAC loads through this system.
- ii). A main circuit breaker shall control the power distribution to all 120VAC circuit breakers.
- iii). The main 120VAC circuit breaker auxiliary contact shall be monitored by the diagnostic system by a dedicated I/O if car level diagnostics option is executed.
- iv). Weather-proof, GFCI protected service outlets shall be provided undercar near subcomponent assemblies spaced no less than 25' from any major system and isolated on a separate circuit independent of interior outlets.
- v). Each 120VAC circuit breaker auxiliary contact shall be monitored by the diagnostic system if car level diagnostics option is executed.
- vi). Passenger convenience outlets on single level cars shall be divided into a minimum of eight (8) separate circuits to mitigate nuisance tripping impacts.

b). Passenger Convenience Outlets

- i). Passenger Seat Outlets
 - (1) A flush-style 120VAC duplex convenience outlet shall be installed in each revenue seat location using the GFCI circuits, as detailed in Chapter 11, and shall include an equal number of appropriate USB ports as approved by Amtrak.
 - (2) Provisions shall be included so that outlets do not limit the ability to reconfigure seats within the cars.
 - (3) The outlets are intended to provide power for passenger electronic equipment, such as laptop computers.
- ii). Table Outlets

- (1) Two duplex outlets supplied by a power strip, shall be installed at each table, located such that the table or seat does not interfere with access to the outlet.
 - (2) Each outlet shall also include an equal number of USB ports.
 - iii). An Amtrak-standard 120V decal per Amtrak Specification 697 shall be installed at each outlet location.
 - iv). The passenger convenience outlets shall be protected by a number of separate power circuits, each of which shall be equipped with a 20 amp GFCI breaker with test and reset buttons.
 - (1) The convenience outlets on each car shall be evenly divided into the power circuits.
 - (2) The number of power circuits will be determined by the Contractor, but they should use 1 amp per foot of carbody as a guide.
 - v). Each passenger convenience outlet shall include a power indicator light to indicate power at the outlet.
- c). Interior Service Outlets
 - i). Duplex GFCI service outlets shall be located in each toilet room, electrical locker and utility lockers in all car types, in locations and quantities suitable for their intended use in those areas.
 - ii). The food service area of the food service car shall be equipped with GFCI protected service outlets as specified in Chapter 16.
 - iii). Service outlets shall be protected locally by GFCI outlet rated for 120VAC, single phase, 60 Hz, 20 amps at each service outlet location.
- d). Special Service Outlets
 - i). In each accessible area, luggage rack tower, and bicycle rack area, there shall be a dedicated GFCI outlet or charging cable capable of charging mobility aid devices such as electric wheelchairs.
 - (1) The circuit shall be fed by a dedicated circuit breaker and all associated wiring shall be able to support up to 0A current draw.
 - (2) If the outlet itself cannot support 30A, the circuit breaker shall be rated to the weakest component in the arrangement.
 - ii). In each bicycle rack area, there shall be GFCI outlets capable of charging electric bicycles and scooters.
 - (1) There shall be sufficient outlets to plug in each bicycle that can be stored in the area.

- (2) The circuit shall be fed by a dedicated circuit breaker and all associated wiring shall be able to support up to 20A current draw.

15.8 Battery Charger

a). General

- i). Each car shall have two solid-state DC battery chargers with temperature compensation.
 - (1) The second battery charger will act as an emergency hot standby in case the first battery charger has a failure and can no longer operate. If the first battery charger fails, the changeover to the second battery charger shall be automatic and not require any manual intervention.
 - (2) Battery chargers shall rotate to avoid extended periods of inactivity.
 - (3) There shall be a backup manual override that can be crew operated in case the automatic battery charger changeover fails.
 - (4) Each individual battery charger shall meet the reliability requirements in Chapter 4.
 - (5) The battery charger shall be either mounted under the car in an equipment box, near the battery box, oriented so that the indicator lights can be seen from outside the car without opening panels, or the battery charger shall be installed in the electrical locker.
 - (6) The battery charger shall be rated appropriately for the DC load it will be supplying.
 - (7) Alternative proposals, subject to Amtrak review, may be allowed if the performance criteria are satisfactorily accounted for.
 - (8) The battery charger function description shall be submitted at PDR and updated during design review. **[CDRL 15-03]**
- ii). The battery charger shall provide DC power to support all DC loads, including battery charging, while the car is operating with HEP on.
- iii). Upon the loss of HEP or the failure of the battery charger, the system shall automatically transfer the DC loads to the battery system without interruption of power and shall be demonstrated during design review.
- iv). The DC battery system shall be responsible for feeding car loads and systems which must be available for operation independent of the availability of the 480VAC HEP, such as public address, digital trainline, marker lights, side and end door systems, standby lighting, and others, as specified in Table 15-3.
- v). The battery and charger system shall be comprised of:
 - (1) Battery charger with temperature sensor

- (2) Battery (multiple cells)
- (3) Load drop device or devices
- (4) Load drop controller (may be located elsewhere)
- (5) The same battery type and battery charger shall be used on all car types.

b). Operation

- i). The battery charger shall be connected in parallel to simultaneously charge the battery while supplying power to the individual car bus and shall be capable of supplying uninterrupted DC power during load transfer between LVPS and battery.
- ii). The charging system shall incorporate modes for Current Limit, Normal Charge, and Trickle Charge.
- iii). The Contractor shall propose an Amtrak approved method to incorporate battery charging and the output voltage will be regulated at a battery temperature-compensated value.
- iv). The charger shall be sized with sufficient capacity to simultaneously recharge the battery from a fully discharged state and to support the maximum possible DC bus loads plus a 25% reserve beyond the worst-case continuous load condition.
- v). Recharge time of a fully discharged battery shall not exceed five hours to reach at least 80% of capacity at 77°F, with all normal car DC loads on.
- vi). The Contractor shall provide, at design review, a load budget assessment that includes calculations to demonstrate that the charger provided has sufficient capacity to meet these needs. **[CDRL 15-04]**

c). Basic Charger Characteristics

- i). Basic charger characteristics shall include the following:

Input Voltage	480VAC nominal (tolerance range +10%/-15%), 3-phase, 3-wire
Input Frequency	60 Hz nominal (tolerance range 56-64 Hz)
Input Protection	3-pole circuit breaker (external reset)
Output Voltage, Temperature Compensated	73.6VDC at 68°F ambient; 80VDC maximum
Temperature Compensation	In accordance with the battery manufacturer's recommendation
Ripple	Maximum of 2 volts peak-to-peak any load within rating

Audible Noise	62 dBA maximum for components mounted inside the car
Ability to automatically recharge the battery from any state of discharge, including 0 volts on battery terminals.	
Charging voltage ambient temperature compensated as sensed at the battery.	
Following a HEP power outage, the charger shall restart with a reduced current load for a period of time after restoration of HEP in order to minimize the short-term startup HEP load.	
Diagnostic information for the battery charger and battery current and voltage levels shall be recorded and available remotely if car level diagnostics option is executed.	
See Chapter 4 Reliability, Availability, Maintainability for additional requirements.	

d). Circuit Breakers

- i). The charger system shall be equipped with two circuit breakers, one for the charger output and one for the battery disconnect near the battery charger.
- ii). If needed a second battery disconnect switch shall be located adjacent to the battery box.

e). Indicators

- i). The charger shall include individual status indication LEDs that are displayed from the front face. These shall include:

Supply 480VAC On	Green
Current Limit (in current limit mode)	Amber
Load Dump Relay Energized	Amber
Supply 480VAC off/out of tolerance	Red
Rectifier Failure	Red
Temperature Sensor Failure	Red

- ii). A lamp test pushbutton shall be provided, which when pressed will cause all lamps to light. All indicators and meters should be able to operate without 480VAC present.
- iii). The charger shall include four meters on the front face:

DC Amps (total charger output)	0-100 amps
Battery Amps (current into/out of battery)	100-0-100 amps (zero center)
DC volts (charger output voltage)	0-100 volts
Battery Temperature	0-250 degrees F

- iv). All metered information, diagnostics, and fault information shall be recorded and available remotely through the car diagnostic system if car level diagnostics option is executed.
- f). Self-Protection
 - i). At a minimum, the charger shall be self-protected against the following fault conditions:
 - (1) Open circuit battery or wiring
 - (2) Short circuit battery or wiring
 - (3) Battery ground fault
 - (4) Temperature sensor fault
 - (5) Low input voltage
 - (6) Low output voltage
 - (7) Input phase loss
 - (8) Reversed battery connections
 - (9) System overload
 - (10) Voltage or current over limit
- g). Temperature Sensor
 - i). The temperature sensor shall be sealed and mounted onto one of the inter-cell plates of the battery assembly and shall be sufficiently marked so as to be readily identifiable and accessible during maintenance or battery cell change out.
- h). Operation of Battery Charger System
 - i). Operation of the battery charger shall be as follows. See Table 15-3 for additional details:
 - (1) **Normal Mode:** 480VAC HEP "ON"; DC system "ON"
 - (a) All AC and DC loads available
 - (b) All DC loads fed by battery charger
 - (2) **Standby Mode:** 480VAC HEP "OFF"; DC system "ON"
 - (a) Battery voltage above manufacturer recommended standby level based on battery type.
 - (b) All DC loads fed by battery

- (c) Immediately after loss of HEP, the car shall go into standby mode, where most of the car lighting, all doors, ECP braking, and the communications system remain in operation.
 - (d) Refrigeration equipment shall remain on.
- (3) **Load Shed Mode:** 480VAC HEP “OFF”; DC system “ON”
 - (a) Battery voltage potential range for load shed the manufacturer has recommended based on battery type.
 - (b) Only essential DC loads remain on, de-energizing non-essential systems.
- (4) **Emergency Mode:** 480VAC HEP “OFF”; DC system “OFF”
 - (a) Battery voltage below the manufacturer recommended minimum level based on battery type.
 - (b) All DC loads are without power because the load drop device has disconnected the battery system, or the battery system is disabled due to equipment failure.
 - (c) In emergency mode only independently, powered systems remain on. Upon restoration of HEP, all DC loads shall be available immediately after a brief window to confirm HEP is stable, including those that were disconnected as part of standby, emergency or load drop. DC load transfer by the battery charger shall be independent of the state of the battery when HEP is available. The battery charger should be able to operate normally regardless of the condition of the battery set.
- i). Load Shed/Drop Device
 - i). The low-voltage power system shall be equipped with a switching device(s), which shall shed load from the battery in accordance with Table 15-3 and the battery manufacturers recommendations.

15.9 Battery System

- a). General
 - i). The battery shall provide power for necessary systems when the HEP system is not available.
 - ii). The battery system shall be compliant with APTA Recommended Practice PR-E-RP-007-098.
- b). Batteries
 - i). The Contractor shall submit a battery design that:

- (1) Meets the load requirements found in Table 15-3 with at least 25% extra capacity;
 - (2) Provides the longest life-cycle cost effective system; and
 - (3) Provides the latest technology that is available in passenger rail battery design.
 - ii). All car types shall utilize the same type of battery cell.
 - iii). The batteries shall be recharged by the battery charger as specified above.
 - iv). Batteries shall be nickel-cadmium (Ni-CAD), lithium ion or nickel-metal hydride, or other Amtrak approved type.
 - (1) Lead-acid batteries are prohibited.
 - v). The batteries shall be housed in cases of a fire-retardant design.
 - vi). The batteries shall be a low-maintenance type and shall not require the frequent adjustment of the electrolyte level.
 - vii). The battery system may utilize a centralized water fill apparatus that meets the ambient environmental requirements of the specification.
 - viii). The battery shall be designed to minimize hazards to operating personnel during service, operation, line maintenance and shop maintenance.
- c). Battery Performance
- i). Nominal battery voltage of 64VDC shall be provided to the DC power distribution system in each car when HEP is not present and the batteries are fully charged.
 - (1) Alternate methods of compliance for battery system voltage may be proposed but must still meet the requirements and relative performance characteristics and modes specified for the battery and battery charger systems.
 - ii). The batteries shall have a design service life of no less than twelve years and shall be capable of withstanding a minimum of 2000 deep cycles without failure.
 - (1) A deep cycle shall be defined as discharging the battery to 0.8V/cell to 1.0V/cell and recharging it to 80% of its rated capacity at 77°F in no more than five hours.
 - (2) The actual discharge voltage will be established in accordance with the battery manufacturer's recommendations.
 - iii). The battery system shall be sized to carry the full DC load after loss of HEP, as defined in Table 15-3 (standby mode) for no less than two hours.

- (1) The battery system shall provide a 25% power safety margin above the calculated load.
- iv). A DC load budget shall be developed by the Contractor and submitted to Amtrak for approval during the design review process, demonstrating that the battery system as proposed meets all requirements and provides adequate capacity for the required loads for the required duration.
- d). Battery Markings
 - i). Each battery cell or battery unit shall be permanently marked with the following information:
 - (1) Manufacturer's name
 - (2) Battery type
 - (3) Catalog or part number
 - (4) Nominal rated capacity at five- and eight-hour discharge rates
 - (5) Serial number
 - (6) Date manufactured
 - (7) Amtrak name
 - (8) Amtrak part number
 - (9) Warning and safety precautions (i.e. use no acid, etc.)
 - (10) Blank space where installation date can be written
 - ii). Markings shall be resistant to the chemical and mechanical environment encountered in service for the design life of the cell.
 - iii). Polarity of the positive cell terminal shall be identified by a red post insulator or bushing and/or a plainly marked p, pos or + symbol.
 - iv). Polarity of the negative post shall be identified with a black post insulator or bushing and/or a plainly marked n, neg or - symbol.
- e). Battery Enclosure
 - i). Design and Construction
 - (1) Battery Enclosures shall meet the requirements of 49 CFR 238.225 and EN 50272-2.
 - (2) The batteries shall be housed in an approved rattle-proof stainless steel battery box located in an approved location under the car floor unless isolated from the passenger seating areas by a non-combustible barrier.

- (3) The battery box shall be of adequate size to accommodate a crated battery from at least two suppliers.
- (4) Battery enclosure covers shall be hinged and designed to prevent the direct entry of water.
- (5) No combustible material shall be used for the trays or cell blocking.
- (6) The battery box floor shall have a drain inboard of the running rail.
- (7) Means shall be provided to prevent lateral and longitudinal movements of the battery using approved fire-resistant material.
- (8) The cells shall be installed such that the plates are parallel to the sides of the car.
- (9) Wire terminations shall be both labeled and color coded red (for positive) and black (for negative).
- (10) Battery enclosure shall be protected by the use of a fire suppression system that is adequate to contain/extinguish any type of battery fire.

ii). Accessibility for Maintenance

- (1) The battery shall be mounted for ease of replacement and maintenance.
 - (a) All cells shall be fully and easily accessible for servicing.
- (2) When open, the hinged covers should provide unimpeded access to the batteries for the replacement or routine maintenance and shall include a suitable prop rod or latching mechanism to hold the access door open.
- (3) If the battery trays must be moved to provide access for servicing, they shall be mounted on a robust locking slide-out tray.
 - (a) The tray shall lock in the fully extended and fully retracted positions, with a safety latch.
 - (b) Sufficient slack shall be provided in the battery cables to permit tray movement, and anti-chafing materials such as cable carriers shall be applied to prevent damage to the cables.
 - (c) Use of cable disconnect plugs for tray movement is prohibited.
- (4) The rearmost cells shall have vertical line of sight visibility to the filler caps well clear of the side of the carbody when the tray is extended.
- (5) The battery box shall be completely self-draining to allow flushing of the battery with water.

iii). Ventilation

- (1) Battery venting shall be designed so that there can be no accumulation of trapped gases.
 - (2) There shall be no devices that can cause sparking in the battery ventilation airflow.
 - (3) Ventilation holes shall be provided with a fine mesh that allows for proper ventilation but prevents intrusion of leaves or small debris.
 - (4) Fiberglass or other approved fire resistant easily replaceable filtering media shall be applied to ventilation openings to prevent dust ingress due to car motion.
- f). Battery Disconnect
- i). There shall be a battery disconnect available to first responders in case of an accident. The location shall be readily accessible in any accident scenario include a rollover derailment such as in the interior in the vestibule area.
 - ii). The battery disconnect concept and arrangement shall be submitted at Preliminary Design Review. **[CDRL 15-05]**

15.10 DC Power Distribution System

- a). General
- i). Power for all DC loads shall be distributed throughout the car through switch and circuit breaker panels located in the electrical equipment lockers accessible from the car interior.
 - ii). A master battery emergency OFF switch/pushbutton shall be included in the switch locker, which shall permit the train crew to totally disconnect the car battery from all car loads.
 - iii). Each DC branch return circuit shall be floated from the carbody.
 - iv). The low voltage power distribution arrangement concept shall be submitted at Preliminary Design Review. **[CDRL 15-06]**
- b). 74VDC Power System
- i). Systems and components that are operated on 74VDC shall be powered from the battery charger through a power distribution system that includes control switches, circuit breakers and load shed and load drop relays located in the electrical locker.
 - ii). Circuit breakers shall be sized and labeled according to their circuit and function.
 - iii). A main circuit breaker shall control power distribution to all 74VDC circuit breakers.

- iv). The main 74VDC circuit breaker auxiliary contact shall be monitored by the diagnostic system by a dedicated I/O if car level diagnostics option is executed.
- v). Each 74VDC circuit breaker auxiliary contact shall be monitored by the diagnostic system if car level diagnostics option is executed.
- c). 24/12VDC Power System
 - i). If multiple systems utilize 24VDC or 12VDC power sources, then there shall be a consolidated 24/12VDC power distribution system located in the electric locker instead of using multiple DC/DC converters.
 - ii). A main circuit breaker will be supplied for the DC-to-DC converter and each sub system utilizing the 24/12VDC system shall have its own dedicated circuit breaker.
 - iii). Each converter shall report health to the diagnostic system if car level diagnostics option is executed.
 - iv). Each 24/12VDC circuit breaker auxiliary contact shall be monitored by the diagnostic system if car level diagnostics option is executed.
- d). DC-to-DC Converters and Inverters
 - i). DC-to-DC Converters and Inverters used to supply other voltages, including commercially available units, shall be certified to EN 50121 and 50155.
 - ii). Converter and Inverter reliability shall meet the auxiliary power MDBC requirements in Chapter 4.

15.11 Electrical Panels

- a). General
 - i). An electrical locker shall be provided in all car types, locked with the standard coach key.
 - (1) All control switches, circuit breakers and indicators shall be located in this locker unless specified otherwise.
 - ii). Controls and switches designated for crew operation shall be located on electrical panels separate from devices designated for maintenance operation such as circuit breakers.
 - (1) If crew and maintainer controls are located in the same locker, the panels shall have separate doors to prevent crew operators from accidentally using maintenance devices.
 - iii). All circuit breaker and switch panels shall meet all recommendations of APTA Recommended Practice PR-E-RP-002-98.

- iv). The circuit breaker panels shall be dead front type, with removable front covers, of a design such that all components are front serviceable.
- v). Circuit breakers shall be arranged so that the handles move vertically, with the ON position up.
- vi). The panels shall be conveniently located, in the electrical locker, for ease of access by service personnel.
- vii). Reduced wiring and ease of maintenance shall be of prime consideration.
- viii). If it is impractical to house all circuit breakers in the electrical locker, additional circuit breaker panels may be proposed for Amtrak approval.
- ix). A wiring gutter shall be provided along the top, sides and bottom, for the routing of high voltage leads to their designated circuit breakers.
- x). Appropriate installation methods and materials (wire gutters, conduits, tie bars, etc.) shall be provided for routing high voltage leads to their designated circuit breakers internal to the electrical locker.
- xi). The circuit breaker panel shall be configured for easy removal so that maintenance and repair action are not impeded.
- xii). Electrical locker arrangement, including separation details of crew operated devices and maintenance operated devices, shall be submitted at IDR.
[CDRL 15-07]

b). Switch and Circuit Breaker Panel Arrangement

- i). Each circuit breaker panel shall carry apparatus arranged to be easily accessible to connections and designed to prevent an operator from coming in contact with live voltage when operating switches or circuit breakers.
- ii). All switches and circuit breakers shall be provided with a nameplate clearly identifying the electrical circuit it controls with at least three spare slots for future circuit breaker installations.
- iii). The ampere rating for each circuit breaker shall be indicated on the circuit breaker front plate, arm or toggle lever.
- iv). All circuit breakers and switches shall indicate ON with toggle up and OFF with toggle down.
- v). Circuit breakers for the different voltage power distribution systems shall each be grouped with their respective voltage and be labeled according to the appropriate voltage.
- vi). A main circuit breaker shall be provided for each voltage level.
- vii). Circuit breakers, whether in groups or individually, shall provide a means for locking out and tagging out.

- viii). The Contractor shall illustrate the Lock Out Tag Out procedure during the design review process.

15.12 Spare Conduit

- a). Spare conduits shall be installed for future use in concealed areas where there are no access panels. Spare conduits shall follow requirements in APTA PR-E-RP-002-98, Installation of Wire and Cable.
- b). Areas include but are not limited to underneath the floor panels, sidewalls, vestibules, ceiling panels, etc. for running future wiring laterally across the aisle, or longitudinally down the car.
- c). Spare conduits shall be uninterrupted from end to end. If pull boxes are needed, they shall be located in areas that have sufficient maintenance access.
- d). Spare conduit size shall be a minimum 0.5 in.
- e). Spare conduit shall have a pre-installed spare wire through the length of the conduit to facilitate easy wire pulling in the future. The spare wire shall be an appropriately size that can withstand the mechanical strength of pulling a bundle of wire without breaking.
- f). There shall be separate spare conduits for 208V class, 120V class, 74V class, and communications and network class wiring.
- g). From the 120V circuit breaker panel, there shall be conduits that can run wire to each corner of the car.
- h). From the 74V circuit breaker panel, there shall be conduits that can run wire to each corner of the car.
- i). For communications and network conduits, there shall be sufficient conduits between equipment lockers and vacant areas where future equipment could be installed.

15.13 Car Location Identifiers for All Subsystems

- a). To consolidate LRU configurations, each LRU that can be installed in multiple locations within the car shall utilize a car location identifier key integrated into the car wiring.
- b). Each LRU shall be able to read the location and determine on its own the appropriate functionality.
- c). LRUs shall not be manually configured with different software, dip switch settings, or other manual means.
- d). The system integrator shall be responsible to oversee that each subsystem is following this approach.

15.14 Integrated Schematics

- a). The Contractor shall prepare and submit, for acceptance by Amtrak, an integrated schematic diagram package showing all electrical systems and including all components, wiring, and loads on the car. **[CDRL 15-08]**
- b). Conduit, wiring, and locator diagrams should also be included. See Chapter 23.

Table 15-1: Communication Trainline Pin Assignments

(For car-to-loco connections only)

Pin	Amtrak Standard	APTA Standard
1	Shield	Shield (Common)
2	Battery Negative	Battery Negative
3	PA/Tape Music #1 (black) (**)	PA/Tape Music #1 (black)
4	PA/Tape Music #1 (white) (**)	PA/Tape Music #1 (white)
5	Intercom (black) (**)	Intercom (black)
6	Intercom (white) (**)	Intercom (white)
7	PA Control (black) (**)	PA Control (black)
8	PA Control (white) (**)	PA Control (white)
9	Passenger Info (black) (**)	Music-3 (radio)(black)
10	Passenger Info (white) (**)	Music-3 (radio)(white)
11	Brake Application (pass-thru for future use)	Brake Application
12	Brake Release (pass-thru for future use)	Brake Release
13	Brake Negative (pass-thru for future use)	Brake Negative
14	Open Doors R.H. (*)	Open Doors R.H.
15	Open Doors L.H. (*)	Open Doors L.H.
16	Close Doors R.H. (*)	Close Doors R.H.
17	Close Doors L.H. (*)	Close Doors L.H.
18	Door Closed Light (*)	Door Closed Light
19	Brake Released Light	Brake Released Light
20	Brake Applied Light	Brake Applied Light
21	Hot Journal Light	Hot Journal Light
22	Conductor's Signal	Conductor's Signal
23	Door Closed Light (*)	Door Close Light
24	Tape Music #2 (black) (pass-thru)	Tape Music #2 (black)
25	Tape Music #2 (white) (pass-thru)	Tape Music #2 (white)
26	Conductor's Door Light Feed	Conductor's Door Light Feed
27	Attendant Call System	Attendant Call
Crossed Trainlines (*)	14 & 15, 16 & 17, 18 & 23	14 & 15, 16 & 17, 18 & 23

Pin	Amtrak Standard	APTA Standard
Twisted Shielded pairs (**)	3 & 4, 5 & 6, 7 & 8, 9 & 10, 24 & 25	3 & 4, 5 & 6, 7 & 8, 9 & 10, 24 & 25
Source	Amtrak dwg A-63-7676-1 (under revision)	APTA Std PR-E-RP-017-99

Table 15-2: Multiple Unit (MU) Trainline Pin Assignments

All MU trainlines shall be pass-thru with no interruptions as described in 15.3.2

Pin	Amtrak Standard	APTA Standard
1	Reserved Pass-thru	Spare (reserved for cruise control)
2	Alarm Bell	Alarm Bell
3	D Throttle	D Throttle
4	Control Negative	Control Negative
5	Emergency Sand	Emergency Sand
6	Generator Field	Generator Field
7	C Throttle	C Throttle
8	Forward (*)	Forward (*)
9	Reverse (*)	Reverse (*)
10	Wheel Slip	Wheel Slip
11	Reserved Pass-thru	Spare
12	B Throttle	B Throttle
13	Control Positive	Control Positive
14	Reserved Pass-thru	Spare
15	A Throttle	A Throttle
16	Engine Run	Engine Run
17	Dynamic Brake Setup	Dynamic Brake Setup
18	Remote Loadmeter (**)	Remote Loadmeter (**)
19	Remote Loadmeter (**)	Remote Loadmeter (**)
20	Dynamic Brake Warning	Dynamic Brake Warning
21	Dynamic Brake Start	Dynamic Brake Start
22	Reserved Pass-thru	Spare
23	Manual Sanding	Manual Sanding
24	Dynamic Brake Excitation	Dynamic Brake Excitation
25	Reserved Pass-thru	MU Headlight
26	Remote Fault Reset	Remote Fault Reset
27	Brake Emergency	Brake Emergency
Crossed Trainlines (*)	8 & 9	8 & 9
Twisted Shielded pairs (**)	18 & 19	18 & 19
Source	Amtrak dwg A-63-7676-1 (under revision)	APTA Std PR-E-RP-017-99

Table 15-3: Power Phase Matrix

NOTE: Battery voltage levels listed are included as an example based on specific battery type / chemistry.

Condition	Normal	Standby	Load Shed	Emergency
Description of Condition	– HEP Power. Normal operation. – All systems on and functioning.	– After loss of HEP. Systems powered by main car batteries. – ALL DC loads on.	– After standby. Essential systems powered by main car batteries.	– No car battery power. – Lights are independently powered per FRA requirement.
Timeline	normal	2 hours		90 minutes
Threshold	normal	after HEP loss	after standby	after load shed
DC Lights:				
All Passenger Interior Lights. Vestibules, Toilet Rooms, Electric Locker, Cafe	Yes	Yes	Yes	No
Reading	Yes	Yes	No	No
All Exterior Lights: Platform, Status, Marker Lights	Yes	Yes	Yes	No
Independent Power Source Emergency Lights	No	No	No	Yes
Doors:				
Side Door Controls and Operators	Yes	Yes 40 sec every 30 min	Yes 40 sec every 30 min	No
End Door Controls and Operators	Yes	Yes 30 sec every 5 min	Yes 30 sec every 5 min	No
Door Closed Summary Circuit	Yes	Yes	Yes	No
Communications and Networks:				
PA	Yes	Yes 20 sec every 20 min	Yes 20 sec every 20 min	No
Networks	Yes	Yes	Yes	No

CONFIDENTIAL — DO NOT DISTRIBUTE

Condition	Normal	Standby	Load Shed	Emergency
Description of Condition	– HEP Power. Normal operation. – All systems on and functioning.	– After loss of HEP. Systems powered by main car batteries. – ALL DC loads on.	– After standby. Essential systems powered by main car batteries.	– No car battery power. – Lights are independently powered per FRA requirement.
Timeline	normal	2 hours		90 minutes
Threshold	normal	after HEP loss	after standby	after load shed
Communications	Yes	Yes	Yes	No
Passenger Wi-Fi	Yes	Yes	No	No
HVAC System:				
HVAC heating and cooling	Yes	No	No	No
Toilet System:				
	Yes	Yes*	No	No
Other Systems:				
Wheelslide	Yes	Yes	Yes	No
Convenience Outlets	Yes	No	No	No
Food Service Cars:				
Refrigeration	Yes	Yes	No	No
Water System	Yes	Yes	No	No
Other Appliances	Yes	No	No	No
Point of Sale System	Yes	Yes	No	No

*Toilet System shall remain functional as long as main car battery, air supply, and water temperature are not preventing safe operation. See Chapter 10 HVAC and Chapter 17 Water and Waste for additional details.

15.15 CDRLs

CDRL	Description	Due
CDRL 15-01	Network interface control document	30 days prior to Electrical PDR
CDRL 15-02	Transformer capacity and lifespan analysis	30 days prior to Electrical PDR
CDRL 15-03	Battery Charger Function description	30 days prior to Electrical IDR
CDRL 15-04	Battery Charger Load budget assessment	30 days prior to Electrical IDR
CDRL 15-05	Battery disconnect concept and arrangement	30 days prior to Electrical PDR
CDRL 15-06	Low voltage power distribution arrangement concept	30 days prior to Electrical PDR
CDRL 15-07	Electrical locker arrangement, including separation details of crew operated devices and maintenance operated devices.	30 days prior to Electrical PDR
CDRL 15-08	Integrated schematic diagram package	30 days prior to Electrical PDR

* End of Section 15 *

Amtrak Single Level Fleet Replacement

Technical Specification

16. Food Service

Revision 0

Table of Contents

16.1	Overview	16-1
16.2	General Requirements	16-1
16.3	Material Preferences	16-7
16.4	Café/Lounge.....	16-7
16.5	Reference Information.....	16-32
16.6	CDRLs.....	16-32

16.1 Overview

- a). This chapter defines the technical requirements, interior design, and configuration for the Café/Lounge food service area provided for the Single Level Fleet.
 - i). Compliance with preliminary design concepts included in the specification and attachments does not relieve the Contractor of all the other requirements within the specification.

16.2 General Requirements

- a). This chapter describes the required components and appliances for the food service area, a desired layout, and functional criteria.
- b). All food service area equipment and fittings shall meet the attachment requirements of 49 CFR Part 238.233 and APTA Standard PR-CS-S-006-98.
- c). Compliance with the CFR requirements shall consider the worst-case scenario of the food service equipment when fully loaded with all supplies and an entire stock of fully loaded appliances.
- d). A flexible, easily reconfigurable structural mounting system shall be provided for the food service equipment interface to the carbody.
- e). Any location designated for alcohol storage shall be provided with a padlock hasp for lockability.
 - i). The capability to store alcohol in lockable refrigerated and lockable non-refrigerated storage areas is required. These areas will be finalized during the design review process.
- f). General Mechanical Requirements
 - i). Food service components shall be designed to minimize noise.
 - ii). Replacement of any major appliance shall not require any disassembly of the food service area structure.
 - iii). Stainless steel fasteners with vibration-damping inserts shall be used to attach the food service area structure to the carbody.
 - iv). Metal surfaces of the food service area shall be suitably grounded to the carbody to prevent electrical shock.
 - v). All areas under sinks shall be constructed from stainless steel cabinetry with swinging doors.
- g). General Appliance Requirements
 - i). All food service appliances shall be heavy-duty grade commercial food industry apparatus, suitable for the rail vehicle operating environment.

- ii). Their structure shall be sufficiently robust for meeting the FRA mounting strength requirements without requiring framing reinforcement, unless otherwise approved by Amtrak.
- iii). All appliances shall be mounted within the food service area in a manner that complies with regulations regarding attachment strength and resistance to acceleration forces.
- iv). Wherever possible, appliances of the same manufacturer, model, and part shall be used for ease of spare management and maintenance.
- v). Appliances with doors shall have mechanical latches, and not solely rely upon magnetic latches to keep doors closed.
- vi). Appliance change-out time (the time to remove a defective unit, install a replacement unit and verify function of the replacement unit) shall not exceed 30 min. for the food service appliances specified in this chapter.
- vii). Appliances with refrigeration or freezing systems shall be self-contained units, and not employ "split systems" with separate components located elsewhere such as under the floor.
 - (1) The retention mechanisms shall not interfere with the appliance's operation or routine cleaning or servicing and shall allow the removal and replacement of the appliances within the specified times.
 - (2) Equipment removal and installation shall require less than 50lbf.
- viii). All appliances shall be installed to provide adequate ventilation for cooling/heat dissipation and to prevent heat buildup on adjacent surfaces, per the manufacturer's recommendations.
- h). General Water System Requirements
 - i). Water system connections to individual appliances shall be made by FDA compliant quick-break connectors, with a labeled quarter-turn water supply ball valve.
 - ii). Any liquid drains shall be directed through the floor to drain under the car and clear of any undercar components, using easily accessible connectors.
 - iii). Potable water from the car supply tank using suitable water backflow checks shall be provided to the food service area for distribution to any appliance requiring the use of water.
 - iv). The potable water supply shall have a particulate filter and an antibacterial filter to purify the water to Public Health Service (USPHS) standards.
 - v). These filters shall be located between the freshwater tanks and the food service area equipment and shall be located for easy cleaning and replacement.

- vi). These filters shall be identical to those specified for the potable water system on the other cars, to the extent possible.
- vii). Individual ball type shut off valves shall be provided for all appliances requiring the use of water. All water system components shall be of lead-free design.
- viii). Manual ball type drain valves shall be provided to allow draining all of the food service area piping and appliances, either for water system servicing or manual draining of the car in advance of storage, or in anticipation of freezing conditions.
- ix). These valves shall drain the water system to the ground under the car clear of any undercar components. Instructions shall be posted in an approved food service area location providing water draining instructions for the LSA, including the draining of water contained within appliances.
- i). General Sanitation Requirements
 - i). The food service car shall be designed and constructed in full compliance with:
 - (1) US Food and Drug Administration (FDA) Food Code, 2017,
 - (2) FDA Handbook on Sanitation of Railroad Passenger Cars, 1964,
 - (3) Amtrak Food Service Sanitation & Public Health Standards, 1997
 - (4) 21 CFR Part 1250.
 - (5) All applicable Code of Federal Regulations concerning general sanitation, water, and interstate conveyance sanitation for:
 - (a) FDA
 - (b) US Environmental Protection Agency (EPA)
 - (6) The Contractor is required to arrange and comply with all Federal agency review, inspection and certification requirements for the food service area, such as described in 21 CFR Part 1250.41.
 - ii). Certificate Holder
 - (1) The food service area shall have a 5 in. high by 7 in. wide certificate holder on the inner face of a galley locker door to display under glass the FDA Form 2371, Certificate of Sanitary Construction when issued.
 - iii). The design and installation of countertops, wall panels, floor-to-wall joints, storage locations, recycling and trash and recycling receptacles and lockers and component mounting shall not permit food particles, debris, liquids or moisture to reside behind, over or under any of their surfaces.

- (1) Countertops shall have a raised edge on all exposed faces and a cove on all edges adjacent walls and bulkheads and be properly sealed and caulked.
 - (2) All outside corners formed by two planes shall have a minimum radius of 0.25 in.
 - (3) Corners formed by three planes shall have a minimum spherical radius of 0.375 in.
- iv). All approvals, including approvals from the FDA, are the responsibility of the Contractor.
 - (1) The Contractor shall be responsible for correcting any observations found during FDA inspections.
 - (2) All cars shall be certified for conformance with FDA regulations.
 - (3) All approvals shall be supplied with each car history book. **[CDRL 16-01]**
- v). All countertops and serving counters must be non-porous, corrosive-resistant, and easily cleanable surfaces.
 - (1) The countertops for passenger use shall meet all ADA requirements.
 - (a) The area adjacent to the ADA service counter shall have a wheelchair turnaround circle for passengers using wheeled mobility devices to turn around and travel back to their seating location.
 - (2) The countertops in food service preparation areas must comply with all FDA sanitation and lighting requirements.
- vi). All storage locations below the countertop shall have:
 - (1) The inside of the storage location shall be easy to clean, with large 0.75 in radius sanitary corners and all joints sealed for good sanitation and to meet FDA requirements.
 - (2) Visible hardware and fasteners should be minimized to aid cleaning, reduce build-up of contaminants, and provide for pleasing aesthetics.
 - (3) Easy to clean guides for all items stored within shall be provided on the sides and back of the locker and on the inside of the locker door. The guides shall prevent trash and liquids from getting between the container and locker wall.
- j). General Safety Requirements
 - i). All food service equipment shall be designed to accommodate passengers and train crews from the 5th percentile female to the 95th percentile male ranges.

- ii). Safety of passenger, crew and maintenance personnel shall be a prime consideration in design of all food service equipment.
- iii). Emphasis shall be placed by the Contractor for inclusion of passenger and LSA handholds throughout the food service area, to assist if the car unexpectedly lurches or sways.
 - (1) They shall be provided for passenger use when entering the car from connecting cars, passing through the car, standing in the food service area, using the condiment stations, or other areas where a passenger or crew may be standing.
 - (2) In general, there should be a convenient handhold for passenger use throughout the car.
 - (3) The perimeter of the LSA food service area counters shall be equipped with a continuous safety handrail, or similar safety assist arrangement.
 - (4) Handrails shall be finished to be consistent with their surroundings and shall not infringe into clear passageway widths as defined by the ADA.
- iv). Projections from the food service area face or edge of countertop which could injure crew members, including knobs, switches, outlets, and latches shall be recessed.
 - (1) There shall be no finger pinch points in the food service area, or elsewhere in the food service car.
- v). In addition to the basic emergency equipment to be provided on all car types, the food service areas shall also have the listed emergency equipment in the food service area.
 - (1) The emergency equipment storage locations shall be labeled in accordance with all applicable Amtrak signage requirements.
- k). General Electrical Requirements
 - i). The food service car electrical distribution system shall provide suitable Head End Power (HEP) and low voltage power supply electrical power distribution, including 208VAC or 120VAC 60 Hz power, to the food service area (see Chapter 15).
 - (1) Each food service appliance shall have an identified dedicated simplex outlet and individual supply circuit breaker and switch.
 - ii). Located in the car main electrical locker shall be all main terminal boards, main circuit breakers and other items required for distribution of food service electrical power to a local food service area electrical panel.
 - (1) Each circuit breaker shall interrupt all lines of the circuit.

- (2) Circuit breakers and electrical outlets intended to provide a dedicated power circuit to a specific food service appliance shall be permanently and clearly labeled for that appliance.
 - (3) The appliance operation shall be supported during Head End Power (HEP) outages using approved designs.
 - iii). The Contractor shall provide both a complete electrical schematic and a wiring diagram for all food service equipment.
 - iv). Each appliance shall be powered from its own circuit breaker located in the food service equipment electrical locker, and the appliance shall be grounded to the carbody through its wiring harness.
 - (1) Individual labeled electrical outlets shall be provided for each appliance.
 - (2) In addition, a toggle switch shall be provided in an approved food service area location for each appliance to allow the unit to be switched off manually.
 - (3) A Light Emitting Diode (LED) pilot shall be provided for each switch, wired so that it will illuminate when power is on at the load side of the respective closed appliance switch.
 - (4) Alternate power connection arrangements may be proposed during design review.
 - v). The food service area shall have a local dedicated circuit breaker panel for LSA use which shall include circuit breakers and switches for the food service equipment and food service lighting.
 - (1) It shall be covered with a polycarbonate door (to allow the positions of the switches and circuit breaker to be seen) with a paddle latch to keep the door closed.
 - (2) The dedicated circuit breaker panel shall meet the requirements in Chapter 13.
- I). General HVAC Requirements
 - i). The car HVAC system will provide ventilation, heating and cooling to the food service area as part of the overall car HVAC system, as described in Chapter 10.
 - ii). The Contractor shall ensure that the HVAC system is designed to remove the heat produced by the appliances and any other heat sources.
 - (1) HVAC cooling/heating distribution shall be designed to accommodate all Food Service arrangements and be adjustable depending on arrangement load demands.
 - (2) Details to be reviewed during Design Review.

CONFIDENTIAL — DO NOT DISTRIBUTE

iii). The Contractor will supply a heat load analysis to Amtrak for review.

- (1) All food service equipment shall be installed with sufficient free space between the equipment and walls to permit circulation of cooling/ventilation air in accordance with the manufacturer's recommendations.

m). General Lighting Requirements

i). All food service appliance area lighting shall be in accordance with APTA Recommended Practice PR-E-RP-012-99 and the latest revision of the USPHS FDA Food Code.

- (1) All normal light levels along the entire length of the food service area shall be a minimum of 30 foot-candles, and all standby lighting shall provide a minimum of 10 foot-candles.

ii). Types and styles of lighting fixtures shall be presented by the Contractor during initial bid and shall be submitted for approval by Amtrak during the design review. All lighting shall be controlled by switches in the food service circuit breaker area.

iii). Lights shall be located so they will not produce glare, nor shine into the face either of passengers or the LSA.

- (1) The fixtures selected shall be suitable for the railroad environment and shall be robust, easy to clean and maintainable for the life of the food service area.

n). General Cart Requirements

i). The carts described below are intended to function interchangeably across the fleet and with the Airo platform carts for standardization.

ii). The carts shall be capable of being used as refrigerated carts and dry storage carts.

16.3 Material Preferences

a). The food service and seating areas shall be designed to provide an aesthetically pleasing and efficient area for passengers and train crew.

i). The Contractor shall be responsible for providing a comprehensive and unified appearance throughout all areas of the car as well as being complimentary and consistent with any other car type(s) built to this Specification.

ii). Choice of finish materials shall be submitted for Amtrak review and approval.

iii). Please refer to Exhibit F for more information.

16.4 Café/Lounge

a). Vision

- i). The café provides an opportunity for all coach passengers to purchase food and refreshments on board, however it also provides a chance to relax and enjoy the beautiful landscape of the United States of America. In this way, it is a focal destination as well as a functional space.
- ii). The café should have a large, open and continuous counter at an accessible height. This highly visible area should have a passenger friendly aesthetic.
- iii). A space should be reserved on the outside wall of the café for branding.
- iv). The counter should be kept clear of equipment to allow for future food service opportunities such as a 'grab and go' location.
- v). The design should be future ready – The design should be considered as modular so that equipment can be upgraded or changed as service models evolve over time.
- vi). Please refer to Exhibit F for more information.

b). Appliances

- i). Figure 16-1 lists the desired appliances along with an example part number and the quantity required within the café food service area.
- ii). Note that example part numbers are given to establish a starting place for appliance performance and will be finalized during the design reviews.
- iii). The car builder will propose the exact manufacturer and part number for each appliance based on functionality, shock and vibration, service history, power requirements, and ability to meet crashworthiness requirements for mounting.
- iv). Detailed functional requirements for each appliance is listed below.
- v). In addition to these requirements, the Contractor shall factor in FDA cleaning clearances, radii, and sanitary design. An FDA inspection and subsequent approval will be required for all car types. The Contractor will be responsible to rectify any discrepancy discovered by the FDA inspector at any time until a certificate of sanitary construction is issued.

(1) Refrigerated Docking Station

- (a) Refrigerated carts shall be stored within a docking station built into the food service area as a module.
- (b) Each cart docking compartment shall include carrier stops, guide rails, and retention latches.
- (c) Drainage from cart condensation shall be directed away from the front of the docking station to avoid flooding, spills, and water leakage onto the floor of the food service area.

- (i) The module shall have a base pan with a cross break and 0.25" radii on all edges.

Figure 16-1: Appliance List – Café

Appliance	Description	Example Part Number	Quantity Desired
Refrigerated Cart Docking Station (3 cart)	3 cart docking station with cart chiller, cart sensor, temperature monitoring,	Stahl L002923	1
Refrigerated Cart	Insulated food cart with capability to maintain food temperature of 40 degrees F for one hour after loss of power	Bucher BA700036	3
Handwashing Sink	Sink basin with IR faucet for handwashing purposes, includes soap dispenser and paper towel holder mounting.	-	1
Microwave	Countertop stackable microwave, 0.6 cu ft capacity, 2100 watts, heavy volume, 4 stage cooking, touchscreen	Amana HDC212	2
Trash and Recycling Storage	Stainless steel module for storing removable trash and recycling bin. Trash and recycling bin is accessible through a drawer.	-	1
POS	Point of Sale machine for commercial transactions. POS provided by Amtrak, provisions provided by Contractor	-	1
Rapid Cook Oven	0.54 cu ft capacity, ventless, cool touch exterior, touch control	TurboChef ECO ST	1
Freezer	Insulated freezer cabinet with ability to keep food goods at or below 0 degrees F.	-	1
Storage Cabinets	Stainless steel cabinets or open shelving for dry storage to maximize space usage within food service area.	-	As space allows
Countertop Workspace	Clear available workspace for food preparation with 6" backsplash and 0.25" radii.	-	As space allows
Coffee Maker	Twin coffee brewer with 1.5 gallon satellite servers,	Wilbur Curtis GEMTS16A-1000	1
Ice Maker	590 lb., 26" wide water cooled, cublet-nugget style ice machine and waster dispenser with bin, countertop mounting, 40lb bin ice storage	Hoshizaki DCM-500BWH	1
ATLAS Carrier Storage	Stainless steel cubbies for ATLAS Carrier storage to maximize space usage within food service area.	-	As Space Allows
ATLAS Carriers	Atlas sized dry goods container for storage and transport of goods between commissary and food service area	Bucher BA740012	As Space Allows

- (d) Locations for the cart docking shall be designed for the carrier door to remain closed when in the stored position.
 - (i) Carts will remain closed in 'stored' configuration due to spacing and optimizing space in the galley.
 - (ii) In order to access goods in a cart, the retention latch must be rotated, and the door of the cart must be opened.
- (e) The retention latches shall be used to retain the cart in its position.
 - (i) The latches shall rotate 180° so that they can be rotated clockwise or counterclockwise to release the carts.
- (f) The guide strips inside the docking station shall be made from a polymer material that prevents damage to the carts while also securing them in place to prevent rattling.
 - (i) The guide strips shall be replaceable in case of significant damage.
- (g) Cart Identification Sensor
 - (i) These sensors indicate to the chiller cart if there is at least one cart docked to the refrigerated docking station.
 - 1. If there is a cart docked, the chiller will function as normal.
 - 2. If there are no carts detected, the chiller will not be on.
 - (ii) This will prevent potential damage to the internal components of the chiller.
- (h) Cart Chiller
 - (i) The cart chiller shall be mounted on wheels that allow the cart chiller to easily traverse the threshold of the refrigerated docking station.
 - (ii) The chiller cart is intended to dock semi-permanently inside the refrigerated docking station.
 - 1. This chiller would only be removed for maintenance or replacement.
 - (iii) The cart chiller shall be roughly (12" x 37" x 21") and shall be interchangeable with the chiller carts used in the Amtrak Intercity Procurement. Example part number listed as STAHL L002923.

- (iv) The cart chiller shall function to keep food at or below 40°F.
 - 1. The cart chiller will be suitably insulated to prevent all condensation from appearing on the outside of the module.
 - 2. The temperature within the exhaust and return ducts of the module shall be monitored and reported to wayside.
- (v) There will be alarm annunciation to the train crew that the refrigerated display is malfunctioning if the temperature in the display case reaches 41°F for a continuous one-hour period or if the temperature ever reaches 50°F.
- (vi) The cart chiller shall be suitably sized to maintain pre-chilled stock to 40 °F or lower within 90 min of startup as determined by refrigeration system capabilities.
- (vii) The cart chiller will be qualified using the EN ISO 23953-2:2015 test.
- (viii) Refrigerant used in the refrigeration equipment shall be presented and approved by Amtrak during PDR.
- (ix) The cart chiller shall have the following features:
 - 1. Push handle at the front
 - 2. Mounted on 4 wheels
 - 3. Quick locking mechanism to secure in docking station
 - 4. Connection to the cooling area on the back side
 - 5. Power connection for 120V AC/48V DC with Harting plug
 - 6. Protection against evaporator freeze-up during low load operation
 - 7. Digital Controller with touch panel that includes alarm annunciation, status displays, and password protection for setting adjustment
- (x) The refrigeration system shall be controlled by the suction line pressure signal and the supply air and exhaust air temperature sensors.
 - 1. Depending on the changes in pressure, the speed of the compressor shall be adjusted accordingly

between the minimum and maximum speed.

2. The unit shall be turned on and off based on the temperature sensor readings.

(i) Ducting

- (i) The ducting on the back of this module directs the warm and cool air to and from the food carts so that the carts are always within the expected temperature range.
- (ii) The ducting also is directed to the car's HVAC exhaust system to take heat away from the refrigeration equipment.
- (iii) The ducting shall be insulated so that the condensation is limited as much as possible.
- (iv) Insulation should be mechanically fastened to the duct with no exposed insulation fibers. The use of insulation tape is not allowed.

(j) Electrical Connection

- (i) The electrical connection between the chiller cart and the docking station shall provide a quick connect, not damage any electrical connectors, and be properly insulated from moisture.
- (ii) 3 carts shall be docked in the café docking stations.

(2) Refrigerated Cart

- (a) Carts are intended to move food items from the commissary to the train, dock in their compartment and be taken back to commissary for restocking after a trip is complete.
- (b) The cart shall be roughly (16" x 21" x 37") and shall be interchangeable with the carts used in the Airo fleet. Example part number listed as Bucher BA700036.
- (c) The refrigerated cart shall be delivered with 12 trays loaded on shelves inside.
- (d) The cart shall be able to move seamlessly in and out of the docking station.
- (e) The Contractor is responsible for ensuring that the tolerances between the docking station and the refrigerated cart both:
 - (i) Do not cause rattling of the cart while the train is in motion.
 - (ii) Are not so tight that the cart is damaged during docking and undocking.

- (f) Carts shall continue to keep items at FDA acceptable temperatures from the time food is placed inside until the food is removed for consumption.
 - (i) Food cart interior will be accessed semi-regularly and will be docked to a refrigeration docking station when used as a refrigerated cart on the café car.
- (g) The cart is expected to function with limited wear and tear damage for the lifespan of the train.
- (h) Stainless steel push-to-close or slam latches shall be used on the cart doors.
 - (i) Sealant on the door gasketing is subject to FST testing-silicone is recommended.
- (i) The cart will come with a padlock hasp for locking the contents of the cart when the cart is unattended.
- (j) A card holder shall be provided at the top of the cart door.
 - (i) This material will be aluminum and clear anodized.
- (k) A 75 mm diameter wheel will be used on all carts.
 - (i) The top of the cart handle shall be 30 mm above the top surface of the cart to allow for items to be placed on top of the cart during transport.
- (l) The cart shall be capable of a maximum loading of 115 kg, or similar as determined by the supplier.
 - (i) The cart shall be 25 kg empty, or similar as determined by the supplier.
- (m) The bottom of the module will be a single pan that includes the lower portion of the sidewalls to contain any condensation.
 - (i) The main sidewalls of the module will be fastened to the lower pan so that water does not exit the module.
 - (ii) The cart module will be adequately sealed to prevent leakage of cart contents into the galley during normal train operation.
- (n) The inner and outer surfaces of the cart will be non-porous, corrosive resistant, and easily clean-able.
 - (i) Any seams will need to be sealed with silicon or mounted with gaps of < 1/32" to meet FDA requirements.
 - (ii) No sharp edges, chips, or surface defects will be present.

- (iii) The interior of the cart shall have 0.25" radius or greater on all corners for cleaning.
 - (o) The cart in conjunction with a compliant working chiller shall function to keep food at or below 40°F.
 - (p) The cart will be suitably insulated to prevent all condensation from appearing on the outside of the module.
 - (q) The cart shall be suitably insulated to allow a compliant working chiller to bring room temperature stock down to 40 °F or lower within 90 min from startup or pull down pre-chilled stock to 40 °F or lower within 90 min of startup as determined by refrigeration system capabilities (i.e., no gaps or cold air leaks).
 - (r) The cart shall be capable of holding up to 12 trays inside.
 - (i) The tray dimensions will be determined by the inside dimensions of the cart.
 - (ii) These dimensions will be relayed in drawings to the customer.
 - (iii) It is understood that trays for these carts will likely be custom size.
 - (iv) Trays shall be provided by the Contractor within the cart upon delivery.
 - (s) The refrigerated cart module will be aesthetically pleasing. The supplier shall provide sublimation treatment to all cart panels.
 - (t) The supplier shall provide either anodizing with clear or single color on the structural extrusions for the cart.
 - (u) Any required labeling from the manufacturer shall be placed in a location that is not visible while the cart is in the stored position.
 - (v) The Contractor shall provide a manufacturer drawing showing all critical dimensions for the cart for Amtrak approval.
- (3) Handwashing Sink
- (a) A sink shall be provided where the sink basin is at least (12" x 10" x 6").
 - (b) The basin and sink counterspace shall be made from welded stainless steel.
 - (c) Marine edges shall be included on the front edge of the handwashing sink area.

- (d) A backsplash of at least 6" shall be included on the other edges of the sink area.
- (e) The radius between the backsplash and the handwashing sink shall be at least $\frac{3}{4}$ ".
- (f) The drain in the bottom of the sink basin shall be 1.25" in and shall be capable of being plugged with a ball valve attached to an L shaped rotational lever mechanism.
- (g) The L shaped rotational mechanism shall extend to the front of the module so that it is easy to reach this lever.
- (h) All requirements described in the water and waste chapter of this specification shall apply to the sink.
- (i) The faucet for the handwashing sink shall use an IR sensor to allow water to run through the faucet. The faucet shall be sized and shaped to allow the water to flow to the center of the handwashing sink basin.
- (j) Power for the faucet shall be hard wired. Battery replacement arrangements are prohibited.
- (k) Faucet spout shall be located centered over the drain of the sink basin.
- (l) The soap dispenser used by Amtrak is manufactured by Celeste Industries Corporation.
 - (i) The Contractor should supply the mounting base for the soap dispenser.
 - (ii) The base is made of Delrin and is tapered.
- (m) The paper towel holder shall be SanTRAL Plus PTU 31 E ST or similar.
 - (i) This shall have anti-fingerprint coating, have a filling volume of 500-600 sheets of folded paper towels, be lockable, and be wall mounted.
- (4) Microwave
 - (a) a purchased off the shelf item that meets or exceeds the features from the example part number. Example part number listed as Amana HDC212.
 - (i) Countertop stackable microwave,
 - (ii) 0.6 cu ft capacity, 2100 watts,
 - (iii) heavy volume,

- (iv) 4 stage cooking,
 - (v) Touchscreen.
- (5) Trash and Recycling Storage
 - (a) Trash and recycling will be stored in a stainless-steel module with drawers for the trash and recycling bins to slide in and out of the module.
 - (b) The drawer shall be mounted on sturdy, durable, cleanable drawer slides that allow for continuous cycles of opening and closing and operate smoothly.
 - (c) The drawer shall operate with push to open, slam to close latches.
 - (d) The stainless-steel or aluminum trash and recycling bins shall be completely sealed so that no liquid can escape the trash and recycling bin.
 - (i) These bins are intended to be removable for emptying the trash and recycling and for cleanability.
 - (e) In this food service area, the cumulative minimum internal volume for the storage required is 20.2 cu ft. (50 in horizontal x 35 in tall x 20 in deep).
 - (f) This includes the features for the trash and recycling bin.
- (6) Point-of-Sale (POS)
 - (a) A Point-of-Sale unit will be provided by Amtrak in the food service area.
 - (b) The POS unit will be manufactured and installed in accordance with Amtrak POS standards in effect at the time of design and manufacture of the trainset.
 - (c) The POS operation shall be supported during Head End Power (HEP) outages according to the Table 15-3 Power Phase Matrix battery table.
 - (d) The system shall also support real time inventory management of on-board food service items.
 - (e) Shortages shall be annunciated to onboard crew as well as transmitted wayside for mitigation by Amtrak Food and Beverage Services.
 - (f) Details of the wayside messaging shall be clarified during mobilization.

(7) Point of Sale System

- (a) As an option, the Contractor shall submit an option to provide a point of sale system as part of this contract.
- (b) A Point of Sale (POS) system is a specialized computerized system that facilitates the processing and completion of retail transactions. It serves as the central hub where passengers make a payment for goods on-board the train.
- (c) Hardware:
 - (i) Terminal/Checkout Counter: This is the physical location where the POS system is set up. It includes a computer terminal with a display, a barcode scanner, receipt printer, and a customer-facing display.
 - (ii) Barcode Scanner: Used to scan the barcodes on products, providing quick and accurate identification.
 - (iii) Card Reader: Allows customers to make electronic payments using credit or debit cards.
 - (iv) Cash Drawer: Safely stores cash received during transactions.
 - (v) Receipt Printer: Prints transaction receipts for customers.
 - (vi) Customer Display: A screen facing the customer that displays the items being rung up and the total cost.
- (d) Software:
 - (i) Point of Sale Application: The core software that manages and processes transactions. It includes a user interface for the crew to input items, calculate totals, and finalize sales.
 - (ii) Inventory Management: Tracks the quantity of products available for sale and updates inventory levels after each transaction.
 - (iii) Sales Reporting: Generates reports on sales, inventory, and other key metrics.
 - (iv) Employee Management: Manages user accounts and permissions.
 - (v) Payment Processing Integration: Links with payment gateways to process electronic transactions securely.
 - (vi) Security Features: Includes measures like user authentication, transaction encryption, and audit trails to ensure data security and integrity.

- (vii) Network segregation is critical to Amtrak and must be addressed and handled through Design Review with Amtrak.
- (8) Rapid Cook Oven
 - (a) A purchased off the shelf item that meets or exceeds the features from the example part number. Example part number listed as TurboChef ECO ST.
 - (i) 0.54 cu ft capacity
 - (ii) ventless
 - (iii) cool touch exterior
 - (iv) touch control
- (9) Freezer
 - (a) The freezer shall function to keep food at or below 0°F.
 - (b) The freezer shall be suitably insulated to prevent all condensation from appearing on the outside of the module.
 - (c) The temperature within the module shall be monitored and reported to wayside.
 - (d) There shall be alarm annunciation to the train crew that the freezer is malfunctioning if the temperature in the freezer reaches 1°F for a continuous one-hour period or if the temperature ever reaches 5°F.
 - (e) Drainage for the freezer condensation shall take into account ice melt in the freezer and condensation generated by the evaporator.
 - (f) The freezer shall be easily cleanable with a base pan that has a backsplash and 0.25" radii.
 - (g) In this food service area, the cumulative minimum internal volume for the freezer required is 9 cu ft. (24 in horizontal x 36 in tall x 18 in deep).
 - (h) Two adjustable shelves that can only be removed with tools at a maintenance facility shall be included.
- (10) Storage Cabinet
 - (a) Storage Cabinets shall be constructed from stainless-steel.
 - (b) These modules shall be designed to retain goods while the train is in motion.

- (c) Storage cabinets can come in the form of a cabinet with hinged doors or open shelving with retaining bars.
 - (d) This will depend on the item stored in each location and shall be determined with Amtrak during the design reviews.
 - (e) Storage cabinets that function as cabinets shall have:
 - (i) hinged doors with stainless-steel hinges,
 - (ii) push to open, slam to close latches,
 - (iii) door swing limiting mechanism to prevent the doors from colliding and denting
 - (iv) adjustable shelving to accommodate varying products shall be provided
 - (f) Storage cabinets that function as shelves shall have:
 - (i) Adjustable shelving to accommodate varying products
 - (ii) Stainless steel retention bars to prevent items from sliding off the shelf while the train is in motion.
 - (g) In this food service area, the cumulative minimum internal volume for the storage required is 6.25 cu ft. (27 in horizontal x 20 in tall x 20 in deep).
- (11) Countertop Workspace
- (a) A stainless-steel workspace is required for food preparation.
 - (b) The workspace shall have 6" backsplash and 0.25" radius minimum for cleanability.
 - (c) The countertop shall be of a usable height between 36" and 38" tall.
 - (d) The countertop shall be attached to the adjacent modules with no holes for fasteners on the top of the workspace.
 - (e) In this food service area, the minimum surface area for workspace required is 23.75 sq ft. (90 in horizontal x 38 in deep). An alternative workspace may be proposed if space is a constraint.
- (12) Coffee Maker
- (a) A purchased off the shelf item shall be provided that meets or exceeds the features from the example part number. Example part number listed as Wilbur Curtis GEMTS16A-1000.

- (i) Twin coffee brewer
- (ii) 1.5 gallon satellite servers
- (iii) A spare coffee maker shall be provided in storage in the event of failure.
- (iv) All coffee maker drains shall have the capacity to drain both warmers without overflowing or splashing liquid onto the counter.

(13) Ice Maker

- (a) A purchased off the shelf item shall be provided that meets or exceeds the features from the example part number. Example part number listed as Hoshizaki DCM-500BWH.
 - (i) 590 lb. production capacity in 24 hour period
 - (ii) 26" wide
 - (iii) water cooled, cublet-nugget style ice machine
 - (iv) waster dispenser
 - (v) countertop mounting,
 - (vi) 40lb bin ice storage

(14) LSA Seat

- (a) A seat similar to a coach seat shall be provided with an associated table for the LSA to rest during breaks as to not occupy one of the passenger seats in the seating area.
- (b) The table shall be designed to support 50 lbf at the edge of the table.
- (c) This seat shall be capable of supporting 300lbs downward force in all loading conditions.

(15) ATLAS Carrier Storage

- (a) ATLAS carriers shall be stored within carrier compartments built into the food service area module.
- (b) Each carrier compartment shall include carrier stops, guide rails, and retention latches.
- (c) Carrier storage modules shall be made from stainless-steel.
- (d) Locations for the carriers are designed for the carrier door to remain closed when in the stored position.

- (i) Carriers will remain closed in 'stored' configuration due to spacing and optimizing space in the galley.
 - (ii) In order to access goods in a carrier, the retention latch must be rotated, and the door of the food storage container must be opened.
- (e) The carrier storage compartments will include carrier stops to ensure the carrier is located toward the front of module.
- (f) The retention latches shall be used to retain the carrier in its position. The latches shall rotate 180° so that they can be rotated clockwise or counterclockwise to release the carriers.
- (g) The guide strips inside the storage cabinets shall be made from a polymer material that prevents damage to the carriers while also securing them in place to prevent rattling.
 - (i) The guide strips shall be replaceable in case of significant damage.

(16) ATLAS Carrier

- (a) This carrier is designed to fit into modules throughout the galley as dry storage containers.
- (b) This carrier is made from standard Atlas carrier dimensions and is subject to a 25lb single person lift regulation.
- (c) This includes the weight of the carrier and the contents of the carrier.
- (d) The carrier shall be able to move seamlessly in and out of the carrier storage compartments and the Contractor is responsible for ensuring that the tolerances between the storage location and the carrier both do not cause rattling of the carrier while the train is in motion and is not so tight that the carrier is damaged during docking and undocking.
- (e) The carrier is expected to function with limited wear and tear damage for the lifespan of the car.
- (f) Stainless steel push-to-close or slam latches shall be used on the carrier doors. Sealant on the door gasketing is subject to FST testing.
- (g) A card holder shall be provided at the top of the cart door. This material will be aluminum and clear anodized.
- (h) The carrier shall be capable of a maximum loading of 9 kg, or similar as determined by the supplier. The carrier shall be 2.5 kg empty, or similar as determined by the supplier.

- (i) The carrier module will be adequately sealed to prevent leakage of carrier contents into the food service area during normal train operation.
 - (j) The inner and outer surfaces of the carrier will be non-porous, corrosive resistant, and easily cleanable.
 - (i) Any seams will need to be sealed with silicon or mounted with gaps of < 1/32" to meet FDA requirements.
 - (ii) No sharp edges, chips, or surface defects will be present. The interior of the carrier shall have 0.25" radius or greater on all corners for cleaning.
 - (k) In alignment with the Atlas Standard, this carrier shall be capable of holding 4 half size Atlas trays.
 - (l) The carrier module will be aesthetically pleasing.
 - (i) The supplier shall provide the carrier with sublimation treatment to only the door of the carrier.
 - (m) The supplier shall provide either anodizing with clear or single color on the structural extrusions for the carrier.
 - (n) Any required labeling from the manufacturer shall be placed in a location that is not visible while the carrier is in the stored position.
 - (o) The Contractor shall provide a manufacturer drawing showing all critical dimensions for the cart for Amtrak approval.
- c). Functional Criteria
 - i). The following items shall be reviewed with the criteria listed below for each.
 - ii). Sanitary Design Review Criteria
 - (1) Appropriate cleaning radii of at least 0.25" on worksurfaces and 0.75" on sink areas.
 - (2) Backsplashes of at least 6" on worksurfaces and sink areas.
 - (3) Appropriate cleaning clearances around appliances such that a 95th percentile male can fit their hand and a rag easily between objects for cleaning.
 - (4) All edges and seams are sealed with food grade silicone sealant and gaps greater than 1/32" are sealed in food storage, food preparation, and all other food related areas such as trash compartments shall be sealed in this manner.

- (5) Floor drains are provided for locations prone to spills and leaks, especially near water piping to eliminate water pooling on the floor.
 - (6) Openings are protected from allowing pests and vermin to congregate
 - (7) Proper sealing methods are used to prevent moisture from corroding or otherwise damaging the food service area
 - (8) All drain pans and catches are accessible for cleaning
 - (9) No tools are required to move objects subject to daily cleaning rituals
- iii). Refrigeration and Freezer Equipment Review Criteria
- (1) As an option, temperature monitoring of the refrigeration and freezer equipment shall be provided.
 - (2) Temperature monitoring system functionality
 - (a) Temperature monitoring shall be accomplished through a set of redundant sensors.
 - (i) The refrigeration controller shall relay temperatures for each of the refrigerated modules locally and in one location on a panel in the kitchen.
 - (b) Additionally, temperatures shall be reported to wayside through the use of a PT100 sensor.
 - (i) The PT100 sensor and the controllers for the equipment shall be calibrated to ensure they are reporting the same temperature.
 - (ii) Temperatures shall be logged and accessible for at least a 6 month period of time after the date of data collection.
 - (c) Temperatures for the refrigerated food carts shall be monitored in the ducting between the refrigerated docking station and the refrigerated cart.
 - (i) Industry standard is to monitor the temperature and combine 80% of the temperature for the return air and 20% for the supply air.
 - (ii) This calculation shall be used to determine the likely warmest temperature of the air in the food cart and shall inform the setpoint and need for temperature adjustment.
 - (d) Temperatures for refrigerated cabinets shall be monitored directly in the refrigeration cabinet at the warmest temperature location and shall inform the setpoint and need for temperature adjustment.

- (e) Presently, Amtrak monitors the temperature of a refrigerated food cart by placing a yogurt in the center of the cart and manually records the temperature of the yogurt on an interval. If the yogurt is out of temperature the food in the cart is considered out of temperature and therefore spoiled. The Contractor shall provide a system that consistently functions without allowing the yogurt to test out of temperature and cause loss of revenue from spoiled goods.
- (3) Type Tests
- (a) Type Tests for refrigeration and freezer systems shall be evaluated using ISO 23953-2 to determine the temperature probe location and validate performance of the system and produce a test report for Amtrak's evaluation and approval as specified in ISO 23953-2. **[CDRL 16-02]**
 - (b) The following elements of design validation are of particular interest to Amtrak and shall be performed as type tests if information is not included in the ISO 23953-2 test report:
 - (i) Operational Temperature
 - 1. The system shall maintain food safe temperatures between 33°F to 40°F (1°C to 4°C) consistently for 8 hours.
 - 2. The freezer module will need to maintain temperature ranges below 0°F (-18°C) consistently for 8 hours.
 - 3. The supplier will propose a test to show the units maintain operational temperature under standard conditions:
 - a. 74.6°F (23.7°C) and 55% rH.
 - b. An allowable tolerance to this would be +/- 2 degrees F and +/- 5%.
 - 4. The refrigeration systems shall be suitably insulated to maintain the specified temperature limits during a power loss of 60 minutes to avoid condemning of perishable food products.
 - 5. Should the car level diagnostics option be executed, the refrigeration system shall have real-time and remote temperature monitoring and alarm annunciation capabilities that shall alert onboard crew.
 - 6. The Contractor shall propose a test to show the units

maintain operational temperature under standard conditions:

- a. 74.6°F (23.7°C) and 55% rH.
- b. An allowable tolerance to this would be +/- 2 degrees F and +/- 5%.

(ii) Probe Placement

1. The temperature probe will need to be placed in the warmest location of the refrigerated compartment so that all food items stay within the acceptable temperature range.

(iii) Air Flow

1. The air flow through the module will need to be evaluated to ensure that there are no warm air pockets within the refrigerated compartment.

(iv) Operational Load Testing

1. The operational load of the refrigeration module needs to be evaluated to ensure that the refrigeration unit functions within the acceptable temperature range with simulated service loading conditions.
2. Amtrak will provide loading conditions prior to test procedure approval.
3. Three total tests will satisfy the operational load requirement: full load, half load, empty load.
4. The operational temperature of the refrigeration system should maintain food safe temperatures.
5. The refrigeration module will need to maintain temperature ranges between 33°F to 40°F (1°C to 4°C) consistently for 8 hours.
6. The freezer module will need to maintain temperature ranges below 0°F (-18°C) consistently for 8 hours.
7. The Contractor shall propose a test to show the units maintain operational temperature under standard conditions:
 - a. 74.6°F (23.7°C) and 55% rH.
 - b. An allowable tolerance to this would be +/- 2 degrees F and +/- 5%.

(v) Condensation Evaluation

1. The refrigeration module, freezer, and chilled cart modules shall function with zero condensation on the outside surface of a module when exposed to the following environmental conditions:
 - a. 74.6°F (23.7°C) and 55% rH.
 - b. An allowable tolerance to this would be +/- 2 degrees F and +/- 5%.
 - c. Zero condensation is defined as no fogging, beading, or dripping liquid on any outside surface of the module.
2. The Contractor shall perform a test to observe modules while they are functioning at the specified temperatures for 8 hours.

(vi) Pull Down

1. The refrigeration and freezer modules are expected to pull down to temperature within 60 min with an inlet temperature of 70°F and repeated with inlet temperature of 110°F.
2. The module will be completely empty for this test.
3. The refrigeration unit shall reach a temperature range of 33-40°F within the specified time.
4. The freezer unit shall reach a temperature of below 0°F within the specified time.

d). Additional Equipment Requirements

i). HVAC

- (1) Food service areas generate a large amount of ambient heat, smells, and humidity in the air; as a result, the HVAC system calculations must take into account the appliances and usage case of the food service area. Detailed HVAC requirement information can be found in Chapter 10, HVAC System.
- (2) Appliance-Specific Ventilation
 - (a) Ventilation to specific appliances is required.
 - (b) This ventilation can come in the form of recycled air through the HVAC system or directly exhausting the outlet air for an appliance.

- (c) The Contractor shall submit a proposal for which appliances listed below will be directly exhausted and provide all relevant calculations as justification.
- (d) The submittal will be subject to Amtrak's review and approval during the design review process. **[CDRL 16-03]**
 - (i) Ovens
 - 1. Rapid Cook Ovens
 - 2. Microwave Ovens
 - (ii) Refrigeration
 - 1. Refrigerated Docking Station
 - 2. Refrigerated Storage
 - 3. Refrigerated Alcohol Display
 - (iii) Freezer
 - (iv) Other Appliances
 - 1. Coffee Maker
 - 2. Ice Maker
- ii). Electrical Equipment
 - (1) Electrical equipment information is shared in the points below. Detailed electrical requirements can be found in Chapter 15, Electrical System.
 - (2) Convenience Outlets
 - (a) Convenience Outlets shall be located during design reviews after discussion and approval from Amtrak.
 - (b) At least 8 duplex convenience outlets shall be located within the café food service area.
 - (c) Only the convenience outlet near the attendant seat shall have USB ports.
 - (d) General purpose convenience outlets in this area shall not have USB ports.
 - (3) Appliance Outlets
 - (a) Appliance Outlets shall be located directly behind a desired appliance.

- (b) The outlets shall be properly sized and selected to safely power each appliance, and the electrical system shall provide a dedicated breaker for each type of outlet.
 - (c) Appliance outlets shall not have USB ports.
 - (4) POS Outlet
 - (a) POS shall have an electrical circuit and dedicated breaker.
 - (b) The POS outlet shall have USB ports.
 - (c) The POS outlet must be available on car battery power and follow the battery load Table 15-3: Power Phase Matrix.
- iii). Lighting
 - (1) Lighting general information is shared in the points below.
 - (2) Detailed lighting information can be found in Chapter 13, Lighting System.
 - (3) Overhead Lighting
 - (a) Overhead lighting shall be from flush mounted panel lights in the ceiling panels and/or from spotlights.
 - (b) Overhead lighting can be turned off if the car lighting mode is set to night mode.
 - (c) These overhead light fixtures cannot be required to meet FDA light intensity level requirements for food preparation counters, sinks, and workspaces.
 - (4) Shelf Lighting
 - (a) Shelf lighting will be from surface mounted strip lights. These strip lights will be different brightness levels based on the area they are illuminating.
 - (b) Shelf lighting alone shall be the main source of illumination to meet FDA light intensity level requirements for food preparation counters, sinks, and workspaces.
 - (c) To illuminate a shelf, the shelf or underside of the top of the module above the shelf shall have a strip light mounted.
 - (d) To illuminate a workspace, the underside of the shelf above the workspace shall have a strip light mounted.
- iv). Communications Equipment
 - (1) Communications equipment for the café are described below.

- (2) Detailed information regarding communications equipment can be found in Chapter 14, Communications.
- (3) PA Speakers
 - (a) PA speakers shall be located on the ceiling panels at both ends of the café/lounge car.
 - (b) The speakers used in this location shall be identical to PA speakers used in other locations for ease of maintenance and replacement.
- (4) PA Intercom
 - (a) PA Intercom shall be mounted near the entrance door of the café.
 - (b) This intercom shall be identical to the PA intercom used in other locations for ease of maintenance and replacement.
- (5) Security Cameras
 - (a) As an option, security cameras shall be mounted to ceiling panels and shall give surveillance view of all areas of the café/lounge car for security, theft protection, and identification of possible hazards.
 - (b) At least 3 cameras shall be used to achieve this goal.
- (6) Smoke Detectors
 - (a) Smoke Detectors shall be mounted on the ceiling panels at both ends of the café.
 - (b) The smoke detectors used in this location shall be identical to the smoke detectors used in other locations for ease of maintenance and replacement.
- v). Emergency Equipment
 - (1) The following emergency equipment pieces shall be included and stored in a conspicuous, accessible, and labeled location. Please refer to Chapter 18 Emergency Equipment for more information.
 - (a) Snap lights
 - (b) First aid kit
 - (c) Fire extinguisher
 - (d) AED
- vi). Security

- (1) Many items within the food service area will need to be secured. The following items are identified with specific locking preferences. Any other locking or security items will be discussed with Amtrak during design reviews.
 - (a) Cart Locking
 - (i) The cart storage compartments shall include mechanisms that will lock the carts in the compartment as well as prevent the cart door from opening.
 - (ii) The locking mechanism shall use an Amtrak supplied padlock to secure the carriers.
 - (b) Cabinet Locking
 - (i) Cabinets shall include padlock hasps as determined with Amtrak during design reviews.
 - (ii) The locking mechanism shall use an Amtrak supplied padlock to secure the selected cabinets.
 - (c) Carrier Locking
 - (i) The carrier storage compartments shall include mechanisms that will lock the carriers in the compartment as well as prevent the carrier door from opening.
 - (ii) The locking mechanism shall use an Amtrak supplied padlock to secure the carriers.
 - (d) Freezer Locking
 - (i) The freezer shall include padlock hasps as determined with Amtrak during design reviews.
 - (ii) The locking mechanism shall use an Amtrak supplied padlock to secure the selected cabinets.
- vii). Countertop Heights
 - (1) Countertop shall be 36" maximum.
- viii). Dispensers
 - (1) The following dispensers shall be provided in the café:
 - (a) Cold beverage cup dispenser
 - (b) Paper towel dispenser
 - (c) Napkin dispenser

- (d) beverage stirrer dispenser
 - (e) utensil dispenser
 - (f) condiment holders
- ix). Color Material and Finish (CMF)
 - (1) Please refer to Exhibit F for more information.
 - (2) Please also refer to Materials and Workmanship in Chapter 19.
 - (3) General expectations are listed below.
 - (a) CMF will be finalized with Amtrak after the mockup review.
 - (b) Stainless Steel Modules
 - (i) Stainless Steel Modules shall be created from sheet metal that is sized to prevent denting, oil canning, or otherwise non-sturdy structures.
 - (ii) The modules shall be constructed from 304 stainless-steel with a #4 finish (320 grit) or as approved during design reviews with Amtrak.
 - (c) Carshell Walls
 - (i) Carshell walls shall be lined to create interior walls for the café. Sidewall liners shall be made from molded thermoplastic with an easy to clean surface finish.
 - (d) Partition Walls
 - (i) Partition Walls shall be created from a composite structure such as aluminum honeycomb or HPL skinned honeycomb panels.
 - (ii) The finish of the wall and material of the outside skin shall meet all structural requirements for crashworthiness based on mounting and attached loads to the panel.
 - (e) Ceiling Panels
 - (i) Ceiling Panels shall be created from a composite structure such as aluminum honeycomb or HPL skinned honeycomb panels.
 - (ii) The finish of the passenger facing side of the ceiling panel and material of the outside skin shall be inspired by the CMF document and meet all structural requirements for crashworthiness based on mounting and attached loads to the panel.

- (iii) The finish of the material on the non-passenger facing side shall be coated such that there is no risk of corrosion from moisture from steam or humidity within the car.
- (f) Café Area Countertops
 - (i) Countertops within the cafe area shall all be made from solid surface material at the service counter and from stainless-steel at the LSA workstation area.
- (g) Café Area Flooring
 - (i) Flooring within the café area shall be made from rubber flooring with a friction, no-slip texture.

16.5 Reference Information

a). Passenger Flow

- i). The Contractor shall diagram expected passenger flow through/past food service areas for Amtrak agreement and approval.
 - (1) This shall be presented by the Contractor at the IDR phase. **[CDRL 16-04]**

16.6 CDRLs

CDRL	Description	Due
CDRL 16-01	FDA Approvals	Prior to revenue service
CDRL 16-02	Type Tests for Refrigeration and Freezer systems	During FDR
CDRL 16-03	Ventilation Plan	During IDR
CDRL 16-04	Passenger Flow	During IDR

* End of Chapter 16*

Amtrak Single Level Fleet Replacement

Technical Specification

17. Water and Waste System

Revision 0

Table of Contents

17.1	Overview	17-1
17.2	Water System.....	17-3
17.3	Freeze Protection.....	17-10
17.4	Waste Retention System.....	17-12
17.5	Status Indicators	17-17
17.6	Waste System Controls.....	17-17
17.7	CDRLs.....	17-18

17.1 Overview

a). General

- i). Each car shall have a water supply system and toilet rooms consistent with the arrangements and requirements in Chapters 1 and 11.
 - (1) For rooms and cars having an Accessible Toilet Room (ATR), the layout shall meet the requirements of 49 CFR Parts 27, 37, and 38 or latest regulation, and U.S. Department of Transportation Section 504 covering the barrier free transportation of the elderly and handicapped.
 - (2) The Cafe/Lounge car shall have systems of larger water capacity for food preparation needs, as detailed in Chapter 16.
- ii). All water, waste and sanitation systems on all cars shall comply with:
 - (1) All applicable Federal regulations, including:
 - (a) the most recent edition of the US Food and Drug Administration (FDA) Food Code,
 - (b) the requirements of the US Public Health Service (USPHS), and
 - (c) the applicable Code of Federal Regulations for the FDA and the Environmental Protection Agency (EPA) concerning general sanitation, water, toilets and interstate conveyance sanitation, including 21 CFR Part 1250.
 - (2) The latest edition of the Amtrak Food Service Sanitation regulations and the Amtrak Public Health Standards.
- iii). The Contractor shall work with Amtrak to arrange for an FDA inspection of the design and completed installation of the water and waste system of the cars to ensure that it meets all requirements, in accordance with 21 CFR Part 1250.41.
 - (1) Documentation of compliance shall be submitted to Amtrak. **[CDRL 17-01]**
- iv). All materials and workmanship shall comply with Chapter 19 requirements.
- v). The water and waste system shall be able to operate without damage or failure under all specified environmental temperatures and elevations per Amtrak Specification 963.
 - (1) All components selected by the Contractor shall be designed to withstand the railroad environment from a durability and debris damage perspective especially with respect to freeze protection.
 - (2) All freeze protection components shall have a complete and automatic draining function for all fresh water from the system whenever water

- temperature approaches freezing with a minimum of specialized hardware being required.
- (3) Means for alerting train crew in advance of automatic draining shall be provided to avoid nuisance activation of this feature.
 - (4) Any undercar water and waste piping and systems shall be housed within undercar protective enclosures and shall not be exposed.
- vi). It is required that the water supply piping systems be designed to provide gravity drainage with a minimum of automatic freeze protection valves, manual drain valves and vacuum breakers being required for complete drainage in freezing conditions when power is not available.
 - vii). Gasket selection for the water system shall be suitable for the application. Any water that flows to a drinkable source shall be suitable for potable water. Cork gaskets are explicitly prohibited.
 - viii). Ease of servicing and maintenance, rapid repair, reliability, resistance to winter freezing conditions, and safety shall be major design considerations.
 - (1) Where servicing of consumable items is required, such as filters, accessibility shall be gained from the interior of the car.
 - (2) Maintainable components of the in room faucets and piping shall be easily accessible
 - (3) The design of the water system on all car types shall incorporate means to easily sanitize and flush the entire water system, as periodically required by the FDA.
 - (4) All potable water lines shall be isolated from flush water lines through appropriate valves or by alternate means.
 - ix). Each water consuming device on the car, such as each sink, drinking water dispenser, shower, toilet, coffee maker, etc., shall have an individual stainless steel quarter-turn supply line shutoff valve located adjacent to the device that can be accessed by the train crew without the use of tools, to deal with in-service failures during train operation.
 - (1) This device shall not be accessible to passengers.
 - (2) Servicing and shutoff valves shall be stainless steel quarter-turn ball valves unless otherwise specified.
 - (3) Each shutoff valve, drain valve, reset switch or other control device for the water and waste systems shall have an exterior locker identification label and shall have identification and operating instructions on the valve or device itself.
 - x). Complete details of the water and waste systems on all car types, including Food service appliances and restrooms, shall be presented to Amtrak for approval during design review.

CONFIDENTIAL — DO NOT DISTRIBUTE

- (1) This shall include maintainability analysis and access provisions, and winterization details.

b). Capacity

- i). In the coach cars, the water supply system shall have sufficient capacity to serve a fully seated passenger load for the car configurations described in Chapter 1 for a 48-hour period without replenishment for all water consumption needs, including hand washing, and toilet flushing operations.
 - (1) In the Cafe/Lounge cars, the water supply system shall have a capacity sufficient to supply all food service functions along with normal restroom and drinking water requirements for a full passenger car load for at least 48 hours.
- ii). The waste retention system capacity shall be based upon providing 0.05 gallons of volume for each car passenger seat per hour, plus an additional 8 ounces of water per flush, for 48 train operating hours, with sufficient tank capacity to permit a toilet servicing cycle of five days. Expected capacity for waste retention system is 250 gallons.
- iii). The car requiring the greatest waste retention shall be used in determining waste capacity, with this same size tank applied to all passenger car types which contain toilet facilities.

17.2 Water System

a). General

- i). Each car shall be provided with a water system which will supply hot and ambient temperature potable running water for various crew and passenger needs. The water shall be provided for drinking, hand washing, cafe requirements and toilet system operation.
- ii). Particular emphasis shall be placed on meeting the winterization and maintainability requirements.
- iii). Refer to Chapter 16 for additional galley requirements.
- iv). The water system shall include:
 - (1) water tanks,
 - (2) fill system,
 - (3) drain system with freeze protection valves,
 - (4) protective heaters,
 - (5) water pressurization equipment (if used),
 - (6) filter,

- (7) water distribution piping with service valves,
 - (8) water heater and thermal insulation
 - v). The water system shall be pressurized or gravity fed.
 - (1) If pressurized, it shall use filtered air derived from the main reservoir system using a governor system, with adjustable water system pressure, or pressurized system by means of an electric pump.
 - vi). The potable water supply shall have a particulate filter and an antibacterial filter to purify the water to Public Health Service (PHS) standards.
 - (1) These filters shall be located between the freshwater tanks and the dispensing equipment and shall be located for easy cleaning and replacement.
 - (2) All filters shall be easily replaced.
 - vii). Means for complete freeze protection, system drainage, maintainability and periodic sanitation shall be included.
 - viii). The entire water system shall conform to FDA and USPHS regulations and shall use lead-free components.
 - ix). Plans for construction of the water system shall be submitted to the FDA for review for conformity with FDA requirements. **[CDRL 17-02]**
 - x). The design and materials shall be approved by Amtrak.
 - xi). The water system shall be designed to allow complete drainage of all equipment by gravity.
 - xii). Potable water piping shall be designed to allow periodic sanitization by an Amtrak approved process.
 - xiii). As an option, the Contractor shall supply an on-board Ozone system to support filtration, disinfection and odor control of the water and waste system. The system shall operate reliably under all environmental conditions defined in Amtrak Specification #963, including freeze protection and debris shielding while being integrated into the water distribution system, ensuring no backflow. The system shall be demonstrated through water sample analysis before and after treatment using NSF/ANSI-certified methods.
 - (1) If the option is not exercised, the water and waste system shall be designed to accommodate an external filtration system allowing for a closed system flush.
- b). Storage Tanks
- i). Storage tanks shall be stainless steel or other approved materials having equal durability and include internal baffle plates.

- ii). The tanks shall be located in a protected equipment enclosure and fully covered with water resistant fiberglass insulation and supplied with protective heating for winter operating conditions.
 - iii). All storage tanks shall be constructed in accordance with the latest revision of Section VIII of the American Society of Mechanical Engineers (ASME) Boiler and Pressure Vessel Code for Unfired Pressure Vessels designed to withstand a static water pressure of 110 psig.
 - iv). Each storage tank shall have a manual drain valve, a manual shutoff valve, an ASME pressure relief valve and a freeze protection automatic drain valve or approved alternate design.
 - v). A permanent sign shall be installed on the inside face of the electric locker door identifying the total car freshwater tank capacity.
 - vi). A manual drain valve shall be provided to permit the water tanks to be flushed and drained.
 - vii). All water tanks shall be located and designed to allow full accessibility for servicing, removal and replacement. All tanks shall incorporate lifting/supporting points for handling by maintenance personnel.
 - viii). Water storage tanks shall be implemented with safe and reliable water treatment system to minimize the requirement for regular cleaning of water tanks. Amtrak is open to alternatives regarding water treatment solutions to reduce the amount of cleaning requirements for water storage tanks.
 - ix). Storage tanks shall be designed so as not to allow accumulation or sediment or other debris, a flat bottom shall not be permitted.
- c). Water System Fill Stations
- i). General
 - (1) The water fill point itself shall be a barbed male nozzle, which shall be enclosed in a blue painted metal housing with a self-closing cover.
 - (2) The water fill point shall be compatible with existing Amtrak wayside filling equipment and shall use a minimum 0.75 in. diameter fill piping.
 - (3) All water fill stations shall be easily cleanable, and so located and protected as to minimize the hazard of contamination of the water supply.
 - (4) Complete identification signage and refill instructions shall be provided.
 - ii). Fill Station Locations
 - (1) A water fill point for the car's water system shall be provided on each side of the car at approved locations, at a sufficient distance to prevent contamination from the waste tank drain stations.

- (2) The fill points shall be located and self-protected to minimize contamination hazards arising from wastewater system discharge, dust, dirt and debris.

iii). Fill Station Enclosures

- (1) Each fill station shall be mounted in a recessed corrosion resistant enclosure and covered with a spring loaded, top hinged, weather-tight, corrosion resistant, gasketed cover.
- (2) The cover shall be labeled and equipped with over-center springs to securely keep the cover either open or closed.
- (3) The bottom surface shall be designed to allow complete drainage of fluid from the enclosure interior
- (4) The design of the water fill point shall be adequately dimensioned for ease of use by maintenance personnel wearing heavy winter gloves. The water fill point itself shall be a male nozzle, which shall be enclosed in a blue painted metal housing with a self-closing cover.

iv). Water System Pressurization Valve

- (1) If required for pressurization, adjacent to the fill point shall be a three-way water system pressurization valve in compliance with the requirements of Amtrak AAMPS catalog number 22 946 70710.
 - (a) This valve must have the enlarged vent port design to permit rapid venting of the water tank within seconds.
- (2) The valve shall have two positions, **FILL** and **WATER**.
 - (a) In the **FILL** position, the valve shall cut off tank pressurization air, if used, rapidly vent the water tank and permit filling the tank. This will allow the tank to be filled via a check valve located immediately behind the fill nozzle.
 - (i) The system shall permit complete filling from one side of the car, without requiring access to the other side of the car.
 - (ii) A means shall be provided to indicate when the water tanks are completely filled.
 - (iii) Any excess water shall be directed to the bottom of the car and easily visible from the side of the car.
 - (b) When the valve is placed in the **WATER** position, the vent will be closed, and air pressure applied to the water in the tank, if used.
 - (c) The air valve and check valve shall be enclosed behind sheet metal, easily serviceable from the front, with only the valve operating handle exposed.

d). Hot Water

i). Each car shall be capable of producing hot water.

- (1) One hot water tank shall be provided for each car with the capacity of the tanks dictated by the car with the most demand on the longest long distance route. The water heater shall operate from 480 VAC, 3-phase and shall be rated at 9kW. Hot water temperature shall be maintained at approximately 180° F in the tank.
- (2) An active mixing valve shall deliver hot water at 118° F to the hot water distribution system. A temperature and pressure gauge shall be provided at the tank and a temperature gauge downstream of the mixing valve.
- (3) The water heater shall include, but not be limited to the following features: electric immersion heater, a factory installed thermostatic control, and low water protection. Tank shall be well insulated thermally. The tank shall be located to permit removal of the heater elements without disturbing the tank. Elements shall be replaceable in one hour or less.
- (4) Control voltage to the electric water heater system shall be 120 VAC from car power supply.
- (5) Status, faults, errors, and diagnostics (overload contactor switch, heating elements, water level, etc.) for the hot water heater shall be accessible by PTU.
 - (a) Should the car level diagnostics system option be executed, the above shall be communicated to the CDU. Details to be discussed during design reviews.

ii). Hot Water Delivery

- (1) The water heating system shall be capable of providing continuous water heated to 100°-105°F at every faucet.
- (2) The water heating system shall be capable of providing continuous water heated to 110°-119°F in the food service area for a minimum of 15 minutes.
- (3) Wherever hot water is dispensed, the system shall be designed to deliver heated water immediately.
- (4) The water heating system design, potentially using a mixing valve, shall be capable of delivering water at the required temperatures while minimizing the volume of water used.

iii). Hot Water Storage Tanks

- (1) All hot water storage tanks shall be stainless steel or other corrosion resistant approved material and suitably insulated.

CONFIDENTIAL — DO NOT DISTRIBUTE

- (2) They shall be constructed in accordance with the latest revision of Section VIII of the ASME Boiler and Pressure Vessel Code for Unfired Pressure Vessels at a setting pressure of 75 psig.
 - (3) Gravity drainage provisions shall be incorporated into the design.
 - (4) The storage tanks shall have an easily accessible manual drain valve, a manual shutoff valve and a freeze protection automatic drain valve.
 - (5) Storage tanks shall be designed so as not to allow accumulation of sediment or other debris, a flat bottom shall not be permitted.
 - iv). Water Heater Protection
 - (1) Each water heater shall be equipped with an accessible thermostat, an ASME temperature and pressure sensitive relief valve piped to drain under the car and be equipped with low water protection.
 - (2) No damage shall result to the water heater and related devices and wiring if the water supply is cut off causing it to run dry, or if electrical power is disconnected in freezing conditions.
 - (3) Information labels shall be installed on all doors where reset switches are located.
 - v). Maintainability
 - (1) The water heater elements shall be easily replaceable with the tank installed in the car.
- e). Water Piping
 - i). All water system piping and fittings, unless otherwise approved by Amtrak, shall be seamless stainless-steel tubing, piping or other approved materials having equal durability.
 - ii). Layout and installation shall be accomplished with a minimal number of connections.
 - iii). Anti-water hammer air chambers shall be provided as required.
 - iv). Waterproof plastic identification labels shall be applied to all piping where connections are made to valves or devices.
 - v). All water supply piping and components shall be of lead-free construction and shall comply with the requirements of Chapter 19.
- f). Water Backflow Checks
 - i). The water system shall be configured to prevent water backflow into the water raising system under all conditions, in compliance with USPHS regulations.

- ii). If points of connection between potable and non-potable water exist, backflow and back siphon protection devices meeting American Society of Sanitary Engineers (ASSE) standards shall be installed to protect against mixing of potable and non-potable water.
- iii). These devices shall be located to also protect against potential backflow or back siphon conditions may occur.
- iv). They shall be arranged to allow easy replacement if necessary.
- g). Water Raising
 - i). If a water raising system is required, it shall use compressed air supplied by the cars main air reservoir pipe through an approved governor and regulator valve to pressurize the water system, per Chapter 9, or pressurized system by means of an electric pump.
 - ii). Particulate and desiccant type air filters with an automatic drain and an oil removal filter shall be provided to remove all contaminants and moisture from the air supply to the system.
 - (1) The arrangement shall easily allow replacement of the filters.
 - iii). All air regulation valves shall be mounted above the top of the water level in the storage tanks.
 - iv). An ASME pressure relief valve shall be provided.
 - v). The potable water supply to the sinks and drinking water dispenser shall be provided through a check valve and adjustable pressure reduction valve.
 - vi). The potable water supply used for toilet rinse water shall be separately taken from the water supply tanks through a check valve and adjustable pressure reduction valve.
 - vii). All pressure adjustment settings shall be easily accessible for inspection with pressure test ports being provided, and backflow protection shall be provided.
- h). Restroom Sink Supply
 - i). Hot and cold water shall be piped to each sink faucet.
 - ii). Water supply for all faucets shall be 0.5GPM.
 - iii). In all cases where there is a toilet, a sink is expected to be provided next to or within close proximity.
 - iv). The faucet shall be touchless.
 - v). Power for the faucet shall be hard wired. Battery replacement arrangements are prohibited.

- vi). All exposed parts shall be stainless steel.
- vii). All fixtures, dispensers and appliances shall be constructed in accordance with the requirements of USPHS.
- viii). The faucet design shall be approved by Amtrak.
- ix). See Chapter 11 for additional details.
- i). Galley Supply
 - i). The Cafe/Lounge cars shall draw filtered, potable water from the car supply, and distribute it to the hand sink, coffee brewers, ice makers and other water consuming appliances in accordance with the requirements of Chapter 17.
 - ii). All water system exposed parts shall be stainless steel.
 - iii). All fixtures, dispensers and appliances shall be constructed in accordance with the requirements of USPHS.
 - iv). The galley hand wash sink shall provide 110°F-119°F water per FDA requirements.

17.3 Freeze Protection

- a). During Operation
 - i). The freeze protection system shall consist of automatic water drain valves, insulation, protective heaters, manual drain valves, self-draining pipes and similar devices configured to provide the required protection.
 - ii). The system shall have sufficient capacity to permit train operation without damage or failure under all operating and environmental conditions specified by Amtrak Specification 963.
 - iii). There shall be sufficient excess capacity of insulation to allow for time-related deterioration over the design life of the equipment.
 - iv). The freeze protection system shall be designed to permit pipes and fittings to be disassembled for maintenance and repair without removing the entire protective system.
 - v). The freeze protection system shall be fully automatic in operation, and not require any train crew or maintenance personnel action to activate or reset.
 - vi). All freeze protection valves shall meet the requirements of Amtrak Specification 1004, latest revision or approved equal.
- b). Out of Operation
 - i). The water system shall be freeze protected to enable it to be disconnected from Head End Power (HEP) indefinitely in subfreezing temperatures, with

- no damage resulting to any component of the water system under any condition.
 - ii). Complete manual means shall also be provided to permit the system to be fully drained when desired.
 - iii). The entire water system, including its piping and all appliances, shall be free-draining and shall avoid arrangements where water may become trapped.
 - iv). Automatic vacuum breaker valves shall be installed at all elevated points and other locations as necessary to permit complete venting of the system when draining.
 - v). The system shall be designed and geometrically arranged so as to require the absolute minimum of drain valves.
 - vi). All pipe insulation shall be water resistant.
 - vii). A permanent sign shall be installed on the inside face of the electric locker door providing instructions for the manual draining of the car's water system.
- c). Drain Valves
- i). The freeze protection system shall make use of an Amtrak approved automatic, self-contained drain valve which will automatically open when sensing an adjacent ambient air temperature of approximately 38°F (temperature falling) and close at 40°F (temperature rising) when there is no electrical power on the car.
 - ii). All drain valves shall be equipped with a quick warm-up heater to close the drain valves when HEP is available, to allow a car in freezing temperatures to be immediately watered when placed on electrical power.
 - iii). All drain valves shall have a manual override feature located near the fill valve to allow the car to be filled at any time regardless of temperature or HEP availability.
- d). Electrical Protective Heat Tape
- i). The water storage tanks and all water supply components exposed to ambient temperatures shall be protected against freezing by electrically powered self-regulating heat tape and thermal insulation.
 - ii). To prevent unnecessary electrical consumption, all heat tapes shall be supplied electrical power only when the exterior ambient temperature is below 45°F.
 - iii). All electrical protective heat tape shall be of an automatic self-limiting 120VAC design which can be cut to length from bulk rolls for replacement.
 - iv). All connections shall be made using the manufacturer's watertight splicing kit, and each individual length shall be terminated with a power monitoring system.

- v). Such heat tape shall be of a design that can withstand the application of live steam at 225°F without damage, as this is often the only method available in an Amtrak maintenance facility for thawing a frozen car.
- e). Electrical Heat Tape Monitoring System
 - i). An approved system shall be provided in the electrical locker inside the car to indicate the operating status of all heat tape systems.
 - ii). To verify the proper operation of all antifreeze protective heat tapes for the water and waste system, the Contractor shall arrange a monitoring system and associated indicators to verify that electrical power is present at the far end of every heat tape segment when power is being supplied to the system.
 - iii). A logical, organized system layout shall be provided, with each indicator labeled for ease of maintenance personnel quickly identifying an individual defective heat tape.
 - iv). A POWER ON test pushbutton shall be located on the panel to allow electrical power to be supplied to all of the heat tapes on the car when ambient temperature is above the setting at which the system would be energized.
 - v). Monitoring of the current or ground fault circuit breaker status, as well as the presence of voltage at the end of each heat tape, shall be provided.
 - vi). Alternate methods for detecting and reporting the failure of any heat tape segment may be employed subject to Amtrak approval.
- f). Maintainability
 - i). Maintainability aspects of the system shall be demonstrated on the interior mock-ups.
- g). All details of the freeze protection system shall be submitted to Amtrak for approval during design review. **[CDRL 17-03]**

17.4 Waste Retention System

- a). General
 - i). All waste collection fixtures and components shall be constructed in accordance with the requirements of 21 CFR Part 1250 and USPHS.
 - ii). The system shall have previous successful application in rail passenger service.
 - iii). All toilet system piping, the waste tank and all associated fittings, drain piping and serving valves, unless otherwise permitted by Amtrak, shall be manufactured from acid-resistant stainless steel suitable for sewage service.
 - iv). All waste retention system servicing valves shall be quarter-turn stainless steel ball valves with full diameter port openings.

- v). The WCRS shall be a positive/negative pressure type system with sufficient useable capacity to collect and retain all toilet waste generated on the car during a 72-hour period in a single tank, for discharge at a wayside dumping facility. Minimum waste capacity shall be per Section 17.1.b.
- vi). Electrical and plumbing connections shall be designed so that components can readily be installed, removed and exchanged.
- vii). Modular construction shall be utilized in the design of all components and subassemblies.
- viii). No special tools shall be required for maintenance or replacement of system components.
- ix). As there are frequent foreign object blockages of the toilet system encountered in toilets, sufficient easily accessible leak-tight access caps and cleanout ports shall be provided in all waste system piping to permit rapid and easy removal of clogs by maintenance staff during servicing stops.
- x). The waste tank, all waste piping, and waste system components shall be designed to prevent accumulation of mineral deposits and scale and provide a procedure for their removal.
- xi). The waste system shall be designed to operate over all operating and environmental conditions specified by Amtrak Specification 963 and avoid damage from freezing.
- xii). Plans for the toilet system shall be submitted to the FDA for review for conformity with FDA requirements. **[CDRL 17-04]**
 - (1) Complete details on the system design shall be presented to Amtrak for approval during design review.

b). System Requirements

- i). The system shall be designed for failsafe operation and protection of passengers, crew, service personnel and equipment.
- ii). Ease of servicing and maintenance, reliability and safety shall be major design considerations.
- iii). Compressed air shall be supplied by the main reservoir trainline pipe.
 - (1) This system shall be kept separate from any compressed air supply system which may be required for the water supply system.
 - (2) Air lines and valves shall be sized for air pressures up to 150 psig.
 - (3) Any use of pressurized air for the WCRS or a water raising system shall not impact the functionality of the air brake system under any scenario.

- iv). Designs shall incorporate features to limit the amount of air consumed during flush cycles or leaks or failures within the system.
- v). The toilet system shall automatically recover from loss of power (including interruptions of HEP and/or compressed air) without nuisance alarms.
- c). Toilet Operation
 - i). A toilet flush cycle shall be initiated by the passenger by operating a touchless, ADA-compliant flush actuator, which shall be mounted on the wall, unobstructed by a raised toilet lid, and easily apparent to the passenger.
 - ii). Signal indicator lights may be provided for passenger information on system status and any delay in mechanical flushing action shall be supplemented with visual feedback of a flush request.
 - iii). Rinse water shall be sprayed into the toilet bowl during the flush cycle to adequately clean the bowl without allowing water to exit the bowl.
 - iv). The toilet waste shall be drawn by vacuum and / pressure from the toilet to the waste tank, for later discharge at a collection facility.
 - v). Filtering shall be provided to protect the pressure generating device from blockage due to waste debris, waste fluid or water.
 - vi). It is desired that the water consumption during the flush cycle be minimized.
 - vii). The toilet shall not flush if the waste tank is full, or if system logic determines that a complete flush cycle is not possible and shall protect against excessive air consumption created by unnecessary multiple flush requests or multiple flushes on cars with multiple toilet rooms.
 - viii). The flush control unit shall be approved by Amtrak during design review.
[CDRL 17-05]
- d). Toilet
 - i). All toilets shall be ADA-compliant, where applicable.
 - ii). The toilet shall be designed as a service-proven, self-contained unit with an elongated bowl, interchangeable between all car types.
 - iii). The shroud shall be coordinated with the toilet module design.
 - iv). The toilet shall be securely mounted to the restroom, using stainless steel or approved corrosion resistant mounting fasteners.
 - v). The toilet bowl shall be easy to maintain and clean.
 - vi). It shall be designed to prevent waste matter and mineral deposits from adhering and shall not rust or corrode.

- vii). Bowl surfaces shall curve in a continuous fashion and shall be free of recesses and inaccessible areas.
 - viii). The sides of the bowl shall be steep and sloped toward the discharge to allow waste to accumulate for evacuation.
 - ix). To prevent downstream blockage of waste system piping, the bowl outlet shall be a smaller diameter than the piping to serve as the most restrictive point in the piping system.
 - x). Overflow protection shall be provided to prevent the bowl from flooding should the outlet be plugged.
 - xi). Rinse water shall be injected into the bowl with sufficient force and distribution to push all waste matter toward the bowl outlet and completely clean the bowl unless otherwise approved by Amtrak.
 - xii). The bowl shall be easily and completely cleaned with ordinary cleansing agents and tools.
 - xiii). The flush-drain valve shall be a self-contained unit which provides a zero-leakage seal at the bowl outlet after operation.
 - xiv). The toilet system shall be designed to retain a hermetic seal over the opening of the waste pipe when closed to prevent odors from entering the restroom.
 - xv). The valve design shall be self-cleaning and prevent waste material from being trapped in it.
 - xvi). The design shall survive closing on solid objects without damage.
 - xvii). Cutout valves shall be easily accessible, without tools, for operation en route from inside the car.
 - xviii). The toilet assembly and its components shall be mounted so as to be accessible and removable for service and maintenance.
 - xix). Special attention shall be given for ease of clearing foreign object clogs from the piping system, and additional piping cleanout ports with suitable maintenance access should be provided in the toilet to waste tank piping to facilitate rapid cleanout.
- e). Waste Tank Assembly
- i). The waste tank assembly shall be designed as a self-contained unit. Waste tanks shall be located and designed to allow full accessibility for servicing, removal and replacement. Waste tanks shall incorporate lifting/supporting points for handling by maintenance personnel.
 - ii). The waste tank assembly shall be constructed to withstand debris damage.
 - iii). The waste tank shall be constructed of acid resistant stainless steel.

- iv). The tank design shall prevent sloshing during normal train operations but shall not impede normal tank drainage nor flushing operations and shall not retain excessive sludge deposits during operation.
 - v). The tank design shall allow all internal portions of the tank to be cleaned by maintenance personnel.
 - vi). Suitable interlocks shall be applied to prevent system operation when draining the waste tank. Waste tank drainage shall be readily possible from either side of the car, through a 4 in. diameter Amtrak standard Andrews 400A style quick-disconnect adapter. The 4" waste drain handle shall be ergonomic requiring less than 50 LBF to operate.
 - vii). The hose connection and any necessary valve handle to operate shall be easily accessible without the need to open any covers but shielded from debris damage.
 - viii). A hose connection to the adapter shall interface with the wayside servicing facility.
 - ix). Only one person shall be required to drain and service the waste tank from a single point outside of the car without needing to crawl under the equipment.
 - x). The drain connection arrangement shall minimize the amount of possible waste spillage when the drain hose is disconnected.
 - xi). All waste tank assembly exposed surfaces which are liable to waste spillage during servicing shall be sealed as water resistant and as nonporous as practical and shall be easily sanitized by Amtrak maintenance forces without damage.
 - xii). Storage tanks shall be designed so as not to allow accumulation or sediment or other debris, a flat bottom shall not be permitted.
- f). Vent
- i). The exhaust from any waste tank system device shall be routed to the top of the car or underside of the car, and designed to prevent passengers, both inside and outside the car, from being exposed to objectionable odors from waste gases, or from odors being ingested by the car fresh air intakes.
 - ii). The Contractor shall investigate use of easily replaceable filters or other such methods.
- g). Waste System Piping
- i). All waste system piping shall be seamless acid resistant stainless steel or approved alternative materials suitable for sewage service.
 - ii). All piping shall be installed with generous radius sweep bends and elbows to avoid blockages.
 - iii). Cleanout access ports shall be provided throughout the waste piping.

- iv). The system shall be designed to facilitate the clearing of any line blockage.
- v). All piping and tubing shall have a smooth interior finish.
- vi). Any pneumatic system piping used shall comply with Chapter 19.
- vii). All drain piping not connected to the WCRS shall be seamless stainless steel.
 - (1) This shall include the piping from all restroom sink drains, Cafe car sink drains, and coffee brewer drains and all other drains not handling human wastes.
 - (2) Such drains shall be piped using a suitable penetration through the car floor to discharge under the car, well clear of the track rails and adjacent undercar apparatus.
- viii). All waste system drain piping shall be installed with positive gravity drainage slope, and have generous radius sweep bends and elbows to avoid blockages.
 - (1) The piping shall be designed to facilitate the clearing of any line blockage between the toilet and waste tank.
 - (2) Ice shall not be allowed to build up at the drain point.
 - (3) Kazoos or approved alternate shall be placed on all through floor gray water drains to prevent insect intrusion into the car.

17.5 Status Indicators

- a). The status of the water and waste system, including the volume of water in the water tank, and the volume of waste collected in the waste tank, shall be monitored continuously, and displayed on an indicator panel or screen inside the car. Water and waste tank fill levels shall be provided in no less than four even increments.
- b). Should the car level diagnostics system option be executed, a separate system shall provide the diagnostic status of the antifreeze protection heat tapes on the car when HEP is present, and shall be accessible remotely.
- c). The design of all status indicators shall be approved by Amtrak. **[CDRL 17-06]**
- d). Water and waste tank fill levels shall also be displayed on the car exterior in close proximity to the water fill stations.
- e). An OUT OF SERVICE indicator shall be located on the outside of each restroom, which shall indicate if the control system has determined the toilet to be out of service due to a full waste tank or other malfunction, or if the train crew has locked the restroom.

17.6 Waste System Controls

- a). An Amtrak approved control system shall be supplied to provide proper control and maintenance diagnostics for the WCRS.
- b). Design and materials shall comply with all applicable requirements of this specification.
- c). The system shall be designed for the railroad passenger car environment and shall not be affected nor need to recycle itself due to interruptions of the HEP, trainline air pressure, en-route waste tank system servicing or other normal aspects of intercity train operation per this Specification.
- d). All controls, switches and sensors shall be unaffected by the environment, and be maintenance free for a six-year period.
 - i). Should the car level diagnostics system option be executed, all diagnostic information for the waste system shall be available to the car diagnostic system and shall be available remotely.
- e). The Contractor during design review shall present for Amtrak approval a matrix of all normal, abnormal and fault conditions, and the water and waste system response to each condition. **[CDRL 17-07]**
- f). All logic parameters shall be designed for ease of future adjustments and reprogramming by Amtrak, with complete software provided to Amtrak to make such adjustments.
- g). All limit switches shall be environmentally sealed, nonadjustable, keyed to ensure proper installation and permanent setting, provided with one wiring configuration, color coded and labeled.

17.7 CDRLs

CDRL	Description	Due
CDRL 17-01	Documentation of FDA Compliance	Prior to system Qualification Testing
CDRL 17-02	FDA Approval of Water System Construction	30 days before IDR
CDRL 17-03	Details of Freeze Protection System	30 days before IDR
CDRL 17-04	FDA Approval of Toilet and Waste Retention System	30 days before IDR
CDRL 17-05	Flush Control Unit Details	30 days before IDR
CDRL 17-06	Status Indicator Designs	30 days before IDR
CDRL 17-07	Matrix of all Conditions (normal, abnormal and fault) and the Water and Waste System response.	30 days before IDR

* End of Chapter 17 *

Amtrak Single Level Fleet Replacement

Technical Specification

18. Emergency Equipment

Revision 0

Table of Contents

18.1	Overview	18-1
18.2	General Requirements	18-1
18.3	Emergency Equipment Lockers	18-1
18.4	Automated External Defibrillator (AED).....	18-3
18.5	Seat-Back Safety Information Card.....	18-3
18.6	CDRLs.....	18-4

18.1 Overview

- a). Each car shall be equipped with emergency equipment per the requirements of 49 CFR Part 239.101.a.(6) as well as outlined in this chapter.
- b). Emergency equipment provided shall include fire extinguishers, pry bars, sledgehammers, first aid kits, chemiluminescent snap lights and seat-back passenger safety information cards.
- c). One storage container for an Automated External Defibrillator (AED) shall be provided in the Café/Lounge car and location will be determined during the design review process.

18.2 General Requirements

- a). Emergency equipment as provided shall meet all applicable regulations, standards and specifications.
- b). Equipment provided shall be located and installed in a manner that facilitates identification and access of the emergency equipment when needed by passengers and crew members without the use of keys or tools, unless otherwise specified.
- c). Emergency equipment shall be located as to be available to passengers in the range from the 5th percentile female to the 95th percentile male, and in accordance with applicable ADA regulations.
- d). All emergency equipment shall be new and shall be qualified for use for a minimum of one year after delivery of the car.
- e). Each car shall be shipped with a full complement of emergency equipment unless otherwise specified by Amtrak.

18.3 Emergency Equipment Lockers

- a). General
 - i). An emergency equipment locker shall be provided on each car in a location approved by Amtrak.
 - ii). The location of the locker shall be in compliance with all applicable ADA requirements.
 - iii). The emergency equipment locker shall be recessed into the wall and shall have a clear polycarbonate hinged front panel, equipped with sealing provisions.
 - iv). The polycarbonate panel shall be mounted in an equipment locker door equipped with a non-lockable paddle latch, so crewmembers can access the emergency equipment without breaking the seal.
 - v). There shall be a light fixture located inside the equipment locker that will always be illuminated regardless of door position.

- vi). Alternate emergency equipment locker designs can be submitted for approval by Amtrak.
 - vii). The locker shall be marked with emergency equipment signage that is compliant with Federal emergency signage standards and compatible with Amtrak standard signage per Amtrak Specification 697 for the safety equipment contained therein.
 - viii). At a minimum, the emergency equipment locker shall be designed to include emergency tools, a fire extinguisher, a first aid kit and snap lights.
 - ix). The equipment shall be securely attached to the interior of the locker and shall not be loose nor rattle within the locker but shall be easily removed in the event of an emergency.
 - x). Emergency locker shall be equipped with a car emergency light.
- b). Emergency Tools
- i). Each emergency equipment locker shall include the following emergency tools:
 - (1) A 6 lbs. sledgehammer with an 18 in. handle
 - (2) An 18 in. pry bar
 - ii). The tools shall be installed in a manner that will prevent vibration and rattling and be readily available for emergency use.
 - iii). The Contractor shall incorporate the same tools currently in use by Amtrak. Vendors and part numbers shall be provided during Design Review.
- c). Fire Extinguisher
- i). The fire extinguisher shall be securely mounted in a manner that will prevent vibration and rattling and allow its prompt removal in case of fire.
 - (1) The installation shall conform to the requirements of NFPA Specification No. 10.
 - (2) The fire extinguisher shall be clearly marked with instructions in accordance with NFPA Specification No. 10.
 - (3) The extinguisher shall be installed so that the pressure gauge can be easily seen for inspection without opening the locker cover.
 - ii). A dry-chemical, 10-pound fire extinguisher, UL rated 2A-40 type B/C shall be included in the emergency equipment locker of each car.
 - iii). A dry-chemical, 2.5 lbs. fire extinguisher, UL rated 1A-10 type B/C shall also be included in the food service area of the Café/Lounge car. See Chapter 16.

- iv). Fire extinguishers shall have all required certifications prior to shipment of the car and be within their current annual inspection date.
- v). The Contractor shall incorporate the fire extinguishers currently in use by Amtrak. Vendors and part numbers shall be provided during Design Review.
- d). First Aid Kit
 - i). A first aid kit, compliant with the requirements of 49 CFR Part 239.101a.(6).(ii), Pac-Kit model 6311AMT or approved equal, shall be included in the emergency equipment locker.
 - ii). First aid kits, identical to those specified above, shall be located in the emergency equipment locker, and in the cafe area of the Cafe/Lounge cars (see Chapter 16).
 - iii). The Contractor shall incorporate the first aid kit currently in use by Amtrak. Vendors and part numbers shall be provided during Design Review.
- e). Snap Lights
 - i). Each emergency equipment locker shall include one package (quantity of 10) of 6 in. yellow 12-hour chemiluminescent snap-lights, Cyalume model 9-01360 or approved equal.
 - ii). Snap lights shall also be provided in the Food service car.
 - iii). The Contractor shall incorporate the snap lights currently in use by Amtrak. Vendors and part numbers shall be provided during Design Review.

18.4 Automated External Defibrillator (AED)

- a). One storage container for an Amtrak-provided Automated External Defibrillator (AED) shall be provided in the Café/Lounge car that is accessible to crewmembers, in accordance with Amtrak AED installation specification.
 - i). The container shall be a minimum of 9 in. wide by 20.5 in. deep and shall provide no less than 19 in. of vertical storage clearance.
 - ii). If the AED is to be lifted vertically out of the holder, a minimum clearance of 24 in. must be provided above the top of the holder.
 - iii). The containers shall securely retain the AED under all car accelerations. Appropriate signage shall identify the locations of the AED units.
- b). Details of location and installation of the defibrillator shall be submitted for Amtrak review and approval. **[CDRL 18-01]**

18.5 Seat-Back Safety Information Card

- a). The Contractor shall develop the artwork for a passenger seat-back safety information card illustrating the type, location and use of all safety features, emergency equipment, emergency signage and emergency exit pathways for each

car type.

- b). Only a single safety information card shall be provided, which shall adequately describe all car types in a possible consist.
- c). This safety card shall be designed in the format of Amtrak's "Passenger Safety Instructions" and shall include a clear Braille overlay.
 - i). Artwork is to be provided for Amtrak review and approval.
- d). Electronic artwork, suitable for printing, shall be provided to Amtrak prior to the delivery of the first batch of cars. **[CDRL 18-02]**
- e). The Contractor shall be responsible for the printing and delivery of the first 10,000 copies of the seat-back safety card prior to the delivery of the first batch of cars.
- f). Seat-back safety cards shall be shipped to a location to be determined by Amtrak.
- g). Seat back safety cards are required for all potentially occupied seating locations in each car.
- h). Additionally, a dedicated seat back safety card holder shall be included at each seating location.
- i). In the event of interference with assemblies such as workstation tables, alternate holder locations and designs shall be the responsibility of the Contractor.
- j). The holder design for all locations should be identical unless otherwise approved by Amtrak.

18.6 CDRLs

CDRL	Description	Due
CDRL 18-01	AED Location and Installation Details	During PDR
CDRL 18-02	Seat-Back Safety Card Electronic Artwork	30 days prior to PDR

* End of Chapter 18 *

Amtrak Single Level Fleet Replacement

Technical Specification

19. Materials and Workmanship

Revision 0

Table of Contents

19.1	Overview	19-1
19.2	Sustainability	19-1
19.3	General Requirements	19-1
19.4	Joining and Fastening	19-3
19.5	Fasteners	19-5
19.6	Stainless Steel	19-10
19.7	High-Strength Low-Alloy (HSLA) Steel	19-12
19.8	Steel Castings	19-13
19.9	Aluminum	19-14
19.10	Elastomers	19-16
19.11	Glazing Materials	19-18
19.12	Rubber Floor Covering	19-24
19.13	Paneling	19-27
19.14	Woven Fabrics	19-32
19.15	Non-Woven Fabrics	19-32
19.16	Seat Cushion and Upholstery	19-33
19.17	Carpet	19-36
19.18	Counters.....	19-37
19.19	Welding and Brazing	19-37
19.20	Exterior Marking Films and Graphics	19-42
19.21	Paints and Coatings	19-43
19.22	Powder Coating.....	19-45
19.23	Durability and Maintenance.....	19-45
19.24	Insulation.....	19-45
19.25	Flammability and Smoke Emissions	19-47
19.26	Piping	19-49
19.27	Fiberglass-Reinforced Plastic	19-52
19.28	Thermoplastic Sheet	19-54
19.29	High Pressure Laminates.....	19-55
19.30	Decorative Laminate Film	19-55
19.31	Solid Polymer Surface.....	19-56
19.32	Air Filters	19-57
19.33	Wire and Cable	19-58

19.34	Wire and Cable Connections	19-68
19.35	Conduit.....	19-73
19.36	Electrical and Electronic Designs.....	19-75
19.37	Electrical Devices and Hardware	19-76
19.38	Semiconductor Standards.....	19-82
19.39	Printed Circuit Board Standards	19-84
19.40	Auxiliary AC Motors.....	19-87
19.41	Recyclable Materials	19-88
19.42	CDRLs.....	19-88

19.1 Overview

- a). This Chapter defines the requirements for materials and workmanship that shall apply to the design and manufacture of systems and subsystems for assembly into Amtrak's passenger vehicles.
- b). This Chapter shall apply to all phases of the project.
- c). It shall be the responsibility of the Contractor to inform its suppliers of the requirements of this Chapter as well as enforce them.

19.2 Sustainability

- a). The Contractor shall consider environmental responsibility throughout the performance of this contract.
- b). By emphasizing sustainable measures and materials, the goal is to minimize the overall environmental impact, surpassing standard alternatives and contributing to a more resilient and eco-friendly future.
- c). When selecting materials, the Contractor shall evaluate and prioritize materials with lower environmental footprints, considering factors such as resource extraction, production processes, and end-of-life recyclability. The Contractor shall prioritize the use of renewable and recycled materials over non-renewable alternatives wherever feasible.
- d). The Contractor shall consider throughout the design review process initiatives to optimize energy usage throughout the project's lifecycle, from construction and operation to decommissioning.

19.3 General Requirements

- a). Applicability
 - i). This Chapter defines the requirements for all material and workmanship which shall apply to the design and manufacture of the vehicles, and all systems, subsystems and components contained therein, that are to be built to this specification.
 - ii). All materials and methods of assembly shall be in conformance with the applicable requirements of this Chapter, and all applicable standards, specifications, and references.
 - (1) Those references, standards and specifications listed constitute a partial listing; the Contractor shall be responsible for identifying and complying with all applicable regulations, industry standards and material specifications whether listed herein or not.
 - (2) The revision of these references that are current at time of issuance of Notice To Proceed (NTP) shall apply unless a specific revision of a given specification or standard is referenced.

b). Marking and Storage

- i). All materials intended for use on these vehicles shall be marked or stored so as to be readily identifiable and shall be adequately protected during handling and storage.
- ii). All stored material subject to corrosion shall be protected by waterproof covers, coatings or packaging. Equipment covers, cable entrances and openings shall be closed to prevent ingress of water or dirt.
- iii). All dated material shall have the expiration date clearly marked. Expired material or material expiring within one year of car acceptance shall not be used.
- iv). Material or components which require maintenance during storage shall be properly maintained per the component(s) manufacturer's instructions. The Contractor shall document such maintenance, and provide these records as requested by Amtrak.
- v). Rejected material shall be clearly marked and stored in an area specifically designated for that purpose.
- vi). Carshells stored outside shall have open cavities covered to prevent water and dirt ingress. Covers should be inspected weekly to check for damage.

c). Prohibited Materials

- i). The following materials shall not be used in the construction of the vehicle:
 - (1) Polyvinyl Chloride (PVC)
 - (2) Asbestos
 - (3) Cadmium (except for batteries) and cadmium plating
 - (4) Lead (excluding solder used on safety-critical electronics or in brake shoes)
 - (5) Urethane foam
 - (6) Carcinogenic materials as listed by current publication of the American Conference of Governmental Industrial Hygienists (ACGIH):
 - (a) Where there are materials that contain trace amounts of carcinogenic substances, they shall be clearly identified in the Safety Data Sheet.
 - (b) Exposure to classifications A1, A2, and A3 carcinogens shall be carefully controlled to levels as low as possible below the TLV (Threshold Limit Value) set by the ACGIH.
 - (7) Materials in the List of Highly Hazardous Chemicals, Toxics and Reactives, 29 CFR 1910.19, Appendix A.

- (8) Chlorofluorocarbons (CFCs) and Hydrochlorofluorocarbons (HCFCs)
- (9) Materials that, in their normal installed state, emit products that are known to be toxic or irritants.
- (10) Magnets, unless approved by Amtrak. Magnets for transformers and proximity switches that do not exceed IEC 60601-2-23 are acceptable.

d). Material Reporting Requirements

- i). Whenever a commercial material is not covered by a specification or standard, the Contractor shall identify the material by the commercial trademark, name and address of the Supplier. The Contractor shall submit a description and the technical data specifications of the material composition along with independent laboratory test results of material being tested per 49 CFR Part 238 requirements for approval at the intermediate design review. **[CDRL 19-01]**
- ii). The Contractor shall keep on file Safety Data Sheets (SDSs) for all chemical materials (paints, solvents, adhesives, lubricants, etc.) used in the manufacture, maintenance, operation or repair of the vehicles, and shall provide a copy of each SDS in the appropriate maintenance manual. SDSs shall comply with 29 CFR Section 1910.1200 (g).
- iii). The Contractor shall maintain records that trace all materials to their manufacturers and production specifications and methodologies.
 - (1) The Contractor shall propose a digital material passport for all materials to track data involved in its life cycle and can facilitate data mining in supply management during the production process.

19.4 Joining and Fastening

a). General

- i). Certain combinations of materials require particular care in joining to avoid the possibility of corrosion. Isolating and moisture-proofing materials, appropriate to the materials being joined, shall be used at all times where these combinations exist.
- ii). The Contractor shall submit joining and fastening data, specifications and standards for all types and methods of fastening and joining used to Amtrak for review and approval at the design review. **[CDRL 19-02]**
- iii). All hinges shall be stainless and piano hinge style.
 - (1) The use of any other hinge must be submitted to Amtrak for review and approval on a case-by-case basis.
- iv). The Contractor shall submit to Amtrak a dissimilar metals report, identifying all locations where dissimilar metals, or metals and wood are joined, and describing the methods used for mitigating galvanic or chemical corrosion at those locations. Merely treating a surface with primer, anodization, or coating

CONFIDENTIAL — DO NOT DISTRIBUTE

may not be acceptable if it is likely to be compromised during maintenance and handling over the life cycle of the equipment. These methods shall be subject to review and approval by Amtrak. **[CDRL 19-03]**

b). Joint Fitting

- i). Joints shall be properly fitted, whether exposed or concealed. When not otherwise specified in drawings or specifications, materials between 0 and 0.5 inches of thickness shall have gaps between joints held to a dimension not greater than 10% of the thinner material being joined, or 0.002 in., whichever is greater. Materials with thickness greater than 0.5 inches shall be held to a maximum gap of 0.06 inches. Gaps shall be uniform in width. The edges of panels shall have a smooth, finished appearance.
- ii). Where excessive gaps (greater than those permitted by approved drawings or standards) are found to exist at the faying surfaces of structural bolted or riveted connections, metal shims of the same material as that of the deficient part may be used, but only with the written permission of Amtrak. Shims, if used, shall be mechanically fastened to one of the base parts being joined. The use of epoxy or other plastic filler at such locations is prohibited.
- iii). Cut-to-fit, match drilling, filing, and other hand-fitting practices are prohibited.
- iv). Location and process for implementing seams must be submitted for approval.
- v). All seaming plans must be submitted for Amtrak acceptance.

c). Metal-to-Metal Connections

- i). Where metals contact each other, the contact surfaces shall be free of dirt, grease, rust and scale. Unless specified otherwise, the contact surfaces shall be coated with a metal-base primer that conforms to GSA Federal Standard TT-P-664D or alternate coating technology meeting or exceeding the applicable performance requirements noted in TT-P-664D. Metal primer may be omitted for like-stainless steel to like-stainless steel joints.

d). Wood-to-Metal Connections

- i). Where wood and ferrous metal surfaces are placed together, except as bonded surfaces in plymetal, the exposed wood shall be coated with two coats of aluminum paint conforming to GSA Federal Standard TT-P-38E, that prevents moisture intrusion, and the metal shall be coated appropriately with an Amtrak approved primer that conforms to GSA Federal Standard TT-P-664D.
- ii). Additionally, all bolts or rods passing through wood shall be coated with aluminum paint conforming to GSA Federal Standard TT-P-38E.

e). Wood-to-Wood Connections

- i). Where wood and wood are placed together, both abutting surfaces shall be coated with two coats of aluminum paint conforming to GSA Federal Standard TT-P-38E that prevents moisture intrusion.

19.5 Fasteners

a). General

- i). The Contractor and all suppliers are responsible for selecting fastener types, sizes, styles, lengths, materials, grades and finishes that will meet the requirements of this Specification. The Contractor shall minimize the number of different sizes and styles of fasteners used. Whenever a maintenance process requires the removal or application of a fastener, consideration shall be given to the ease of access to such fasteners.
- ii). Fasteners used throughout the vehicle shall be metric fasteners, except as provided otherwise. All fasteners used on the vehicle shall be specified under one of three categories: electrical and electronic; structural and safety-related; or decorative.
- iii). Safety-related fasteners include, but are not limited to, those applied to trucks, bolsters, brake equipment attachment, couplers and attachment of interior components or other fasteners as identified by Amtrak. A fastener is safety related if a single fastener failure will create an unsafe condition.
- iv). The following are prohibited:
 - (1) Self-tapping and self-drilling screws, Velcro/dual lock and, double sided tape shall not be used without approval by Amtrak.
 - (2) Protruding screws, mounting bolts, or similar items on the vehicle interior or exterior, except for those appointments that cannot be built into the structure in any other manner.
 - (3) Tapped holes in structure, brackets, and other vehicle assemblies. Tapping plates shall be used when installing fasteners into vehicle structure or subassemblies.
 - (4) Fasteners installed into blind holes, unless specifically approved by Amtrak.
 - (5) Use of elastic stop nuts for electrical connections.

b). Threaded Fasteners

- i). If approved by Amtrak, all inch-standard threaded fasteners shall dimensionally conform to ANSI Standard B1.1 or Industrial Fasteners Institute Fastener Standards. All approved inch-standard threaded fasteners shall conform to SAE J429 and J995, or ASTM F593 and ASTM F594 for both material and strength.

- ii). Prevailing-torque type locknuts shall be nylon insert type, ESNA or approved equivalent, conforming to IFI Fastener Standards or NASM21044. Distorted thread locknuts shall only be used where the locknut may be exposed to temperatures above 200°F.
 - iii). When making connections to heat producing apparatus, thermal expansion of the components shall be taken into consideration for selection of fastener materials. If the joined components are high expansion alloys such as copper or austenitic stainless steel, austenitic stainless-steel fasteners shall be used. If the joined components are low expansion materials such as carbon steel or ferritic stainless steel, zinc plated carbon steel fasteners of minimum Grade 5 shall be used.
 - iv). All screws or bolts used to secure access panels to the interior, undercar, or roof equipment shall be made captive to the panel in which they are used.
 - v). When bolts are used to secure apparatus where the bolt head is not accessible, a reusable mechanical locking device shall be used to prevent the bolt head from turning when the nut is being turned. Threaded inserts shall not be permitted without prior written Amtrak approval.
 - vi). At least 1.5 screw threads shall be visible beyond all nuts. When used without elastic stop nuts, bolts shall not project more than 1.5 threads plus 0.25 in. for bolts 0.25 in. diameter or less and shall not project more than 8 threads for larger diameter bolts. With elastic lock nuts, bolt threads shall not project more than 0.25 in., regardless of bolt size.
- c). Metric Fasteners
- i). Metric fasteners shall be utilized on all components and assemblies in all cars. All components, control groups, or individual units that are supplied by a supplier or sub-supplier to the Contractor, shall be supplied with metric fasteners conforming dimensionally to ANSI B1.13M (ISO-metric) Standards. Metric fastener material and strength shall conform to ISO 898-1 and 898-2 or ISO 3506-1 and 3506-2. All internal fasteners and threaded components of the approved assembly shall have ISO-metric threads. Internally, there shall be no mixing of metric and inch threaded fasteners. Replacement, repair or maintenance parts supplied under this Specification shall contain all necessary replacement fasteners of the correct size and grade.
 - ii). Metric fasteners shall be marked as required in *Metric Fastener Standards*, Industrial Fasteners Institute, latest edition.
- d). Structural Fasteners
- i). All structural fasteners shall have documentation identifying manufacturer and purchase specifications available for examination by Amtrak at the Contractor's Quality Assurance (QA) department. This documentation shall include the fastener material or grade and finish including plating material and specifications, when applicable. Whether the purchaser is a subcontractor, supplier or the Contractor, the Contractor shall obtain and

hold this documentation for a period of not less than the expiration of the warranty period of the last vehicle accepted.

- ii). All safety-related fasteners shall either: a) be manufactured, tested, and distributed in accordance with ASME Standard B18.18.3M, including the requirements of ASME accreditation or b) have a representative sample of each production lot of fasteners tested for conformance to purchase specifications by an independent laboratory accredited by the American Association of Laboratory Accreditation (A2LA), or approved equivalent. A production lot is defined as one size of fastener, from one manufacturer, and produced during one continuous production run. Fasteners not meeting this definition of production lot shall be treated as separate lots. Testing shall be performed using sample quantities as proposed by the Contractor and approved by Amtrak. Tests conducted shall confirm that fastener material meets specified chemistry, strength and manufacturing method requirements. The purchaser shall obtain certified test results from the testing laboratory and the Contractor shall obtain and hold the documents for a period of not less than the expiration of the warranty period of the last vehicle accepted.
- iii). All structural or safety-related fasteners that have been subjected to processes introducing the risk of hydrogen-embrittlement must have certification of hydrogen-embrittlement testing. The certification must be based on a representative sample of actual production fasteners that have been tested for hydrogen embrittlement following SAE USCAR 7 procedures. The plating process must be certified to ASTM F519 procedures. An ASTM F606/F606M wedge test sample may be used in place of the ASTM F519 standard samples. Test loads must be a minimum of either proof load or 80% of ultimate tensile strength and held for a minimum of 168 hours. If any failures occur the entire lot shall be rejected.
- iv). All structural bolts, nuts and washers for undercar equipment shall be a minimum Grade 8 and the bolt diameter shall be no less than 0.375 in., regardless of design load. Stronger fasteners shall be used if the application requires. The mounting and attachment bolts for undercar mounted equipment and equipment support structures or brackets shall be sized to the design strengths required plus an appropriate safety factor. Undercar mounted equipment shall be supported by brackets or other structures whenever possible. Bolts or screws used for structural connections shall have full size bodies in areas subject to bearing and/or shear loads.
- v). Drawings containing all dimensions, standards, plating and any other requirements for the fastener shall be provided for all structural or safety-related fasteners. For fasteners of similar design with the same properties a schedule drawing showing each part number and its specific requirements maybe provided. Drawings for structural or safety-related fasteners shall be provided prior to delivery of the first cars to Amtrak.

e). Decorative and Appearance Fasteners

- i). All interior fasteners exposed to view shall be limited whenever possible and be either bright or finished to match the surfaces being joined and installed such that the fastener head is flush with the mating surface. The fastener head shall be tamper-proof. Bright finished fasteners used for stanchions shall be austenitic stainless steel. Bright finished interior fasteners may be either austenitic or plated martensitic stainless steel. Type A sheet metal screws shall not be used. Amtrak reserves the right to approve all exposed fasteners in the customers view.
- ii). All exterior fasteners visible to passengers shall be austenitic stainless steel for steel, High Strength, Low Alloy (HSLA) steel and stainless-steel car bodies. Exterior aluminum shall be joined by austenitic stainless steel or aluminum alloy fasteners, as appropriate to the design and appearance requirements. Fasteners used on the side sill to attach heavy equipment brackets shall be considered structural fasteners.
- iii). All fasteners used to secure access covers or panels to equipment boxes or interior panels shall be made captive to the panel in which they are used. Where access for service is expected more often than every five years, access panels shall be equipped with stainless steel draw-down latches. Quarter- turn fasteners shall have a minimum shank diameter of 0.25 in. and be of adequate strength.
- iv). All decorative and appearance fasteners shall have documentation that identifies the manufacturer, base material, plating or finish if applied and the fastener type. The Contractor or supplier shall maintain this documentation on file for Amtrak to review for a period of not less than the expiration of the warranty period of the last vehicle accepted.

f). Torquing

- i). All safety-related fasteners, including truck and brake equipment bolts and all fasteners exposed to fatigue loads, shall be torqued to industry standard torque values for the size and grade of fastener and "torque striped" after torquing by paint or other approved means. All other fasteners shall be torqued to a value appropriate to the application, so that they do not loosen in service.

g). Washers and Lock Washers

- i). Appropriate grade flat washers, conforming to ASME B18.21.1 or ASME B18.22M, shall be used under the heads of all bolts and under all nuts where enlarged holes, slotted holes or soft mating metals are being fastened. Where high strength fasteners are applied, flat washers shall be hardened and comply with ASTM F436/F436M.
- ii). Helical lock washers shall not be used. If applicable, prevailing torque nuts or standard nuts with the use of appropriate Loctite or equal thread locking compound shall be used for these applications.

- iii). Other types of washers, including Belleville, NORD-Lock, or Nomel washers, may only be used for special applications with Amtrak's approval.
- h). Rivets and Lock Pins
 - i). Rivets and lock pins exposed to passengers or crew shall be austenitic stainless steel or aluminum, as appropriate to the materials being joined. Structural steel rivets shall conform to ASTM A502-03 or ANSI B18.1.2 Standards. Rivets may be hand driven when hot and shall completely fill the rivet holes. Rivets driven cold shall be mechanically driven. Exposed heads shall be concentric with the shank and free from rings, fins, pits and burrs.
 - ii). Swage-locking (Huck bolt type) fasteners shall conform to Military Specification MIL-P-23469/1B. All rough surfaces of the collar end of these fasteners shall be machined or ground smooth where accessible to passengers, crew or maintenance personnel.
- i). Plating of Fasteners
 - i). All carbon, alloy and martensitic steel fasteners shall be plated with zinc with clear or yellow chromate finish, unless specifically waived by Amtrak.
 - ii). Zinc plating shall conform to ASTM B633-07, Type VI, Hexavalent Chromium Free.
 - iii). Requests for alternative coatings must be submitted to Amtrak for review and approval.
 - iv). The Contractor shall submit qualification results for each process used at each subcontractor applying the proposed coating, as noted below.
 - v). Any request for alternative coating shall, as a minimum, include:
 - (1) 1) coating manufacturer's product data including required thickness,
 - (2) 2) ASTM B117 test results from an accredited third-party laboratory,
 - (3) 3) documentation of torque/tension characteristics, and
 - (4) 4) supporting documentation from the coating manufacturer regarding the propensity for the coating process to cause hydrogen embrittlement of the fastener during coating.
 - vi). Regardless of the coating's propensity for hydrogen embrittlement, each lot of high strength fasteners, including OEM zinc or yellow chromate plated bolts (Grade 5 or Metric Grade 8.8 or higher) shall be tested for hydrogen embrittlement. Each lot of lower strength fasteners shall be tested for hydrogen embrittlement if the coating has the possibility of causing hydrogen embrittlement. If the proposed coating results in a change in the K-value for the plated fastener to outside the range of 0.13-0.15, as defined by Industrial Fasteners Institute Standard IFI-543, the Contractor shall use the alternate coating on all fasteners within the particular LRU. The LRU shall contain an indelible label identifying the coating type used within the LRU and the

CONFIDENTIAL — DO NOT DISTRIBUTE

required torque values for each size fastener used therein. Fasteners internal to a subcomponent within an LRU may use the standard coating system if they are not subject to removal during Amtrak's maintenance activities. Alternative coatings shall not be used unless specifically approved by the Project Manager.

j). Bolt Holes

- i). All bolt holes shall be accurately located and aligned, and when necessary, during assembly, holes may be reamed round to a specified size in position, as approved by Amtrak. Bolt hole clearances shall not exceed the Industrial Fasteners Institute's requirements. Slotted hole size for length, width, and edge distance should follow industry standards.

19.6 Stainless Steel

a). General

- i). Contractor shall provide structural stainless steel that complies with the following requirements:
 - (1) Austenitic stainless steel shall meet the Certification Provisions of ASTM A666.
 - (a) Structural applications: Contractor shall test for susceptibility to intergranular corrosion in accordance with ASTM A262:
 - (i) Practice A: Shall be used to accept material only.
 - (ii) Practice E: Required for final determination of acceptance or rejection of material that is not acceptable by Practice A.
 - (2) Any connected or abutting visible metal parts will be of a matching metal (aluminum or stainless steel) in single grade and should match in color and finish, unless specifically called for to be contrasting in the specification.
 - (3) Sustainability
 - (a) As stainless steel is one of the most predominately materials over the car body the utmost efforts must be main to ensure sustainable sourcing.
 - (b) The stainless-steel supplier shall optimize the use of green energy and maximize the percentage of recycled material while maintaining all material composition and strength requirements.
 - (4) Duplex stainless steel may be used only with specific Amtrak approval:
 - (a) General requirements:
 - (i) As per ASTM A480/A480M

- (ii) When CVN impact tested, based on lots, shall have minimum absorbed energy of 27 J (20 ft-lb) at -29 C (-29 F)
- (b) Structural applications:
 - (i) Test for susceptibility to intergranular corrosion in accordance with ASTM A923:
 - 1. Practice A: Use to accept material only.
 - 2. Practice C: Required for final determination of acceptance or rejection of material that is not acceptable by Practice A.
 - (ii) Where duplex stainless steels are welded to other structural steels, paint the less-noble steel with weld-through primer.
- (5) Structural components assembled by fusion or resistance welding:
 - (a) Specification and composition of austenitic stainless steel shall conform to:
 - (i) AISI type 201L, 301L, 301LN or SUS301L (with Nitrogen), 316L
 - (ii) ASTM A666 requirements, except that the carbon content shall not exceed 0.03% and type 301LN and SUS301L (with Nitrogen) shall not exceed 0.25% nitrogen.
 - (b) Austenitic Stainless steel used in structural applications covered by the Specifications shall also conform to APTA PR-CS-S-004-98.
- (6) Other stainless steels conforming to ASTM A666 are acceptable for non-welded applications.
- (7) Use:
 - (a) Contractor shall comply with uses as permitted throughout the Specifications.
 - (b) Austenitic and duplex stainless steels may be unpainted.
 - (c) Unpainted austenitic or duplex stainless steels exposed to passengers shall be a single grade in which both the color and surface finish of abutting pieces shall match, except where the design specifically calls for contrasting appearance.

b). Testing

- i). Tensile strength shall be determined with a testing machine having a maximum head speed of one-half inch per minute. The bend test shall be made with the axis of the bend parallel to the direction of rolling; after bending, no cracks shall be visible to the naked eye. Gauge (thickness) tolerances of materials shall be in accordance with standard industrial tolerances.

c). Flatness Tolerance

- i). Coil stock shall meet standard mill flatness tolerances, unless otherwise specified. Sheet stock shall be of stretcher-leveled quality. The camber of the sheet stock shall not exceed 0.25 in. in 8 ft.

d). Finishing Methods

- i). Unless otherwise specified, all smooth surfaces exposed to passengers shall be given a medium-grit finish on the exposed side. Grain shall be in a direction to suit the decorative treatment in the interior of the car and shall be specified on the component drawings. Alternate finishes shall be submitted to Amtrak for approval.
- ii). 120-180 grit finish on interior and exterior surfaces (#4 Brushed Finish), 30 Ra μ in MAX.

e). Surface Treatment

- i). All stainless-steel portions which contribute to the car aesthetics such as car shell or interior fittings shall be treated with a nitric or citric acid passivation bath.
 - (1) Passivation medium, concentration level and duration of treatment, as well as the rationale for selection, shall be proposed by the Contractor for review and approval by Amtrak. **[CDRL 19-04]**
 - (2) Waivers from passivation may be granted on a case-by-case basis excepting carshell components which cannot be exempted from passivation.
- ii). Stainless steel shall be cleaned in accordance with American Society for Testing and Materials (ASTM) A380. Post passivation testing shall be performed in accordance with ASTM A967. Test results, as well as visual approval of the aesthetics of the FAI pieces, shall be subject to Amtrak review and acceptance. The approved FAI piece shall form the basis of pass-fail acceptance criteria of all future vehicles.

19.7 High-Strength Low-Alloy (HSLA) Steel

a). General

- i). HSLA steels shall be more than twice as corrosion resistant to atmospheric exposure as plain carbon steels, as measured by the ASTM G101 corrosion

CONFIDENTIAL — DO NOT DISTRIBUTE

index. It is preferred that HSLA steels used for welded structure meet specified weld- and heat-affected zone toughness requirements without post-weld heat treatment or heat-generated stress relief. As a minimum, HSLA steels shall conform to ASTM A572, ASTM A588, ASTM A606 - Type 4, ASTM A1008 or A1011- Grade A or 70 or ASTM A710, Grade A, Class III.

- ii). Exposed sheet steel shall have a smooth surface free from pitting. Mill test reports for each heat of steel used in the construction of these vehicles shall be retained on file by the Contractor, shall be available for inspection by Amtrak upon request and shall be submitted with the vehicle history book.
- iii). Heat treated parts made of HSLA steel shall be certified. A record of this certification, including hardness test results, shall also be retained on file and available for inspection by Amtrak upon request.

19.8 Steel Castings

a). General

- i). The Contractor shall be responsible for selecting casting grade, composition, strength, heat treatment, finishing, and design best suited for the intended application. As a minimum, steel castings for structural use, including cast-weld designs for truck frames and bolsters, shall comply with AAR M-201 Grade B plus 2% Nickel, with the following mechanical properties:
 - (1) Minimum tensile strength: 75 ksi (517 MPa)
 - (2) Minimum yield strength: 48 ksi (331 MPa)
 - (3) Elongation: Minimum 25% in 2 inches
 - (4) Reduction of area: Minimum 50%
- ii). Design and testing of truck bolsters and side frames shall comply with AAR M-202 and AAR M-203, respectively. Cast steel to ASTM A27/A27M, grade 65-35, may be used for truck structure, bolster and center bearing arrangements as an alternative to the AAR M-201 material specified above.
- iii). Coupler, drawbars, and anchors shall comply with AAR M-201, Grade "C", quenched and tempered.
- iv). Pattern markings and serial numbers shall be applied in a manner that does not impair the casting strength. If castings are found to be non-conforming to requirements determined by the design qualification castings, the material shall be repaired, retested, and re-inspected or destroyed at the Contractor's expense.
- v). Qualification Test: The quality of steel castings shall be checked in accordance with the requirements of AAR M-201. The contractor shall perform a Qualification Test on one casting, selected by Amtrak, from the first lot of production castings to verify the casting design. The Contractor shall have radiographic testing performed per ASTM E94 or E1030 using

reference radiographs from ASTM E446- or E186, as may be applicable. The radiographic sensitivity shall be at least 2% (2- 2T) for sections >3/4 in. thick and (2-4T) for sections ≤3/4". Acceptance levels for the radiographic testing shall be submitted to Amtrak for review and approval. The surface quality of the steel castings shall be evaluated in accordance with ASTM A 802/802M. Radiographs resulting from the Qualification Test shall be made available to Amtrak for review.

- vi). Welding: All weld repairs shall be qualified in accordance with the requirements of AWS D15.1 or ASTM A488/A488M. When castings are found to be unacceptable, they shall be repaired in the original factory of manufacture prior to shipment or by another repair process approved by Amtrak. Castings requiring repair or modification by welding after completion of heat treatment may be stress relieved locally by using electrically controlled heating to not greater than 1,150°F, followed by slow cooling. Manual torch stress relief shall not be permitted. For cast-weld designs, the entire length of all welds on any welded assembly of several separate castings selected for design qualification shall be radiographically inspected to ASTM E94/E94M using reference radiographs from ASTM E390.
- vii). The Contractor shall prove the quality of castings by either destructive or 100% radiographic inspection. Following the establishment of a satisfactory procedure, quality control shall be maintained by testing one or more of each lot at a frequency to be determined by Amtrak, the Contractor and the subcontractor. This frequency shall be influenced by the critical requirements of the part.
- viii). Steel castings used in locations not specifically referred to shall be selected by the Contractor or its subcontractor for composition and characteristics best suited to the application but shall be subject to review by Amtrak.

b). Heat Treating

- i). Where physical strength is gained by heat treating, a physical test shall be conducted on each treating charge of each heat of castings. Where more than one heat is represented in a treating charge, a physical test shall be conducted on each heat represented in each treating charge.
- ii). All steel castings used in the truck structure shall be made of electric furnace or controlled open hearth steel and shall be heat treated.

19.9 Aluminum

a). General

- i). Aluminum alloy mill products shall be identified by designations prescribed by The Aluminum Association and shall conform to specifications contained in the Association's publication *Aluminum Standards and Data*. Aluminum alloy castings shall only be used for trim and for door thresholds. Such castings shall conform to ASTM B26, B85 or B108 for, respectively, sand, die or permanent mold castings. Aluminum alloy forgings shall conform to ASTM B247-02a. Copies of all test reports for sheet, extrusions, and

forgings used shall be retained on file by the Contractor, shall be available for inspection by Amtrak upon request and shall be submitted with the vehicle history book.

- ii). Unpainted aluminum used for interior surfaces exposed to contact by passengers and the crew shall have anodic coating, with a minimum coating thickness of 0.0004 in. and a minimum coating weight of 21 milligrams per square inch (mg/sq. in.) to protect the material.
 - (1) Color and coating type shall implement the Customer Experience Vision and CMF requirements of the contract and shall be subject to Amtrak approval.
 - (2) Scratched or damaged anodized aluminum components may not be repaired and delivered to Amtrak as part of the assembly.
- iii). All aluminum surfaces of the car body, including not only surfaces in contact with dissimilar metals but also surfaces in contact with aluminum and surfaces not in contact with any materials at all, but excluding exterior uncolored surfaces, shall be cleaned and given one coat of zinc chromate primer or approved-equivalent.
- iv). Aluminum used for heat sinks shall be nickel plated to minimize contact corrosion and surface pitting.
- v). All interior Aluminum components, trims, and finishes shall utilize 100% recycled Aluminum wherever possible. Where virgin grades are required, production must incorporate the use of renewable energy.
- b). Fabrication and Fastening
 - i). The forming of aluminum parts, their joining by bolting, riveting, and welding, and the protection of contact surfaces shall conform to the requirements of the Aluminum Company of America's (ALCOA) Technical Report Number 524 Specification Covering Use of Aluminum in Passenger Carrying Railway Vehicles, except as specified otherwise.
 - ii). The specific measures to be taken to prevent risk of contact and resultant possible electrolytic corrosion shall depend upon determination of the most suitable method which shall be adapted to the design involved, and the following instructions are provided for general guidance. These instructions shall not supersede recommendations of the aluminum manufacturer.
 - iii). Aluminum alloy surfaces shall not be secured to, nor make direct metal-to-metal contact with, the surfaces of copper, brass, bronze, silver, nickel and nickel-plated parts or alloys thereof, lead, tin and ferrous materials. The surfaces of aluminum alloy parts secured to steel parts shall be protected with a one-part polysulfide sealant, zinc chromate paste, silicone sealant or Amtrak approved equal used as the joint compound. Alternatively, an insulating material shall be non-hygroscopic and, if fibrous, shall be impregnated with bitumen or other water-repellent substance.

- iv). Wood shall not be placed in contact with aluminum alloy except with written permission from Amtrak.
 - v). Some form of surface covering, or insulation shall be provided for all bolts, rivets, securing clips and devices to prevent contact with the aluminum alloy, if the bolt or other device does not also consist of a compatible aluminum alloy. Stainless steel and carbon steel fasteners, including washers and nuts, plated in accordance with provisions of this Specification, shall be coated with a protective non-chromate paste before installation. Where possible, only the head and unthreaded portion of the shank of the bolt shall be in contact with the aluminum part when secured in place. Suitable bushings may be used in place of the protective non-chromate paste. Rivets driven hot shall be covered by a protective oxide coating due to the heating; but the method of riveting shall, if possible, always be with the formed rivet head in contact with the aluminum alloy.
- c). Gauge
- i). Aluminum sheet gauge size shall be in accordance with the American or Browne and Sharp Standard Gauge.

19.10 Elastomers

- a). General
- i). All elastomeric parts shall be of neoprene, or approved equal, unless otherwise specified. The elastomer shall be compounded and cured to perform satisfactorily in the temperature range specified. The elastomers shall have high resistance to ultraviolet and other solar radiation, weather, all Amtrak car washing fluids, and the longest possible life consistent with other specified characteristics. All elastomeric parts shall be resistant to ozone, oxidation, heat, oil, grease and acid.
 - ii). All resilient mounts shall be of natural rubber. Synthetic rubber compounds may be substituted for natural rubber only when approved for a specific application.
 - iii). All elastomeric parts are to be marked with the date of manufacture and shall not have aged more than 12 months when assembled into the vehicle.
- b). Tests
- i). All tests shall be conducted according to the latest revisions of the specified ASTM test procedures, unless otherwise specified. All resilient, natural rubber mounts and elastomeric truck suspension components shall be tested in accordance with the performance requirements for the following and must be provided by the manufacturer: ASTM D2240-05, ASTM D412-06ae2, ASTM D1149-07, ASTM D573, ASTM D395-03.
 - ii). (Method B), ASTM D624-00 (die C) and ASTM D746-07. All joints shall be vulcanized. The durometer hardness shall be suitable for the construction and conditions specified.

- iii). Unless otherwise agreed by the Contractor:
 - (1) ASTM D412-06ae2 tensile strength shall be 1500 psi (min.)
 - (2) ASTM D412-06ae2 elongation for sheet material shall be 300% (min.)
 - (3) ASTM D412-06ae2 elongation for extruded material shall be 275% (min.)
 - (4) ASTM D573 loss in tensile strength shall be 15% (max.) when subjected to 168 hours at 158°F.
 - (5) ASTM D1149-07 shall have no cracks when subjected at 100 parts per hundred million (pphm) at 104°F for 100 hours and a specimen elongation of 20%.
- iv). The test specimens shall be cut out from the extruded material, and at least one tensile strength and elongation test and one accelerated aging test shall be made on the material used for each order. If the compound or cure, or both, are changed during the production of material for one order, at least one test of each type shall be made for each different batch.
- v). The ozone resistance of the elastomer shall be tested in accordance with ASTM Standard D1149 using an ozone concentration of 100 ppm, an exposure time of 100 hours at 100°F, and a specimen elongation of 20%. The elastomer shall not exhibit any cracks during the test period.
- c). Life Expectancy
 - i). For all parts made by vulcanizing an elastomer to metal, any premature failure (less than five years) between metal and the elastomer or in the elastomer, occurring when the parts are used in normal service and according to the provisions of this Specification, shall be considered as having been caused by defect of materials or workmanship.
- d). Metal Parts
 - i). Metal parts to which elastomeric material is vulcanized shall be made of SAE 1020 or 1045 hot-rolled steel, except for air brake equipment.
- e). Bonding
 - i). The joining of elastomeric pieces shall be conducted by the hot vulcanization process. Bonding of elastomers shall not be allowed unless the Contractor submits the application, bonding procedure, and bonding agent technical data for approval prior to the purchase of any materials.
- f). Truck Parts
 - i). Truck bumpers and snubbers shall be compounded to be resistant to abrasion, oil, grease and acid.

- g). Air Brake Parts
 - i). Brake control system elastomer compounds shall be selected by the air brake supplier guidelines.
- h). Glazing Strips
 - i). Glazing strips shall be of neoprene conforming to ASTM C542-05, or of rubber fulfilling fire safety requirements of this specification.
 - ii). The compounding of the rubber shall be such as to preclude discoloration or staining of neighboring areas, particularly from water drainage.
 - iii). Window glazing sections shall be service proven and constructed of high-quality elastomeric compounds containing neoprene subject to approval by Amtrak.
 - iv). Glazing strips and other elastomeric extrusions shall be continuous and made from neoprene or other compounds suitable for the purpose and shall be free of major defects of material or workmanship.

19.11 Glazing Materials

- a). General
 - i). All window glass shall be provided with tints, screens, or other solar/thermal limiting measures as required by the Heating, Ventilation and Air Conditioning (HVAC) design. The tints shall not preclude passengers from being seen from outside the car or limit their vision when looking out the body side windows. The window glass shall meet Amtrak Specification 336 or be otherwise approved by Amtrak.
- b). Safety Glass
 - i). All safety glass must meet the requirements of ANSI Z26.1, Table 1, Safety Glazing Material for Use Anywhere in Motor Vehicle. Where specified, safety glass must also meet the requirements for the following:
 - (1) FRA Type I as specified in 49 CFR 223 and 49 CFR 238
 - (2) FRA Type II as specified in 49 CFR 223 and 49 CFR 238
 - ii). Where FRA Type I or Type II glass is required, the glazing, its mounting to the vehicle, and the vehicle structure must meet the requirements for ballistic impact and large object impact as required by 49 CFR 238. All glazing performance requirements must be met both with and without the application of the glazing protective film. All safety glass must be of the laminated type.
 - iii). Flatness
 - (1) When an individual window of glass is laid on a truly flat surface, such as a surface plate, the glass shall not indicate a bow of more than 0.030 inch per linear foot.

- iv). Dimensional Tolerance
 - (1) The overall dimensions of any window supplied shall not exceed ± 0.060 in. dimensional deviation. The thickness of individual pieces must be held within 5% of the specified thickness.
- v). Overlap Tolerance
 - (1) The overlap of one laminate of the window with respect to the other at an edge shall not exceed 0.03125 in. Corners and burrs shall be ground smooth and all edges shall be treated in accordance with SAE J673, Edge No. 4.
- vi). Color
 - (1) When new, there shall be no more than $\pm 4\%$ variation in the color of individual windows of laminated sheet glass when examined over a white background.
- vii). Haze
 - (1) All the laminates of the safety glass shall be so nearly free from haze that the laminated glass shall have approximately the same clarity as non-laminated plate glass of the same nominal thickness.
- viii). Internal Contamination, Dirt, Specks and Scratches
 - (1) Occasional specks of foreign material and scratches are permissible, provided such specks do not exceed
 - (2) 0.020 in. in greatest dimension and scratches do not exceed a total of 3 in. in length and neither are within the central three-quarters area of the window. Amtrak reserves the right to determine which windows are to be rejected.
 - (3) The visual inspection criteria for laminated glazing shall be submitted for Amtrak approval as part of the glazing design review. **[CDRL 19-05]**
- ix). Bond Separation
 - (1) The bond between two sheets of glass and the membrane shall be of such quality that when the glass is broken by twisting or by direct impact, there will be no separation between the glass sheets. Windows that contain un-bonded areas shall not be used.
- c). Light Transmission
 - i). Average visible light transmission through clear safety glass must be a minimum of 85%.

- d). Plastic Glazing
 - i). Plastic glazing must meet the requirements under ANSI Z26.1, Table 1, Item 4, Safety Glazing Material for use in Motor Vehicle only in Specific Locations. Where specified, safety glass must also meet the requirements for the following:
 - (1) FRA Type I as specified in 49 CFR 223 and 49 CFR 238
 - (2) FRA Type II as specified in 49 CFR 223 and 49 CFR 238
 - ii). Where FRA Type I or Type II glazing is required, the glazing, its mounting to the vehicle, and the vehicle structure must meet the requirements for ballistic impact and large object impact as required by 49 CFR 238. Material must be selected from Sabic "Margard," Atohaas "Tuffak CM 2," or approved equal, meeting 49 CFR 223. The installation must meet 49 CFR 238.113, Emergency Window Exits, and 49 CFR 238.221, Glazing.
- e). Material Physical Properties
 - i). Plastic materials used in the glazing of side windows and door windows must meet the following requirements.
- f). Strength
 - i). Samples must be prepared and tested according to 49 CFR 223 and 49 CFR 238 and ANSI Z26.1, Section 5.10, Impact, Test 10 (Dart Drop, Table 2 Heights). Samples must not shatter or break when subjected to the falling dart impact requirements of Test No. 10. The dart tip must be no more than 0.5 in. radius. Denting or marring of the surface of the tested piece in this test is permissible.
- g). Light Transmission
 - i). Visible light transmission through clear plastic glazing must not be less than 85% in 0.125 in. thickness, 82% in 0.25 in. thickness, 80% in 0.375 in. thickness, and 78% in 0.5 in. thickness.
- h). Color
 - i). Materials must have UV stabilizer additives to inhibit fading and loss of properties due to extended exposure to direct sunlight. When new, there must be no more than 4% variation in the color between lights of plastic material of a specified color and thickness, when examined over a white background, and measured by the appropriate light transmission or colorimeter inspection and test instruments.
- i). Abrasion Resistance
 - i). Plastic glazing materials must be silicone-coated on both sides to increase resistance to abrasion. The coated plastic must meet ANSI Z26.1, Section 5.17, Abrasion Resistance, Test 17 (Plastics). The change in percent haze after 100 cycles must be less than 6%. The glazing material supplier must

CONFIDENTIAL — DO NOT DISTRIBUTE

perform the following test prior to qualification: The plastic glazing material after 300 hours of weatherometer testing must pass abrasion resistance ANSI Z26.1, Section 5.17. This test must be performed for initial product certification and the results must be provided with drawing submittal.

j). Chemical Resistance

- i). Samples must be prepared and tested per ANSI Z26.1, Section 5.19, Chemical Resistance, Test 19 (Non-stressed). The exposed fabricated edges of the test samples may be coated with the same material as the face surfaces by the manufacturer. In addition to the chemicals specified in this test, the test must include, but not be limited to, such cleaning solutions as dilute oxalic acid solution (3% by weight), half-strength Neleco Products Subway Soil Solvent – (one gallon Part 1 to 2 pounds Part 2, in 10 gallons water), and Electrosol. The exposure time of the test must be increased to 1-hour intimate contact with the test chemicals on the faces of the test sample. The contaminants must be either wiped or sprayed onto the coated faces of the test sample. Any tackiness, crazing, or apparent loss of transparency is cause for rejection. After immersion, a change in percent haze greater than 55, as measured by ANSI Z26.1, Section 5.17, Abrasion Resistance, Test 17, is cause for rejection.

k). Dimensional Tolerance

- i). The overall dimensions of individual units as supplied must be within 0.030 in. of the nominal dimension specified. The thickness of the plastic materials must be within a tolerance of + 5% of the nominal thickness.

l). Flatness

- i). When an individual piece is placed on a truly flat surface, such as a surface plate, the material must not indicate a bow of more than 0.030 inch per linear foot, in any direction.

m). Edge Work

- i). All edges must be straight and perpendicular to the surface and must be sawed or routed and free of burrs in order to prevent cutting of the rubber glazing strips. Sharp corners must be removed around the entire periphery.

n). Optical Quality

- i). Optical quality of the plastic glazing materials must be in accordance with ANSI Z26.1, Section 5.15.2.2, Visibility Distortion. No light and dark patches, existent over the entire area, may appear in the shadow of the unmasked area of the specimen before the specimen has been moved a distance of at least 14 in. from the screen.

o). Weathering

- i). The plastic glazing material must pass the long arc Xenon lamp Weathering ANSI Z26.1, Section 5.16, Weathering, Test 16. No detectable cracks in the

coating must develop when the specimen is strained 2%. Stress may be applied by imposing 6,000 psi loading, using a tensile testing machine.

p). Material Quality

i). Foreign Material and Inclusion Defects

- (1) Foreign material and inclusion defects must not exceed the following limits:
 - (a) Less than 0.009 in.: Allowed to the extent that they do not constitute a severe defect such as clustering.
 - (b) 0.009 in. to 0.020 in.: Allowed up to 10 per square foot average over the area of the piece.
 - (c) 0.021 in. to 0.050 in.: Allowed up to three per square foot average over the area of the piece.
 - (d) 0.051 in. to 0.065 in.: Allowed one per square foot average over the area of the piece.
 - (e) 0.0651 in. to 0.15 in.: Allowed one per edge, only in the outer 25% of the piece.
 - (f) Above 0.15 in.: Not allowed.
- (2) There must be no black speck clusters of three or more above 0.02 in. in a 1 in. diameter circle.
- (3) Defects occurring in those areas of the lights that are covered by the glazing strips is not cause for rejection.

ii). Fibers and Scratches

- (1) Fibers and scratches must not exceed the following limits:
 - (a) Less than 0.060 in. in length: Allowed to the extent that they do not constitute a severe defect such as clustering.
 - (b) 0.061 in. to 0.125 in. in length: Allowed up to a maximum of two per square foot average over the area of the piece.
 - (c) 0.126 in. to 0.250 in. in length: Allowed up to a maximum of one per square foot average over the area of the piece.
- (2) Greater than 0.250 in. in length: Not allowed.
- (3) Fine scratches that are detectable only when viewed in bright back lighting are acceptable.

iii). Bubbles

- (1) There must be no clusters of bubbles, no chain bubbles, and no bubbles larger than 0.030 in. in diameter. If present, bubbles 0.020 in. to 0.030 in. in diameter must have a minimum separation of 3 in. In any 2 in. diameter area of glazing material, there must be a maximum of four bubbles with diameter between 0.010 in. and 0.020 in.

iv). Apparent Runs

- (1) Apparent runs must not exceed the following limits:
 - (a) Less than 0.125 in.: Allowed to the extent that they do not constitute a severe defect such as clustering.
 - (b) 0.125 in. to 0.250 in.: Allowed up to a maximum of four per square foot average over areas of piece but not to the extent that they constitute a severe defect.
 - (c) 0.251 in. to 0.500 in.: Allowed up to a maximum of one per square foot, if it does not constitute a severe defect.
 - (d) 0.501 in. to 1.00 in.: Allowed up to a maximum of one per edge, only in the outer 25% of piece area.
 - (e) Above 1.00 in.: Not allowed.

v). Orange Peel

- (1) "Orange peel" in the surface is cause for rejection of the material.

vi). Marking

- (1) All glazing shall be marked with proper identification in accordance with FRA 49 CFR Part 223 requirements. Each window shall be marked for identification by the supplier in legible letters 0.125 in. to 0.25 in. high in the lower right-hand corner as viewed from the inside of the vehicle. This identification shall be no closer than 0.375 in. to the edge. The identification shall give the product name, the manufacturer, the serial number and FRA Type designation. Markings shall be legible and permanent for this application and shall be applied in such a manner so as not to reduce the integrity of the coating.

vii). Shipping

- (1) The material shall be carefully prepared for shipping and shall be properly protected to prevent damage. If a pressure sensitive masking is used, it shall be easily strippable from the material and not leave a gummy or sticky residue.

q). Window Shades

i). Fire Resistance and Durability

- (1) All shades, blinds and nets should meet the requirements for 14 CFR 25, Appendix F, Part 1, (Vertical test) Flame time ≤ 10 sec and Burn length ≤ 6 inches. As well as ASTM E 662-01 Ds (4.0) ≤ 200 .
- (2) The materials must display high dimensional nubility under extreme climactic conditions and fluctuations as well as high UV resistance and high degree of tear resistance and resilience.

ii). Certificates Required:

- (1) GREENGUARD Gold
- (2) STANDARD 100 Class IV by OEKO-TEX®
- (3) Environmental Product Declaration (EPD)
- (4) Health Product Declaration (HPD)

r). Sunshades

i). Quality and Composition

- (1) Sunshades should block out glare and solar heat, while having a excellent rate of visibility in order to enjoy the view with the shade down, aiming for a visible light transmittance (vT) of 10%. Composition should be made up of 100% knitted polyamide or rPET with a metalized backing.

s). Blackout Blinds

- i). Blackout Blinds should be constructed of a weave with 1-2% openness and aim to have a vT level of 0%, by using a laminated back layer to block out visible light.

19.12 Rubber Floor Covering

a). General

- i). The rubber flooring shall be made of a synthetic rubber compound mixed with multi-colored speckles of the same material dispersed throughout the material thickness, with a semi-matte finish.
- ii). Rubber floor covering shall meet ADA visibility and coefficient of friction requirements, with a static coefficient of friction of at least 0.6 on level surfaces and 0.8 on ramps, even when wet with both rubber and leather soled shoes.
- iii). Rubber floor covering shall be non-staining, non-discoloring, and 100% non-oil extended.

- iv). Only high-quality hard clay shall be used as filler.
- v). No whitening (limestone) shall be used in the compound. At room temperature, the rubber flooring shall bend around a 0.75 in. (19 mm) diameter mandrel without breaking, cracking, crazing or showing any change in color.
- vi). The rubber flooring material shall be fully homogeneous throughout and shall meet the requirements of ASTM F1344-04. Rubber flooring shall conform to the criteria below.
- vii). The flooring shall meet TRRL Pendulum Dry 91 Wet 29.
- b). Sustainability
 - i). The raw material should be sourced from suppliers who adhere to ethical and sustainable practices.
 - ii). The rubber flooring must contain a minimum of 15% recycled content.
- c). Thin Skinned Blister
 - i). A thin-skinned blister is a blister, which when finger-pushed, will collapse upon itself. Thin skin blisters of the indicated sizes will be permitted as follows and shall be repaired as indicated:
 - (1) Maximum Size – 0.030 in. (0.8 mm) height, 0.80 in.² (5.2 cm²) area with longest dimension of 2 in. (51 mm).
 - (2) Maximum Population – 3 blisters in a 12 in. (30.5 cm) by 12 in. (30.5 cm) area, and there shall be only one other blister within 3 ft (0.91 m) of this area.
 - (3) Repair Method – using a hypodermic needle, apply just enough Super Bond 420 or Bostik 1685 to bring to a flush surface.
- d). Thick Skinned Blister
 - i). A thick-skinned blister is a blister, which when finger-pushed, will collapse and then return to its original condition. Thick skin blisters of the indicated sizes will be permitted as follows and shall be repaired as indicated:
 - (1) Maximum Size – 0.030 in. (0.8 mm) height, 0.80 in.² (5.2 cm²) area with longest dimension of 2 in. (51 mm).
 - (2) Maximum Population – 3 blisters in a 12 in. (30.5 cm) by 12 in. (30.5 cm) area, and there shall be only one other blister within 3 ft (0.91 m) of this area.
 - (3) Repair Method – no repair authorized.

e). Lumps

- i). A lump is a blister without a void, consisting of solid material. Lumps of the indicated sizes will be permitted as follows and shall be repaired as indicated:
 - (1) Maximum Size – 0.030 in. (0.8 mm) height, 0.80 in.² (5.2 cm²) area with longest dimension of 2 in. (51 mm).
 - (2) Maximum Population – 3 lumps in a 12 in. (30.5 cm) by 12 in. (30.5 cm) area, and there shall be only one other lump within 3 ft (0.91 m) of this area.
 - (3) Repair Method – no repair required.

f). Holes

- i). A hole is a defect, which is 100% through the material. Holes of any size or population will not be permitted nor shall holes be repaired.

g). Thin Area

- i). A thin area is a defect where the sheet is below thickness locally. Thin areas of the indicated sizes will be permitted as follows and shall be repaired as indicated:
 - (1) Maximum Size – 0.030 in. (0.8 mm) deep at the lowest point, 3 in.² (19.4 cm²) area with the longest dimension of 5 in. (127 mm).
 - (2) Maximum Population – one thin area in a 40 in. (1 m) by 40 in. (1 m) area, and there shall not be another thin area within 3 ft (0.91 m) of this area.
 - (3) Repair Method – rub with #00 steel wool to blend this area into the normal thickness material and then buff to a normal surface finish.

h). Color and Marbling Distribution

- i). Tolerances for color and marbling variation shall be submitted to Amtrak for approval during preliminary design review. If the base coloring is not within 5% between production runs, or the marbling is not consistent over the entire surface, the roll shall be rejected.
- ii). Additives should provide UV resistance to prevent fading or discoloration from sunlight exposure through windows. Pigments must withstand cleaning chemicals without bleeding or loss of color.

19.13 Paneling

a). Plymetal

- i). The term "plymetal" as used in this Specification covers metal-faced plywood and shall conform to the following requirements when tested per ASTM D2718 and ASTM D3930:

Test Conditions	Minimum Metal to Wood Average Shear Value (or 80% Wood Failure)
Dry shear	250 lbf/in. ² (1.7 MPa*)
Boil shear, 3-hour boil, tested wet at room temperature	150 lbf/in. ² (1 MPa) – Flat, non-textured sheet 60 lbf/in. ² (0.4 MPa) – Textured sheet
Soak shear, 48-hour soak wet at room temperature	150 lbf/in. ² (1 MPa) – Flat, non-textured sheet 60 lbf/in. ² (0.4 MPa) – Textured sheet
Creep or cold flow, under static load for 48 hours, at room temperature	250 lbf/in. ² (1.7 MPa)
* MPa = Megapascal	

- ii). Plymetal that is faced with melamine shall have the melamine bonded to the metal sheet in accordance with this Specification, and the melamine-faced metal sheet shall then be laminated to the plywood core in accordance with this Chapter. Melamine shall be pressure bonded to marine grade plywood using industry approved adhesives. No contact bonding of melamine to plywood is permitted. The term "cored panels" means honeycomb panels bonded to melamine or to metal faced hardboard (similar to Metalcomb, as marketed by Cored Panels, Inc., Farmingdale, New York). Such panels must comply with United States Department of Agriculture Forest Products Laboratory Report No. 1937, Shear-Fatigue Properties of Various Sandwich Construction.
- iii). All exposed edges of the panels shall be covered in a fireproof manner.
- iv). Plymetal prohibited for use in flooring.

b). Plywood

- i). All plywood shall be manufactured to conform to the requirements of NIST PS 1, and then stored under cover. All plywood panels shall be formed from one piece and shall be sealed with two coats of epoxy paint on all edges and cutouts as soon as possible after fabrication. All exposed edges of the panels; joints between panels, fastener heads and openings of panels used in areas accessible to moisture shall be waterproofed and sealed in accordance with MIL-P-8053, paragraph 3.4, prior to installation in the car.

c). Honeycomb Panels

- i). The term "honeycomb panels" as used in this Specification refers to an assembly of honeycomb material bonded to melamine-faced metal panels or to metal panels. Aluminum honeycomb core material shall be commercial-grade meeting the requirements of MIL-C-7438G per AMSA-81596 and shall

CONFIDENTIAL — DO NOT DISTRIBUTE

meet the requirements of AMS-C-7438. Bonding shall be sufficient to develop the full strength of the honeycomb material. Stainless steel honeycomb panels shall be constructed in accordance with the requirements of MSFC-SPEC-445. The adhesive bond strength of the honeycomb core to the stainless-steel face shall not be less than 15 lb/in. (2.68 kg/cm) climbing drum strength when tested in accordance with SAE-AMS-STD-401. The adhesive bond strength of the integral stainless frame to stainless steel face shall not be less than 30 lb/in (13.6 kg/2.5 cm) climbing drum strength when tested in accordance with SAE- AMS-STD-401. Stainless steel honeycomb panels shall be tested in accordance with SAE-AMS-STD-401 to demonstrate the following requirements. Test results shall be subject to Amtrak review and approval.

- (1) Core shear yield at 200°F (93°C) 250 lbf/in.² [1.72 Megapascal (MPa)]
- (2) Flatwise tension at 200°F (93°C) 250 lbf/in.² (1.72 MPa)
- (3) Beam flexure at 200°F (93°C) 75,000 lbf/in.² (517.13 MPa)
- (4) Core shear fatigue at R.T. 150 lbf/in.² @ 10⁶ cycles (1.03 MPa)
- (5) Flatwise tension at R.T. 250 lbf/in.² @ 10⁶ cycles (1.72 MPa)
- (6) Beam flexure at R.T. 50,000 lbf/in.² @ 10⁶ cycles (344.75 MPa)

- ii). Honeycomb panels meet the relevant flammability and smoke emission requirements. Results shall be subject to Amtrak review and approval. No other honeycomb materials will be permitted.

d). Melamine-Faced Aluminum

- i). Melamine-faced aluminum panels shall be constructed by laminating melamine to aluminum sheets as follows: The melamine impregnated papers shall be directly molded to the aluminum sheets at temperatures of no less than 270°F (132°C) and pressure no less than 1000 psi (6.9 MPa). The surface characteristics, after manufacture, shall be no less than that required of type GP (General Purpose) in the NEMA Standards Publication No. LD-3. The melamine and the required binder sheets shall be 0.020.
- ii). ± 0.005 in. (0.51 ± 0.13 mm) thick. The aluminum sheets shall not be less than 0.025 in. (0.64 mm) in thickness when used as a facing on plywood. The aluminum sheets shall not be less than 0.081 in. (2.1 mm) in thickness when not laminated to a substrate such as plywood. Aluminum sheets shall be properly cleaned by etching, sanding or other approved process to ensure full, permanent, acceptable adhesion.
- iii). The use of any adhesives to bond the melamine sheets to the aluminum backing will not be acceptable. The bond between the melamine and aluminum sheets shall, as a minimum, meet the following requirements:

ASTM D952 Internal Bond	2,600 lbf/in. ² (17.9 MPa)
ASTM D790 Flexural Strength - (S)	with grain: 26,500 lbf/ in. ² (183 MPa) crossgrain: 25,300 lbf/ in. ² (174 MPa)
ASTM D790 Modulus of Elasticity - (E)	with grain: 2.8 x 10 ⁶ lbf/ in. ² (19.3 GPa) crossgrain: 3.1 x 10 ⁶ lbf/ in. ² (21.4 GPa)
ASTM D638-08 Tensile strength	with grain: 22,300 lbf/ in. ² (154 MPa) crossgrain: 20,300 lbf/ in. ² (140 MPa)

e). Melamine Panels

- i). Unbacked melamine panels may be used in the vehicle interior. The panels shall be a minimum of 0.125
- ii). ± 0.005 in. (3.2 ± 0.1 mm) thick. The surface characteristics shall be no less than that required of type GP (General Purpose) in the NEMA Standards Publication No. LD-3. Sidewall panels shall be of unbalanced melamine. However, ceiling panels located under air ducts must be balanced melamine to prevent warpage from duct condensation.

f). Phenolic Composite Floor Panels

- i). Phenolic composite floor panels shall be designed to withstand the following physical requirements with no visible or audible indications of delamination of the panel skin from the core and permanent deformation of the top surface shall be less than 0.010 in. (0.25 mm) unless otherwise specified. There shall be no puncture or damage to fibers of the top surface. There shall be no separation of any internal core from the top or bottom skin. There shall be no fracture of the balsa core.
 - (1) Indentation Resistance – The floor panel shall withstand a concentrated load of 300 lbs. (136 kg) applied to a test dowel that has an overall 0.375-sq in.² (242 sq. mm²) surface area, with a 0.0625- in. (1.6 mm) radius on bottom edge of test dowel.
 - (2) Static Load Test – Average Loading – A representative sample section of the flooring (without rubber floor covering attached) shall be supported on beams spaced at the maximum spacing used on the car using production bonding and fastening techniques. A uniformly distributed load in accordance with the crush loading requirements of Chapter 2 shall be applied to both sides of the joint (butt and/or shiplap). There shall be less than 0.088-in. (2.2 mm) deflection.
 - (3) Static Load Test – Maximum Loading – Using the identical floor panel-mounting configuration as described above, a uniformly distributed load


of 200 lb/ft² (976 kg/m²) shall be applied to both sides of the joint (butt or shiplap).

- (4) Small Area Static Load Test – Using the identical floor panel mounting configuration as described above, a 300 lb (136 kg) load shall be applied to a 1.0 in. (25.4 mm) by 3.0 in (76 mm) contact area directly over the midspan, 6 in. (152 mm) from the outer car body sidewall edge. The footprint shall be machined flat within 0.010 in. (0.24 mm) and the edges shall have a radius of not more than
- (5) 0.125 in. (3.17 mm) – There shall be less than 0.200 in. (5.08 mm) deflection as a result of the load applied.
- (6) Small Object Impact Test – Using the identical floor panel mounting configuration as described above, a 16 lbs. (7.26 kg) standard bowling ball shall be raised directly over the mid-span, 24 in. (610 mm) from the edge of the panel and dropped from height of 60 in. (1500 mm). Permanent deformation of the top surface shall be less than 0.0625 in. (1.587 mm).
- (7) Large Object Impact Test – Using the identical floor panel mounting configuration as described above, a 150 lb (68 kg) load shall be dropped upon a 3.0 in. (76 mm) by 8.0 in. (200 mm) contact “footprint” pad located directly over the midspan, 24 in. (610 mm) from the edge of the panel and dropped from a height of 12 in. (305 mm). The “footprint” pad shall have a rubber pad on the downside surface with a Shore D 70 minimum, at a 1.00 in. (25.4 mm) thickness machined flat within 0.060 in. (1.524 mm) with edges having a radius of not more than 0.030 in. (0.762 mm). Permanent deformation of the top surface shall be less than 0.030 in. (0.762 mm). Some damage to the top phenolic composite skin will be allowed.
- (8) Rolling Load Test – Using the identical floor panel mounting configuration as described above, a four-wheel cart with a load of 200 lbs. (91 kg) per wheel shall be rolled on the panels laterally, longitudinally and in a circular path 24 in. (610 mm) radius. The wheels shall be 3 in. (75 mm) in diameter, 1 in. (25.4 mm) wide with a 0.125 in. (3 mm) radius on each edge with a Shore A durometer of 80.
- (9) Flammability and Smoke Emission Tests – Floor panels meet the relevant flammability and smoke emission requirements.

g). Acoustic Wood Paneling

- i). Acoustic wood paneling provides a premium experience in the luxury suite, mitigating the high volume of auditory disturbance experienced within the train. The acoustic dampening properties combined with the real wood veneers elevate this space to a luxury choice, reflecting the on-cost of ticket purchase and manufacture.
- ii). Acoustic wood paneling structure should be made up of:

- (1) Real wood decorative surface with an FR treatment (matching the wood used across the train)
 - (2) Laminated onto 16 mm MDF substrate (natural color)
 - (3) Balancing + black 100% PET felt paneling.
- iii). Design details of spacing will be determined during design reviews.
- iv). The material shall meet all flammability, smoke and toxicity requirements of this specification.
- v). All wood must be FSC certified, backing materials will be comprised of recycled materials.
- vi). Acoustic Performance
 - (1) The panels shall demonstrate sound absorption coefficients (α_w) of at least 0.95, determined through accredited lab testing in accordance with ISO standards.
 - (2) Absorption values for common frequency ranges shall meet or exceed specified targets.
- vii). Panel thickness shall be approximately 16-18mm. Weight shall be kept to a minimum while maintaining acoustic performance and durability.
- viii). The panels shall stand up to common impacts and surface wear. Their decorative finish shall resist scratching, abrasion, and scuffing. Panels shall be repairable if damaged.
- h). Real Wood Laminate
 - i). The laminate shall have a decorative real wood veneer surface with a satin finish, protected with a Tedlar Cap layer.
 - ii). The material shall meet all flammability, smoke and toxicity requirements of this specification.
 - iii). The laminate shall utilize FSC certified wood from responsibly managed forests. Adhesives and resins shall have low VOC content, per 40CFR59 Subpart C. It shall be recyclable at end of life.
 - iv). The application of the Tedlar cap will provide good abrasion, chemical and UV resistance to the material.

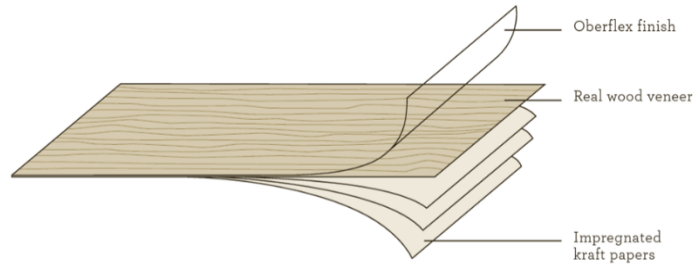

19.14 Woven Fabrics

- a). The texture of fabrics on trains should be soft and comfortable to the touch, while also being durable and easy to clean. Woven fabrics for Amtrak cars must be breathable, moisture-wicking, temperature regulating, and comfortable to the touch. A composition of 60% Wool and 40% cotton is recommended to provide breathable, moisture wicking and natural antibacterial properties.
- b). Sustainability
 - i). All raw materials should be sourced from suppliers who adhere to ethical and sustainable practices.
 - ii). Natural materials should be sourced organically, while synthetic materials should be made from recycled or renewable sources.
 - iii). Where possible OEM and suppliers should prioritize non dyed coloring to minimize processing and impact on the environment.
- c). Fabrics must be fire-resistant, passing NFPA-130 seat upholstery, BSS 7239 FAR 25.853 (a) Appendix F, part 1. FR should not be affected by when exposed to liquids or conventional cleaning methods (wet shampooing or dry cleaning).
- d). Woven fabrics must pass the abrasion ASTM D3884 test, passing <50% wear with 150 cycles of wear with a CS-10 wheel under a 1000 gram load. Tear resistance is defined by ASTM D2261 by applying a force of 15 lbf to a tear in the material in both the warp and fill directions. The test passes if the material does not tear completely in either direction.
- e). Burst/puncture resistance is defined by FTMS 191A Method 5122 and tested by applying a force of 200 lbf to the material. The test passes if the material does not burst or puncture under the applied force.
- f). Anti stain treatment should be applied to ensure longevity and cleanability.
- g). Dyes and finishing treatments must ensure UV resistance and color fastness.

19.15 Non-Woven Fabrics

- a). Microfibre Cloth
 - i). The faux suede fabric shall have a soft, plush, supple texture and handle. It shall be made from a non-woven structure of fine microfibers to ensure it is

CONFIDENTIAL — DO NOT DISTRIBUTE

lightweight, draping, stain resistant, and exceptionally durable. The composition should be made up of the following layers, totaling a minimum weight of 27 ounces per linear yard:

- (1) FACE: 100% recycled polyester microfiber 0,15d
- (2) INNER SCRIM: 100% recycled polyester 150d
- (3) BACKING: 10% recycled polyester microfiber 0,15d and 90% polyester FR 0,50d

- ii). Sustainability – As above, the composition of the cloth should come from predominantly recycled polyester with >60% over the finished article.
- iii). The fabric shall meet all flammability, smoke and toxicity requirements of this specification.
- iv). The fabric shall have a thickness of 1.2mm +/- 20% and demonstrate breathability.
- v). The fabric shall withstand 200,000 double rubs per Wyzenbeek method and have a minimum breaking strength of 115 lbs. warp and 118 lbs. fill per ASTM D5034. It shall be resistant to sagging, crocking, pilling, and shrinking. The fabric shall be spot cleanable and machine washable for easy maintenance. It shall achieve grade 4.5 minimum for colorfastness to light and crocking per AATCC 16.3 and 8.

b). Acoustic Felt

- i). Acoustic felt should be made up of 90% wool and 10% Nylon or 100 percent Trevera.
- ii). Acoustic felt shall meet the same performance characteristics as microfiber.
- iii). The fabric shall meet all flammability, smoke and toxicity requirements of this specification.

19.16 Seat Cushion and Upholstery

a). Cushion Material

- i). The bottom seat cushion shall be molded polyurethane foam with an approved fire barrier material or silicone. It shall meet Amtrak Specification 665 or be otherwise approved by Amtrak. Indentation Force Deflection (IFD) measured at 25% compression of 50 ± 5 lbs., 3.5 ± 0.4 lbs./cubic ft. density with a support factor of 2.1 min or be otherwise approved by Amtrak.
- ii). The back cushion shall be molded polyurethane foam meeting Amtrak Specification 665 or be otherwise approved by Amtrak.
- iii). IFD measured at 25% compression of 33 ± 3 lbs., 3.1 ± 0.3 lbs./cubic ft. density with a support factor of 2.1 min. or be otherwise approved by Amtrak.

- iv). The Engineer's and Assistant's seat in the Engineer's cab shall be silicone or a molded polyurethane foam with an approved fire barrier material.
- v). Approved fire barrier fabrics are Tex Tech Industries TTI 8174 and DuPont Nomex 17253. Alternative fire barrier materials will be considered. Approval is contingent upon submittal of the following tests to Amtrak's Industrial Design group for review and written approval.

Test Identification	Test Description	Test Pass/Fail Criteria
ASTM D3884 (CS-10 wheel, 1000 gm wt.)	Abrasion Resistance	150 cycles @ 50% wear through
ASTM D2261	Tear Resistance	15 lbf (in both the warp and fill directions)
FTMS 191A Method 5122	Burst/Puncture Resistance	200 lbf

b). Lamination

- i). All visible surfaces must be made from a tri-laminate panels. The laminate is a heat set polymer web adhesive (Min 0.9 OZ/SQ YD) that allows the fabric to bend and breathe easily. The durability of the laminate is a key performance requirement for Amtrak and each vendor submitting a bid must be able to demonstrate that they have at least two years of experience in manufacturing laminated textile panels, they have a quality control system to ensure repeatable performance, and their lamination panels have been tested under jounce and squirm conditions to 100,000 cycles with no visible delamination, puckering, crack marks, bubbles, or blisters. Tests must be conducted to Daimler Chrysler Test Specification PF-10254 Change A, S6.4 Jounce and Squirm or approved equivalent. Additionally, the laminate must meet the 12 second vertical burn flammability requirements of 14 CFR Part 25.853(a) Appendix F, Part I(1)(a)(ii) as defined in FRA 238.103 appendix B.
- ii). Alternate materials may be suggested and must be submitted to Amtrak Industrial Design for initial approval.

c). Synthetic Leather

- i). The grain of synthetic leather shall complement traditional top grain leather.
 - (1) It shall be a soft organic texture which shall approximate a top grain finish but without an animal hide appearance.
- ii). The synthetic leather shall have a weight of approximately 410 Grams Per Square Meter and a thickness of approximately 1.15 Millimeters.
- iii). Synthetic leathers should be comfortable and sustainable over the product lifetime, both in their material composition and longevity.

- (1) All synthetic leathers should be primarily bio-based and where possible sourced from agricultural waste as opposed to potential food sources.
- iv). Backcloths to be 100% bio-based, constructed of rayon along with a bio-based PU layer, achieving an overall bio-based content of >60%.
- v). Requirements

Test Identification	Test Identification	Test Pass/Fail Criteria
ASTM D-3884	Abrasion	1000 cycles, 500g H-18 wheels. No wear through
AATCC 8	Colorfastness	Dry/Wet grade 5
ASTM D-4705	Stitch tear strength	23.85 lbf. Warp/Weft average
ASTM D-4157		300,000 Double Rubs
ASTM D-2261	Tear strength	

- vi). Synthetic leather shall have the cushioning foam laminated to the back to achieve a soft feel.
- vii). Material must meet the flammability, smoke and toxicity requirements of this specification.
- viii). Color Accuracy
 - (1) The color differences between any measured production component and the accepted color sample for that component shall be less than ± 1 dE.
- d). Top Grain Leather
 - i). All upholstery leather applications shall have a top-grain finish, ensuring a consistent color and texture devoid of any defects or imperfections. The thickness of the hide will be between 1.0 and 1.2 mm. Leather strap applications must use belting leather at a thickness of 2.8-3.2 mm.
 - ii). Leather should be sourced from suppliers who adhere to ethical and sustainable practices (i.e. minimize impact on water scarcity, run on renewable energy, reuse of waste material, etc.). The tanning process used to treat the leather should also be environmentally friendly.
 - iii). The leather must comply with smoke, toxicity, and flammability requirements of this specification.
 - iv). The leather should offer a superior and comfortable seating experience for passengers, with excellent breathability to ensure comfort during long journeys. It should withstand 60,000 cycles on the BS EN ISO 5402-1 (Flexometer Method) without cracking of the finish.

- v). The color differences between any measured production component and the accepted color sample for that component shall be less than ± 1 dE.
- vi). Durability and Maintenance
 - (1) The leather must exhibit resistance to regular wear and tear, as well as fading when exposed to sunlight. It should pass a 72-hour UV light exposure test with a score of 4 or better on the AATCC greyscale for color change.
 - (2) The leather should also have anti-stain treatments and anti-soiling properties to ensure easy cleaning and maintenance.
 - (3) The leather's color fastness will be tested according to ASTM D5053 (50 cycles wet & dry), and it must achieve a score of 4 or better on the AATCC greyscale for color change. The following standards must be met:
 - (a) Flex ASTM D 2097: 70,000 Flexes
 - (b) Elongation: ASTM D 2211: 30-50% at 50lb
 - (c) Slit Tear ASTM 2212: 15lb
 - (d) Tear strength: ASTM D 4705: 40 lb
 - (e) Abrasion ASTM D 7255: 4000+ cycles (CS-10 wheels), 300+ cycles (H-18 wheels)

19.17 Carpet

- a). All carpets shall meet all flammability, smoke and toxicity requirements of this specification.
- b). The carpets should be easily maintained with regular vacuums and cleaning products. The final construction of all carpets should work towards durability without significant wear for 8 years + Anti stain.
- c). Wherever possible suppliers should use non-dyed yarns to minimize processing and use of dye, by utilizing naturally occurring colors such as natural whites, light and dark greys. All polyamide (PA) to be Econyl® 100% recycled material.
- d). Location and process for implementing seams must be implemented for approval.
- e). All seaming plans must be submitted for Amtrak acceptance.
- f). High Traffic Areas
 - i). Carpets for use in corridors, aisles and any other high traffic areas should be highly durable and easy to traverse with a suitcase, food cart or wheelchair.
 - ii). Quality and Composition

- (1) Four colors: Yarn dyed carpet with a square woven, level loop pile construction, 100% PA Econyl®, with a low pile height (approximately 0.106 inches). Total weight
 - (2) 49.95 oz. Per yd². Backing material to be 100% synthetic yarns, from recycled feedstock where possible.
- iii). The carpet should be installed directly on to the floor surface, without an additional underlay.
- g). Low Traffic Areas
 - i). These areas should have a luxurious feel and maintain a 'new' appearance over repeated use.
 - ii). Four color: Yarn dyed carpet with a square woven, level loop pile construction, high quality 90% wool, 10% PA Econyl®, with a medium pile height (approximately 0.177 inches). Backing material to be 100% synthetic yarns, from recycled feedstock where possible. To be used with an additional pad or underlay for comfort with a weight of 17.0 oz. Per yd².
 - iii). Total carpet weight minimum 66.5 oz. Per yd²
- h). The carpet will have a stain resistant chemical applied.
- i). The carpet will have a secondary, moisture resistant backing applied that will not delaminate. The thickness shall be nominally 0.09375 in. with a density of 18 lb/ft³, and a weight of 30 oz./yd². The compression resistance shall be 5 lb/in.
- j). The carpet shall be easily removable without extensive labor while eliminating the likelihood of damaging the floor paneling.
- k). Carpet adhesive shall be submitted to Amtrak for approval.
- l). Alternate carpet types may be submitted for review but must meet or exceed the performance requirements of this Chapter.

19.18 Counters

- a). All counter surfaces shall be made from Amtrak approved materials. All countertop material shall be made from FDA and NSF approved non-porous material.
- b). All stainless-steel countertops shall be made from type 304 stainless steel with a thickness of at least 14 gauge. Stainless steel countertops shall have a brushed satin finish. All seams shall be finished to match the counters brushed satin finish. Counters shall be built in a manner that do not flex, deform, rattle or "oil can".

19.19 Welding and Brazing

- a). Responsibility
 - i). The Contractor shall be responsible for the quality of all welding and brazing. All welders employed in the making of welds on structures or products built

under this Specification shall have been tested and qualified to determine their ability to operate the welding equipment to be used in making the types of welds required hereunder and to produce satisfactory welds therewith.

- ii). All welding practices shall be according to requirements of AWS D1.1, *Structural Welding Code – Steel*; AWS D1.2, *Structural Welding Code – Aluminum*; AWS D1.3, *Structural Welding Code – Sheet Steel*, AWS D1.6, *Structural Welding Code – Stainless Steel*, AWS D15.1 *Railroad Welding Specification for Cars and Locomotives*, and the AWS Handbook. AWS Standard D1.1 shall apply to steel of $\frac{1}{8}$ -in. and greater thickness, and AWS Standard D1.3 shall apply to steel less than 0.125 in. thickness. Requirements for cyclically loaded structures shall be applied. Cast steel welding shall be according to AWS D15.1 or ASTM A 488/488M, *Steel Castings, Welding, Qualification of Procedures and Personnel*. Resistance welding shall be in accordance with AWS D17.2/17.2M, *Specification for Resistance Welding in Aerospace Applications*. Laser welding, if used, shall comply with AWS C7.2, *Recommended Practices for Laser Beam Welding, Cutting, and Drilling*.
 - iii). All welding practices not specifically covered in this Chapter shall be in accordance with the applicable requirements and recommendations of the American Welding Society (AWS). Should the Contractor propose an alternate standard, it shall be subject to Amtrak's approval.
 - iv). All arc Welding Procedure Specifications (WPS) shall be fully qualified by the Contractor, accompanied by Procedure Qualification Records (PQR) containing welding test results, and subject to approval by Amtrak and a Certified Welding Inspector, welding engineer, or other individual qualified to review said documentation. The use of WPS qualified per AWS B2.1 shall not be permitted in their original form. WPS and PQR originally qualified per AWS B2.1 may be rewritten to conform to the requirements of the applicable structural welding code and used within the limitations of that code. Resistance welding schedule certifications and machine qualifications shall be submitted for review and approval by Amtrak along with the arc welding WPSs and PQRs.
 - v). Welders shall make only those welds for which they have been qualified according to the requirements of the applicable AWS code, ASTM A 488/488M, or other approved qualifying procedures. Records of welder qualification tests shall be made available for review.
- b). Test Welds
- i). Amtrak shall have the right to require an operator to make test welds to determine their ability to produce satisfactory welds of any given type. Amtrak shall also have the right to require the making of test welds to settle any question that shall arise as to the suitability of any welding method or procedure used during production. The recommendations of the AWS shall be followed in the making of tests and the settlement of other questions that may arise hereunder regarding welding practice.

- ii). Fatigue allowable stresses shall not exceed the lesser of fatigue limits in AWS D1.1, or 50% of the joint strength level calculated from ASME maximum allowable stress values. Higher values shall only be used if qualified by Contractor tests.
- c). Cleaning
 - i). Prior to welding, parts to be joined shall be properly cleaned of coatings and films such as rust, oxide, mill scale, oil, grease, corrosion products, and other foreign materials. Cleaning materials and processes shall be in accordance with applicable parts of Section 2, MIL-HDBK-132, *Protective Finishes*. Finished welds shall present a clean appearance.
- d). Welding Rod
 - i). All welding rod, wire, electrodes or filler metal; shall be chosen by the Contractor or subcontractor with respect to manufacturer, type and size necessary to achieve the highest quality work. The Contractor shall have full responsibility for the character of the work produced. It shall be purchased in packages which shall be marked with the Manufacturer's name and the specification, diameter, and net weight of the material.
 - ii). The material shall be stored in accordance with recommendations of the *AWS Structural Welding Code* so as to protect it from damage, and so that it shall be easily identified. Material shall be issued and handled in such a way as to prevent it from being mixed with that of another specification.
 - iii). The ferrite number for austenitic stainless-steel welds shall be between WRC4 and WRC10, or as proposed by the Contractor and approved by Amtrak.
 - iv). In case a question arises regarding the suitability of welding rod, wire, electrodes or filler metal, the provisions of AWS Standard D1.1/D1.1M shall govern.
- e). Control
 - i). Current, voltage, distance, flame, and other variables shall be so controlled as to give a smooth weld, free of gas pockets, oxide inclusions, variations in width and thickness, wandering and spattering.
- f). Penetration
 - i). Penetration of weld metal into the bottoms of angles and vees and fusion, shall be complete. Weld metal shall run into the base metal at the finished surface of the weld in a smooth curve approximately tangent to the surfaces of the base metal to avoid sudden change of section and resultant concentration of stress. Undercutting shall not exceed 10% of the thickness of the thinnest element, or 0.030 in., whichever is less.
- g). Warpage

- i). The method of depositing weld metal shall be chosen so as to minimize warpage and locked-up stresses. Tack welding, skip welding, offset welding and other comparable procedures shall be used for this purpose.
- h). Intermittent Weld Spacing
 - i). Intermittent fusion-weld spacing pitch shall not exceed 5 in. for 2-in. (minimum) weld lengths, such that a minimum weld length of 40% of the overall joint length is achieved. Exceptions may be granted, for example to avoid warpage in thin sheet, where the design exhibits sufficient strength with welds applied on larger spacing, subject to Amtrak review and approval.
- i). Fusion Welding
 - i). Manual fusion welding by the gas process may only be used on sheets more than 3/32 in. (2.38 mm) in thickness. Any other application of this process must be approved by Amtrak.
- j). Resistance Welding
 - i). Resistance welding shall be in accordance with AWS Standard D17.2/D17.2M Class B for structural applications and Class C for non-structural applications. Production witness testing requirements shall be followed unless specifically waived or modified by Amtrak in writing.
 - ii). Stainless steel parts shall be joined, insofar as possible, by resistance welding. Procedures shall employ accurate control of current, time, electrode size and shape, and tip force, to produce uniform welds of specified strength which shall not be subject to surface corrosion. Resistance welds in materials other than austenitic stainless steel shall be arranged to avoid tension or "peeling" forces on the welds under any anticipated loading condition.
 - iii). Spacing of resistance and spot welds shall be appropriate to the design. Spacing shall not exceed 2 in. plus twice the weld nugget diameter for any structural application, including car body side sheets. For any corrugation application, if the pitch of the corrugation nodes does not allow the above weld spacing, there shall be two spot welds between each node.
 - iv). Surface indentation shall not exceed 20% of material thickness (t) or 0.01 in., whichever is greater. However, for exterior resistance-welded areas exposed to passenger view, indentation shall not exceed 10% of material thickness or 0.005 in., whichever is greater. For exposed welds, the Contractor shall vary welding parameters and conditions within their acceptable ranges to minimize indentations. Surface burn and discoloration shall be removed by chemical cleaning, or an approved equal method, and sanding or polishing to match the surrounding surface.
- k). Special Welding
 - i). Procedures for structural welding of stainless steel to HSLA, or other combinations of metals or conditions not covered by AWS specifications or

codes, shall be submitted for approval. Welding PQRs for these dissimilar welds shall include a Vickers microhardness traverse spanning both base metals, the weld metal and both Heat Affected Zones (HAZ) and shall demonstrate that the hardness does not exceed 400 HV.

- ii). Austenitic stainless steel electrodes or wire specifically intended for welding of dissimilar metals, such as 309L or 312L, shall be used to join carbon or HSLA steels to stainless steels.
- iii). For the application of welding processes not addressed in other parts of this specification, the Contractor shall submit equipment qualifications, procedure qualification records, and welding procedure specifications either conforming to identified industry standards or consistent with the approach of AWS Standard D17.2/17.2M, *Specification for Resistance Welding in Aerospace Applications*.
- iv). Standards that may apply to selected processes include:
 - (1) AWS Standard D17.3/D17.3M, *Specification for Friction Stir Welding of Aluminum Alloys for Aerospace Applications*.
 - (2) ANSI/AWS Standard C7.2, *Recommended Practices for Laser Beam Welding, Cutting, and Drilling*.
 - (3) ANSI/AWS Standard C7.4/C7.4M, *Process Specification and Operator for Laser Beam Welding*.
 - (4) ISO/DIS Standard 15609-4, *Specification and Qualification of Welding Procedures for Metallic Materials - Welding Procedure Specification - Part 4: Laser Beam Welding*.
- v). Galvanized steel shall not be welded to stainless steel. Brazing shall not be used to join stainless steel to either stainless steel or to any other metals.
- l). Toughness of Welded Assemblies
 - i). The Contractor shall prove all welded steel structures are above the ductile-brittle transition temperature for the specified environmental exposure. Specifically, the weld Heat-Affected Zone (HAZ) and base metal shall resist service impact loads at the lowest specified operating temperature without brittle failure. If the Contractor's approved design does not require greater toughness, the minimum impact value for Charpy V-Notch (CVN) specimens shall be 20 ft-lbf of absorbed energy at the lowest specified operating temperature. CVN test results shall be submitted along with Procedure Qualification Records (PQRs) for all structural steel welding procedure specification (WPS) qualifications.
- m). Torch Brazing
 - i). All brazing, characterized by heating above 840°F, shall follow the recommendations contained in the AWS *Welding Handbook*, Volume 2. Procedures and personnel who do brazing work shall be qualified in

accordance with AWS Standard B2.2, *Standard for Brazing Procedure and Performance Qualification*.

n). Torch Soldering

- i). All structural (not electrical) soldering, characterized by heating below 840°F, shall follow the recommendations contained in the AWS *Welding Handbook*, Volume 2. Procedures and personnel who do torch soldering shall be qualified in accordance with AWS Standard B2.3/B2.3M, *Specification for Soldering Procedure and Performance Qualification*.

19.20 Exterior Marking Films and Graphics

a). General

- i). Graphics shall be transportation grade materials, printed on opaque background with clear, vandal resistant overlayment. All graphics materials are to be approved by Amtrak. Application techniques shall be in accordance with manufacturer's recommendations.

b). Physical Properties

- i). Shall be able to withstand long-term exposure to all environmental and operating conditions specified in Amtrak Specification 963.
- ii). Lettering film shall be sufficiently opaque so that, when applied, films shall completely hide any contrasting background and shall be readily legible.
- iii). There shall be an initial 60-degree gloss value of 40 when tested in accordance with ASTM Standard D523-08.
- iv). Films shall retain adhesive properties after one week of continuous exposure to a temperature of 66°C (150°F).
- v). Films shall be able to conform to moderate contours of the vehicle's interior and exterior surfaces at locations where decals are to be applied.
- vi). Overall thickness of processed film shall be between 0.10 mm and 0.20 mm (0.004 and 0.008 in.).
- vii). Films shall withstand immersion in either distilled water or SAE No. 20 motor oil for 24 hours at temperatures from 21°C to 32°C (70°F to 90°F) without any appreciable degradation in adhesion, color or general appearance.
- viii). Marking films shall withstand effects of detergents and brushes used in vehicle washing procedures for removal of graffiti.
- ix). Films shall use a removable grade adhesive that upon removal does not require use of solvents or secondary operations.
- x). Square or rectangular graphics shall have rounded corners of suitable radius.

19.21 Paints and Coatings

a). Materials and General Requirements

- i). Painting of the car shall serve to protect the vehicle from corrosion.
- ii). Paint is prohibited on the interior of the car at customer facing areas, unless otherwise approved by Amtrak on a case-by-case basis.
- iii). Paint coatings should also assist in the overall maintenance of the vehicle by providing easy to clean surfaces. The vehicle must be fully and properly coated to achieve its service life with regular maintenance intervals. Interior surfaces shall in general not be painted, with specific approval being required during Design Review.
- iv). The surface preparation, primer, paint, and graphics applications shall ensure that the car can operate at least eight years between major exterior finish repairs or replacement.
- v). Preparation of the painted surface and application of painting materials for brushing or spraying shall be in accordance with the paint supplier's recommendations. Each coat shall be uniformly applied over all surfaces to be covered, and shall be free from runs, sags, or other application defects.

b). Paint Process Documentation

- i). The Contractor shall prepare a paint coating and application document containing procedures for surface cleaning and preparation, priming, surfacing, repairing, and painting for the car body and all equipment that is painted or powder coated.
 - (1) A detailed paint schedule showing the equipment painted, paint type and manufacturers, recommended thickness, and other pertinent information shall also be included.
 - (2) The document shall meet Amtrak Specifications 353 and 354.
 - (3) This document shall be submitted during IDR and FDR and shall be included in the maintenance manuals. **[CDRL 19-06]**

c). Painting Restrictions

- i). Any equipment or parts of equipment which would be damaged or suffer impaired operation from painting shall not be painted and shall be corrosion resistant.
- ii). The following items shall not be painted:
 - (1) Wire and cable
 - (2) Copper tubing, piping, and fittings
 - (3) Conduit and fittings

- (4) Heat transfer surfaces
 - (5) Grounding pads and straps
 - (6) Wheels
 - (7) Axles
 - (8) Brake rotors
 - (9) Brake shoes and pads
 - (10) Air hoses
 - (11) Pedestal liners
 - (12) Elastomeric parts
 - (13) Grease fittings
 - (14) Linkages
 - (15) Threaded parts used for adjustments
 - (16) Electrical equipment
 - (17) Couplers, drawbars, draft gears, and yokes
 - (18) Wearing surfaces
 - (19) Corrosion Protection
 - (20) Stainless steel carbody
- d). Color Accuracy
- i). The color differences between any measured production component and the accepted color sample for that component shall be less than ± 1 dE.
- e). Corrosion Protection
- i). Concealed surfaces capable of rusting or oxidation shall be properly cleaned, then primed with a rust inhibiting paint, and painted with an approved finish coat of paint.
 - ii). All exposed surfaces shall be suitably finished to prevent corrosion during storage and operation, in accordance with the following requirements:
 - (1) Areas exposed to dirt shall be designed to minimize retention of dirt and moisture, and sections that may retain moisture or dirt shall be provided with adequate drainage and ventilation and shall be accessible for cleaning. Under-pans or covers, suitable sealed, may be used where applicable to protect underframe sections.

- (2) Joints and crevices shall be sealed with a polysulphide, butyl rubber, or equivalent sealant which is resistant to the operating environment, shall not absorb moisture and shall remain resilient and maintain its sealing properties for the life of the vehicle.
- (3) Metal surfaces shall be treated with surface preparation and primer materials specific for the metal with due consideration for the severity of exposure to which the surface is subjected.
- (4) Any corrosion protection removed for welding shall be replaced after welding is completed.
- (5) Where arc welding is performed on joints between stainless steel and other materials.

19.22 Powder Coating

- a). Powder coating shall have a smooth flow and uniform appearance with a particle size of <100 µm, and film thickness of 60 µm - 80 µm. For durability finished thickness will be between 1.5 and 2.5 mm.
- b). Where like-anodize is specified. The powder coating shall have a silk gloss (satin) finish resembling anodized aluminum. Gloss level 65-85 R'/60°.
- c). The powder coating shall be formulated to minimize environmental impact. VOC content shall be less than 5 g/L. Waste powder shall be recyclable and reusable.

19.23 Durability and Maintenance

- a). The coating shall exhibit anti-graffiti properties and excellent weather resistance, achieving over 50% gloss retention after 3 years Florida exposure per ISO 2810.
- b). It shall pass 1000 hours xenon arc exposure with over 90% gloss retention per ISO 16474-2.
- c). The coating shall show no infiltration or blistering after 1000 hours condensation water exposure and acetic acid salt spray testing per ISO 6270-2 and ISO 9227.
- d). It shall demonstrate good hardness and flexibility, passing cross-hatch adhesion, impact, cupping, and bending tests per ISO 2409, 2794, 1520, and 1519. The coating shall allow mortar residue to be removed after 24 hours per ASTM D3260.

19.24 Insulation

- a). Acoustical Insulation
 - i). To reduce movement, structurally borne sound, and noise generated by the vibration of the roof, floor and side sheets, panels, air conditioning ducts and other metal surfaces, in particular the doors, damping material shall be applied to the inner side of these surfaces (exterior of the HVAC ducts).
 - ii). Korfund Vibrodamper Compound, Aquaplas DL-10-HV or Amtrak approved equal shall be applied to the interior of the complete structural car shell

including the roof, sides, floor, ends, webs of all posts, carlines, floor beams and other structural elements; however, if acoustic requirements can be fulfilled by car shell design (e.g., local stiffness) then a partial application of the compound would be sufficient.

- iii). The material shall not contain any asbestos and shall meet the flammability and smoke emission requirements of Chapter 19.19. Application of this damping compound and the surfaces to which it shall be applied shall be in accordance with recommendations of the manufacturer of the compound. The thickness of the damping material shall be such that acoustic requirements are fulfilled.

b). Thermal Insulation

- i). The roof, sides, under floor, and ends of the vehicles, including the inside faces of posts and structural members shall be fully insulated. The density, thickness and type insulation shall be determined by U value requirements established by the HVAC calculations and shall be in accordance with the requirements of these Technical Provisions.

- ii). General

- (1) Insulation materials shall be rigid, nonrigid or spray-on type. Materials shall be non-absorptive of fluids and gases, self-extinguishing, and vermin-proof, and shall have the required properties to meet the noise, vibration and heat loss limits as specified herein.
- (2) All materials shall be graded and labeled as standard with the recognized industry associations or societies. Labels shall be permanently affixed to, or imprinted on, the packages or containers of the materials.

- iii). Installation

- (1) All insulation materials shall be installed in accordance with the Manufacturer's recommendations. Rigid and non-rigid preformed insulation shall be secured with mechanical fasteners or fire-resistant adhesive, or both. Spray-on insulation shall be applied over surfaces free from dirt, grease and other contaminants that might affect the adherence of the material. Parts subject to corrosion shall be given required protection prior to applying the insulation. The Contractor shall take care to avoid thermal shorts in the insulation as installed. Exposed insulation fibers is not allowed. The design should minimize the use of insulation tape.

- iv). Materials

- (1) The following materials are acceptable for use on the vehicle:
 - (a) Rigid insulation
 - (b) Glass fiber preformed board

- (c) Non-rigid Insulation
- (d) Spun glass fiber in flexible rolls or mineral wool batts
- v). Insulation Performance
 - (1) Insulation materials shall be certified to conform to the following requirements:

Property	ASTM Test Method	Requirement
Flame Resistance		
Glass Fiber Board	E162 E662	Flame spread 25 max Ds(4.0) – 100 max
Non-rigid Insulation	E162 E662	Flame spread 25 max Ds(4.0) – 100 max.
Spray-on Insulation	E162 E662	Flame spread 25 max Ds(4.0) – 100 max.
Vapor Barrier		
Rating	C353 Water Method	2.5 perm at 90°F [32°C] and 50% relative humidity
Note: A vapor transmission rate of one grain of water vapor per square foot per hour at a pressure difference of one inch of mercury is defined as one perm.		

- (2) The thermal conductivity of insulation materials shall be certified when tested in accordance with ASTM C177-04 or ASTM C518 at 75°F [24°C] mean temperature.
- (3) Insulation separated by a vapor barrier shall be used under the floor. The underfloor insulation shall be protected by stainless steel sheathing which shall seal the underside of the vehicle against water, dust and debris.
- (4) Floor insulation material shall be compatible with the material used at locations in the vehicle structure and shall not mold, rot, or sustain vermin.

19.25 Flammability and Smoke Emissions

- a). General
 - i). The vehicle and its components shall comply with the requirements of 49 CFR Part 238.103 Appendix B, NFPA 130 Chapter 8, and APTA Recommended Practice PR-PS-RP-005-00. Compliance of the materials with these requirements shall be fully documented with test reports and certificates. For test reports submitted from previously performed tests, the Contractor shall demonstrate that materials included in the test report are identical to the actual materials used on the construction of the vehicles. For

high-risk materials, test data from these reports shall be dated no more than five years old from the Contract award data and shall be submitted to Amtrak for approval. For low-risk materials, test date from these reports that are dated between five and 10 years old shall be accompanied by a letter from the manufacturer stating that the materials included in the test report are identical to the actual materials used in the construction of the vehicles. Materials deemed as low risk shall be approved by Amtrak.

- ii). There are instances where the Specification calls for use of specific materials, such as Lexan, when it is known that they do not meet all requirements of this Chapter. It is predetermined that use of materials defined by this Specification is acceptable.
 - iii). A Smoke, Flammability and Toxicity Matrix showing the total weight of each combustible material, where used, supplier's name, flammability and smoke emission test identity, test facility, test requirements, test results, nature and quantity of the products of combustion, and heating value in Btu/lb and Btu/hr shall be submitted by the Contractor during detailed design review. This table shall include all items including items which are/ have been waived from testing or are considered small items with associated waiver numbers listed for approved waivers. **[CDRL 19-07]**
 - iv). Maximum limits for smoke emission shall be determined using the smoke propagation mode which generates the most smoke.
 - v). Should the Contractor believe that the quantity of a particular material is such that it would not contribute significantly to a fire, the Contractor may request a waiver from testing for this material. The waiver shall be submitted in writing and shall include the total weight of the material to be used, the location and the distribution of the material in the vehicle, and any previous test reports available. Waivers shall be accompanied by proper justification and will be reviewed on a case-by-case basis. The Contractor shall be responsible for complete conformance with these standards for itself and its subcontractors and suppliers. Amtrak may, at its discretion, require that the current batch of material being provided for this Contract be retested for conformance with these standards.
- b). Electrical Fire Safety
- i). Electrical equipment shall conform to NFPA Standard 130, Section 8-6, except where more restrictive requirements are imposed by this Specification.
- c). Combustible Content
- i). The design of the vehicle shall minimize the total combustible material content of the vehicle.
- d). Toxicity
- i). Those materials and products generally recognized to have highly toxic products of combustion shall not be used.

- ii). All materials used in the vehicle construction, except for materials used in small parts (such as knobs, rollers, fasteners, clips, grommets, and small electrical parts) that would not contribute significantly to fire propagation or to smoke or toxic gas generation, shall be tested for toxicity using Boeing Specification Support Standard BSS-7239. Materials shall meet the following maximum toxic gas release limits (ppm) as determined per BSS-7239.

Carbon Monoxide (CO)	3500 ppm
Hydrogen Fluoride (HF)	200 ppm
Nitrogen Dioxide (NO ₂)	100 ppm
Hydrogen Chloride (HCL)	500 ppm
Hydrogen Cyanide (HCN)	150 ppm
Sulfur Dioxide (SO ₂)	100 ppm

- iii). The tests shall be run in the flaming mode after 240 seconds using the NBS Smoke Density Chamber for sample combustion. The gas sampling may be conducted during the smoke density test. The test report shall indicate the maximum concentration (ppm) for each of the above gases at the specified sampling time. The Toxicity test data shall be included in the Smoke, Flammability and Toxicity Matrix.

19.26 Piping

a). General

- i). All piping shall be deburred and blown out after cutting or forming. After installation, the piping runs shall be cleaned using an approved method and procedure.
- ii). Piping shall be installed free of low spots to provide complete drainage away from control devices and to prevent damage by freezing. All piping shall be adequately clamped (clamps not welded to pipe) to prevent vibration, using an approved elastomeric tape between the clamp and the pipe. Copper tubing shall be sheathed at clamps or sheathed clamps shall be used. Piping through bulkheads or structure shall be positioned to avoid chafing by the use of clamping and/or grommets. Air and water lines shall be assembled to allow sufficient slope to permit gravity drainage.
- iii). All piping shall be installed using a minimum number of fittings. Unions shall be used only where necessary to permit replacement of apparatus. Hoses shall be provided with swivel type fittings to allow replacement without disturbing surrounding piping or apparatus. Steel braided hoses should be considered for connection of all faucets and small water heaters for ease of maintenance. Piping in storage or left open due to the installation shall be capped to prevent contamination.

b). Air Brake Piping and Fittings

- i). Air brake tubing and piping shall be of good commercial quality, free of burrs and scale.

- ii). Carbody air line which is 0.5 in. nominal and smaller, and in protected locations, shall be of seamless copper tubing, in accordance with Federal Specification WW-T-799F, Type "K", with wrought copper or cast brass sweat type fittings in accordance with ANSI Standards B16.22 and B16.18, or stainless steel. Fittings for stainless steel pipe shall be approved by Amtrak.
- iii). All air piping on trucks and carbody air lines larger than 0.5 in. nominal or where subjected to flying debris shall be black pipe conforming to ASTM Standard A53/A53M (schedule 80) with black malleable iron welded fittings, all painted the same as the underframe. Stainless steel pipe and welded stainless steel fittings may also be used where approved by Amtrak. Bends in piping shall utilize large bend radii whenever possible to prevent restriction to the free flow of air. Threaded fittings may be used only where approved on a case-by-case basis. Malleable iron street ells or close nipples shall not be used, except at brake valve exhaust ports.
- iv). Hoses shall be allowed where relative motions are expected such as coupler to carbody, truck to carbody, between truck components, vibrating equipment to its mounting base, and other applications as approved by Amtrak.
- v). Brake system piping shall be installed in accordance with the recommendations of AAR Standard S-400. Brake piping shall have no low spots (traps) or any 45° or 90° elbows that form "doglegs" in piping runs. The highest point in the Brake Pipe shall be the branch pipe connection to the brake control unit.
- vi). Any piping or tubing which could be disconnected during servicing (event recorder air manifold, etc.) shall be permanently labeled to enable the piping to be reconnected correctly when reassembled.
- vii). Flexible air lines utilized in toilet systems shall meet or exceed SAE J844.
- c). Air Conditioning and Refrigeration System Piping and Fittings
 - i). Air Conditioning refrigerant lines shall be of annealed seamless copper tubing meeting the requirements of either ASTM B 280 or ASTM B 88 Type K copper tubing and the requirements of ANSI Standard B16.22 shall be used for wrought copper sweat type fittings. This shall also apply to lines within supplier furnished apparatus except that finned tubing in evaporators and condensers need not be type K. Instead of elbows, tubing may be bent by means of a tubing bending tool. All tubing shall be deburred after cutting.
 - ii). Piping shall be routed to keep the amount of bends to a minimum. All inaccessible runs of tubing shall be without joints. All suction lines and those subject to sweating shall be insulated. If necessary to limit transmitted noise and vibration to the carbody or to protect the refrigerant compressor from external vibrations, vibration isolators shall be used in the piping connections to the refrigerant compressor.
 - iii). After fabrication, the system shall be cleared of all dirt and foreign matter using an approved procedure. The completed refrigeration system shall be

evacuated and charged with refrigerant using an Amtrak-approved procedure.

- iv). The discharge of condensate drains lines shall be directly to the roadbed avoiding car structure, electrical cables, and other undercar equipment.

d). Soldering of Piping and Fittings

- i). Copper air brake and refrigerant tubing lines shall be continuously purged with an inert gas during joining and shall be joined using silver solder conforming to Federal Specification QQ-B-654A, BCuP-5, or BAg-5.
- ii). Condensate drain tubing and car body air brake tubing shall be joined using silver solder. Soldered joints shall be wiped, and the flux cleaned from the tubing and fittings after soldering.

e). Water Piping and Fittings

- i). Water piping shall be stainless steel or seamless copper tubing in accordance with ASTM Standard B75- 02 and sized for the service intended. Piping shall be clamped with necessary sound insulation to prevent rattle and be sloped to allow drainage. The use of color coded PEX water lines with crimped fittings may be acceptable but needs further approval by Amtrak.
- ii). Fittings shall be sweat type wrought copper or cast brass in accordance with ANSI Standards B16.22 and B16.18 or "Swage-lok" compression type or stainless steel.
- iii). All piping, fittings and other wetted surfaces shall be of "lead free" composition.
- iv). If copper piping is used, it shall be joined using silver solder conforming to AWS Bag-2 for cast brass fittings and to AWS BCup-3 brazing filler metal for wrought copper fittings, using a continuous purging with an inert gas during joining. The use of solder with lead content is strictly forbidden. The exterior of brazed joints shall be wiped clean after brazing. Flux shall be cleaned from the piping interior of brazed joints.
- v). After installation, the complete water system shall be sanitized using the sanitizing procedure currently used by Amtrak per SMP 47601.
- vi). The piping shall be routed and sloped to allow for proper drainage. Low points in piping shall be equipped with Ogontz or equivalent automatic drain valves (specified in respective Chapters), each equipped with a heater, which shall discharge all the water in the vehicle to the tracks whenever the air temperature at the valve falls below 38°F. This shall be demonstrated during the climate room testing described in Chapter 20.
- vii). To ensure complete drainage, venting valves shall be provided to operate in conjunction with the drain valves. At each automatic drain valve, a manual drain valve shall be piped in parallel. Sufficient manual drain valves shall be

provided to allow complete draining of the car. Valves shall be labeled in accordance with Amtrak Specification 696. Manual drain valves shall be accessible without use of tools and location is subject to Amtrak approval.

- viii). Drains from the water system shall be routed to discharge directly onto the ground, avoiding car structure, electrical cables and all other undercar equipment.
 - ix). To ensure effective drainage and prevent the accumulation of standing liquid, all drains must either have a recessed cover or, if no cover is required, the drain hole must be positioned as the low point with no interferences "i.e." weld buildup. Additionally, to prevent liquid pooling all drainage systems must be sloped to the drain, allowing liquid to flow freely.
 - x). Electrically powered freeze protection, such as heat trace tape secured with conductive aluminum tape, shall be provided for the water fill housings, underfloor and/or equipment area water piping, water system drainpipes, and water tanks. A blanket heater may be used to protect the water tank. All electrically powered freeze protection components shall be readily accessible for routine maintenance and repair. Provisions shall be provided, whether through current detection and/or LED indicators to alert on board personnel as to the function of the freeze protection components.
- f). Sewage Piping and Fittings
- i). All toilet system piping, the waste tank and all associated fittings, drain piping and serving valves, unless otherwise permitted by Amtrak, shall be manufactured from acid-resistant stainless steel suitable for sewage service.

19.27 Fiberglass-Reinforced Plastic

- a). General
 - i). Fiberglass-Reinforced Plastic (FRP) shall be a glass-fiber-reinforced, laminated material, composed of a gel coated surface, fiberglass reinforcement and a polyester or other approved thermoset resin. FRP shall withstand, without any physical deformation or structural damage, the environmental conditions in Amtrak Specification 963, be resistant to acids, alkalis and cleaning solutions used by Amtrak.
 - ii). FRP shall be manufactured by the matched die molding or open molding process. Production techniques shall ensure that the glass fiber reinforcement is distributed throughout the final product in such a manner as to avoid resin-rich or resin-starved sections. A structural analysis shall be provided to confirm that the construction method chosen is adequate for its intended purpose.
 - iii). FRP parts shall have a greater thickness at attachment points and edges. Exposed sharp edges will not be allowed on any parts. Fasteners used to secure sections of FRP assemblies if used shall not be removed or cutoff to facilitate fit-up during installation to the car.

- b). Resin
 - i). The resin shall be of high-quality, commercial grade, thermosetting, polyester, phenolic or vinylester material selected to meet the requirements of the Contractor and manufacturer molding process requirements.
- c). Reinforcement
 - i). The fiberglass reinforcement shall be mat, fabric woven roving, continuous roving, chopped spun roving, or swirl mat as required to meet the physical properties of this Specification and the molding process requirements. The glass content shall be a minimum of 20% by weight. FRP should be straight without bowing and flexing. Additional supports may be required.
- d). Gel Coat
 - i). The gel coat shall be a high gloss finish resistant to scuffing, fire, weather and cleaning agents. The gel coat shall have a minimum thickness of 0.015 in. If the surface of the FRP panel is to be painted, a primer gel coat shall be used and the part shall be painted in accordance with manufacturer's specifications. If the FRP panel does not receive paint, then the gel coat shall be pigmented to match the color selected by Amtrak. The reinforced composite component shall be gel-coated on all exposed surfaces. The surfaces shall withstand, without any physical deformation or structural damage, the environmental conditions and resistance to acids, alkalis and cleaning solutions recommended by the Contractor.
- e). Additives
 - i). Additives, fillers, monomers, catalysts, activators, pigments, fire retardants and smoke inhibitors shall be added to the resin mixes to obtain finished products with the required physical characteristics of this Specification.
 - ii). Mineral filler shall not exceed 28% of finished weight for any preformed matched die molding process.
- f). Color Accuracy
 - i). The color differences between any measured production component and the accepted color sample for that component shall be less than ± 1 dE.
- g). Strength Requirements
 - i). Independent laboratory test certificates shall be provided stating that the reinforced plastic material complies with the requirements of the following standards. Test specimens shall be conditioned in accordance with ASTM D618-08.

Mechanical Property	ASTM Test	Open Moldings	Matched Die Molding
Tensile Strength	D638-08	10,000 lbf/in. ²	12,000 lbf/in. ²
Compressive Strength	D 695	18,000 lbf/in. ²	22,000 lbf/in. ²

Flexural Strength	D790	15,000 lbf/in. ²	22,000 lbf/in. ²
Impact Strength	D 256	6 ft lb per in. of notch	8 ft lb per in. of notch
Hardness	--	45 Barcol	45 Barcol

19.28 Thermoplastic Sheet

a). General

- i). Thermoplastic sheet used in the construction of the vehicle shall withstand, without any physical deformation or structural damage, the environmental conditions described in Amtrak Specification 963, and shall be resistant to Amtrak cleaning solutions. Thermoplastic sheet shall be used as extruded or vacuum-formed.
- ii). All non-visible thermoplastics should be made up of 100% recycled content, and visible parts a minimum of 50% recycled content.
- iii). Only UV stabilized pigments shall be used to create the specified color of the thermoplastic sheet. The color and surface finish of parts manufactured from this material shall be approved prior to the production run of any parts.
- iv). Unless otherwise stated in the specification, all visible plastic moldings should have a textured surface of VDI39 with a uniform surface appearance.

b). Quality

- i). The finished parts shall be free of waves and quilting on both sides. Degraded polymer in the sheet shall not be allowed, and if present, shall be cause for rejection of the piece. Voids, lumps and contamination shall also be cause for rejection of parts if the defects are larger than 0.010 in., and the population of these defects is greater than one defect in four square feet.

c). Strength Requirements

- i). Independent laboratory test certificates shall be provided stating that the thermoplastic sheet complies with the requirements of the following standards. Extruded sheet in the surface finish specified shall be used for testing.

Mechanical Properties	ASTM Method	Value
Specific Gravity	D 792	1.20 to 1.45
Tensile Strength	D638-08	7,000 lbf/in. ² minimum
Tensile Modulus	ASTM D638	450,000 psi
Flexural Strength	D790	10,000 lbf/in. ² minimum
Flexural Modulus	D790	4.5 x 10 ⁵ lbf/in. ²
Hardness Rockwell	D 785	90 to 120 ("R" Scale)
Heat Deflection (annealed)	D 648 @ 264 lbf/in. ²	190°F minimum

Impact Strength (Fabricated Parts)	D 3029 Gardener Dart Drop 0.5" dia. ball at 73°F	320 in. lb minimum

d). Color Accuracy

- i). The color differences between any measured production component and the accepted color sample for that component shall be less than ± 1 dE.

19.29 High Pressure Laminates

a). Flat Textured HPL

- i). The laminate shall have a decorative melamine surface available in a variety of colors, patterns, and finishes. The backside shall be sanded smooth. The laminate shall have a uniform appearance free of defects and 0.375 in thickness.
- ii). The laminate shall utilize sustainable materials with low VOC content, per 40CFR59, Subpart C. It shall be recyclable at end of life.
- iii). HPL must meet ASTM E 162-98 for flammability index of less than 35 and BS 476 Part 7 Class 1 for flame spread. It shall meet ASTM E-662-01 with smoke emission of less than 100 in the first 1.5 minutes and less than 200 in the first 4 minutes.
- iv). Thickness shall be approximately 0.030 to 0.050 inches to meet strength and fire performance requirements.
- v). The laminate shall resist staining, impacts, boiling water, and other common exposures. It shall have wear resistance of 400 cycles minimum per NEMA LD3. Laminate shall be repairable or replaceable if damaged.

b). Pressed HPL

- i). Pressed laminate will emulate a slatted wood effect, with a pressed texture design on a wood-grain HPL.
- ii). This material should match as closely as possible the color and grain of the real wood laminate specified.
- iii). Texture detail to be defined in the design review process.
- iv). Pressed HPL will meet all performance criteria listed in 19.28.a).

19.30 Decorative Laminate Film

- a). The decorative laminate film shall be a lightweight, glass fiber reinforced Tedlar-capped material suitable for application to thermoplastic substrates. The film shall be dimensionally stable yet flexible enough for application to flat and moderately curved surfaces.
- b). The material shall meet all flammability, smoke, and toxicity requirements of this

specification.

- c). Multiple layers will be required to meet the Customer Experience Vision requirements as approved in Final Design Review.
- d). Film materials must meet low toxicity standards set out in ABD 0031 for the following substances (ppm):
 - i). $HF \leq 70 *$
 - ii). $HCl \leq 120 *$
 - iii). $HCN \leq 10 *$
 - iv). $NO_x \leq 10 *$
 - v). $CO \leq 300 *$
 - vi). $H_2S+SO_2 \leq 10 *$
- e). Durability and Maintenance
 - i). The film shall demonstrate exceptional resistance to staining, solvents, chemicals, and abrasion for ease of cleaning with common cleaners.
 - ii). In high traffic areas, film must be glass fiber reinforced.
 - iii). The film shall pass testing for adhesion, abrasion resistance, mar resistance, dimensional stability, graffiti resistance and detergent resistance. It shall demonstrate a tensile peel strength of at least 4.5 lbs/in after 168 hours when applied according to manufacturer specifications. Standard details:
 - (1) Adhesion of Surface Layer DMS 2291: Pass
 - (2) Abrasion Resistance DMS 2290: Pass
 - (3) Tensile Strength ASTM D 882 (psi / N/mm²)
 - (a) long. d. $\geq 10.670 / \geq 75$
 - (b) tran. d. $\geq 9.960 / \geq 70$

19.31 Solid Polymer Surface

- a). Solid surfaces will be a non-porous, fully sealed, homogeneous material maintaining the same composition throughout the part.
- b). Composition shall be of acrylic polymer, natural minerals (aluminum trihydrate) and pigment, with a satin finish.
- c). A thickness of no less than 1/2 inch must be approved by Amtrak on a case-by-case basis.
- d). Material shall naturally resist damage from heat, mold, mildew and stains.

CONFIDENTIAL — DO NOT DISTRIBUTE

- e). Material shall be assembled with non-porous, waterproof seams.
 - i). Location and process for implementing seams must be implemented for approval.
 - ii). All seaming plans must be submitted for Amtrak acceptance.
- f). The material shall meet all flammability, smoke and toxicity requirements of this specification.
- g). A minimum of 14% Pre-Consumer Recycled Acrylic should make up the composition of the material.
- h). The material must meet GREENGUARD GOLD Certification for low chemical emissions and be ROHS compliant.
- i). Solid surface should be repairable in situ for scratches, and the supplier should provide a 10-year commercial warranty for the material.

19.32 Air Filters

- a). HVAC and Equipment Ventilation Filters
 - i). HVAC system air filters shall conform to Amtrak Specification 685 or as approved by Amtrak and shall be selected in accordance with the manufacturer's recommendations for the specific equipment involved. All filters shall have an integral frame. Filters shall be the throw-away type available in standard commercial sizes except reusable filters that may be approved for specific applications where throw-away filters are not available. Filters shall be designed to meet the performance requirements of each installation and shall be approved.
- b). High Pressure Air Filters
 - i). An air filter assembly with a replaceable filter element shall be provided in the air line that connects each subsystem to the main reservoir air supply system. The main reservoir air filter filtering capability, flow rate capability and overall size shall be appropriate for the application so that the filter replacement interval is greater than one year. Quality of compressed air supplied by the locomotive shall conform to APTA Standard PR-M-S-011-99. It shall be possible to gain access to the filter element for replacement without requiring any pipe fittings to be disconnected or loosened. Glass fiber mat types of filter media shall not be used for high pressure or high-volume applications. Filters shall be provided for each of the following systems and any others operated from the air supply system:
 - (1) Each air brake control assembly
 - (2) Waste system
 - (3) Horn
 - (4) Low pressure air filters

CONFIDENTIAL — DO NOT DISTRIBUTE

- ii). Replaceable media type filters shall use resin-bound, spun-glass fiber materials. It shall be non-absorptive of fluids and gases.

19.33 Wire and Cable

a). General

- i). All wire and cable used shall exhibit the physical and electrical properties for 110°C rated wire and cable specified in Amtrak Specification 323. High temperature wire, used for heater circuits, shall be as defined as Amtrak Specification 323.
- ii). A minimum number of wire types and sizes shall be used in the vehicle. Selection of wire size and insulation shall be based on the current carrying capacity, voltage drop, mechanical strength and temperature and flexibility requirements and in accordance with APTA Recommended Practice PR-E-RP-009-98 and applicable AAR, ICEA, ASTM or MIL Specifications. The Contractor shall submit to Amtrak for review and approval, a procedure for installation of wiring and cable, including the criteria and procedures for the repair of damaged wire or cable. This procedure shall be included in the heavy maintenance manual.
- iii). In no case shall wire smaller than the following sizes be used:
 - (1) Wire on electronic units, cards, and card racks – No. 22
 - (2) Wire in control compartment – No. 16, No. 18 with Amtrak approval
 - (3) Wires pulled through conduits and/or wireless – No. 12, No. 14 with Amtrak approval
 - (4) All other wire – No. 12, No. 16 with Amtrak approval

b). Wiring – General

- i). All vehicle wiring shall be in conformance with APTA Recommended Practice PR-E-RP-002-98 and PR-E-RP-009-98, Chapter 3 of the National Fire Protection Association's Publication NFPA No. 70, and the AAR Manual of Standards and Recommended Practices, Section F, Specification S-538, *Wiring Practice and Rolling Stock Standard*, except where otherwise specified, and except that all wire shall be as required in this Specification. Design wire amperage capacity shall comply with the latest revision of the National Electric Code. When more than three current-carrying conductors are applied in a raceway or cable, the amperage capacity shall be derated. Circuit protection shall be in conformance with Chapter 2 of NFPA publication No. 70, Article 240.
- ii). Shields used for audio and other wiring requiring EMI/RFI protection shall be grounded at one point only within the vehicle, and not at both ends of the shield.

c). Data Communications Wiring

- i). All data communications (Ethernet) wiring shall be able to support EIA/TIA 568 Cat 6a communications for data on rolling stock. It shall be suitable for use in undercar and inter-car applications when installed in flexible (polyimide) or rigid conduit; it shall be suitable for the application and shall maintain long-term electrical integrity for all aspects of the EIA/TIA requirements including impedance, crosstalk, attenuation, and shielding effectiveness. The cable will also meet environmental and safety requirements associated with rolling-stock cables. The cable shall be designed with rolling-stock requirements in mind and will support high-speed data transfer for no less than 20 years in the rail environment. All accelerated life tests performed in the qualification are specified with the intention of this service life. The cable shall be designed so that installation with normal care into new car shells or undercar will not damage its electrical integrity. The cable shall be designed so that installation in raceways with other cables is proper (cable will not be impacted by crushing or cable-to-cable abrasion). The cable shall be able to be terminated with vendor specified connectors that are suitable for use in industrial communication equipment (M12 or similar).
- ii). The cable shall have the following characteristics:
 - (1) Construction
 - (a) Conductors: Stranded tin-plated copper 4 x (2 x #24AWG) (or .5mm²)
 - (b) Insulation: Radiation cross-linked data grade polyolefin 125V
 - (c) Component configuration: Wires are twisted or helically cabled to ensure electrical performance to Cat 6a standards – 100Z characteristic impedance on finished cable
 - (d) Shielding: Foil and TC braid designed to meet 200mZ/m transfer impedance
 - (e) Binders/tapes: As required to enhance integrity
 - (f) Jacket: Radiation cross-linked polyolefin (low smoke, complying with toxicity requirements) 0.8 mm minimum at thinnest point.
 - (2) Electrical Requirements
 - (a) Impedance: 100Z+/-5Z
 - (b) Shielding effectiveness (30 MHz- 100 MHz): 40dB
 - (c) Voltage rating: 300V
 - (d) Shall comply with TIA Standard, TIA-568-C.2 for Balanced Twisted-Pair Telecommunications Cabling and Components Standards
 - (3) Environmental Requirements

CONFIDENTIAL — DO NOT DISTRIBUTE

- (a) Cable jacket will withstand the following tests per AAR RP 585
 - (b) Tensile and Elongation Section 5.1 and 5.2
 - (c) Oil Resistance 5.3 and 5.4
 - (d) Thermal Shock 5.8.4
 - (e) Penetration 5.9.4
 - (f) Abrasion 5.9.8.2
 - (g) Corrosion resistance ASTM D2671-00(2007)e1
 - (h) Temperature -40°C - 90°C
- (4) Mechanical Requirements
 - (a) Bending radius: 6x OD (fixed)
 - (b) Car-to-car cables should have a test modeling the installed condition, with periodic measurement of electrical characteristics – 3,000K cycles – with no application-altering failure in electrical performance.
- (5) Smoke and Flame
 - (a) NFPA 130 (UL1685) or equal, i.e., UL 1581 (tray) or IEEE 383 1974
 - (b) Amtrak Specification 352, Smoke Flame and Toxicity
- d). Wire Handling
 - i). All wiring shall be performed by qualified, experienced wiring personnel using appropriate tools for stripping insulation, cutting, tinning, soldering, harness making, attaching terminals and other wire fabrication tasks. All wiring tools and equipment shall be used as recommended by the tool and equipment manufacturer.
 - ii). Wire shall be protected from damage during all phases of equipment manufacture. Wire shall not be walked on, dragged across sharp or abrasive objects, kinked, or twisted, or otherwise mishandled. The ends of wire shall not be permitted to lay on wet floors or other damp areas where moisture may be absorbed into the conductors.
 - iii). When removing insulation, wire strands shall not be nicked or broken in excess of the requirements of FAA Specification No. AC 43.13-1A, Section 449, *Stripping Insulation*. Additionally, the following criteria apply:

Wire Size	Maximum Number of Nicked Strands*
Wires smaller than No. 10	None

CONFIDENTIAL — DO NOT DISTRIBUTE

No. 10 through 1/0	7.4 percent
Above 1/0 through 1600/24	4.4 percent
Above 1600/24	graduated scale
*Definitions: A cutoff strand shall count as two nicked strands. A nick is defined as 25% or more of the strand area damaged or cut more than 1/3 of its diameter.	

e). Wire Harness

- i). The layout of wiring, for both vehicles and equipment, shall be designed in advance of its installation and in cooperation with the suppliers of the related equipment. Wiring shall be prefabricated into standard harnesses, wrapped, and tied with nylon wire ties or a high strength, waxed lacing cord designed not to invade the wire insulation. Harnesses shall be installed with identical arrangement and location in each vehicle having similar equipment. Separate harnesses shall be provided for major circuit groups or types, or as required for specified circuit separation. All circuits and branches shall be separable by means of terminal boards or approved connectors to isolate portions from others for troubleshooting. All circuits subject to periodic high potential tests shall be so arranged that they can be conveniently isolated for the tests.
- ii). Alternative methods for fabricating and installing wiring, which are standard carbuilder practice, may be submitted for consideration by Amtrak at the appropriate design review.
- iii). Harnessed wires shall not be installed in conduit or wire ways. Wires from different conduits or other openings shall not be harnessed together with wires running within the box or entering the box through another entrance point. Each harness or group of wires between equipment enclosures shall contain a minimum of 10% spares, but no fewer than two spares for each wire size at the time of car delivery. All conduits and wire ways shall be arranged to allow ease of replacement of individual wires between equipment enclosures after delivery.

f). Circuit Separation

- i). Circuits shall be physically separated to reduce the possibility of unsafe conditions, electrical interference, or equipment damage.
- ii). The following major circuit groups shall not be harnessed or bundled together, shall not run in the same conduit, and shall be physically separated and secured in enclosures, wire ducts, junction boxes, or other wire routing devices:
 - (1) 480VAC HEP trainline
 - (2) 27-point communications trainline
 - (3) 27-point MU trainline

- (4) I-ETMS/PTC/Cab Signal circuits
 - (5) AC power circuits
 - (6) DC control circuits
 - (7) Communication circuits
 - (8) Unprotected wiring (e.g., battery or HEP trainline to circuit breaker)
 - (9) Data communications (Ethernet) wiring even though it might be in the same car to car 27-point communications trainline jumper
- iii). Conductors which shall operate at potentials differing by 50 volts or more shall not be cabled together and shall not be placed in the same conduit, raceway, duct, junction box, or enclosure, except that 120VAC and 480VAC may be run in same conduits providing all the wire insulation is rated at 600VAC minimum. Where it is impossible to avoid having wires at different voltages in the same equipment enclosure, the wires shall be physically separated, bundled, and secured separately such that contact between wiring is not possible. All wiring within an enclosure shall be insulated for the highest voltage in the enclosure unless Amtrak approved otherwise.
- iv). Wiring connected to transient-generating apparatus shall not be run adjacent to wiring carrying signals to, from, or between semiconductor circuits, logic circuits, vital no-motion circuits, data transmission or communication circuits. In cases in which adequate physical separation is impossible, shielded wire shall be used for all conductors involved.
- g). Wire and Cable Runs
- i). Wire and cable runs shall be properly placed to be protected from the environment, debris and be arranged to allow for proper heat dissipation per manufacturer's requirements.
 - ii). All wire and cable shall be free of kinks, insulation damage, insulation abrasions and nicked strands. Wire installation shall not be subject to accumulations of water, oil, or other foreign matter. Flexible Nylon or Sealtite conduit shall not be used on the exterior or underside of the carbody without Amtrak approval.
 - iii). Cables shall be laid in place with sufficient slack at the bends so that cables will clear the inside bend surface of the strain relief device.
 - iv). Conduit shall be attached to the carbody employing clamps; welding shall not be used under any circumstances.
 - v). Concealed wires, such as within conduits, raceways, and wire ducts shall be such that wires may be replaced or added to without the removal of other than an access panel at each end of the wire. It shall not be necessary to disconnect or disassemble conduit to accomplish this task.
 - vi). Wiring run in loom shall not be carried over a potential chafing hazard.

CONFIDENTIAL — DO NOT DISTRIBUTE

- vii). Wires entering any removable box shall be harnessed and secured to facilitate removal of the box.
- viii). All wires and cables shall be fully protected against any contact with any surface other than that designed specifically to support or protect them. This applies to all current carrying wires, cables, or buses on the vehicle.
- h). Undercar
 - i). The 480VAC HEP trainline conductors shall be cleated in place; No. 6 AWG and larger may be cleated in place or installed in rigid conduit.
 - ii). All undercar wiring smaller than No. 6 AWG shall be run in Rigid Galvanized Steel (RGS) conduits in an approved manner. Conduits shall be of waterproof construction. Permanently retained watertight strain relief bushings, with insulated throat liners of an approved design, shall be used at locations where wires, cords or harnesses enter or exit conduit, junction boxes and equipment enclosures. In addition, strain relief bushings on equipment enclosures shall include a permanently retained O-ring type seal.
 - iii). In addition to cleating of the 480 VAC trainline and NO 6 AWG and larger cables, they should be enclosed in a stainless-steel wire way as to not be exposed to the elements or debris strikes.
 - iv). Wires or cables shall not pass through or over the battery compartment and shall not pass over heat generating equipment, even if the wires or cables are in conduit.
 - v). Rigid galvanized steel conduit shall be run to all rigid-mounted enclosures. One Rigid conduit union shall be used in each run of conduit between rigid-mounted enclosures. The use of running threads is prohibited.
 - vi). RGS conduit shall be run as near as possible to resiliently mounted equipment, with flexible conduit, not to exceed 18" in length, completing the run. The use of flexible conduit shall be limited as much as possible.
 - vii). Open undercar wiring shall be protected over the trucks by running the wiring through RGS conduit, with suitable protective bushings applied at the ends.
 - viii). Conduit routing and the connection to boxes shall minimize exposure to water entering the conduit: for example, conduit should not enter from the top of the enclosure if possible. Drip loops shall be employed as appropriate.
- i). Exterior of Roof
 - i). All wiring to roof-mounted equipment shall be run in rigid galvanized steel conduits within the carshell.
 - ii). Wires or cables exposed or in conduit shall not pass over or near heat generating equipment.

- iii). Conduit routing and the connection to boxes shall minimize exposure to water entering the conduit: for example, conduit should not enter from the top of the enclosure if possible. Drip loops shall be employed as appropriate. Boxes shall be raised above surfaces where water, snow/ ice could accumulate (including from plugged drains), to reduce the possibility of water incursion.
- j). Interior
 - i). Any wiring passing through the floor shall be run in rigid conduit. Wiring, even if enclosed in loom, must not be run through partitions without suitable bushings being provided at such points of passage. Conduit openings from below must extend at least 1 in. above the floor level to ensure water cannot enter the conduit from above, such as from a wet floor.
 - ii). All 480V wiring above the car floor and within the sides, ends or roof of the car shall be carried in EMT or rigid steel conduits. Short runs, not to exceed 18 in. of flexible conduit may be employed to make final connections to equipment. If used, flexible conduit must meet all Smoke, Flame and Toxicity requirements. All wiring in the walls shall be in EMT or rigid conduit. Wiring in the roof shall be carried in thin-wall aluminum or steel conduit, in metal duct or "Panduit" material meeting the requirements of Amtrak Specification 352. All flexible nonmetallic conduits shall be installed in protected areas only, unless specifically approved by Amtrak. In wire ducts, wire shall be secured at each entrance and exit point, to prevent chafing movement.
- k). Cable Cleating and Support
 - i). Open-run cable shall be supported by using split-block cleats of molded neoprene or silicone rubber, spaced no more than 4 feet apart. Slack shall be allowed in the cable to accommodate both thermal expansion and contraction of cable.
 - ii). Each cleat shall have a channel-shaped stiffener of at least 10-gage material on the side away from the mounting bracket which shall act to spread the bolt clamping force over the entire length of the cleat. Bolts shall have lock nuts.
 - iii). Cleats shall be designed to grip each cable individually and firmly, but without causing any damage to cable insulation, including cold flow of the insulation. Cleats shall include spacers in the mounting holes to prevent crushing the cleat by overtightening the mounting bolts. Each cable in the cleat shall have its own cutout sized to the correct wire diameter. The cleat material shall be fire retardant insulating material with a durometer of 50 to 60.
 - iv). Cleated cables shall be routed and supported such that they cannot, under any combination of forces and car movement, touch each other or any other part of the car, except the cleat cushioning material.
- l). Wire Securement and Termination

- i). All wiring shall be secured and protected against movement, chafing, and any contact with conductive, sharp, or abrasive objects including the inside surfaces of wire runs.
- ii). No wiring shall be secured directly to the vehicle structure, equipment enclosures, or any metallic surface. Wiring securing devices shall be either completely non-metallic or metallic with a resilient, insulating member between the wiring and the metallic portion of the device.
- iii). All wiring shall be located and secured such that normal equipment motions, maintenance access, heat sources and the environment do not damage or reduce the life of the wiring.
- iv). Junction boxes, with terminal boards, shall be used, as required, for wire terminations. Harness connections to the boxes, as well as internal wiring to terminal boards, shall be as specified. Exterior junction boxes shall be watertight.
- v). Wire and cable dress shall allow for sufficient slack at equipment terminals to provide for movements induced by shock and vibration, equipment shifting, alignment, cover removal and component replacement. Sufficient lengths shall be provided at points of termination for additional re-terminations without applying tension to the wire and without splicing the wire, as follows:

No. 10 AWG and smaller	Three re-terminations
No. 8 AWG and large	Two re-terminations

- vi). A drip loop shall be provided on all exposed wires and cables to prevent fluid runoff into connected equipment.
- vii). Wire tying devices shall be of such material and construction that they will adequately retain the wires for the life of the wiring and shall be resistant to ozone and ultraviolet light. Wire and cable ties shall be trimmed using the proper tool and located to eliminate any hazard to personnel from sharp edges. Wire tying devices shall be snug but shall not be so tight as to cause indentation and cold flow damage to the insulation. Wire tying devices shall be mechanically fastened to a permanent structure. Adhesive-installed mounting bases shall not be used for ties or for cable support.
- viii). Wire tying devices shall not be used:
 - (1) For any external undercar application
 - (2) To support wire under its own weight
 - (3) To support/secure any type of conduit
- ix). All wire bundles and cables within an enclosure shall be supported by the use of tape rails, shall be spaced away from the equipment box structure, metal edges, bolt heads and other interference points and shall have electrical clearance from the covers, regardless of the insulation properties of covers. Wire bundles shall be located above or alongside the apparatus rather than

at the bottom of the box wherever possible. In all cases, wire shall be a minimum of 1 inch above the bottom of the box. Wire entry into control or junction boxes shall not be permitted through the bottom of the box.

- x). Truck wiring shall be designed to ensure sufficient slack, for pivoting, spring action and jacking and shall be provided with clamp supports and abrasion protection. T-splices will not be permitted.
 - xi). All jumpers, jumper heads and jumper receptacles shall be sealed in an approved manner to prevent the entry of water at any operational speed.
 - xii). Any wiring needed to calibrate and test vehicle functions shall be a part of the permanent vehicle wiring to enable Amtrak to conveniently maintain the equipment. This wiring shall terminate in approved connectors in the respective control groups and cabinets.
 - xiii). Amtrak requires wiring and cabling to be accessible for repairs; the Contractor shall submit a complete wiring plan for evaluation at the appropriate design reviews.
- m). Marking
- i). All terminal boards and terminal posts shall be plainly marked with non-conductive hot stamping type markings so that they shall be easily identified. Devices shall be labeled via silk-screening onto panels, mechanically attached plastic labels (adhesives are not acceptable alternate), or other permanent means approved by Amtrak in design review.
 - ii). Wires shall be marked with sleeve-type labels with permanent typed-on lettering, such as TE/Raychem TMS or approved equal, or with non-conductive hot stamping type markings. Both ends of each wire are to be identified. Wires smaller than 6 AWG should be labeled the length of the wire at intervals of 6" and the wire identification should be color coordinated as to voltage type. Wires 16 AWG or smaller may be color coordinated and tagged on each end with the sleeve type labels mentioned here.
- n). Cable and Wire Identification
- i). The Contractor shall provide a listing of all wire codes and device and connector identification used on its equipment as part of the integrated schematics manual.
 - ii). The identification system shall be designed to utilize the minimum number of alphanumeric characters to identify devices and interconnecting wiring. Device, terminal and wire identification is intended to provide unique, consistent, clear, concise and recognizable identification of wiring and devices as an aid to maintenance of electrical systems. The wire-designation system shall be one which relates the designation in some way to indicate where it shall go and where it shall come from. Each individual piece of wire shall be given its own distinct identification so that it shall be positively identified at its opposite end without the necessity for "ringing through." As

much as possible, naming shall be consistent among all Amtrak equipment. This naming system will be employed on the following:

- (1) Electrical Arrangement Drawings
 - (2) Electrical Schematics
 - (3) Wiring Diagrams
 - (4) Labels on hardware
 - (5) Car Electrical Panels, etc.
 - (6) Device names: circuit breakers, indicators lights, switches, relays, contactors, pressure switches, etc.
 - (7) Car Wiring
 - (8) The above categories on drawings provided by different vendors (for example, air brake schematic and electrical schematics)
- iii). By using the nomenclature and appropriate schematic, an electrician shall be able to easily identify any point in a circuit, such as an auxiliary contact, and locate that point on the hardware.
- iv). The identical name shall be used for a given component in all references - arrangement and schematic drawings, wiring diagrams, panel and switch plate legends, and maintenance manuals.
- v). It shall be the Contractor's responsibility to ensure that:
- (1) All equipment suppliers conform to this Specification.
 - (2) A consistent numbering system is used throughout the vehicles; and
 - (3) Component device and wire names are not duplicated.
- vi). At a minimum, the following major electrical system components shall be identified:
- (1) Electrical panels
 - (2) Contactors and motor starters
 - (3) Relays and timers
 - (4) Switches and circuit breakers
 - (5) Electronic components
 - (6) Terminal blocks
 - (7) Connectors

- (8) Each wire
 - (9) All labels shall be permanent and expected to be legible for the life of the vehicle.
 - (10) Labels shall be easy to read and observable without having to disturb wiring, especially for:
 - (a) Relay names
 - (b) Contactor/Motor starter names
 - (c) Terminal block and terminal identity.
 - (11) In cases where two or more identical panels are used, the respective panel names "A" and "B" (as appropriate) shall be affixed to the car body or mounting plate, not the panel.
 - (12) Numbering system shall be consistent between Contractor and component supplier, such as floor heat wire names. It shall be possible for an electrician to connect all external car wiring to a panel without requiring a drawing.
- o). Pulling Compound
- i). Pulling compound shall be non-conductive, non-hygroscopic, non-odorous, and shall not attract vermin.
- p). Solder
- i). Wire connections or terminations by soldering shall not be permitted unless explicitly approved by Amtrak prior to application.
- q). Tape
- i). Use of electrical tape shall be minimized. Electrical tape shall not be used without the prior approval by Amtrak. If used, electrical tape shall be as specified in Section F, S-540 of the AAR Electrical Manual of Standards and Recommended Practices, or equivalent; UL Listed; and a minimum of 0.007 inch thick. Electrical tape shall meet or exceed the voltage rating of wire where the tape is applied.

19.34 Wire and Cable Connections

- a). General
- i). All wire and cable shall be free of kinks, insulation damage, insulation abrasions and nicked strands. Wire installation shall not be subject to accumulations of water, oil, or other foreign matter.
 - ii). Cables shall be laid in place with sufficient slack at the bends so that cables will clear the inside bend surface of the strain relief device.

- iii). Conduit shall be attached to the carbody employing clamps; welding shall not be used under any circumstances.
- iv). Concealed wires, such as within conduits and wire ducts shall be such that wires may be replaced or added to without the removal of other than an access panel at each end of the wire. It shall not be necessary to disconnect or disassemble conduit to accomplish this task.
- v). Wiring run in loom shall not be carried over a potential chafing hazard.
- vi). Wires entering any removable box shall be harnessed and secured to facilitate removal of the box.
- vii). All wires and cables shall be fully protected against any contact with any surface other than that designed specifically to support or protect them. This applies to all current carrying wires, cables or buses on the vehicle.
- viii). All equipment enclosures and junction boxes shall be fitted with terminal boards or connectors.
- ix). The Contractor shall submit the proposed design and product line for all connections and terminations for approval as part of PDR. **[CDRL 19-08]**
 - (1) Number 6 and smaller type terminal boards and quick-disconnect terminals, other than those stated herein, will only be permitted with approval.
- b). Terminal Boards and Terminal Points
 - i). All electrical terminal points and terminal boards of wire size AWG 10 or larger shall have brass studs and connections, each of which shall be locked using a single brass nut with brass flat washer and a plated spring-type lock washer. Studs, nuts, and washers may also be made of corrosion-resistant plated steel, where approved. Each board or connector shall have the necessary number of terminations plus a minimum of 10% spares, but not fewer than one spare unless approved. Binding head screw type terminal boards will be permitted only where approved. All terminal boards shall be in accordance with Federal Specification A-A-59125.
 - ii). All wires of size range AWG 12 to 14 shall use modular spring lock terminal blocks. The terminal block modules will be mounted on din rails. The supplier shall provide standard 35mm wide DIN-rail in 7.5mm, 15mm and 58mm heights. The DIN-rail shall meet RoHS (Restriction of Hazardous Substances Directive) standards and shall be available perforated or unperforated. Materials will include chromated-steel, copper, and aluminum. The modules shall be color coded for the ability to tell the signal type at a glance. The metal body shall contain a high strength spring steel spring element that will provide a gas-tight connection with the conductor.
 - iii). Spring connection shall be stainless steel. The terminal blocks shall come with carbody ground modules that are connected directly to carbody ground. The terminal blocks shall come with insertable shorting plugs. The terminal

blocks will have snap in positive lock labels. Terminal Blocks shall have a method of labeling for easy identification which is universal across all connection technologies. The modules will have a place to label the terminal number as well as the terminal block name. Each wire shall have a ferrule on its end and be able to be inserted by engaging the spring with a standard 3mm slot size screwdriver. Stranded wire of any size shall have a ferrule on its end.

- iv). Terminal Block accessories and bridging systems shall be compatible and interchangeable with all connection technologies (screw, spring and IDC technology) including flexible bridging system, modular testing, standardized labeling system and pluggability features.
 - v). Threaded studs shall have a minimum of 2-1/2 threads exposed beyond the final nuts. Adequate space shall be provided to permit connecting wire terminals with standard tools. All terminals shall be properly torqued to assure sound connections. Spacers shall not be used.
 - vi). Jumpers between terminal board points shall be brass or plated steel. Wire jumpers between adjacent terminals of terminal boards will not be permitted.
 - vii). Terminal blocks will employ closed bottom blocks.
 - viii). An approved permanent marking strip on each terminal board shall be provided and attached adjacent to the wire junction point to identify the wires attached thereto.
 - ix). A maximum of two terminals shall be connected to any one binding screw. A maximum of four terminals shall be connected to any one threaded stud, provided that there is no interference between terminal barrels. On terminal boards, the wiring shall be arranged so that no more than two terminals are connected to a stud, from each side of the terminal boards.
- c). Wire Terminations
- i). Terminals and connections used throughout the vehicle shall be the mechanical, solderless, crimp type made by TE Connectivity/AMP or other approved manufacturer with a comprehensive line of terminals, connector pins and application tools available.
 - (1) Terminals shall be tested to Military Specification MIL-T-16366F for temperature rise, voltage drop, vibration, current overload, and corrosion.
 - ii). All wire terminations shall be accessible to remove or replace. Wire terminations shall not be covered by other wires.
 - iii). All heater wiring terminations shall be Nickel plated and the terminal insulation shall be rated for high-temperature applications.
 - iv). Terminals and connections shall be attached to the wiring with proper crimping tools and dies as recommended by the manufacturer. Application

tooling shall incorporate die or piston stops to prevent over crimping. To prevent under crimping, all application tooling shall incorporate a “full cycle” feature that once started, requires the tool to be brought to the stops before the crimped connection can be removed. The Contractor and its suppliers shall employ a certification process to ensure that all tooling remains within calibration to properly crimp the lugs.

- v). Spade (i.e., Fast-On) terminal usage is to be limited and shall only be used with Amtrak approval. Hook-type terminals shall not be used. Corrosive protection shall be provided for all base materials.
 - vi). Conductors subject to motion relative to the terminal shall be protected by suitable means to prevent breakage of the conductor at or near the terminal. Sufficient slack shall be provided in all wires and cables to prevent breaking or pulling out of bushings and terminals. A maximum of one wire shall be crimped in any one terminal.
- d). Power Cable Terminations
- i). Power cables shall be terminated with an approved compression terminal. Sufficient cable slack shall be provided to preclude breaking or pull-out from bushings or terminals and to allow two terminal changes. Cable conductors shall be clean prior to installation of terminals. Compression terminals shall be applied using tools and procedures recommended by the terminal manufacturer for that purpose. Swaging tools shall be of a type that ensures complete swaging in every case.
- e). Cable Connectors
- i). All cable connectors shall conform to SAE AS50151 except for the screw coupling arrangement replaced with the ¼ turn quick disconnect bayonet lock. They shall employ removable crimp contacts of the correct size for the wire being terminated. Except as noted below, the connector contact area shall be plated with a minimum of 0.000030 in. of gold over a minimum of 0.000050 in. of low stress nickel. For high current applications, the connector contact area shall be plated with a minimum of 0.00010 in. of silver. Adjacent connectors shall either use different inserts or different insert orientations to prevent erroneous connections. The car-side piece of all cable connectors shall be rigidly mounted.
 - ii). Connectors shall be keyed so as to not be accidentally interchanged between adjacent connectors. Spare contact allocation shall be 10% to 15%, but no less than 4, per connector. Reduced numbers of spare wires in a given connector may be submitted to Amtrak for review and will be approved on a case-by-case basis if 10% of the contact count is less than 4.
 - iii). Power and control wiring shall be separated in different connectors if they exceed 120VAC. Disconnected plugs will be supported so as to not drop to the ground, floor or other position in which they might be readily damaged. Connectors are to be mounted to provide convenient hand access so as to be easily mated and unmated.

- iv). All cable connectors used in exterior locations shall be of the environmental watertight variety and a molded type wherever possible (such as speed sensors). Cable connectors shall be equipped with sealing gaskets on the front mating surface and on the back where the cable enters. Bolts within the connector shall be long enough to ensure that there is sufficient room to terminate the cable wires within the connector body. The cable jacket shall be held by a clamp within the connector body. Unused connector pin positions shall be sealed with either connector contacts or plastic sealing plugs designed for that purpose.
 - v). Plastic bodied connectors shall not be used on the exterior of the vehicle.
 - vi). In waterproof interior locations, the use of non-weatherproof connectors will be allowed as approved. All other connector requirements specified in this Chapter which do not directly apply to weatherproofing shall be met.
 - vii). Alternative connectors such as Harting HAN™ Modular series may be used as approved by Amtrak.
 - viii). Ethernet connectors shall be M12 style connectors (per IEC 61076-2-101) as manufactured by Harting or approved equal. Ethernet connectors for intercar jumpers shall be housed in an environmentally sealed connector shell suitable for M12 connectors as manufactured by Harting, or approved service-proven equal.
- f). Quick-Disconnect Terminals
- i). Only Amtrak-approved quick-disconnect terminals may be used. They shall be modular, and they shall provide positive terminal engagement and be shock and vibration proof. All terminals shall be provided with insulation equal to that of the wire. No "push-to-fit" (FAST-ON) type terminals will be permitted unless specifically approved by Amtrak for that unique application.
- g). Grounding/ Bonding Connections
- i). Grounding and bonding shall be done in accordance with APTA Standard PR-E-S-005-98, unless otherwise approved by Amtrak. All grounding and bonding jumpers and straps shall be sized to handle fault current for which the voltage drop shall not exceed 25V. The bonding method employed shall not produce a dc resistance in excess of 0.0025 ohms, or more than 0.025 ohms at 150 kilohertz for any applied ac voltage. Grounding and bonding jumpers, and brazed shunt straps shall be flexible.
 - ii). The car body shall be grounded to each truck frame by means of a separate cable which shall be sized to safely ground the car under normal conditions.
 - iii). The 120VAC, 60 Hz, single-phase service shall be separately and firmly grounded to the car body structure and have a green indicating color band applied to the terminations.

- iv). All apparatus operating at 480VAC and not directly grounded to the car body through its mounting shall have grounding straps. This particularly applies to resiliently mounted equipment.
- h). Wire Splicing
 - i). Splicing of conductors shall be avoided and shall be permitted only with Amtrak approval, on a case-by-case basis.
 - ii). Splicing of conductors in conduit will not be permitted. In the event a splice is approved, it shall be in a junction box and the spliced joint shall be mechanically as strong and have the same conductivity as any other part of the conductor. The splice shall be an insulated permanent crimp splice in accordance with SAE AS7928, Type II, Class I, and shall be installed with the crimping tool and die of the splice manufacturer. All splices shall be insulated with a self-sealing, weathertight, seamless shrink tubing. The outside diameter of the spliced portion of the cable after the insulation is applied shall not exceed the outside diameter of the un-spliced portion by more than 40%. Splices shall be identified in the integrated schematic.

19.35 Conduit

- a). Types
 - i). Thin-wall EMT type conduit shall conform to UL 797. Flexible metal conduit shall conform to Federal Specification A-A-55810. Flexible polymer conduit shall conform to SAE AS81914.
- b). Size and Fill
 - i). Conduit shall be sized such that the sum of the cross-sectional areas of the conductors and their insulation does not exceed 40% of the cross-sectional area of the conduit for three or more conductors. For two conductors, a limit of 31% shall be used, while for a single conductor, a limit of 53% will be permitted. Where conduit having a length not exceeding 24 in. without bends of more than 15° is used between enclosures, a maximum fill of 40% will be permitted.
- c). Installation
 - i). General
 - (1) A run of conduit between junction boxes and/or pulling outlets shall not contain more than the equivalent of four quarter bends, 360° total, including the outlet fittings. Bend radii at the inner surface of the bend shall be no less than eight times the nominal inside diameter of the conduit.
 - (2) All conduit bends and offsets used shall be made by the use of special forms or tools and shall have the largest radius possible so that wires can be pulled without the use of tackle or power.

- (3) Conduit shall be securely clamped with all runs electrically grounded to make a continuous ground. Suitable approved insulation to prevent electrolysis shall be provided where steel and aluminum are in contact.
- (4) All conduits shall be arranged to prevent moisture traps and shall drain toward control boxes, except that all open-ended conduits shall be installed in such a manner as to ensure gravity drainage out the end. The conduit arrangement and installation shall be subject to approval. Open ended conduits are prohibited.

d). Conduit Fittings and Junction Boxes

i). General

- (1) The conduit fittings and junction boxes for vehicle wiring shall be as manufactured by the Contractor or by a supplier of a comprehensive line of parts.
 - (a) The Contractor shall submit the proposed product line for approval. **[CDRL 19-09]**
- (2) All conduit fittings and junction boxes shall be provided with gasketed covers.

ii). Boxes

- (1) All exterior junction boxes shall be fabricated of material appropriate for exterior usage, such as stainless steel, or as approved by Amtrak. All exterior junction boxes shall be weatherproof and shall be connected in such a way that drainage from equipment groups will not pass through the conduit into the junction boxes. Interiors of all junction boxes shall be primed and then protected with a white, insulating epoxy powder coating. If electrical faults within the box can be detected, the interior of the junction boxes may be left unpainted. Equipment areas containing non-insulated electrical devices at more than 120 volts to ground shall be plainly marked with warning signs worded DANGER – XXX VOLTS. Covers for electrical junction boxes shall be accessible at all times without having to remove other equipment.

iii). Conduit Interface

- (1) The open ends of conduit shall be provided with strain relief type fittings with extended rubber bushings, bell-mouth fittings, or insulated throat box connections as approved or an alternate solution may be presented and used subject to approval. All conduit entries into removable equipment boxes shall be secured by means of a bolt-on watertight access panel or an alternative solution may be presented and used subject to approval.

iv). Covers

- (1) All junction box covers shall be retained by captive screws. All fasteners used in junction boxes shall be stainless steel. All covers shall be designed to accept or mate with a bulb-type clamp-on seal.

v). Wireways

- (1) Wireways shall only be permitted in approved ceiling locations. They will not be permitted in the car body sidewall or under flooring areas. Only conduit will be permitted to run within the car body.
- (2) All wireways shall be "Panduit", meeting Amtrak Specification 352, or rigid steel with a coating to minimize the risk of oxidation and rust formation. The trays shall be adequately supported throughout their entire length in an approved manner. There shall be absolutely no sharp edges. The trays shall be completely de-burred before installation on the vehicles. Grommet clamps shall be provided at all locations where cables or wires enter or leave the wireways. Under no circumstances shall leads be draped over the edge of the wireways, with or without wireway edge protection.
- (3) Wireways shall be located to provide access to the harnesses contained within for maintenance action.
- (4) Bends in wireways shall be avoided; however, if they are required, approved protection shall be provided to avoid insulation chafing at the bends.
- (5) Wireways shall not contain more than 30 current-carrying conductors at any cross-section. The sum of the cross-sectional areas of all conductors contained at any cross-section of a wireway shall not exceed 40% of the interior cross-sectional area of the wireway.
- (6) All wire and cable shall be securely fastened within wireways to eliminate movement and resultant chafing.

19.36 Electrical and Electronic Designs

a). General

- i). Except as otherwise indicated, electrical equipment and components shall conform to IEEE-16 (2020). Electronic equipment shall conform to EN 50155. Solid state power converters shall conform to IEC 61287-1. All mandatory type and routine tests shall be performed.

b). Reliability Standards

- i). A standardized MIL-HDBK-217F reliability part stress prediction shall be performed on all electrical and electronic control systems. This reliability prediction shall be based on the "ground Mobile" environment. Use of alternative reliability database information and prediction methodologies or

statistically meaningful filed failure data from comparable operating environments may be permitted with Amtrak approval.

c). Ability to Repair

- i). All electrical devices including such items as PC boards, relays, contactors, and filters shall be capable of being repaired by Amtrak in its electronics laboratory. It is recognized that some equipment, due to its complexity, cannot be economically repaired by Amtrak. In preliminary design reviews, the Contractor shall identify all situations where this could be the case, for ruling by Amtrak, whose decision shall be final.
- ii). Units shall not be sealed, potted, or constructed to prohibit repair by Amtrak. Units that must be potted or sealed by design other than Lowest Level Replaceable Units (LLRUs) shall have a minimum 10-year warranty.

d). Hardware

- i). All hardware associated with electronic and electrical systems, including the case, heat sinks, mounting brackets, etc., shall be protected against moisture, oxidation, and common airborne contaminants.

e). Wiring

- i). Wire selection, routing and securement shall be accomplished with the goal of having the wire and cable last the life of the car body. All movement and chafing of wire and cable shall be eliminated. The use of additional wear material(s) to extend life without elimination of the movement, wearing or chafing will not be permitted.

f). Optical Fibers

- i). Any application of optical fibers shall be approved by Amtrak. Samples of all fiberoptic cables and termination connectors shall be submitted for approval.
- ii). Fiber optic cables shall be installed in accordance with the cable manufacturer's instructions, shall be adequately protected from damage of any kind, and shall be readily accessible for maintenance and inspection. Fiber optic terminations shall be of quick disconnect type, designed to prevent degradation due to the car environment, including vibration and variation in temperature, and shall be capable of inspection and repair without removal from the car.

19.37 Electrical Devices and Hardware

a). General

- i). All electrical devices shall be service-proven. Electrical connections shall use either captive screws or captive nuts, with crimp terminals.

b). Suppressors

- i). Suppressors shall be incorporated across inductive devices to minimize switching transients. All suppression devices shall be selected on the basis of their ability to absorb the amount of energy available in the connected circuit, for the number of cycles of operation expected in service, without requiring replacement prior to scheduled overhaul. All magnet valves and relay/contacter coils shall have free-wheeling diode or metal-oxide varistor voltage spike suppression, or other suppression means, except where this results in deterioration of performance. Coil suppression devices shall be located physically on or as close as possible to the coil it protects (preferably directly at the coil terminal). Wherever possible, the suppression of transients shall be at the source.

c). Contactors and Relays

- i). Contactors shall be defined as those devices, which control one kilowatt or more of electricity through their main contact tips. Unless specified, all contactors shall meet or exceed the requirements of Amtrak Specification 528, section 4.3- 4.5 or Amtrak approved alternative solution.
- ii). Relays shall be defined as those devices which switch less than one kilowatt of electricity through their contacts. Unless specified, all relays shall meet or exceed the requirements of Amtrak Specification 528, section 4.3- 4.5 or Amtrak approved alternative solution.
- iii). Preference shall be given to solid state relays and contactors where possible.
- iv). All contactor and relay coils shall be suppressed with a solid-state device to prevent transients being generated onto the low-voltage network.
- v). All devices shall be satisfactorily tested for proper functioning in orientations up to 30° from the mounting plane as fitted in the vehicle. They shall be installed to be fully accessible for inspection, servicing, repair and ease of replacement. There shall be no more than two wires connected to any one terminal. Installation shall be such that, when required, arc spray is directed, by a non-asbestos arc chute, away from ground and adjacent electrical devices.
- vi). All devices shall be constructed and utilized in a fail-safe manner; that is, all failures shall be in a direction such that neither the passengers, the crew, nor the equipment is placed at risk.
- vii). All magnetic devices shall be a heavy-duty type suitable for railroad service. They shall be constructed such that the main tips or contacts "make" and "break" with a wiping or rolling motion that minimizes build- up of deposits and/or pitting. Contact and/or tip replacement shall not exceed 5% of the total number during any annual inspection period.
- viii). Device contacts or tips shall not be placed in parallel to increase the total current load in excess of the rating for an individual contact or tip.

- ix). All devices shall be readily identifiable by means of a permanent, durable marking strip giving the device circuit designation. No identifications shall be obscured, or partially obscured, by wire routing. The identification strip shall be mounted adjacent to the mounting of said device.
 - x). Bifurcated contacts shall be used in low voltage applications whenever necessary due to dry contacts or low current switching requirements.
 - xi). All time delay relays shall be of the R-C delay or solid-state type. No mechanical or pneumatic time delay devices will be permitted.
 - xii). Where plug-in relays are approved, the relay shall be positively retained by means of a retaining clip or bar. This device shall be captive, of rugged construction and shall be easily positioned for relay installation and removal without the need for special tools. When the relay is removed, the retainer shall itself be retained so that it cannot come in contact with devices, which may have exposed energized electrical circuits, and it shall not interfere with the operation of any other device when in this position.
- d). Switches
- i). Switches are defined as those manually operated devices that control less than one kilowatt of electrical power through their contacts. Unless otherwise specified, switches shall meet the requirements of MIL-DTL- 3950. Toggle and push button switches shall be per MIL-DTL-3950, MIL-PRF-8805, MIL-DTL-83731 or equal, as approved by Amtrak. All exterior switches and switches located in "wet" areas shall be IP66 rated or higher. All switches provided shall be of high quality and shall be fully suitable for the rigors of Amtrak's service environment, including cycle life. The design and selection of all switches shall be subject to review and approval.
 - ii). Switches shall be provided with a "keying" feature such that after installation, the body of the switch will be constrained from mechanical rotation.
 - iii). Under no circumstances shall poles of switches be placed in parallel to carry currents in excess of the contact pole rating given by the manufacturer.
 - iv). There shall be a maximum of two wires connected to each terminal of the device.
 - v). Switches shall be individually replaceable without disconnecting or removing anything other than the mounting fasteners and electrical connections of the switch to be replaced.
 - vi). All control switches, which are subject to water splash, which is defined to mean any switches mounted near windows or doors, or mounted on the Engineer's control console, shall be environmentally sealed.
- e). Circuit Breakers
- i). All circuit breakers provided shall be extremely rugged and fully suitable for the service intended. They shall meet the requirements of Amtrak

Specification 498, section 4.4. Design and selection of all circuit breakers not available within Amtrak's material control system shall be subject to review and approval.

- ii). The continuous current rating of thermal-magnetic trip circuit breakers shall be selected in accordance with ANSI C37.16 for the load and type of service specified. All thermal-magnetic trip circuit breakers shall conform to the requirements of ANSI C37.13 and ANSI C37.14.
 - iii). All circuit breakers of the same rating shall be of the same manufacture and model throughout the vehicle. Circuit breaker current rating shall be clearly and permanently marked and shall be completely visible after installation.
 - iv). The ON, OFF and TRIPPED positions of all circuit breakers shall be permanently marked on the handle or the case of the circuit breaker. The circuit breaker, when tripped, shall assume a distinct position between the ON and OFF positions to permit determination of the fact that it has been tripped by either its overcurrent or shunt trip elements.
 - v). Circuit breakers shall be individually replaceable without disconnecting or removing anything other than the mounting fasteners and electrical connections of the breaker to be replaced.
 - vi). Every input power circuit shall be protected by an individual circuit breaker. Separate circuit breakers shall be provided for major assemblies or functions. No circuit breaker shall protect more than one circuit, nor shall any one circuit be protected by more than one circuit breaker. Circuit breaker terminals shall not be used as junction points.
 - vii). All circuit breakers shall be selectively coordinated as to ensure that the protective device nearest the fault trips before upstream devices.
 - viii). All circuit breakers shall be sized by current rating and tripping time to protect both the associated equipment and the minimum size wire used for power distribution within the protected circuit without causing nuisance tripping.
 - ix). Each circuit breaker pole shall be equipped with adequate means of arc extinction to prevent flashover.
 - x). Circuit breakers shall not be intended for use as on/off switches. All circuits requiring on/off switches shall be so equipped.
- f). Fuses
- i). Circuit protection functions that can be performed by fuses shall normally be performed by appropriately rated circuit breakers. Fuses shall be used only where specifically called for in the Specification or where the use of circuit breakers is not technically feasible, and only with specific written approval. Fuses may be considered in applications as follows:
 - (1) To protect solid-state equipment from catastrophic damage.

- (2) Where current or voltage levels prohibit circuit breakers.
- ii). Fuses shall be permanently identified adjacent to the fuse, including functional name, fuse type and rating. The rating of each fuse shall be permanently and clearly marked directly on each fuse.
- iii). Fuses shall be readily accessible. All fuses mounted in exterior equipment boxes shall be accessible without going under the vehicle.
- iv). Fuse holders shall contain fuse retention devices at both ends.
- v). Unless explicitly noted otherwise in this Specification, all fuse compartments shall have a spare fuse of identical size and rating for each "in-circuit" fuse and shall be mounted next to the respective "in-circuit" fuse with the fuse holder clearly marked SPARE FUSE. The spare fuse holder shall not be enclosed and shall not consist of any loose parts.
- vi). The use of current limit-type fuses is prohibited.
- g). Bus Bars
 - i). Bus bars are to be fabricated from OFE (Oxygen Free Electronic) or ETP (Electrolytic Tough Pitch) copper (CDA 101). The bus bar conductivity shall be 100% IACS. All bus bar joints and bolted connection points shall be silver or tin plated.
 - ii). Current densities, other than at joints, shall not exceed 1000 amperes per square inch, and in any case shall not exceed a value which would cause a bus bar temperature rise greater than 30°C. Current densities in joints shall not exceed 150 amperes per square inch.
 - iii). Bus bars shall be properly brazed together at joints unless bolted connections are found to be necessary for maintenance purposes and are approved. The overlap at bus bar joints shall be no less than 10 times the thickness of the bus material. Bus bar connection bolts shall be torqued to obtain a uniform bus bar connection pressure of 200psi. Bolting hardware shall be plated steel with Belleville washers to maintain connection pressure.
 - iv). Except for connection areas, bus bars shall be safety insulated, using a high-dielectric, powder coating or other approved means. Tape will not be acceptable. Bus bars that are behind insulating panels will be exempt from this requirement.
- h). Capacitors and Resistors
 - i). Dry tantalum capacitors shall be used in place of aluminum electrolytes, except for high values which are not commercially practical or available, in which case long life grade aluminum electrolytic or dry polypropylene film capacitors shall be used.

- ii). Dry tantalum capacitors shall be in hermetically sealed metal cases, except for surface mounted types when hermetically sealed metal cases are not available.
- iii). Commutating capacitors shall be a paper or plastic film type, shall incorporate a non-toxic impregnant, and shall be chosen to give a service life of at least 20 years. Filter capacitors shall have high ripple current rating for long life.
- iv). Capacitors shall be derated 20% for voltage based on the nominal supply voltage and maximum case temperature. If filter capacitors are exposed to low ripple voltages, lesser values of derating may be accepted if it can be shown that reduced operating temperatures can be achieved due to lower dissipation; however, the sum of the dc and ac ripple voltages shall always be less than the capacitor's voltage rating at a maximum case temperature of 85°C.
- v). All resistors shall be operated at less than 50% of their rated maximum power dissipation. Other power resistor applications may be submitted for approval of lower derating, on a case-by-case basis.
- vi). Use of trim potentiometers or adjustable resistors shall not be permitted without Amtrak approval. Generally, the need for adjustments shall be avoided by use of the appropriate circuitry, and stable precision components.
- vii). Transformers and Inductors
- viii). Transformers and inductors shall be rated at 20% over the maximum specified current level.
- i). Switch, Circuit Breaker and Fuse Panels
 - i). All switch, circuit breaker and fuse panels shall conform to Amtrak Specification 498, with dead front, mounted in the specified equipment enclosures and switch/ electric lockers.
 - ii). Each switch and circuit breaker panel shall carry the necessary apparatus, arranged to be easily accessible to connections and designed to prevent operating or maintenance personnel from coming in contact with live parts when operating the switches or circuit breakers. All live portions of the protected circuitry shall be completely concealed so that no danger of electrocution or shock exists from the touching of the panel, or any appurtenances or devices mounted thereto.
 - iii). All switches, breakers, fuses, and indicating lights shall be provided with a nameplate of raised or recessed lettering on the dead front, clearly identifying the circuit which each device controls and its circuit designation. The dead front panel shall conform to NFPA No. 70, Article 408. A wiring gutter shall be provided along the top, sides, and bottom, for the routing of high voltage leads to their designated circuit breakers.

- iv). The panel shall be secured by approved, captive fasteners and shall be configured for easy removal so that maintenance and repair action is not impeded.
- v). Power distribution to circuit breakers and switches shall be from a bus bar or bus circuit.
- vi). Distributing power by successive or "daisy-chained" connections between device terminals will not be permitted.
- vii). Battery Backup Circuits
 - (1) Any device provided that requires a backup battery must be designed with a five-year battery life unless specifically approved by Amtrak.
 - (2) A "low battery replacement" indicator or an equivalent fault message in the equipment diagnostics shall be provided to enable timely battery replacement prior to a loss of backup functionality.

19.38 Semiconductor Standards

a). General

- i). Semiconductors shall be selected to withstand all continuous and transient voltage and power demands present in the circuit application without damage or reduction in life.
- ii). All circuit designs shall provide for the presence of high current switching equipment on the vehicle and the resultant induced voltages and currents in electrical equipment.

b). Rating

- i). Discrete semi-conductors shall have the following minimum voltage breakdown rating, dependent on the use:
 - (1) Transistors and thyristors operated from the nominal battery supply, or those connected to trainlines, shall have minimum breakdown ratings of four times the maximum circuit rating. Suppression devices shall be provided as necessary to protect the devices and limit the circuit voltage.
 - (2) Diodes operated from the nominal battery supply, used as suppression devices, or those connected to trainlines shall have a minimum Peak Inverse-Voltage rating (PIV) of 1000V. Diodes with less than 1,000 V PIV rating may be used if adequate circuit transient protection is also provided.
 - (3) All discrete semiconductors operated from inverters or other isolating devices shall have minimum breakdown ratings of two times the maximum circuit voltage (except where specifically detailed otherwise). Suppression shall be provided, as necessary, to protect the devices

and limit the circuit voltage to the values specified by the semiconductor manufacturer.

- ii). Semiconductors shall be placed in a clean and ventilated environment which shall favor easy replacement.
 - iii). All semiconductor junction temperatures shall be limited to 150°C (or to the maximum rated temperature for the device, whichever is less) or less at maximum ambient temperature and at maximum rated output power.
 - iv). All semiconductors shall be operated at less than 50% of the maximum continuous current rating or maximum continuous power rating, whichever is more restrictive.
 - v). Integrated circuits operated from the battery supply through inverters or other isolating devices shall be operated within the voltage and current ratings specified by the manufacturer, derated to less than 50% of the maximum stress level at the maximum operating temperature of the device as specified by the manufacturer.
 - vi). Where the supplies to integrated circuits are regulated and surge protected, the voltage rating shall be 15% below the manufacturer's recommended maximum. In addition, the maximum power shall be limited to 50% of the manufacturer's specified maximum at the maximum operating temperature.
 - vii). All gallium arsenide and similar optical semi-conductors shall be rated for operation over the temperature range of -40°C to +85°C.
 - viii). All semiconductors shall be rated "industrial or automotive grade" for reliable operation over the temperature range of -40°C to +85°C, except for discrete power semiconductors (≥ 1 Watt) which shall be rated for temperature range of -55°C to +125°C. Exceptions shall not be taken without proper identification and written authorization from Amtrak prior to first article tests.
 - ix). All suppliers of semiconductors shall be selected according to a recognized standard such as ISO-9002 Section 4.6 or better. Exceptions shall not be taken to the above provisions without proper identification and written authorization from Amtrak prior to the first article inspection.
- c). Availability and JEDEC Registration
- i). To the highest extent practicable, thyristors, transistors and diodes shall be JEDEC registered and numbered.
 - ii). All semiconductors shall be available from at least two manufacturers and available from U.S. distributors. Single source devices, such as high voltage power devices, microprocessors, ASICs, and related support chips may be used only if approved. Such devices shall be essential to the proposed equipment, shall meet the service-proven requirements and shall be supplied by veteran manufacturers likely to support the device.

- iii). Environmental Stress Screening All printed circuit boards or assembled card racks shall undergo Environmental Stress Screening (ESS) in accordance with Section 5.10 of IEEE Std 16-2020. ESS alternatives based upon EN 61163-1 guidance will be considered as approved by Amtrak. All ESS records must be maintained for review by Amtrak inspectors.

19.39 Printed Circuit Board Standards

a). General

- i). Printed circuit boards shall be designed to IEEE Std 16-2020, Section 4.10 except as noted otherwise below.
- ii). Printed circuit boards incorporating vital functions shall be designed to IPC-2220 Design Standards Series, Printed Boards, Class 3.
- iii). Printed circuit boards incorporating components whose power dissipation is in excess of 2 watts, or boards mounted adjacent to such components shall utilize circuit board material per NEMA Standard LI 1, Type FR-5.
- iv). Printed circuit boards shall have a minimum thickness of 0.0625 in base material. All conductor material shall be copper and shall be firmly attached to the board and shall be resistant to blistering and peeling when heated with a soldering iron.
- v). All printed circuit boards shall be designed for ease of testing per ANSI/IPC-D-275, "Testability Design Check List."
- vi). Traces shall be made as wide as practical, with the minimum width being based on a 10°C temperature rise.
- vii). Components with pins shall be mounted only on one side. Connections shall be made to the other side or internal layers via plated through holes. Surface mounted components may be mounted on both sides if part of an approved existing design.
- viii). All circuit boards shall be inherently stiff or shall be reinforced to prevent damage due to vibration or handling. Unless otherwise approved circuit boards larger than 100 in.² shall be centrally stiffened.
- ix). All equipment shall be designed using stable, high tolerance components to eliminate the need for adjustments. Compensation for manufacturing tolerances may be made through parallel precision resistors. All replacement printed circuit boards shall be directly interchangeable without any additional adjustments.
- x). All printed circuit boards shall be of the "plug-in" type, with positive support against vibration, except where otherwise approved otherwise.
- xi). No more than one PC board shall be stacked on each PC card.
- xii). Printed circuit board connectors shall be heavy duty, high reliability, and proven in prior successful rail service. All printed circuit boards shall plug into

CONFIDENTIAL — DO NOT DISTRIBUTE

keyed sockets. Contact fingers and edge connectors shall have 0.000050 in. thick gold plating.

b). Marking

- i). All circuit boards shall be labeled with a part number, serial number, and descriptive nomenclature.
- ii). All components shall be labeled on the board with component drawing references and such other information as may be required to repair and troubleshoot the board. The component and wiring sides of the board shall each be marked to indicate capacitor and diode polarity, and at least two leads or one lead and a graphic symbol indicating orientation of all transistors and thyristors.
- iii). Integrated circuits and other multi-terminal devices shall have an index mark on the component side of the board, visible with the component inserted, to indicate proper keying and insertion; the first pin on all integrated circuits packages shall be identified on the wiring side of the board.
- iv). For boards whose component density is greater than 2.25 components per square inch, the Contractor may submit an alternate marking plan for possible approval. Such a plan should include board marking, augmented by layout drawings.

c). Component Mounting

- i). Components shall be fastened to the board in such a manner as to withstand repeated exposure to shock and vibration. Large components shall be supported in addition to the solder connections. Power resistors shall be mounted on standoffs so that the resistor bodies do not contact the board, spaced far enough away from the board so that resistor-produced heat will not discolor or damage the board or adjacent wires or components.

d). IC and Device Sockets

- i). IC and device sockets are prohibited except for components that must be removed for reprogramming or initial calibration procedures or devices that are available only for mounting in sockets. All socket applications shall be subject to approval by Amtrak. All other components shall be soldered in place.
- ii). Where approved, IC and device sockets shall comply with MIL-DTL-83502E and MIL-DTL-83734H, as is applicable for the device, and shall be made of the following materials:
 - (1) The bodies shall be molded from diallyl phthalate, PTFE Teflon, or approved equal.
 - (2) The contacts shall be fabricated from beryllium copper and shall be plated with a minimum of 0.000030-inch (0.000762-mm) of gold over a

minimum of 0.000050-inch (0.00127-mm) of low-stress nickel in the area of contact with IC pins.

e). Conformal Coating

- i). Both sides of the assembled printed circuit boards shall be coated with a clear insulating and protective coating compliant with IEEE Std 16-2020.
- ii). All IC sockets, connectors and test points shall be masked when the coating is applied.

f). Keying

- i). All printed-circuit boards shall be "keyed" to prevent insertion into the wrong socket. Further, circuit boards in safety related control systems, such as friction brakes, cab signal, PTC, and systems which can cause damage or unsafe train operation if the vehicle is operated with a card removed, shall be connected through a safety circuit or checked through an auto test to disable the vehicle if a circuit board is removed.

g). Circuit Board Connectors

- i). Printed circuit board connectors shall be heavy duty, high reliability, two-part type with a history of successful service in rail applications and shall be approved by Amtrak prior to commencing design.
- ii). Connectors which comply with MIL-DTL-55302G or DIN 41612 (EN 60603) Level 1 or 2, and which have plated contacts as described below, are considered to comply with the requirements of this Chapter.
- iii). The connector contact area shall be plated with a minimum of 0.000050 in. of gold over a minimum of 0.000050 in. of low stress nickel.
- iv). Card edge connectors are prohibited.
- v). All connectors within one panel assembly shall be keyed to prevent damage or malfunction due to incorrect insertion.

h). Testing

- i). Sufficient clearance shall be provided between components to allow testing, removal and replacement without difficulty due to lack of space.
- ii). Test points shall be provided in appropriate locations on modules and printed circuit boards. A negative return test point shall also be provided. The test points shall either accept and hold a standard 0.080 in. diameter tip plug or shall be a turret lug similar to Cambion No. 160-1026-01-05, or approved equal, with sufficient clearance to permit it to accept a standard oscilloscope probe clip and shall be identified by appropriate markings.
- iii). When test points are not suitable, as for complex circuits or micro-processor-based control system, self- diagnostic routines and/or special test equipment may be used to identify the failed Lowest Replaceable Unit.

CONFIDENTIAL — DO NOT DISTRIBUTE

i). Plated-Through Holes

- i). In addition to the general guidelines of the Institute of Printed Circuits (IPC), the following requirements shall be met:
 - (1) Plating Holes – Copper plate shall be a minimum of 0.001 in. minimum average thickness, and 0.003 in. maximum average thickness. Solder plates shall be 0.0003 in. minimum average thickness and 0.0015 in. maximum average thickness.
 - (2) Plated Hole Defects – No more than three voids per hole will be acceptable. Total area of the voids shall not exceed 10% of the total wall area. The largest void dimension shall not exceed 25% of the core diameter or the board thickness, whichever is smaller. There shall be no pits, voids, or cracks at the junction of the whole wall and terminal area to a depth of 1-1/2 times the total copper thickness on the surface.

j). Enclosures

- i). All circuit boards that are rack mounted shall plug into racks containing the mating half of the circuit board connector. The circuit board rack shall mount in an enclosure conforming to requirements in this document. The rack, circuit board and circuit board hardware shall be designed as an integrated system.
- ii). The rack and enclosure shall provide environmental and EMI shielding necessary to meet the requirements of this Specification.
- iii). Printed circuit boards shall be positively retained by means of keeper bars or other approved method. The enclosure or rack cover shall not be used to retain the circuit boards.
- iv). Each circuit board shall be fitted with an ejector or hand grip to assist in board removal. The rack and the edge of each board, or the card ejector, shall be labeled with corresponding numbers to identify board location within the enclosure.

k). Extenders

- i). Printed circuit board extenders (six sets of each type) shall be provided by the Contractor for test purposes. At least two extenders of each type shall be available for use and evaluation throughout the design conformance and acceptance test programs. The interfaces between extender and enclosure and PC board shall be positive and secure and shall prevent malfunction and loss of securement during testing. Mechanical locking means shall be considered for large PC boards.

19.40 Auxiliary AC Motors

- a). Motors shall limit starting current to within industry recommended practices and be equipped with NEMA C-frame type sealed bearings that shall not require re-lubrication for the life of the bearing. Bearings shall be sized to provide a minimum

life of 6 years. Any motor mounted with the shaft vertical shall have bearings suitable for this type of application. Any motor which is exposed to weather shall be a type specifically designed for the environment. Any motor with a vertical shaft and subject to the weather shall include a moisture seal on the shaft to prevent water from entering the bearings.

19.41 Recyclable Materials

- a). Expendable items that are recyclable shall be identified with the appropriate symbols, as defined by the Society of the Plastics Industry, permanently imbedded in the material.

19.42 CDRLs

CDRL	CDRL Description	Due
CDRL 19-01	Material description and test lab results	During IDR
CDRL 19-02	Joining and fastening data	During IDR
CDRL 19-03	Dissimilar metals report	During IDR
CDRL 19-04	Passivation process details	During IDR
CDRL 19-05	Visual inspection criteria for laminated glazing	During IDR
CDRL 19-06	Paint Process Documentation	During IDR through FDR
CDRL 19-07	Smoke Flammability and Toxicity Matrix	During IDR through FDR
CDRL 19-08	Design and product line for electrical connections	During PDR
CDRL 19-09	Design and product line for conduit fittings and junction boxes	During PDR

* End of Chapter 19 *

Amtrak Single Level Fleet Replacement Technical Specification

20. Test Requirements

Revision 0

Table of Contents

20.1	Overview	20-1
20.2	General Requirements	20-2
20.3	Test Plans, Procedures and Reports	20-4
20.4	Material Certification Tests.....	20-10
20.5	Proof of Design Tests.....	20-11
20.6	Installation, Removal, and Maintainability of Equipment.....	20-67
20.7	Pilot Car Testing.....	20-70
20.8	Production Tests	20-80
20.9	Acceptance Tests.....	20-99
20.10	Post-Delivery Testing of Pilot Cars with Other Equipment.....	20-101
20.11	Reliability and Post-Delivery Tests.....	20-101
20.12	CDRLs.....	20-102

20.1 Overview

- a). This Chapter addresses the requirements for the testing of the design and production of the cars and its components. It is based upon the traditional descriptions of testing an individual passenger car.
- b). The cars may have varying components and features depending upon Amtrak.
 - i). Based upon this, the Contractor shall review each part of this Chapter and prepare a matrix of its adaptation for the specific applicability for testing to the cars being constructed.
 - ii). This car testing matrix shall be presented to Amtrak for approval. **[CDRL 20-01]**
 - iii). The overall testing program shall be mutually agreed upon by the Contractor and Amtrak.
- c). References to first car or pilot train shall refer to the first delivered equipment of a particular type.
- d). As part of the production of the cars and its components under this Contract, the Contractor shall be responsible for a comprehensive series of tests to be performed to verify both the suitability of design and workmanship of each car.
- e). The Contractor is also responsible to fulfill all requirements called for by the Federal Railroad Administration (FRA) for testing new passenger equipment, and for operation at 125 mph per the applicable requirements of 49 CFR Parts 238 and 213.345 for Tier I equipment, for submission by Amtrak to the FRA.
- f). The tests and any required adjustments to be performed are grouped into four classifications:
 - i). Material Certification,
 - ii). Proof of Design,
 - iii). Production and
 - iv). Acceptance.
- g). Whenever test requirements overlap, the more comprehensive shall govern.
- h). The Contractor shall perform all tests under Amtrak observation, and the FRA may also observe such tests.
- i). All contractual tests shall be conducted in accordance with Amtrak approved test procedures.
- j). Testing activity scheduled and/or conducted before test procedure approval will be at the Contractor's risk.
- k). Material Certification Tests consist of all tests required to certify that the materials

used in the manufacture of the rail cars meet the performance and behavior requirements of the manufacturer's specifications, all applicable industry standards, and Federal requirements.

- l). A full listing of the material certification tests shall be included in the Master Test Plan, and the certifications and test results shall be submitted to Amtrak for review and approval.
- m). All material samples used for certification testing shall be scrapped upon the conclusion of testing and shall not be used in the manufacture of the cars.
- n). Proof of Design Tests are those tests conducted on the systems and components to validate the design of the cars, to confirm that the systems and components function as intended and in accordance with specifications and Federal requirements, and to ensure that no unintended or undesirable consequences are encountered during production or operation of the cars.
- o). Proof-of-design tests shall be conducted on all major systems and components prior to release of the first cars of each type, and as necessary during production in the event of a design change or component substitution.
- p). Production Tests consists of all components, systems and car tests to be performed on each production car to ensure that each car meets all functional, operational and workmanship requirements and standards, and that any production errors or nonconforming materials or components are revealed and corrected prior to the vehicle being released from the Contractor's facility.
 - i). These tests comprise component-level testing at the supplier's facility, and system-level testing at the Contractor's facility during and at the completion of production to demonstrate conformance with Technical Specification and baseline configuration requirements prior to delivery.
- q). Acceptance Tests consist of production car tests to be performed on each car by the Contractor after delivery of each car to the Contractor's field site or Amtrak's facilities to demonstrate conformance with the Technical Specifications, to ensure that no system functionality was lost during shipment and transit of the vehicle, and as a condition for Acceptance.
- r). Tests related to contract options are included in this Chapter. If a contract option is not exercised, then the relevant tests will not be applicable.

20.2 General Requirements

- a). The Contractor is required to perform all tests as specified herein.
- b). The Contractor and its subcontractors may, at their option, perform additional testing as they deem necessary as part of the quality assurance program.
- c). Unless indicated otherwise, all costs associated with any of the tests performed are to be borne by the Contractor.
- d). In the event of a failure to meet the Technical Specification requirements in any

test, necessary corrections shall be made by the Contractor at its expense, and the failed test shall be rerun in its entirety at the Contractor's expense.

- e). If further corrections or modifications affecting the item under test are instituted, the Contractor shall perform a complete retest at its expense to demonstrate compliance with the Technical Specification requirements.
- f). Notwithstanding the preceding provision, Amtrak shall not charge the Contractor a fee for the use of Amtrak-owned facilities, tracks or utilities located on the Northeast Corridor, or for the use of Amtrak personnel, the first time a particular inspection or test is performed on a particular car.
- g). Amtrak shall have the right to charge Contractor for, and Contractor shall pay, all such expenses in connection with any re-inspection or retesting of a particular car required as a result of a car not having successfully passed the applicable test.
- h). Acceptance of the Fleet or any car thereof by Amtrak shall not occur until after all tests, and retests if applicable, are successfully completed in accordance with the requirements stated in the Contract.
- i). The Contractor shall give at least ten days' notice to Amtrak prior to the start of any test referred to herein.
- j). In the case of pre-revenue service tests per 49 CFR Part 238.111 (b) (2), 45 calendar days' notice shall be given to Amtrak in order to assure timely notification of the FRA. Additionally, CFR Part 238.110 is intended to complement 238.111, as proposed to be revised in the NPRM, and shall be included in the testing requirements.
- k). If the Contract, or any subcontracts, Applicable Laws of any public authority having jurisdiction over Amtrak operations, require the Locomotives or other Equipment or Supplies to be inspected, tested or approved, Contractor shall give the COTR thirty (30) days (sixty (60) days for international travel) notice of its readiness and of the date arranged for any such testing so Amtrak may observe such inspection, testing or approval.
- l). The Contractor shall perform and bear all costs of performing such inspections, tests and approvals unless otherwise provided in the Contract.
- m). If after Contractor begins delivery of the cars or other Equipment or Supplies, Amtrak determines that any such item requires additional inspection, testing, or approval (in addition to inspections and tests provided under the Contract), Contractor shall, upon written authorization from Amtrak, order such additional inspection, testing or approval and Contractor shall give notice as provided hereunder.
- n). These additional inspections or tests shall be conducted at the initial expense of Amtrak, and Amtrak shall grant a non-compensable extension of time equal to any delay caused by such tests.
- o). Notwithstanding the preceding sentence, if such additional test or inspection reveals a defect or failure of the cars or Supplies to comply with the requirements

of the Contract; or with any Applicable Laws, ordinances, rules, regulations or orders or if the original test or any retest or additional testing is improperly conducted by a Contractor Party, Contractor shall bear all costs of correction and retesting thereof, and no extension of the Contract Time shall be granted.

- p). Required certificates of inspection, testing or approval shall be secured by Contractor and promptly delivered to Amtrak.
- q). Neither the observations nor representations of Amtrak in its administration of the Contract, nor Amtrak's inspections, tests or approvals shall relieve Contractor from its obligations to perform the Work in accordance with the Contract.
- r). Except as otherwise provided herein or agreed to by the Parties; tests shall be performed at plants of Contractor or its Subcontractors.
- s). Contractor shall have a valid Amtrak Temporary Permit to Enter prior to performing any work on the Railroad or Amtrak's premises.
- t). For onsite track testing, Amtrak shall identify suitable track meeting the length, alignment and other characteristics identified by the Contractor to permit performance of the required qualification track tests.
- u). Except as provided herein, Amtrak may, at its sole discretion, allow the Contractor to furnish test reports which indicate that equipment furnished under this Contract is identical to equipment which has been previously tested for the same application and accept this as showing conformance with the requirements of this Technical Specification. Amtrak has the discretion to reject any test reports from similar or identical equipment that the Contractor may propose in lieu of actual testing, for any reason at all, including but not limited to differences in the equipment, differences in the operating environment, insufficient time or mileage in service, or anything else whatsoever.

20.3 Test Plans, Procedures and Reports

- a). The Contractor shall prepare and provide to Amtrak as specified the following test documentation. See Chapter 22 for additional details regarding submittal of documents to Amtrak.
 - i). Master Test Plan
 - (1) No later than 180 days after NTP, the Contractor shall submit to Amtrak for review and acceptance a Master Test Plan **[CDRL 20-02]** covering all tests listed in or otherwise required by this Technical Specification.
 - (2) The Master Test Plan shall be updated monthly and presented as an attachment to the program meeting minutes.
 - (3) The Master Test Plan shall include a testing matrix identifying, all tests as required to be performed by the Contractor and suppliers, including but not limited to:

- (a) Material certification tests;
 - (b) Proof-of-design tests, including all required carshell, truck and suspension and ride quality tests;
 - (c) Production tests; and
 - (d) Acceptance tests.
- (4) It shall include a detailed schedule showing the sequence in which the test will be performed, and the time and place of each test to be performed.
 - (5) The plan shall be updated periodically, showing the status of each test procedure, test and associated report summarized in a spreadsheet format.

ii). Test Procedures

- (1) The Contractor shall prepare a detailed test procedure for all tests required by this Specification and for all other tests to be conducted by the Contractor or its suppliers in connection with its own quality assurance program. **[CDRL 20-03]**
- (2) Tests procedures shall be submitted for approval in advance of the anticipated test dates as follows:

Figure 20-1: Test Procedure Submittal Due Dates

Test Type	Procedure Due Date
Supplier Qualification, Proof of Design and Production	No less than 60 days prior to start of testing
Contractor Qualification, Proof of Design Tests	No less than 60 days prior to start of testing
Contractor Production Tests	No less than 45 days prior to start of testing

- (3) All required testing shall be conducted in accordance with Amtrak-approved master test plan and approved test procedures.
- (4) The test procedures shall include the following information:

Title/Approval Page:	Includes the name of the test, test number, revision level, date, author, signature of engineer responsible for system, signature of personnel who reviewed and approved the test, etc.

Revision History:	Provides the history of changes made to the document, including description, not merely date.
Table of Contents:	
1.0 Purpose	Identifies what the test is to accomplish.
2.0 Application	Identifies which car types/equipment is tested with this procedure.
3.0 References	Identifies any documents used as guidance for the test, such as APTA, FRA, ASTM, etc.
4.0 Definitions	Provides definitions of terms used in the test.
5.0 Prerequisites	Provides requirements of car condition before the test can be conducted, such as which tests must be successfully conducted before this test.
6.0 Equipment	Identifies test equipment and any other special requirements; lists instrument model numbers, calibration dates and serial numbers.
7.0 Initial Conditions	Identifies positions and/or state of all devices, controls and equipment.
8.0 Procedure	This is the actual test sequence. The test procedure shall identify pass/fail (or in some cases, intentional overload) criteria for each step in the procedure. Test data may be recorded within this section, or in a separate data section. The test procedure shall identify the conditions required for the performance of the test, including a sheet where test conditions can be recorded, such as voltage, current, resistance, time, etc. Each test performed shall be signed and dated by the technician performing the test.
9.0 Data Sheets	This is a form in which data is recorded, if it is not recorded within the body of the test. If data is recorded by instruments,

such as strip chart format, etc., those results shall be attached here.

- (5) Each car and system shall be tested in exact accordance with Amtrak-approved revision of the test procedure.
- (6) All test and inspection instruments shall be properly calibrated.
- (7) Should a system or component fail a test, the component or system shall be repaired or replaced, and the test repeated from the beginning.
 - (a) The test shall not be restarted at the point at which the failure occurred.
 - (b) Amtrak may, at its sole discretion, determine portions of the failed test which need not be repeated. Unless Amtrak gives written approval to re-test only the portion impacted by the failure of a component.
- (8) Each test shall be a separately controlled document and identified by its own number, title and revision.
- (9) All revisions shall be submitted to Amtrak for approval.
- (10) A history of test revisions and changes shall be maintained and recorded within the test document.
- (11) All tests must be written in an instructional form describing the full activity of each test step and written in duplex-numerical form (similar numbering system as seen in this specification).
- (12) All special tools and/or equipment to be used must be specified within the test document.
- (13) A data collection form shall be used with each procedure and shall be fully identified.
- (14) Each individual test shall be accompanied by a separate sheet where the test results are documented.
- (15) Each step of the test requiring a specified result or measurement shall be included and identified by the duplex-numeric step number referenced in the test document.
- (16) Areas shall be provided for recording actual values produced during the test where needed.
- (17) In addition, acceptance criteria and associated tolerances shall also be shown in parenthesis near the space available for recording the actual value.

- (18) The test number, revision and page number shall be shown on the header of each page or all test procedures.
- (19) Areas shall also be allocated for the date, car number, component serial numbers (as applicable), test equipment serial numbers, verification of test equipment calibration, test status (accepted/rejected) and signature areas for the test technician, Contractor Quality Assurance (QA) representative and Amtrak representative.

iii). Testing Notification

- (1) In the case of pre-revenue service tests per 49 CFR Part 238.111(b)(2), the Contractor shall provide no less than 45 calendar days' notice to Amtrak in order to assure timely notification of the FRA.
- (2) For other tests, each detailed test procedure shall be submitted to Amtrak for review far enough in advance of the planned test date to allow Amtrak at least 60 days for Qualification and Proof of Design tests and 45 days for production tests to initially review and comment on, or approve the procedure, and still have sufficient time to allow the Contractor to modify a rejected procedure and resubmit to Amtrak, to have approval a minimum of ten (10) working days prior to any testing covered by the procedure.
- (3) Amtrak shall witness all tests.
 - (a) Under no circumstances will Amtrak accept the results of a test performed without approved procedures.
 - (b) Amtrak requires the Contractor to do internal pre-testing to validate performance prior to the Amtrak-witnessed testing and may require it for tests requiring Amtrak personnel to travel to a Contractor site. In the event the witnessed tests fails, the unwitnessed test results may not be used as a substitute.

iv). Test Documentation

- (1) The Contractor shall be responsible to provide Amtrak with written test reports for all tests performed on the cars and their components, including supplier test reports.
- (2) Upon the completion of each test, the Contractor shall submit a written report of each test, including copies of all test data, to Amtrak for approval. **[CDRL 20-04]**
- (3) In every case, the report shall include a description of the test, all raw data collected in the test, and a summary of the results in a form that can be directly compared to the Technical Specification without further calculations.

- (4) The test report shall include a record of the testing dates, tracing numbers for any calibrated instruments used during testing and an overall conclusion of the test findings.
- (5) A test shall not be considered as completed until Amtrak (and the FRA, as required) has approved its final written test report.
- (6) Should the test procedure or reports be inadequate and not meet the requirements of the Technical Specification of the FRA, Amtrak reserves the right to require revisions including those requiring more testing tasks or data to satisfy itself that the test program or report is adequate and does meet FRA and Specification requirements.
- (7) The approval of Amtrak does not in any way relieve the Contractor of responsibility for the adequacy of the test program within the scope of this technical specification.
- (8) Upon the completion of all required engineering tests associated with the pilot program, all copies of all test procedures, reports and approvals shall be copied and presented to Amtrak in a single volume and a single pdf document with links to each test that is easily searchable. **[CDRL 20-05]**
- (9) All material certification and proof-of-design test procedures and reports shall be supplied by the Contractor in a separate binder and submitted to Amtrak for review and approval prior to acceptance of the first car of each type and a single pdf document with links to each test that is easily searchable. **[CDRL 20-06]**
- (10) The master test plan shall be included in this binder and a single pdf document with links to each test that is easily searchable.
- (11) Reports on all certification and proof of design tests plus the acceptance tests for the first car of each type shall be submitted and approved by Amtrak prior to acceptance of the first car of each type and a single pdf document with links to each test that is easily searchable.
- (12) For production tests, which are performed on all cars or all components, a separate volume shall be submitted to Amtrak containing all approved tests applicable to individual cars and a single pdf document with links to each test that is easily searchable.
- (13) In the event a test is revised, the Contractor shall supply a copy of the test reflecting approved changes and the upgraded revision status to replace the existing test within this volume and a single pdf document with links to each test that is easily searchable.
- (14) The test reports required by this specification that are performed on all cars or all components shall be included in the vehicle

history books. At the front of the test diction of the vehicle history book there shall be a test log and a single pdf document with links to each test that is easily searchable.

- (15) This test log shall be maintained by the Contractor during the equipment assembly.
- (16) The test log shall have a place for a technician signature and date and will be signed when each test procedure has been completed.
- (17) The test log shall be submitted to Amtrak for review before each car shall be released for shipment to the delivery site.
- (18) All Contractor and Amtrak in process inspection sheets and test data records for that car shall be contained in this test log.

20.4 Material Certification Tests

- a). All materials used in the production of the vehicles shall be tested to verify conformance with all applicable standards, regulations and specifications, and to ensure that the material performs as specified. At a minimum, the following materials shall undergo material certification testing:
 - i). All exterior glazing shall be certified to conform to 49 CFR Part 223 requirements.
 - ii). All interior materials shall be certified to meet smoke, flame and toxicity requirements.
 - iii). All subfloor panels shall be certified to meet strength and impact resistance requirements.
 - iv). All materials used in production of the carshell shall be certified to meet material strength, composition and performance characteristics.
 - v). All components used in the manufacture of truck, suspension and coupler assemblies shall be certified to meet all applicable strength, composition and performance requirements.
 - vi). All insulation materials shall be certified to meet applicable insulation performance standards.
 - vii). All materials used in food preparation areas of the Food service car, potable water systems and trash storage shall be certified to meet all applicable Public Health Service sanitation requirements.
 - viii). All interior and exterior emergency signage materials shall be certified to meet FRA emergency exit signage requirements.
 - ix). All emergency power sources shall be certified to meet FRA emergency exit pathway.

- x). All emergency equipment shall be certified to conform to all applicable FRA regulations and other requirements as necessary.
- xi). All exterior graphics components, including paint, decals and hardware, shall be certified to meet all applicable performance requirements including environmental and air quality requirements, durability in accordance with environmental and climatic conditions, and application in a railroad environment.
- xii). All electrical devices producing magnetic fields shall not pose a hazard to any person with a pacemaker or other cardiac device within any area of the carbody interior, including passenger and maintenance areas. The magnetic field generated by the electrical devices shall be such that the magnetic field at any location where a passenger, driver or maintainer can be shall not exceed 1 mT (ref. "EN 45502-2-1, paragraph 27.6 " equivalent to ISO 14117, paragraph 4.6) when measured using the method defined by EN 50500 or IEC 62597. All car level EMC tests shall include applicable magnetic field interference testing for medical devices.

20.5 Proof of Design Tests

- a). General
 - i). The Contractor shall develop a series of tests to evaluate the design of the carshell and each car system, subsystem and major component to verify that:
 - (1) the performance requirements of the carshell structure, systems and components have been met
 - (2) the system and all component parts function as intended and within all specified parameters
 - (3) no unintended or unanticipated functions, problems or non-conformances are discovered during production or operation of the cars.
 - ii). These tests shall validate the design of all systems and components as supplied by the Contractor and subcontractors and prove that these designs are fully compliant with all applicable specifications, regulations and performance requirements.
 - iii). Proof-of-design tests shall be conducted on systems and components at the facilities of the Contractor or suppliers, or at other facilities as designated by the Contractor.
 - iv). The carshell and its primary structure shall undergo extensive proof-of-design testing to validate the structural strength, dimensional accuracy and performance of the carshell.
 - v). Proof-of-design tests shall also be conducted on completed cars at the Contractor's facility, to ensure that the individual systems and components

have been integrated to function as intended within the completed car, without unanticipated or undesirable effect or degradation of performance of other systems or components.

b). Carbody

i). Weight and Balance

- (1) Each completed car shall be weighed on a certified scale at AW0 condition ready to run [i.e. water, food service equipment, supplies, etc.] to determine compliance with the maximum weight and weight distribution requirement of the specification.

ii). Clearance

- (1) Each completed car type shall be measured at AW0 and AW2 load to verify compliance with the clearance diagram. This shall include all exterior fittings, hardware, safety appliances, (including FRA top-of-rail clearance requirements) etc. Width measurements shall be taken from the centerline of calibrated track, not the carbody.

iii). Car Curving

- (1) The first train containing each car type shall be tested to verify compliance (including having sufficient clearance between truck and carbody/equipment) to successfully negotiate the specified minimum curving radius in both directions of curving.
- (2) This must take into account suspension motion (including worst case broken or collapsed springs), wheel wear, and the actions of maximum buff and draft with all connections made between cars.
- (3) Each possible combination of vehicle configurations including locomotives, car types and legacy cars shall be tested to confirm interoperability.
 - (a) Couplers, trainlines and brake hoses compatibility shall be performed to confirm proper integration of the system at worst case curves, switcher, vertical curves, etc.; including proper receptacles/plugs junctions and length compatibility.

iv). Structural

(1) General

- (a) Unless otherwise indicated, all references to APTA, FRA and other standards indicate applicability of the current versions of the standards, as of the date of the NTP.
- (b) The test plans shall be coordinated with the final design of the carbody shell compliant with 49 CFR Part 238 requirements and shall test structural element strength and/or crash energy management performance, as based upon the design.

CONFIDENTIAL — DO NOT DISTRIBUTE

- (c) Specific details of the structural test plan shall be submitted to Amtrak for approval.
- (d) The first representative carbody of each car type shall be tested by the Contractor to confirm that the FEA is sufficiently accurate to ensure that the carbody structure complies with this Specification.
- (e) If there are no major structural differences between the carbody types and the test results are comparable with the FEA, the Contractor may choose to present data showing the similarities and differences between different carshell types to propose that the testing of certain carshell types can validate the performance of multiple types. In those cases, the worst case carshell must be the one subject to testing. Selection of carshells for testing is subject to approval by Amtrak and to review and objections from the FRA
- (f) The tests shall be performed at an Amtrak approved facility.
- (g) To be acceptable, the test facility must have documentation showing calibration of all instrumentation, have qualified personnel with experience in conducting similar tests, and have the necessary equipment, instrumentation and control equipment to conduct the test.
- (h) The tests shall not begin until the carbody stress and any energy absorption analyses have been submitted and approved by Amtrak.
- (i) The test carshell shall be completely inspected and any non-conformances corrected. All inspection, test, rework, repair and corrective action reports shall be available for review. Particular attention shall be given to recording flatness and straightness.
- (j) The test carshell shall be structurally complete, including all structural parts and fiberglass ends (if part of the design), but excluding such items as exterior and interior trim, windows, doors, seats, lights, interior lining, or other parts that would obscure any structural member from view, or that would interfere with the performance of the test.
- (k) The test shell shall have no paint, primer, sound damping coating, or insulation.
- (l) The weight of underfloor and above floor compartment-mounted equipment and heavy roof-mounted equipment shall be simulated by equivalent weights at their respective locations.
- (m) All structural tests shall be conducted on the same carshell or carshells.

- (n) The carshell shall be weighed and the weight recorded prior to installation of any test equipment.
- (o) For the tests, the car shall be supported on the trucks or equivalent supports to allow longitudinal movement.
- (p) All gauges and instruments shall be in current calibration and remain so for the duration of the test.
- (q) The methods of calibration and time periods for recalibration shall be in accordance with the test laboratory's national standard or ISO standards.
- (r) The laboratory shall have on file a current certification of calibration traceable to the laboratory's national standard or ISO standards.
- (s) The Contractor may conduct preliminary tests per the approved test procedures, but all critical dimensions and flatness shall be verified after the Contractor tests and before the official test begins. All data from preliminary tests shall be recorded per the approved test procedures and available to Amtrak upon request.
- (t) The test of record is to be witnessed by Amtrak.
- (u) A copy of all recorded data shall be given to Amtrak at the conclusion of each test.
- (v) A data acquisition system shall be provided to permanently record all gauge outputs at each load step. The data acquisition system and complete sensor set up shall be qualified by a handheld, high precision fixed shunt resistor across sensors chosen by the Amtrak test representative.
- (w) At the end of each load step, a printout of all strain gauge readings in proper engineering units (micro-strains) and a plot of load vs. gauge reading for critical gauge locations shall be given to Amtrak or its representative for review. Loads shall be reported in pounds for each individual application and totaled.
- (x) The Contractor shall obtain approval of Amtrak or its representative after every load step before proceeding with the next step.
- (y) All vertical and compression loads shall be complete removed, residual stresses measured, and sensors (including vertical load sensors) zeroed at the end of each individual test.
- (z) The Contractor shall not break down the test fixtures until Amtrak or its representative has reviewed and accepted all data for the applicable test.

- (aa) The Contractor shall prepare a color photographic record of the test.
 - (bb) This record shall include photographs of the car in the test fixture configuration for each test, installation of sensor configuration for each test, repairs or modifications, deviations from the drawings, and any areas found to be non-compliant.
 - (cc) The entire procedure shall be video recorded by the Contractor. The camera shall rove to view and record key areas.
 - (dd) All video taken during this test shall become the property of Amtrak. Video camera locations must be approved by Amtrak.
 - (ee) Amtrak reserves the right to test a second car of each type during the construction period.
 - (ff) Should such a test be ordered, it shall be at the expense of Amtrak unless such tests prove the design is non-compliant in any structural area, in which case, the Contractor shall be responsible for the test expense and for all of Amtrak's costs, and the cost of modifications necessary for the car and all other cars to be made compliant with the Specification.
 - (gg) The Contractor (at its expense) shall also perform a complete set of structural tests to qualify the modified car.
- (2) Test procedures
- (a) A procedure shall be prepared for each test.
 - (b) The procedure shall include a description of the test, its purpose, how and with what equipment the specimen is to be loaded and the load increments, the type and location of strain gauges, the location of deflection gauges, a complete description of all fixtures, instruments and gauges and a detailed description of the data acquisition system.
 - (c) Annotated copies of catalog cuts may be used to provide parts of the description.
 - (d) An explanation of the accuracy of the instrumentation shall be provided.
 - (e) Photographs (where available), drawings and sketches shall be included to clarify the text.
 - (f) The test procedure shall provide a step-by-step instruction describing how the load is to be applied, the load at each step, when data is to be recorded, a space for the signature of the test supervisor and a space for recording the authorization to proceed obtained from Amtrak or its representative.

- (g) Test procedures shall be submitted not less than 60 days in advance of the proposed test date; approvals of the test procedure and stress analysis are prerequisites for the start of testing.
- (h) The test procedure shall include a copy of the current calibration certification for each instrument and gauge to be used for the test.
- (i) Typical logging sheets, printouts, plotting forms and examples of any other data sheets for the test or in the final report shall also be submitted as part of the test procedure.
- (j) Tables shall be included to give the maximum allowable reading for each gauge and loading condition.
- (k) Other tables shall be included to provide the requirements for all other test criteria.
- (l) Each test procedure shall contain a table of predicted strain (or stress) its magnitude of the allowable, and deflection at selected gauge locations.
- (m) This table shall list the strain or deflection gauge number, the location of the gauge, the predicted strain (or stress) or deflection from the stress analysis, spaces to enter the actual gauge readings, and a space to enter the calculated percent difference, defined as:

$$\% \text{ difference} = \frac{\text{Actual} - \text{Predicted}}{\text{Actual}} \times 100$$

(3) Strain gauges

- (a) For structural strength testing, a minimum of 200 strain gauges (as typical for an 85 ft long car) shall be applied to the car structure for each of the compression, vertical load and diagonal jacking tests.
- (b) 75% of the strain gauges shall be 3 gauge combinations, such as rosette gauges.
- (c) Some gauges may be used for more than one test if their location on the structure is appropriate for other tests as accepted by Amtrak, but readings from at least 200 strain gauges in locations of interest shall be obtained for each test.
- (d) The location of the strain gauges shall be based on the Contractor's experience, the stress analysis and Amtrak's recommendations.

- (e) There shall be no less than three locations where there are a sufficient number of gauges to encircle the carbody, providing cross sections through the vehicle for evaluation.
 - (f) One location shall be outboard of the bolster, one shall be at the quarter-point between the truck centers, and one shall be at the center of the car.
 - (g) Gauges shall be placed, for example, on all four sides of the side sill and body sills, on the side framing, along the cant rail, on the cross members, and at the center line of the car.
 - (h) For structural post tests (if used), there shall be a minimum of 100 strain gauges applied to the post and car structure in the vicinity of the post.
 - (i) Some of the gauges may be for more than one test if their location on the structure is appropriate for other tests, but readings from at least 100 strain gauges in locations where the stress may be critical shall be obtained for each test.
 - (j) Drawings and sketches showing the location of each strain gauge shall be prepared by the Contractor and submitted for approval as part of the test procedure.
 - (i) These drawings shall dimension the location and orientation of each gauge, showing their distances from edges, connections and bends.
 - (ii) Their locations on the upper or lower, inner or outer surface shall be noted on these drawings.
 - (k) The gauges shall be calibrated and applied in accordance with the manufacturer's instructions for the material being measured and be compensated for temperature.
- (4) Deflection gauges
- (a) For structural strength testing, vertical deflection of the carbody shall be measured along both side sills at each load step during all tests.
 - (b) At least 11 gauges per side shall be used.
 - (c) Gauges shall be located at the end sills, at the bolsters, and at the mid-point between the bolsters.
 - (d) The remaining gauges shall be evenly spaced between the five locations.
 - (e) Measurements shall be taken to the nearest 0.01 in., and the deflections shall be considered as the average of the readings recorded on both sides of the car.

- (f) To measure the longitudinal deflection of the car during compression testing, additional deflection gauges shall be applied at the end sill, near the ram, and at the opposite end sill, near the reaction.
- (g) For the diagonal jacking and lifting tests, an additional deflection gauge shall be applied at the jack or crane that is lowered or raised to measure the vertical movement at the lifting locations.
- (h) During the vertical load test, the change in carbody width due to bending shall be measured and recorded at the belt rail in the center of the car.
- (i) Two additional deflection gauges shall be applied in one of the side door openings closest to the center of the car to measure the change in the diagonal dimensions of the opening during the tests.
- (j) To measure the bending of the collision and corner posts during the post tests, deflection gauges shall be applied at a minimum of seven locations on each post being tested: top, bottom, middle, load application point, between the load application point and the bottom, between the load application point and the center, and between the center and the top.
 - (i) These gauges shall be mounted to measure the deflection of the post in the direction of the applied force.
- (k) Deflection gauges shall be mounted on rigid stands separate from the carbody and its fixtures.
- (l) The contact surface on the car shall have a smooth, polished, low-friction surface plate mounted perpendicular to the axis of the deflection gauge.
- (m) If, during a test, the deflection gauge moves off of this surface plate or contacts the test carshell or the fixtures, the test shall be terminated.
- (n) The gauges shall be readjusted, and the test repeated from the beginning.
- (o) The deflection gauges shall have electrical outputs compatible with the data logging apparatus used with the strain gauges.
- (p) All deflections shall be recorded simultaneously with the strain gauge recordings.
- (q) In addition to the above electronic recordings, dial indicators (mechanical) of sufficient stroke shall be employed.

- (i) Two shall measure the vertical deflection at the center of both side sills during all tests.
 - (r) During the compression tests, dial indicators shall be employed to measure the longitudinal deflection at the end sill next to the ram and next to the reaction at the opposite end of the car.
 - (i) An indicator shall be located next to the lowering jack during the diagonal jacking test.
 - (ii) A dial indicator shall be mounted at the center of the post during each post tested.
 - (iii) These dial indicators shall be read and manually recorded at each load step.
 - (s) All deflection gauges shall have sufficient stroke capacity to measure the maximum deflection expected in the test without the need for resetting any gauge during the test.
- (5) Load cells
- (a) In order to verify the accuracy of the applied loads and reactions, load cells shall be provided at the appropriate locations for each test. Each load cell shall be calibrated to 1.0% accuracy and certified within one year before commencement of the tests over the full range of 1.5 times the maximum load to which the load cell will be subjected during these tests. The Contractor shall provide records of calibration results prior to commencing these tests. The load cells shall have electrical outputs compatible with the data logging apparatus used with the strain gauges. All loads shall be recorded simultaneously with the strain gauge recordings.
 - (b) Load cells shall be placed at the end of the ram and at the reaction point for the compression test. A load cell shall be placed at each secondary spring location for the vertical test and at each ram if the load is applied hydraulically. A load cell shall be placed at each jack location for the diagonal jacking test. A load cell shall be placed at the end of the ram for each post test. Load cell readings shall be taken and recorded at each step of load application and removal process.
- (6) Load Application
- (a) Unless otherwise agreed to by Amtrak, all loads for all tests shall be applied using hydraulic actuators to ensure quick testing schedules of the multiple carshell variants.
- (7) Vertical load test
- (a) Test description

- (i) For structural strength testing, the carbody supported on trucks or simulation thereof, shall be subjected to a vertical load test. The instrumented carshell shall be loaded to simulate ready-to-run weight. A test load, equivalent to the AW3 passenger load, shall be applied to the car in 4 equal steps, resulting in a total of five vertical load increments. The test load shall be distributed in proportion to the distribution of weight in the furnished car. The specimen shall be unloaded in the increments in which it was loaded. Strain gauge, deflection and load cell readings shall be taken at each load increment.
 - (ii) During the vertical load structural testing, both sets of doors on the vehicle shall be installed and their performance validated during max load. Alternatively, six additional deflection gauges can be used to validate the FEA's predicted worst case door opening deflections and the door may be test separately using these worst case deflections.
- (b) Test criteria
 - (i) The car shall be considered compliant with vertical load testing if all of the following conditions are met:
 - 1. Stresses are in accordance with the requirements of APTA Standard PR-CS-S-034-99.
 - 2. Vertical deflection readings plotted against load do not vary by more than $\pm 5\%$ from a straight line (linear) deflection curve, with one end point at the origin (no load) and the other at that point which represents the measured deflection for maximum vertical load.
 - 3. Strain readings plotted against load do not vary by more than $\pm 5\%$ from a straight line (linear) deflection curve, with one end point at the origin (no load) and the other at the point which represents the measured deflection at maximum load.
 - 4. Maximum stresses calculated from stain readings in any structural element do not exceed the allowable stresses approved prior to starting the test program as part of the stress analysis.
 - 5. Recorded residual vertical deflection between bolsters following removal of the maximum vertical test loading does not exceed 0.01 in.
 - 6. Recorded residual car transverse width and/or opening diagonal dimensions following removal of

the maximum vertical test load do not exceed 0.01 in.

7. Indicated residual strains at strain gauges on principal structural elements following removal of the maximum vertical loading do not exceed the maximum error resulting from the accuracy of the instrumentation.
8. Carbody deflection, as measured during the vertical load tests under a load equal to the passenger load of AW3, is not more than the design camber in the side sill at any point between the carbody bolsters.
9. Door operation is normal, including normally expected cycle times.
10. There are no permanent deformations, fractures, cracks or separations in the car structure. Broken welds resulting from the test are to be inspected jointly by the Contractor and Amtrak to determine if the failure is the result of weld quality or stress.
11. Vertical deflection readings validate the required camber values

(8) End Sill Compression Load Test

(a) Test Description

- (i) For structural strength testing, a compression test load as defined in APTA Standard PR-CS-S-034-99 is to be applied to the end sill assembly in the underframe of the test specimen by means of a ram. This load shall be applied horizontally at the horizontal centerline of the carbody.
- (ii) During the compression test, the carshell shall be supported on trucks or simulations thereof to allow free longitudinal movement. The carshell shall be loaded with sufficient dead weight to bring the total body weight of the test specimen to that of an AW0 loaded car. This loading shall be distributed in proportion to the distribution of weight in the finished car.
- (iii) The compression test load shall be applied by means of a controlled hydraulic ram, and the force measured by a means independent of those producing the force. The force shall be measured at the ram and at the reaction at the opposite end of the car. The ram shall be supported at the car end but shall remain free to move longitudinally with respect to the car end. The ram's connection to the

structure shall allow vertical rotation for any deflection of the structure throughout the test.

(b) Test criteria

- (i) The car shall be compliant with end sill compression testing if all of the following conditions are met:
 - 1. Stresses are in accordance with the requirements of APTA Standard PR-CS-S-034-99.
 - 2. The vertical deflection of each side of the test structure is within $\pm 10\%$ of the value determined by the analysis.
 - 3. The force measured at the reaction load cell is within 1.0% of the force applied at the ram.
 - 4. Maximum stresses calculated from strain readings in any structural element do not exceed the allowable stresses approved prior to starting the test program as part of the stress analysis.
 - 5. Indicated residual strains at strain gauges on principal structural elements following removal of the maximum vertical loading do not exceed the maximum error resulting from the accuracy of the instrumentation.
 - 6. There are no permanent deformations, fractures, cracks or separations in the car structure. Broken welds are to be jointly inspected by the Contractor and Amtrak to determine if the failure is the result of weld quality or stress.

(9) Compression load test at the draft stop

(a) Test description

- (i) For structural strength testing, a compression test load of 800,000 lbs. shall be applied to the rear draft stop in the draft gear housing. This load shall be applied at the car transverse centerline and vertically at centerline of shaft. No allowance shall be made for the camber of the carbody.
- (ii) A fixture, which simulates the regular draft gear and carrier, shall be installed. During the compression test, the carshell shall be supported on trucks, or a simulation thereof to allow free longitudinal movement. The carshell shall be loaded with sufficient dead weight to bring the total body weight of the test specimen to that of an AW0 loaded car. This loading shall be distributed in proportion to the

distribution of weight in the finished car. The ram's connection to the structure shall allow vertical rotation for any deflection of the structure throughout the test.

- (iii) The compression test load shall be applied by means of a controlled hydraulic ram, and the force measured by a means independent of those producing the force. The force shall be measured at the ram and at the reaction at the opposite end of the car. The load shall be applied in increments of 25%, 50%, 75%, 87.5% and 100% of full load. After each load increment is applied, the load shall be reduced to not more than 2% of full load. Strain gauge, deflection and load readings shall be taken at each load increment and at each relaxation of load. The ram may be supported at the car end, but shall remain free to rotate at its contact with the car end.

(b) Test criteria

- (i) The car shall be compliant with compression testing if all of the following conditions are met:
 - 1. Stresses are in accordance with the requirements of APTA Standard PR-CS-S-034-99.
 - 2. The vertical deflection of each side of the test structure is within $\pm 10\%$ of the value determined by the analysis.
 - 3. The force measured at the reaction load cell is within 1.0% of the force applied at the ram.
 - 4. Vertical deflection readings plotted against load do not vary by more than $\pm 5\%$ from a straight line (linear) deflection curve, with one end point at the origin (no load) and the other at the point which represents the measured deflection at maximum load.
 - 5. Strain readings plotted against load do not vary by more than $\pm 5\%$ from a straight line (linear) deflection curve, with one end point at the origin (no load) and the other at the point, which represents the measured deflection, at maximum load.
 - 6. Maximum stresses calculated from strain readings in any structural element do not exceed the allowable stresses approved prior to starting the test program as part of the stress analysis.
 - 7. Recorded residual vertical deflection between bolsters following removal of the maximum vertical

test load does not exceed 0.01 in.

8. The residual horizontal deflection between ends following removal of the maximum load does not exceed 0.04 in.
9. Indicated residual strains at strain gauges on principal structural elements following removal of the maximum vertical loading do not exceed the maximum error resulting from the accuracy of the instrumentation.
10. There are no permanent deformations, fractures, cracks, or separations in the car structure. Broken welds are to be jointly inspected by the Contractor and Amtrak to determine if the failure is the result of weld quality or stress.

(10) Diagonal Jacking Test

(a) Test description

- (i) For structural strength testing, the carshell shall be loaded to its AW0 weight, with trucks, or equivalent weight, hanging from the body bolsters. The carshell shall be supported symmetrically at the jack pads at the four corners of the car. One of the jacks shall be lowered in five equal increments until it is free of the jacking pad. The selection of the jack to be lowered should be based on its relation to the center of gravity of the carshell so that the diagonally opposite jack remains in contact with the jacking pad and carries some car weight. All gauges shall be recorded at each increment of jack position. The procedure shall be reversed until the load on the jack is returned to its original level.
- (ii) The amount of torsional deflection or twist shall be measured.

(b) Test criteria

- (i) The car shall be compliant with diagonal jacking testing if all of the following conditions are met:
 1. Maximum stresses calculated from strain readings in any structural element do not exceed 80% of the yield strength.
 2. Strain readings plotted against load do not vary by more than $\pm 5\%$ from a straight line (linear) deflection curve, with one end point at the origin (no load) and the other at the point that represents the measured

deflection at maximum load.

3. Indicated residual strains at strain gauges following return to original level do not exceed the maximum error resulting from the accuracy of the instrumentation.
4. There are no permanent deformations, fractures, cracks or separations in the car structure.
5. Broken welds are to be jointly inspected by the Contractor and Amtrak to determine if the failure is the result of weld quality or stress.

(11) Diagonal lifting test

(a) Test description

- (i) For structural strength testing, the carshell shall be loaded to its AW0 weight, with trucks, or equivalent weight, hanging from the body bolsters. The carshell shall be supported symmetrically at the four most outboard jacking pads of the car. One of the corners shall be lowered in five equal increments until it is free of the support. The selection of the corner to be lowered should be based on its relation to the center of gravity of the carshell so that the diagonally opposite corner remains in contact with the support and carries some car weight. All gauges shall be recorded at each increment of crane position. The procedure shall be reversed until the load is returned to its original level.
- (ii) The amount of torsional deflection or twist shall be measured.

(b) Test criteria

- (i) The car shall be compliant with diagonal lift testing if all of the following conditions are met:
 1. Maximum stresses calculated from strain readings in any structural element do not exceed 80% of the yield strength.
 2. Strain readings plotted against load do not vary by more than $\pm 5\%$ from a straight line (linear) deflection curve, with one end point at the origin (no load) and the other at the point that represents the measured deflection at maximum load.
 3. Indicated residual strains at strain gauges following return to original level do not exceed the maximum

error resulting from the accuracy of the instrumentation.

4. There are no permanent deformations, fractures, cracks or separations in the car structure.
5. Broken welds are to be jointly inspected by the Contractor and Amtrak to determine if the failure is the result of weld quality or stress.

(12) Collision post (if included) elastic test

(a) Test description

- (i) For structural strength testing, the ability of the carbody structure to resist collision post longitudinal loads shall be tested.
- (ii) During the collision post test, the carshell shall be supported on trucks or simulations thereof to allow free longitudinal movement. The post-applied load shall be reacted at the coupler. The carshell shall be loaded with sufficient dead weight to bring the total carbody weight of the test specimen to that of an AW0 loaded carbody. This loading shall be distributed in proportion to the distribution of weight in the finished car.
- (iii) The specimen shall be instrumented as required for the car and collision post per the corresponding test plan. Strain gauges and deflection gauges shall be installed at the same places at some locations so that the structural equivalence of the model to the carbody can be determined.
- (iv) A longitudinal test load as specified in APTA Standard PR-CS-S-034-99 shall be applied to, and centered on, the collision post. This load shall be distributed over an area not to exceed the width of the collision post by 6 in. in height. If the required load allows an ultimate strength limit, a reduced load can be proposed but shall maximize the load to the greatest extent practicable and shall be approved by Amtrak.
- (v) The test load shall be applied by means of a controlled hydraulic ram, and the force measured by a means independent of that producing the force. A fixture and means of cushioning, such as lead sheets, shall be provided to assure uniform bearing and to prevent crippling around the area of force application. This fixture and cushion shall not be attached to the post. The test load shall be applied horizontally parallel to the car longitudinal centerline. The load shall be applied in increments of 25%,

50%, 75%, 87.5% and 100% of full load. The load shall be reduced to not more than 2 percent of full load after each step. Strain gauge and deflection readings shall be taken at each load increment and at each relaxation of load. The ram shall be supported at the car end but shall remain free to move longitudinally with respect to the car end.

(b) Test criteria

(i) The car shall be compliant with collision post testing if all of the following conditions are met:

1. Deflection readings plotted against load do not vary by more than $\pm 5\%$ from a straight line (linear) deflection curve, with one end point at the origin (no load) and the other at the point that represents the measured deflection at maximum load.
2. Strain readings plotted against load do not vary by more than $\pm 5\%$ from a straight line (linear) deflection curve, with one end point at the origin (no load) and the other at the point which represents the measured deflection at maximum load.
3. Maximum stresses calculated from strain readings in any structural element do not exceed the allowable stresses approved prior to starting the test program as part of the stress analysis.
4. Indicated residual strains at strain gauges on principal structural elements following removal of the maximum loading do not exceed the maximum error resulting from the accuracy of the instrumentation.
5. There is no permanent deformation, fractures, cracks or separations in the car structure.
6. Broken welds are to be jointly inspected by the Contractor and Amtrak to determine if the failure is the result of weld quality or stress.

(13) Corner post (if included) longitudinal load test

(a) Test description

- (i) For structural strength testing, the ability of the carbody structure to resist primary side corner post longitudinal compressive loads to all cars shall be tested.
- (ii) During the corner post longitudinal test, the carshell shall be supported on trucks or simulations thereof to allow free longitudinal movement. The post applied load shall be

reacted at the coupler. The carshell shall be loaded with sufficient dead weight to bring the total carbody weight of the test specimen to that of an AW0 loaded carbody. This loading shall be distributed in proportion to the distribution of weight in the finished car.

- (iii) The specimen shall be instrumented as required for the car and corner post in the corresponding test plan. The strain gauges and deflection gauges shall be installed at the same places at some locations so that the structural equivalence of the model to the carbody can be determined.
 - (iv) Longitudinal test loads shall be applied to, and centered on, the corner post as specified in APTA Standard PR-CS-S-034-99. The magnitudes of the loads shall be limited to values that approach the yield strength of the part as predicted by the approved FEA but shall maximize the load to the greatest extent practicable and shall be approved by Amtrak. These loads shall be distributed over an area not to exceed the width of the collision post and not to exceed 6 in. in height.
 - (v) The test load shall be applied by means of a controlled hydraulic ram, and the force measured by a means independent of that producing the force. A fixture and means of cushioning, such as lead sheets, shall be provided to assure uniform bearing and prevent crippling around the area of force application. This fixture and cushion shall not be attached to the post. The test load shall be applied horizontally parallel to the car longitudinal centerline. The load shall be applied in increments of 25%, 50%, 75%, 87.5% and 100% of full load. The load shall be reduced to not more than 2% of full load after each step. Strain gauge and deflection readings shall be taken at each load increment and at each relaxation of load. The ram shall be supported at the car end but shall remain free to move longitudinally with respect to the car end.
- (b) Test criteria
- (i) The car shall be compliant with corner post longitudinal testing if all of the following conditions are met:
 - 1. Deflection readings plotted against load do not vary by more than $\pm 5\%$ from a straight line (linear) deflection curve, with one end point at the origin (no load) and the other at the point which represents the measured deflection at maximum load.
 - 2. Strain readings plotted against load do not vary by more than $\pm 5\%$ from a straight line (linear) deflection

curve, with one end point at the origin (no load) and the other at the point which represents the measured deflection at maximum load.

3. Maximum stresses calculated from strain readings in any structural element do not exceed the allowable stresses approved prior to starting the test program as part of the stress analysis.
4. Indicated residual strains at strain gauges on principal structural elements following removal of the maximum loading do not exceed the maximum error resulting from the accuracy of the instrumentation.
5. There is no permanent deformation, fractures, cracks or separations in the car structure. Broken welds shall be jointly inspected by the Contractor and Amtrak to determine if the failure is the result of weld quality or stress.

(14) Corner post transverse load test

(a) Test description

- (i) For structural strength testing, the ability of the carbody structure to resist corner post transverse loads shall be tested.
- (ii) During the corner post test, the carshell shall be supported on trucks or simulations thereof. Transverse restraint shall be at the lateral stops between the carbody bolsters and truck frame. The carshell shall be loaded with sufficient dead weight to bring the total body weight of the test specimen to that of an AW0 loaded carbody. This loading shall be distributed in proportion to the distribution of weight in the finished car.
- (iii) The specimen shall be instrumented as required for the car and corner post in the corresponding test plan. The strain gauges and deflection gauges shall be installed at the same places at some locations so that the structural equivalence of the model to the carbody can be determined.
- (iv) Longitudinal test loads as specified in APTA Standard PR-CS-S-034-99 shall be applied to and centered on the corner post. This load shall be distributed over an area not to exceed the width of the corner post and not to exceed 6 in. in height.
- (v) The test load shall be applied by means of a controlled hydraulic ram, and the force measured by a means

independent of that producing the force. A fixture and means of cushioning, such as lead sheets, shall be provided to assure uniform bearing and prevent crippling around the area of force application. This fixture and cushion shall not be attached to the post. The test load shall be applied horizontally perpendicular to the car longitudinal centerline. The load shall be applied in increments of 25%, 50%, 75%, 87.5% and 100% of full load. The load shall be reduced to not more than 2% of full load after each step. Strain gauge and deflection readings shall be taken at each load increment and at each relaxation of load. The ram shall be supported at the car end but shall remain free to move transversely with respect to the car end.

(b) Test criteria

- (i) The car shall be compliant with corner post transverse testing if all of the following conditions are met:
 - 1. Deflection readings plotted against load do not vary by more than $\pm 5\%$ percent from a straight line (linear) deflection curve, with one end point at the origin (no load) and the other at the point which represents the measured deflection at maximum load.
 - 2. Strain readings plotted against load do not vary by more than $\pm 5\%$ from a straight line (linear) deflection curve, with one end point at the origin (no load) and the other at the point which represents the measured deflection at maximum load.
 - 3. Maximum stresses calculated from strain readings in any structural element do not exceed the allowable stresses approved prior to starting the test program as part of the stress analysis.
 - 4. Indicated residual strains at strain gauges on principal structural elements following removal of the maximum loading do not exceed the maximum error resulting from the accuracy of the instrumentation.
 - 5. There are no locations of permanent deformation, fractures, cracks or separations in the car structure. Broken welds are to be jointly inspected by the Contractor and Amtrak to determine if the failure is the result of weld quality or stress.

(15) Collision post (if included) elastic-plastic test

(a) Test description

CONFIDENTIAL — DO NOT DISTRIBUTE

- (i) Collision posts at the vehicle ends coupled with locomotives shall be tested per the following requirements.
- (ii) For structural strength testing, the ability of the connections between the collision posts and the carbody structure to withstand a longitudinal load equal to the ultimate load carrying capacity of the post shall be tested.
- (iii) This test shall also verify the structural energy absorption requirement outlined in APTA Standard PR-CS-S-034-99, if used in the design.
- (iv) The test specimen shall be a full-scale structural model of the end of a car. The structural model shall include all structural elements required to support the collision posts including the end underframe and roof between the forward end of the end frame and the bolster. All connections shall be identical to those of production cars. The bolster end of the model shall be attached to a rigid fixture so that the stresses in the post and its supporting structure shall be the same as those in a car subjected to the same load.
- (v) The specimen shall be instrumented in the same manner in which it was instrumented in the collision post elastic test, except that instruments of greater capacity may be needed for this test. The strain gauges and deflection gauges shall be installed in the same locations so that the structural equivalence of the specimen to the carbody can be determined. Longitudinal test loads shall be applied to and centered on the collision post. This load shall be distributed over an area not to exceed the width of the collision post and not to exceed by 6 in. in height.
- (vi) The compression test load shall be applied by means of a controlled hydraulic ram, and the force measured by a means independent of that producing the force. A fixture and means of cushioning, such as lead sheets, shall be provided to assure uniform bearing and prevent crippling around the area of force application. This fixture and cushion shall not be attached to the post. The test load shall be applied horizontally parallel to the car longitudinal centerline.
- (vii) The initial load shall be applied in increments of the same magnitude as those used during the collision post elastic load test. The load shall be reduced to not more than 2% of full load after each step. Strain gauge and deflection readings shall be taken at each load increment and at each relaxation of load.

- (viii) The strain gauge readings and deflections measured during this test shall be within 5% of the gauge readings for the same load and location measured during the collision post elastic test. If difference between the two test results, the fixture and/or the model shall be corrected until agreement within 5% between the two tests is obtained.
- (ix) After agreement between the two tests is demonstrated, the collision post shall continue to be loaded in stroke increments of 20% of the full depth of the collision post until the load carrying capacity of the collision post is obtained. At each 20% load increment, all load cell(s), strain gauges and deflection gauges shall be recorded. The load need not be relaxed after each step.
- (x) The ultimate load carrying capacity of the post shall be defined as the condition where the post cannot support an increased load, or the center of the post has deflected more than its full depth. This deflection shall be measured at the middle of the post from a string connected between the top and bottom of the post.

(b) Test criteria

- (i) The collision post shall be compliant with collision post elastic-plastic testing if all of the following conditions are met:
 - 1. All strain gauges and deflection gauges have the same readings within $\pm 5\%$ for the same loads at the same locations as the collision post elastic load test for 0% to 100% as tested in the elastic test.
 - 2. The connections between the collision post and all other structural members are not completely broken.
 - 3. If required by the design, the collision post and supporting structure have absorbed energy as per APTA Standard PR-CS-S-034-99.

v). Floor Panel Fire Resistance

- (1) Amtrak approved sample of materials representing structural flooring and floor panels shall be tested to verify the ability to withstand the requirements of ASTM E119, when exposed for 30 minutes at up to 1400°F on the material underside.

vi). Safety Appliances

- (1) Must demonstrate compliance with FRA and APTA requirements.

vii). Emergency Window Egress and Access

- (1) Tests shall be conducted to measure the force required to remove each type of emergency window from the carbody. This shall be done both from inside and outside the car. The test shall include a check that car interior furnishings do not interfere with window removal. The force shall not exceed 25 lbf.

viii). Paint Adhesion

- (1) A paint adhesion verification test shall be performed using a standard crosscut adhesion test. This test consists of scribing a grid of four horizontal and four vertical 1-inch long lines through the coating with a sharp steel blade. Pressure sensitive tape, Scotch brand No. 335-2, is then pressed firmly over the scribed area and is then pulled away at 90 degree angle to the sample sheet. The coating shall pass the test if no coating is removed from the substrate material. Several test specimens shall be created by preparing the base metal in the same fashion as the carbody, selecting them to represent different conditions on the car. Specimens shall be painted at the same time as the carbody, with the same painting orientation as on the car (side, overhead, etc.).
- (2) An alternate paint adhesion test procedure based upon a recognized industry standard such as ISO 2409 or ASTM D3359 may be submitted for review and approval.

ix). Gap Filler

- (1) If being supplied as part of this procurement, the powered side door high level station platform gap filler shall undergo proof-of-design testing to evaluate and verify that the filler meets all specification requirements for:
 - (a) Compliance with all applicable ADA requirements;
 - (b) Functional and operational performance under all design loads, track conditions as specified, and safety factors without deformation or deflection;
 - (c) Rate of travel for extension and retraction;
 - (d) Proper operation of all safety provisions and functional interlocks and isolation devices within the unit and with the door system, brakes and indicators;
 - (e) Maintainability and reliability requirements; and
 - (f) Manual retraction with power failure
- (2) These tests shall include an endurance test in which the filler shall be subjected to no less than 500,000 repeated cycles of deployment and storage.

c). Trucks

i). Wheel Load Equalization

- (1) The truck shall be tested in accordance with APTA Standard PR-M-S-014-06, for Class G passenger equipment
- (2) To verify the equalization provided by the truck design, one truck on the first car at AW0 load shall have one wheel jacked up (lifted) 2.5 in. and then increasing to 3 in. while taking load readings every 0.5 inches in both the increasing and decreasing direction and suitable instrumentation provided to measure the load carried on the other wheels. The process shall be repeated with one wheel being dropped (lowered). The load changes shall be in accordance with the requirements of APTA Standard PR-M-S-014-06. In the event that suitable equalization is not attained as indicated by the tests, the truck design shall be corrected, the truck retested at the expense of the Contractor, and all trucks installed under the cars shall be modified to be in accordance with the corrected design.

ii). Truck Frame and Bolster Static Load Test

- (1) The truck frame and bolster shall be tested to verify that the maximum allowable stresses established by the Contractor and approved by Amtrak under an AW3 load are not exceeded. This is a static load test, repeated twice with a complete release between applications and shall be performed with the suspension elements replaced by solid blocking (with resilient pads if necessary). The truck shall be tested either as individual load bearing components or as an assembly, as the Contractor elects. If the load bearing components of the truck rather than the complete assembly are tested, provision must be made to apply all input loads described herein and for the member under test to react to these input loads in a manner which is identical to the reactions that would occur when included as part of the assembly. Forces shall enter the parts or truck at the normal application points and shall be so combined in each case as to produce the maximum unit stresses at the critical points for which the stress estimates were furnished. The tests shall be witnessed by Amtrak.
- (2) No less than 75 strain gauges shall be applied to the truck near the locations of maximum stress points as agreed to by the Contractor and Amtrak, Amtrak having the power of decision in disagreement. The locations of maximum stress points are to be determined by analysis. The critical stress readings of the two applications shall be averaged for comparison with the estimated stresses.
- (3) The loads shall be as listed in Chapter 7. The vertical, lateral, longitudinal, and braking loads shall be applied simultaneously. At no point shall the average stress exceed the allowable stress. If it does, Amtrak shall have the right to require that the design be corrected to bring the test stresses with the allowable stresses; the

CONFIDENTIAL — DO NOT DISTRIBUTE

truck shall be retested at the expense of the Contractor, and all trucks installed in the cars shall be modified to be in accordance with the corrected design. Testing will not be required on service qualified components which can be shown to have had satisfactory service experience of comparable severity and duration, as determined by Amtrak.

iii). Truck Frame and Bolster Overload Test

- (1) To demonstrate that the truck design has adequate strength to sustain a maximum load in the presence of a combination of minor manufacturing defects, a truck frame and bolster shall be overloaded statically. The suspension elements shall be replaced by solid blocking (with resilient pads if required). The loads shall be as listed in Chapter 7.
- (2) No less than 75 strain gauges shall be applied to the truck near the locations of maximum stress points as agreed to by the Contractor and Amtrak, Amtrak having the power of decision in case of disagreement. The location of maximum stress is to be determined by analysis.
- (3) Unit stresses at critical locations shall be measured before and after the test at representative points on the truck as agreed to between the Contractor and Amtrak, Amtrak having the power of decision in the event of disagreement. Certain before-test and after-test critical characteristic dimensional checks may be agreed upon to supplement strain gauge readings. Amtrak shall be present for the tests. There shall be no permanent deformation as determined from strain gauge readings. If such deformation appears, the design shall be corrected to bring the stress under the test condition within the elastic limit of the material involved, the truck shall be retested at the expense of the Contractor, and all trucks installed in the cars shall be modified to be in accordance with the corrected design. Testing will not be required on service qualified components which can be shown to have had satisfactory service experience of comparable severity and duration, as determined by Amtrak.

iv). Truck Frame and Bolster Fatigue Load Test

- (1) To demonstrate that the truck has adequate fatigue strength under dynamic loading, the truck frame and bolster shall be fatigue tested according to the provisions of APTA Recommended Practice PR-M-RP-009-98. Rev.2. For cast and fabricated truck frame and bolster designs the base fatigue test (Phase 1) shall be 6 Million cycles. The number of quasi-static lateral load reversals (curves), braking/traction direction reversals and applied twist loads shall correspond to the expected operation and service environment.
- (2) The truck frame and bolster shall be tested as a unit, with the suspension elements replaced by solid blocking (with resilient pads

CONFIDENTIAL — DO NOT DISTRIBUTE

if necessary). The loads shall be as listed in Chapter 7. The phasing of loads shall result in maximum combined stresses at the critical locations. The test shall demonstrate that the maximum combined stresses at the critical locations do not exceed those required. Critical locations shall be agreed upon by the Contractor and Amtrak, Amtrak having the power of decision in the event of disagreement.

- (3) The frequency of the load cycling shall be as proposed by the Contractor for approval by Amtrak. Prior to the test, the Contractor shall provide documentation and/or drawings for all defects that existed in the truck elements as produced, and the repairs made to the parts containing these defects.
- (4) During the fatigue tests, the truck shall be inspected regularly to detect possible crack initiation and progression. If evidence of progressive cracking or failure is found, the cause shall be assessed by Amtrak and the Contractor after which an appropriate correction shall be established and the test repeated.
- (5) At the conclusion of the fatigue test, a magnetic particle or dye penetrate inspection shall be made for cracks in the presence of Amtrak. If any crack is found, or pre-existing cracks have propagated, the design shall be corrected, the truck retested at the expense of the Contractor and all trucks installed under the cars shall be modified to be in accordance with the corrected design. Testing will not be required on service qualified components which can be shown to have had satisfactory service experience of comparable severity and duration, as determined by Amtrak.
- (6) After completion of the base fatigue test, an extended fatigue test shall be performed. The purpose of the extended fatigue test is to quantify the additional fatigue margin in the truck design.
- (7) The extended fatigue test shall be 2 million cycles with loads increased by 20% (Phase 2), then 2 million cycles with loads increased by 40% (Phase 3) or until failure occurs.
- (8) At the conclusion of the extended fatigue test, a magnetic particle or dye penetrate inspection shall be made for new cracks and propagation of pre-existing cracks. Note that new cracks, propagation of pre-existing cracks and structural failures do not by default constitute a failure for the extended fatigue test but rather data gathered during the extended fatigue test shall be used as part of the Fatigue Assessment Validation Report.

v). Truck Primary Suspension Tests

- (1) A load deflection test shall be performed to demonstrate that the spring rates of the primary suspension system in all axes are within the design limits. This test shall demonstrate that the primary suspension system behaves as predicted and will not result in

excessive deflection or a decrease in truck clearance above top of rail to less than the minimums prescribed.

- (2) For elastomeric primary suspension elements, the following tests are also required following the guidance in EN 13913: low temperature (stiffness), fatigue resistance, static creep, stiffness under sinusoidal motion and damping.
- (3) Hydraulic shock absorber (damper) accelerated life cycle endurance tests shall be performed following the guidance in EN 13802, selection of additional operational environment, physical characteristic and functional requirement tests to be proposed by the Contractor and approved by Amtrak.
- (4) If defects are found, the design shall be corrected and shall be retested at the expense of the Contractor, and all trucks modified to be in accordance with the corrected design.

vi). Truck Secondary Suspension Tests

- (1) Characterization and type testing of air springs shall be based on EN 13597, with tests and test parameters based on Amtrak's specific application as proposed by the Contractor, subject to Amtrak review and approval.
- (2) A load deflection test shall be performed to demonstrate that the spring rates of the secondary suspension system in all axes are within the design limits. This test shall demonstrate that the secondary suspension system behaves as predicted and will not result in excessive deflection.
- (3) Hydraulic shock absorber (damper) accelerated life cycle endurance tests shall be performed following the guidance in EN 13802, selection of additional operational environment, physical characteristic and functional requirement tests to be proposed by the Contractor and approved by Amtrak.
- (4) If defects are found, the design shall be corrected and shall be retested at the expense of the Contractor, and all trucks modified to be in accordance with the corrected design.

vii). Shunting

- (1) A shunting test shall be performed to verify the rail-to-rail resistance over the vehicle complies with the requirements in Section 5.8 using a suitable track signal voltage. Any auxiliary equipment shall be tested for proper operation per the manufacturer's specifications. Any auxiliary equipment activation and deactivation sequences shall be tested through 1000 cycles or the manufacturer's recommendation, whichever is greater, without defect.

d). Couplers

- i). The complete coupler assembly; including draft gear, radial connector, yoke, coupler carrier and uncoupling mechanism, shall be tested to validate conformance to the requirements, including all FRA regulations and applicable APTA standards and recommended practices, (including CEM performance requirements if used), range of motion, vertical loading, draft and buff loads and operations. This shall apply to all coupler types and/or drawbars used on the cars.

e). Brakes

i). General

- (1) The design and specifications of the friction brake system shall be verified through a series of tests that simulate the environment in which the brake system will function. These tests shall analyze the brake system's performance, reliability and safety under the extreme conditions found in revenue service, including full-service and emergency brake rate measurements, analysis of component fatigue, heat creation and dissipation calculations, handbrake performance and materials analysis. These tests shall include computer simulations and dynamic testing of brake system components as performed by the brake system supplier, as well as track tests performed by the Contractor using completed cars.

ii). Brake pad/shoe force tests

- (1) Tests shall be conducted on the first car to verify the actual force produced at the brake pad by the disc brake assembly, and at the brake shoe by the tread brake unit at both a parking brake if a parking brake is supplied and a non-parking brake location agree with calculated values. Tests shall be conducted with brake cylinder pneumatic pressures in 5 pounds/square inch increments, from 0 pounds per square inch to the maximum used, and from application of the parking brake.
- (2) Load cell brake disk caliper and tread brake shoe force measurements shall be taken on each car type to determine brake efficiency. Measurements shall be taken at minimum, full service and emergency brake pipe conditions, operating from 110 psig brake pipe setting and 140 psig main reservoir value. Force shall be measured also with the parking brake applied.

iii). Brake component fatigue tests

- (1) A test set-up shall be arranged such that a disc brake assembly, tread brake unit and brake pad and shoe are exposed as nearly as possible to the same conditions as they will encounter in service. The brake pad and shoe shall be loaded by applying air pressure equivalent to a maximum service brake (friction only) application to the disc brake assembly and the tread brake unit, and the forces

developed by brake reaction torque shall be applied through the mounting arrangement. The entire brake assembly shall be subjected to 1,000,000 cycles of applications and releases at the working loads predicted for an AW2 loaded car. The direction of the reaction torque shall be reversed every ten brake applications. This test will not be required for hardware that has had satisfactory service experience of comparable severity and duration, as determined by Amtrak.

iv). Friction brake system endurance tests

- (1) The first complete car set of the friction brake pneumatic control system produced, before mounting on a car, shall be subjected to an endurance test of 1,000,000 cycles of normal applications and releases to demonstrate that the control apparatus has the endurance required for rail service. The system will not be considered acceptable until the test has been performed without a component failure of any kind during 1,000,000 consecutive operating cycles. Testing will not be required on service qualified components which can be shown to have had satisfactory service experience of comparable severity and duration, as determined by Amtrak.

v). Brake capacity tests

- (1) The first production disc brake assembly, tread brake unit and brake pad and shoe for the car shall be tested using a full scale dynamometer to verify that the friction brake system design can perform the specified friction brake-only operation. A dynamometer test shall be performed to simulate the proposed revenue speed profile, driven by Amtrak defined train schedule service for speeds up to 110 mph. Any elevation grades exceeding 0.2% shall also be taken into account. The complete dynamometer procedure, dynamometer facility and test protocol shall be provided by the Contractor and approved by Amtrak. This procedure is an amendment to the qualification of brake shoe and disc brake materials as specified in Amtrak Specification 973 and Amtrak Specification 80-276. All other attributes of friction brake material performance shall be in accordance with Amtrak Specification 973 and 80-276. The production brake pads and materials shall be used, and temperature limits specified by the brake and wheel supplier shall not be exceeded. For tread brake and brake shoe dynamic testing, a test wheel shall be provided by Amtrak. The test shall be coordinated according to the planned operating pattern.

vi). Handbrake tests

- (1) Handbrake performance shall be verified for compliance to the specification as well as APTA PR-M-S-006-98 using new brake shoes/pads.

- (2) On the first car, a test of the adequacy of the design of the handbrake shall be made (using first new and then fully worn brake shoes) by measuring with a scale the force needed to move the car with the handbrake applied on level tangent track.
 - (3) The “handbrake-applied” indicator light shall also be tested.
 - f). Door System
 - i). General
 - (1) The side and end door systems shall be subjected to extensive testing to confirm that the systems and components meet all requirements for:
 - (a) System integrity
 - (b) Safety
 - (c) Functionality and operation
 - (d) Weather sealing
 - (e) Opening and closing times and speeds
 - (f) Trainline controls, indicators and interlocks
 - (g) Compliance with regulations, recommendations and standards
 - (h) Reliability
 - (i) Maintainability
 - (j) Sustained and compliant performance under all specified operational and environmental conditions
 - (2) All door system components shall be tested through rigorous multiple-cycle operation that simulates the actual installation, hardware and climatic conditions as specified.
 - ii). Side door, Trap door, and Folding step system reliability test
 - (1) A set of side door panels and operators, fully equipped with all required equipment as designed including trap doors and folding steps (gap filler devices if option is executed), shall be installed in a test fixture at the facilities of the door system supplier, and subjected to a repeated open and close cycle test of no less than 500,000 full cycles, so demonstrate the durability of the operators, hangers, switches, motors and all other components of the door system. The test fixture shall simulate the actual door opening, threshold and any pocket in which the doors will be mounted. Power and control to the doors shall be via the actual wire leads that will connect the door operator to the carbody wiring in a

production installation. The door operators shall be monitored for proper function and continued operation. Any failure of the door operators to function or perform according to the specifications, test procedure or performance criteria shall be considered a failure. All failures shall be investigated and analyzed as to cause, and the Contractor or door system supplier shall propose corrective action. Once approved by Amtrak, the door operators shall be modified to conform to the corrective action, and the test shall be started over again. The door system test shall be conducted until both operators function continuously without failure for 500,000 cycles.

- (2) Once the first car has been completely assembled, and the entire side door system has been installed and the functionality has been verified, the side doors, trap doors, and folding steps shall be operated for 15,000 continuous trouble-free cycles each, split evenly between high level and low level opening/closing of the door, trapdoor, and including gap filler cycling. The system shall be monitored to confirm that each door operates through a complete cycle of fully opening and fully closing and latching for all 15,000 cycles. No adjustments or maintenance will be allowed during the test. Any door or door control failure occurring prior to completion of the test will require that the test be stopped, corrective action be taken to document and resolve the failure and start the test at the beginning for all car doors.

iii). Side door, Trap door, Folding steps safety test

- (1) Once installed in a completed car, the side door system, including all side doors, trap doors, and folding steps, shall be functionally tested to verify that the door system and gap filler if optioned design conforms to all applicable safety requirements, including:
 - (a) Trainline and local control, door summary circuit and zero-speed operation
 - (b) Obstruction detection and recycle operation
 - (c) Interlocks, isolation and manual locking
 - (d) Interior, exterior and trainline door status indicators
 - (e) Manual release (interior and exterior), including the force to activate the manual release, the force to open a door that has been released and the process for resetting the doors to normal operation
 - (f) Structural integrity of the door panel and glazing
 - (g) Signage and emergency operation

- (2) Under no circumstances shall a door be allowed to create an unsafe condition.

iv). End door reliability test

- (1) An end door and operator, fully equipped with all required equipment as designed, shall be installed in a test fixture at the facilities of the door system supplier, and subjected to a repeated open and close cycle test of no less than 500,000 full cycles, so demonstrate the durability of the operator, hanger, switches, motor and all other components of the door system. The test fixture shall simulate the actual door opening, threshold and pocket that the door will be mounted in. Power and control to the door shall be via the actual wire leads that will connect the door operator to the carbody wiring in a production installation. The door operator shall be monitored for proper function and continued operation. Any failure of the door operator to function or perform according to the specifications, test procedure or performance criteria shall be considered a failure. All failures shall be investigated and analyzed as to cause, and the Contractor or door system supplier shall propose corrective action. Once approved by Amtrak, the door operator shall be modified to conform to the corrective action, and the test shall be started over again. The end door test shall be conducted until the operator functions continuously without failure for 500,000 cycles.
- (2) Once the first car has been completely assembled, and the entire end door system has been installed and the functionality has been verified, the end doors shall be operated for 15,000 continuous trouble-free cycles each. The system shall be monitored to confirm that each door operates through a complete cycle of fully opening and fully closing for all 15,000 cycles. No adjustments or maintenance will be allowed during the test. Any door or door control failure occurring prior to completion of the test will require that the test be stopped, corrective action be taken to document and resolve the failure and start the test at the beginning for all car doors.
- (3) The end door shall also be tested for proper opening, closing and hold-open times, the force required to manually open the door in manual mode, and for proper operation of the obstruction detection system, the normal/manual/open selector switch, and the push button.
- (4) A set of end door push buttons shall be subjected to a 100,000-cycle test that simulates the use of the buttons to command an end door to open. The buttons shall perform as intended through the 100,000-cycle test without showing signs of wear, abrasion or degradation of the switch, wiring, connectors or seals.

v). Side Door Wheelchair Lift

- (1) If provided, the powered wheelchair lift shall undergo proof-of-design testing to evaluate and verify that the lift meets all specification requirements for:
- (2) Compliance with all applicable ADA requirements;
- (3) Functional and operational performance under all design loads, track conditions as specified, and safety factors without deformation or deflection;
- (4) Rate of travel upward and downward for the lift platform under loaded and unloaded conditions; rate for one full cycle shall not exceed 105 seconds in powered operation and 305 seconds in manual operation;
- (5) Full range of vertical movement for the lift to adequately reach the range of station platforms as specified;
- (6) Proper operation of all safety provisions and functional interlocks and isolation devices within the unit and with the door system, brakes, car diagnostic system and indicators;
- (7) Function of lift after loss of power while in mid-travel, then with restoration of power;
- (8) Proper and secure storage of the lift within the car;
- (9) Maintainability and reliability requirements; and
- (10) Manual operation of lift at rated load.
- (11) These tests shall include an endurance test in which the lift shall be subjected to no less than 2,500 repeated cycles of deployment and storage.

g). Interior

i). Luggage Racks/Towers

- (1) A complete overhead luggage rack, mounted on simulated carbody structure, shall be tested to verify it meets the 250 lb. load requirement. A complete overhead luggage rack, fully loaded with actual weighted luggage and mounted on simulated carbody structure, shall be tested to verify it meets the 8/4/4g crashworthiness requirements. Similarly, a luggage tower module shall be mounted on simulated carbody structure and tested to verify that it meets the design load requirements as well as the 8/4/4g crashworthiness requirements. Additionally, luggage tower modules shall be tested to verify proper operation of all auxiliary functions in secondary storage configurations (i.e. bike storage, ski storage, etc). All variations of luggage towers including towers utilized in the baggage area shall be tested.

ii). Seats

- (1) One sample seat of each seat type identical to a production version shall be tested in a simulated carbody structure by the manufacturer for all criteria specified in APTA Standard PR-CS-S-016-99 and submitted to Amtrak with a detailed test report. This test result must be approved by Amtrak before additional seats can be ordered and assembled into the pilot cars for pre-delivery testing.

iii). Seat Cushion Tests

- (1) Seat cushions of each seat type selected twice at random by Amtrak during cushion production shall be tested to verify compliance with Chapter requirements.
- (2) Seat cushions including those in booth seats (both foam and upholstery) shall be tested to verify compliance with requirements.

iv). Side and End Wall Liner Tests

- (1) A 20lb load distributed over a 0.5 in x 0.5 in surface area applied anywhere on the surface of interior panels shall not cause the panel to deflect more than 1/8 inch. A 50lb load distributed over a 6 in x 6 in surface area applied anywhere on the surface of interior panels shall not cause the panel to damage or crack. Upon removal of the loads, the panel shall return to the original position without signs of damage or permanent deflection.

v). Doors and Hardware

- (1) All interior doors and hatches, including food service units, shall be functionally checked to verify:
- (2) doors hang vertically; verify correct relationship between carbody plane and door plane
- (3) proper open travel
- (4) proper fully closed position
- (5) smooth movement
- (6) smooth latching/ unlatching
- (7) smooth locking & unlocking from external side of door
- (8) correct latch and/ or lock engagement/ release
- (9) non-interference, freedom from sticking or excessive looseness (rattles)

- (10) proper switch activation for all door opening/closing lights, i.e., restroom, locker, closet, etc.
- (11) proper engagement of the ceiling hatch safety catches
- (12) proper function of RFID door lock
- (13) proper function of emergency egress capabilities

h). HVAC

i). Heating and Air-Conditioning Tests

- (1) One complete Heating, Ventilation and Air Conditioning (HVAC) unit and its complete controls shall be given a qualification and capacity test by the air conditioning manufacturer to verify the performance of the unit. This test shall be successfully completed before commencement of the vehicle climate room test. The test shall be conducted in accordance with ANSI/ASHRAE Standard 37. The testing laboratory shall be approved by Amtrak.
- (2) The actual HVAC control system, with actual temperature sensors, shall control all system operations during the test, unless indicated otherwise for specific tests.
- (3) Tests shall be conducted at nominal voltage and frequency, except where otherwise specified. Appropriate test log sheets and calculation forms shall be generated and included with the test procedure for approval. They shall become a part of the test report.
- (4) The accuracy and tolerances of all instrumentation and tests shall comply with the requirements of the ASHRAE Standard 37 Table 4 and all of the required data shall be continuously recorded. Temperature measurements and measurement techniques shall comply with ASHRAE Standard 41.1. An event recorder shall be provided to monitor operation of relays and contactors.
- (5) Note: If more than one type of HVAC unit and/ or controls is provided, then each type shall be fully tested for the following:
 - (a) Temperature Control Performance
 - (i) Verify:
 - 1. function after cold-soak of controls
 - 2. integration with HVAC unit
 - 3. demonstration in all possible modes of operation, for all car types identified in the temperature control specification; not merely cars ordered at this time.
 - 4. ramp up and ramp down of all temperature inputs

5. demonstration of all logic functions, input and output, including:
 - a. control and power circuits
 - b. operation of all safety circuits
 - c. all modes of operation, including fault conditions
 - d. indicators/ display(s), including each condition possible
 - e. fault displays, including each condition possible
 - f. Portable Test Unit (PTU), including all modes of operation
- (b) HVAC Unit and Controls Performance
 - (i) Verify:
 1. operation of capacity controls
 2. operation of pressure controls
 3. performance of expansion valves and measurement of superheat
 4. performance of duct heater safety circuits and thermostat(s)
 - (ii) Refrigerant charge test
 1. The refrigerant charge, by weight, shall be confirmed at the system design conditions. The Contractor shall include the testing criteria in the test procedure which shall be approved by Amtrak. The criteria shall include the following, at a minimum:
 - a. Level of superheat at the evaporator outlet;
 - b. Level of superheat at the compressor suction valve;
 - c. Compressor suction and discharge pressures;
 - d. Level of liquid refrigerant sub-cooling at condenser outlet;
 - e. No air bubbles in liquid line sight glass;

- f. Compressor(s) working at full load/capacity.
- (c) HVAC Unit Performance
 - (i) Verify:
 - 1. Design Cooling Capacity Test – Measured airflow with dry evaporator coil and with wet evaporator coil, Determination of cooling capacity at rated conditions, including power requirements
 - 2. Modulation Capability Test
 - 3. Maximum Operating Conditions (MOC) Functional Test
 - 4. Extreme Operating Conditions Functional Test - capacity at 130° F ambient
 - 5. Humidity Control Test
 - a. humidity control at mild load, high humidity conditions
 - 6. Insulation Efficiency and Liquid Carryover Test
 - 7. Low Temperature Operation – Minimum Cool / Low Ambient Test
 - 8. Heating Capacity Test
 - 9. Abnormal Heating Test with Restricted Airflow
 - 10. Abnormal Heating Test with No Airflow
 - 11. Test of High Limit Temperature Thermostat/Switches
 - 12. Blower Motor / Heater Circuit / Cooling Circuit Interlock Test
 - a. Blower Motor, heater interlock with airflow switch test
 - b. Blower Motor, cooling circuit interlock with airflow switch test
 - 13. Water Tightness Test
 - 14. Exterior Noise Test
 - (d) Temperature Control Integration/Operation with HVAC Unit

- (i) The temperature control components and software shall be connected with an HVAC unit and either fully functional PTU or necessary temperature and pressure sensing controls to effectively perform full functional testing of all software controls. Controller shall simulate actual operational controls and provide controls and verify correct feedback of HVAC unit response. All points of the approved temperature control schedule referenced in Chapter 10 shall be verified for both the temperature rising and the temperature falling cycles. Demonstration of all HVAC operating modes including the pump-down operation, bump start routine, and staggered compressor starting, when appropriate, shall be included.
- (ii) Functional testing shall also include verification of all software control functions, status reporting, and fault recording including lockout conditions and reset.
- (iii) Under steady state operation at design conditions, the control voltage shall be varied between the limits allowed by Amtrak Specification 963. The system shall operate steadily without malfunction.
 - 1. All subjects identified above in “temperature control integration/operation” shall be verified on the integrated system of the temperature controls and HVAC unit.

ii). HVAC System Vehicle Level Pre-Test Requirements

- (1) Prior to any cooling and heating system test, an air balance test, control scan test and a vehicle heat transfer test shall be conducted. The purpose of these tests is to demonstrate conformance with interior ventilation, air flow and pressurization requirements, to demonstrate that the HVAC control, and thermostats perform as specified, and to demonstrate that the overall car body heat transmission does not exceed the specified limits.
- (2) The pre-tests shall be satisfactorily completed before continuing to further climate room testing.

iii). Air balance test

- (1) Prior to any cooling and heating tests, an air balance test and a vehicle pressurization test shall be conducted. Any adjustments to air baffle plates, grilles and diffusers shall be documented during this test.
- (2) Each car type shall be tested and the results recorded to verify specification requirements are met for air distribution and balance, including:

- (a) Fresh air flow rate
 - (b) Return air flow rate
 - (c) Exhaust air flow rate
 - (d) Car pressurization: car interior, restrooms (negative), electric locker
 - (e) Pressure differential of restrooms relative to adjacent car interior
 - (f) Uniformity of supply air flow
 - (g) Interior car noise levels after balancing with blowers on
- (3) Correct air distribution shall be verified with the fresh air and diversion dampers in each of the nominal positions (e.g. For fresh air dampers, closed, partial, full open positions, etc.). Once the required values are established, the system adjustments and settings shall be recorded and diffuser/baffle settings permanently fixed to be used as base settings for the remaining cars of that type.

iv). Temperature control tests

- (1) The temperature control components shall be exposed to the specified thermal environments. All points of the approved temperature control schedule referenced in Chapter 10 shall be verified for both the temperature rising and the temperature falling cycles. The temperatures shall be varied as slowly as practical to reflect natural temperature lags as experienced in the actual installation. Demonstration of the pump-down operation, bump start routine, staggered compressor starting, when appropriate, shall be included.
- (2) Under steady state operation at design conditions, the control voltage shall be varied between the limits allowed by Amtrak Specification 963. The system shall operate steadily without malfunction.

v). Heating and air-conditioning system tests

- (1) General
 - (a) The first of each type of car shall be tested in an approved climate room test facility capable of maintaining any test temperatures from -30°F to 130°F and any relative humidity throughout that range between 25% and 95%. Temperature in the facility shall be uniform throughout. There shall be no more than 5°F variation from 24 in. above top of rail to 24 in. above the vehicle roof and from end to end of the vehicle. Fans may be used to circulate air. Passenger load shall be simulated by

means of evenly distributed heaters and humidifiers inside the vehicle; solar loads shall be simulated by means of evenly distributed heaters inside or outside the vehicles. Humidity introduced into the vehicle shall be calculated and measured to accurately simulate the passengers' latent heat load. The climate room shall have the equipment available to locally raise the condenser temperature to demonstrate the air conditioning system's pressure modulation capability.

(2) Data requirements

- (a) The Contractor shall record sufficient data at intervals of no more than 30 seconds for each air conditioning and heating test to show that the equipment operates satisfactorily and meets design requirements.
- (b) The recorded data shall include the following:
 - (i) Temperatures (°FDB):
 - 1. Return air at both HVAC units;
 - 2. Mixed air at both HVAC units;
 - 3. Fresh air at all air intakes (for both HVAC units);
 - 4. Distributed air throughout the car;
 - 5. Condenser air inlet at both units;
 - 6. Liquid at the filter-drier outlet on both units;
 - 7. Suction at evaporator on both units;
 - 8. Suction at compressor(s) on both units;
 - 9. All temperature sensors and thermostats;
 - 10. Exterior temperature at 24 in. above the rail at both ends of the car;
 - 11. Exterior temperature at 24 in. above the roof at both ends of the vehicle;
 - 12. Interior temperature at 14 seats at 6 in. and 48 in. above the floor;
 - 13. Interior temperature at 4 aisle positions at 6 in. above the floor and 12 in. below the ceiling;
 - 14. Toilet room 6 in. and 48 in. above the floor and 12 in. below the ceiling;

15. Heater guard temperature at all heater locations;
 16. Overheat heater compartment at all overheat protection devices;
 17. Wet bulb temperatures at a minimum of two ambient locations next to the fresh air intakes.
- (ii) Pressures:
1. Compressor(s) discharge on both units;
 2. Compressor(s) suction on both units;
 3. Liquid leaving condenser/sub-cooler outlet on both units;
 4. Suction at evaporator at each evaporator circuit on both units;
 5. Evaporator air pressure drop on both units;
 6. Condenser air pressure drop on both units;
 7. Vehicle pressurization (inches of water gauge).
- (iii) Electrical Data:
1. Input Voltage;
 2. Blower motor current, power, and speed on both units;
 3. Compressor(s) motor current, and power on both units;
 4. Condenser fan motor current, power, speed on both units.
 5. Fresh air damper motor current, power, and position on both units,
 6. Supply air diversion damper motor current, power, and position an all dampers.
- (iv) Relative Humidity Data:
1. Relative Humidity (RH) sensors at 3 aisle positions at 12 in. below the ceiling.
- (c) For the heating tests all heater circuits and devices shall be continuously monitored to determine all device input voltages, currents and power draw. For all tests, the status of all

temperature control modes shall be "event recorded" in parallel with the temperature, pressure and electrical data in a manner which will allow total system functional status to be followed throughout the testing. Coordinating time marks shall be used on all data recording devices.

- (d) The data acquisition system shall have the capability to add channels, if required.

vi). Control scan test

- (1) All control switching points for rising and falling temperatures shall be tested, by varying and adjusting the ambient conditions in the climate chamber and the interior loads in the car. All temperatures that affect the control system shall be tested individually. While stabilized within each control mode the interior comfort requirements of Chapter 10, shall be met. Stabilization shall be when the temperature swing at each of the interior car thermocouples, including all spaces such as the toilet room, stay within $\pm 3^{\circ}\text{F}$ per hour. In the event of any control failure, appropriate adjustments shall be made, and the entire scan test shall be repeated until all system controls performs as intended. If any air flow adjustments are made during the scan test, the airflow balance test shall be repeated. Cooling pump-down cycle, bump start routine, staggered compressor startup and cooling lockout shall also be demonstrated during this test. Heating and cooling shall be sufficiently capable of maintaining desired interior temperature near the lockout temperatures for the compressors or condenser fans with maximum solar loads.

vii). Vehicle heat transfer test

- (1) The overall carbody heat transmission, value shall be determined during this test. The fresh air intakes and exhaust openings shall be sealed, the vehicle doors shall remain closed and the car ventilation system shall be shut down during this test. The climate room ambient temperature shall be maintained at a constant ambient temperature below 20°F during this test. Portable heaters and fans shall be evenly distributed throughout the car and shall be used to heat the car until the car interior temperature stabilizes. Once the car interior temperature is stabilized, the overall carbody heat transmission, value can be calculated by dividing the total heat applied in the car by the floor heaters (in BTU per hour) by the stabilized temperature difference between the ambient and interior temperature (in $^{\circ}\text{F}$). The calculated value must be less than or equal to the specified value.
- (2) In the event the Heat Transfer test is failed, appropriate changes to the car body insulation system shall be made, and the test shall be repeated.

viii). Cooling system tests

CONFIDENTIAL — DO NOT DISTRIBUTE

(1) General

- (a) The air conditioning tests shall demonstrate the performance in cooling the car and maintaining specified car interior temperatures at various designated ambient conditions. Unless otherwise stated, the applied ambient temperatures shall remain constant, within $\pm 3^{\circ}\text{F}$, during all tests.

(2) Pull down and steady state operation at design conditions test

- (a) Prior to this test, the car shall be "soaked" at 110°F Dry Bulb/ 76°F Wet Bulb in the climate chamber for at least 6 hours with all doors closed and maximum solar load applied until the interior temperature has stabilized as described above.
- (b) After the completing the "soak" period, all electrical circuits, including car lights, shall be energized and the air conditioning system shall be turned ON with all car doors and windows closed. Fresh air dampers shall operate per control logic.
- (c) The time required for the system to reduce the interior air temperature to normal ASHRAE conditions shall be recorded, as well as the time for stabilization. Stabilization shall be when the temperature swing at each of the interior car thermocouples, including all spaces such as the toilet room, stay within $\pm 3^{\circ}\text{F}$ per hour. Once stabilized conditions have been reached the test operation shall be continued for 30 minutes with temperatures, pressures, electrical and humidity data recorded at one minute intervals in order to evaluate temperature variations and interior humidity requirement as the controls and equipment cycle. The interior comfort requirements of Chapter 10 shall be met.
- (d) The maximum design passenger load shall be introduced into the car, and the temperature of the ambient air entering the condenser units shall be raised locally to 130°F Dry Bulb, while maintaining 110°F Dry Bulb/ 76°F Wet Bulb in the climate chamber. Again, once stabilized conditions have been reached inside the car, the test operation shall be continued for 30 minutes with temperatures, pressures, electrical and humidity data recorded at 30 second intervals in order to evaluate temperature variations and interior humidity requirement as the controls and equipment cycle. The interior comfort requirements of Chapter 10 shall be met.

(3) Door cycling test (cooling)

- (a) At the same conditions following the pull down and steady state operation at design conditions test, the doors shall be cycled on one side of the car at a rate of 2 minutes open and 15 minutes closed for two hours. The average car temperature shall recover within 2°F of the required interior car temperature within 3 minutes maximum after each door closing.

- (4) High ambient temperature test
 - (a) At the same conditions following the pull down and steady state operation at design conditions test or upon completion of the door cycling test, the climate chamber's ambient temperature shall slowly be raised to 130°F Dry Bulb. After 130°F is reached, the system shall operate continuously for one hour. During the entire test, the system shall not shut down from high pressure, circuit breaker trip, compressor motor overload or failure of any device. Cooling shall be provided at a reduced capacity as described in Chapter 10 during this test. Temperatures, pressures, electrical and humidity data shall be recorded at one minute intervals during the entire test.
 - (b) After the one hour operation, the 480VAC power to the car shall be removed for 2 seconds, and then reapplied. The system shall recover from the power interruption and restart with no system or component malfunction.
- (5) High pressure cut-out test
 - (a) Upon completion of the high ambient test, the climate room temperature (or condenser air inlet temperature) shall be further increased until the high pressure devices on both units are actuated, whereby shutting down the cooling. After actuation, both units must restart as directed by the control system. Temperatures, pressures, electrical and humidity data shall be recorded at one minute intervals during the entire test.
- (6) Condensate carry over test
 - (a) With the climate chamber temperature at 80°F Dry Bulb/75°F Wet Bulb, operate the air conditioning system continuously for a period of 4 hours in the cooling mode. The interior passenger load and solar load must be adjusted during this test to maintain system operation in cooling mode. Any adjustments to internal loads must hold the interior sensible heat ratio constant at 50%.
 - (b) At the end of the test, the heater coil, evaporator blower's compartment, supply air discharge plenum, air ducts and diffusers shall be examined for the presence of water.
 - (c) The test shall be considered successful if, during the test, no condensed water drops, runs, or is blown from the evaporator unit casing and/or its drain pan, and carried in the air stream to the heater coil, evaporator blowers, supply-air discharge plenum, air ducts or diffusers. Overhead heater elements must remain dry.
- (7) Low ambient temperature test

- (a) Upon completion of the condensate carry over test, the climate chamber shall be adjusted to the lowest ambient air temperature at 40% relative humidity that provides the minimum cooling mode with no reheat according to the Contractor's control schedule. The interior passenger load and solar load must be adjusted during this test to maintain system operation in this cooling mode. Any adjustments to internal loads must hold the interior sensible heat ratio constant at 50%. This HVAC system shall operate for 4 hours under these conditions without damage to the equipment, and the evaporator air flow shall not drop more than 15% from the manufacturer's design point. Temperatures, pressures, electrical and humidity data recorded at one minute intervals in order to evaluate temperature variations and interior humidity requirement as the controls and equipment cycle. The interior must conform to the comfort requirements of Chapter 10. While the unit is still running, examine the evaporator coils for evidence of icing, and verify the oil level at each compressor sight glass.
 - (8) Low ambient temperature test with high internal load
 - (a) Upon completion of the low ambient temperature test, the interior loads shall be increased to the maximum design passenger load and full solar load and the ambient air temperature shall be lowered to 3 degrees F above cooling system lockout. Operate the system continuously for a period of 4 hours. During the entire test, the system shall operate continuously without damage to the equipment, with temperatures, pressures, electrical and humidity data recorded at one minute intervals in order to evaluate temperature variations and interior humidity requirement as the controls and equipment cycle. The interior must conform to the comfort requirements of Chapter 10.
- ix). Heating system tests
- (1) General
 - (a) The heating tests shall demonstrate the heating system's ability to heat the car interior and maintain specified interior car temperatures at various designated ambient conditions. Unless otherwise stated, the applied ambient temperatures shall remain constant, within $\pm 3^{\circ}\text{F}$, during all tests. All heating tests shall demonstrate compliance to acceptable touch-safe temperatures on any heaters (125 degrees F).
 - (2) Layover verification test
 - (a) This test begins with the car in a stabilized automatic heating condition with an ambient temperature of 60°F. The car is then placed in its layover mode and the ambient temperature reduced to -30°F at a rate of change not to exceed 20°F/hour. This ambient temperature is maintained for a maximum of eight

hours. The average interior temperature must remain within the allowed layover temperature range during the eight hour period.

- (b) The layover state is continued an additional four hours with reduced applied voltage to its lowest allowable value. Again, the average interior temperature must remain within the allowed layover temperature range during the entire four hour period.
 - (c) No areas of the vehicle may drop below 40°F throughout the test and random measurements may be taken during the test to verify compliance, with particular attention to water piping or sensitive equipment.
- (3) Steady state heating at design conditions test
- (a) Following the layover verification test, the nominal voltage supply is reapplied, and the car is placed in its normal mode, with all car doors closed. Fresh air dampers shall operate per control logic.
 - (b) The time required for the system to raise the interior air temperature to normal ASHRAE conditions shall be recorded, as well as the time for stabilization. Stabilization shall be when the temperature swing at each of the interior car thermocouples, including all spaces such as the toilet room, stay within $\pm 3^\circ\text{F}$ per hour. Once stabilized conditions have been reached, the test operation shall be continued for 30 minutes with temperatures, pressures, electrical and humidity data recorded at one minute intervals in order to evaluate temperature variations and interior humidity requirement as the controls and equipment cycle. The interior comfort requirements of Chapter 10 shall be met, and no heater guard temperature shall exceed the specified maximum, 125°F during the entire test.
- (4) Steady state heating (minimum voltage)
- (a) Upon completion of the steady state heating at design conditions test, the applied voltage shall be reduced to its lowest allowable value. Again, the system shall stabilize the interior air temperature to normal ASHRAE conditions. Once stabilized conditions have been reached, the test operation shall be continued for 30 minutes with temperatures, pressures, electrical and humidity data recorded at one minute intervals in order to evaluate temperature variations and interior humidity requirement as the controls and equipment cycle. The interior comfort requirements of Chapter 10 shall be met, and no heater guard temperature shall exceed the specified maximum of 125°F during the entire test.
- (5) Door cycling test (heating)
- (a) At the same conditions following the steady state heating (minimum voltage) test, the doors shall be cycled on one side of

the car at a rate of 2 minutes open and 15 minutes closed for two hours. The average car temperature shall recover within 2°F of the required interior car temperature within three minutes maximum after each door closing.

(6) Steady state heating tests

- (a) Upon completion of the door cycling test, the doors shall be closed, the nominal voltage shall be re-applied and the maximum design passenger load passengers shall be introduced into the car. Again, once stabilized conditions have been reached, the test operation shall be continued for 30 minutes with temperatures, pressures, electrical and humidity data recorded at one minute intervals in order to evaluate temperature variations and interior humidity requirement as the controls and equipment cycle. The interior comfort requirements of Chapter 10 shall be met and no heater guard temperature shall exceed the specified maximum of 125°F during the entire test.
- (b) This test shall be repeated at the applied voltage reduced to its lowest allowable value and at the applied voltage increased to its highest allowable value.
 - (i) An additional test shall be performed at the maximum voltage to determine the evaluate the temperatures of heaters and heater guards.
- (c) Upon completion of the steady state heating test (with design passenger load), the nominal voltage shall be re-applied, and the design solar load shall be introduced into the car. The climate chamber ambient temperature shall be raised and maintained at 42°F. Allow the system to stabilize the interior air temperature to normal ASHRAE conditions. Once stabilized conditions have been reached, the test operation shall be continued for 30 minutes with temperatures, pressures, electrical and humidity data recorded at one minute intervals in order to evaluate temperature variations and interior humidity requirement as the controls and equipment cycle. The interior comfort requirements of Chapter 10 shall be met, and no heater guard temperature shall exceed the specified maximum of 125°F during the entire test.

(7) Overhead heater safety tests

- (a) The overhead heater protection devices shall be tested with restricted and with no airflow. All protection devices and backup protection devices protecting the heaters and housing from overheating shall be tested individually. The tests shall be conducted at nominal voltage supply with an ambient temperature maintained at 40°F, and then repeated at the applied voltage reduced to its lowest allowable value and at the applied voltage increased to its highest allowable value. The

overhead heater shall be activated independently of the normal regulating controls. Temperature measurements at the devices and heater power measurements shall be taken throughout each test. After the functioning of the device, temperature measurement records shall be continued until steady temperature fall is observed.

- (b) Each test shall be considered satisfactorily completed if the protection device under test has functioned as intended, backup overheat protection devices do not actuate, there is no damage to any equipment or component, and there are no smoke or significant odors detected. When the last level of backup protection device is tested, the test shall be considered satisfactorily completed if the protection device under test functioned as intended, there is no damage to any equipment or component, and there are no smoke or significant odors detected.

(8) Freeze protection tests

- (a) The operation of the freeze protection system (including any door threshold, door pocket, water tank, waste system and water drain valve heaters) shall be demonstrated in the climate chamber. This test begins with the car in a stabilized automatic heating condition with an ambient temperature of 60°F. The car is then placed in its layover mode and the ambient temperature reduced to -30°F at a rate of change not to exceed 20°F/hour, no internal loads and the antifreeze protection circuit energized.
- (b) With the HVAC system operating in automatic mode, cycle the doors on one side of the car open and closed at the same rate as for the door cycling tests. When the doors are closed, spray water at 33°F onto the lower half of at least one pair of doors and the door threshold.
- (c) Continue this operation for one hour. The door thresholds must remain free of ice, any door pocket drains must drain freely, and doors must open and close smoothly for the entire test period.
- (d) Repeat the test using an application of simulated snow. Snow may be made prior to test and applied by hand to the threshold when doors are open, closed or both. The snow may be hard packed to simulate tracking in on footwear or may be spread out to simulate natural snowfall.
- (e) Verify that the freeze protection for the water tanks and water drain valves is working correctly and record the temperature that the systems turned on. Following the Freeze Protection Test, the nominal voltage supply is reapplied, and the car is placed in its normal mode. Verify that the freeze protection systems for the

water tanks and water drain valves continue to function as specified.

- (f) A final manual test shall be conducted of the Ogontz water valve freeze protection. Following testing above and with the chamber at -30°F and water tanks full, remove all power from the vehicle and verify that the Ogontz valves operate at their intended temperature range and provide dumping of all water on the vehicle. Verify that the water piping, valves, and components are not damaged by visual inspection, and following test by bringing the car and chamber back up to room temperature and resupplying the water system to check for leaks and functionality.
- x). HVAC Diagnostic Remote Access Test
 - (1) The HVAC diagnostics remote access functionality shall be validated.
- i). Lighting
 - i). The function and intensity of all lighting systems and their respective controls shall be tested in the first car to verify compliance with the requirements. All systems shall be designed to function in accordance with APTA PR-E-S-010-98.
 - ii). Lighting fixture performance
 - (1) Light level of each fixture shall be measured and compared to the design requirements.
 - iii). Independent power sources (for emergency lights)
 - (1) Performance shall be verified in all modes of operation. Charge and discharge time shall be measured.
 - iv). Marker light certification
 - (1) The marker lights and fixture shall be tested to verify compliance with FRA 49 CFR Part 221.
 - v). Lighting intensity-interior
 - (1) Test shall verify light levels are in accordance with Chapter 13 including APTA PR-E-RP-012-99, APTA SS-PS-004-99, APTA PR-PS-S-002-98, all lighting modes as specified in Chapter 13 and table 13-1, and for all configurations and locations of HPPL signage and LLEPM.
 - (2) Test shall verify adaptive white light control per Chapter 13.13.c.
 - vi). Emergency lighting intensity and duration

- (1) The test shall verify light levels and duration of each car type are in accordance with APTA Standard PR-E-S-013-99, 49 CFR Part 238.115 and any additional requirements of the specification. Tests shall be conducted in both Normal and Emergency modes and compete operation of independent power sources, including recharge times.
- j). Communication/OTIS
 - i). General
 - (1) The communication system shall be tested on the first car of each type to verify that it functions in accordance with the requirements of Chapter 12. The diagnostic function of each individual system shall be tested as a separate test or in combination with other functional testing. The PTU shall be used to successfully access all available car subsystems. The capability to modify all password-protected software parameters shall be verified. The interface and functionality of the Central Diagnostics Unit (CDU) and the wireless Local Area Network shall be tested. Testing shall be conducted to ensure that car faults can be downloaded over the network and that the system database can be updated, the CDU and wireless LAN systems shall be fully functionally tested.
 - ii). PA/IC/OTIS system performance
 - (1) The performance of the public address and passenger intercom system shall be tested to verify that all aspects of the system perform as intended:
 - (a) System selector switch function and indication
 - (b) PA announcements to the car interior only
 - (c) PA announcements to the car interior and to other cars in the train
 - (d) PA announcements received from other cars in the train (coupled to legacy equipment)
 - (e) PA interface with the OCU and the passenger information system
 - (f) Intercom function between IC stations within the car and between the car and other cars in the train (coupled to legacy equipment)
 - (g) Communication along analog COMM/MU lines and communication on the DTL
 - (h) Emergency two-way intercommunications (intercom)

- (i) Speaker volume, including interior and exterior speakers, and in both Normal and Night modes
 - (j) Signal to noise ratio
 - (k) Fault log tests and communication with the CDU
- iii). OTIS system performance
 - (1) The performance of the automatic announcements, sign, and train map portions of the system shall be verified for specification compliance on each car type. All modes of trainline operation shall be demonstrated, as well as interaction with the PA/IC system.
 - (2) Proper readability of the interior signs at 45 feet and exterior signs at 115 feet in direct sunlight and complete darkness shall be demonstrated.
 - (3) The function used to advance the sign reading to the next message shall be demonstrated, using the actual input message to the system. Changes to data files within the OCU shall be demonstrated including editing of files and replacing in-kind.
 - (4) Simulated power drops and restarts shall be tested to ensure the system returns to proper operation without abnormal behavior.
 - (5) OTIS shall be tested per the manufacturer's recommendations to ensure it can be properly set-up, adjusted, reprogrammed, and edited to verify normal operation, minor changes to route or display options, or uploading of entirely new route and visual packages.
- iv). EMI/EMC
 - (1) The test plan shall meet the requirements of APTA Standard PR-E-S-010-98, plus any additional requirements of the specification. All modes of operation shall be tested.
- v). Wayside equipment tests
 - (1) Each wayside and Control Center component of the communications system installed under this Contract, including the radio system, CDU, GPS, automatic vehicle location system, the wireless local area network system, and all other communications and interface with the wayside shall be tested to verify that they function in accordance with the requirements. GPS accuracy shall be tested. The ability to modify software data files and change parameters for the wayside communications system equipment shall be successfully demonstrated. The interface and functionality of the car CDU and the wireless local area network shall be fully tested. Testing shall be conducted to ensure that car faults can be downloaded remotely and that the system database can be updated.

- (2) Each component of the communications system, including the GPS, automatic vehicle location system and wireless local area network, shall be tested to verify that they function in accordance with the requirements. Wayside simulations shall be performed as approved by Amtrak to fully verify all functions. All equipment which is installed under the Contract on Amtrak wayside or Amtrak control center shall also be tested to verify compliance. The ability to modify software data files and change parameters for the communications system equipment shall be successfully demonstrated.
- vi). Wireless LAN
 - (1) The wireless LAN system shall be shown to demonstrate communication between the cars and wayside equipment, to properly connect to representative user devices, and to properly function through intermittent connectivity or power.
- k). Electrical
 - i). General
 - (1) All electrical circuit breakers, protection systems, switches, and relays shall be cycled under full load to demonstrate proper functionality. Electrical protection systems, where included, shall be tested to the degree possible to adhere to the manufacturers specifications.
 - ii). Electrical load/phase balance/power factor
 - (1) One completed car of each type shall be tested to determine the actual electrical loads, their phase balance and power factor. This shall be done under at least three different conditions: maximum heating load, maximum cooling electrical load and ventilation. These values shall be used to verify specification compliance.
 - iii). Trainline tests
 - (1) Trainline tests shall be conducted at both ends of the first cars of each type. All receptacles for the HEP, inter-car, MU and COMM trainline circuits shall be tested for proper functionality using a trainline test unit. Proper functioning of the PA/IC/OTIS shall be conducted to verify communication into and out of the cars functions properly.
 - (2) The first cars shall be coupled to a locomotive or other car on the Contractor's test track, and all trainline functions, including coupling and uncoupling and diagnostic messages, shall be tested to verify correct operation.
 - (3) End of Train functionality for trainlines and 480VAC HEP shall be tested per Sections 15.3.c and 15.5.e.

iv). Network tests

- (1) The Contractor shall submit the results of a Network Interface Card (NIC) test of each end device implementing Ethernet communication in order to verify compliance to IEEE standards. The Contractor shall submit the results to Amtrak for review.
- (2) The Contractor shall perform a complete network integration test of all train networks, including all subsystems and all on-board networks in order to pre-qualify the proposed network architecture prior to implementation on the cars. This test shall consist of a simulated car with all train switches. The subsystem controllers and end devices shall be the actual units in one car, with at least one of every type of controller represented in the test. Other cars and devices may use simulated traffic generators. The tests shall verify that the protocols, datasets, and messages used on all networks correspond to the Network Interface Control Document, and that the specific signal, message, and dataset documentation are provided for each network. At the time of the integration tests, the Contractor shall also demonstrate the fault tolerance of all networks by simulating all possible faults. Amtrak shall have the option of witnessing the tests. The test procedures and results shall be submitted to Amtrak for review and approval.
- (3) Network testing performed by the Contractor shall demonstrate that all networks have capacity 50% above the expected worst case in service load.

v). Battery and battery charger tests

- (1) Tests of battery capacity and the battery charger shall be made to show compliance with their requirements. The ability to charge the batteries and support other low voltage loads shall be verified. The capacity of the battery to support essential loads for the required time upon loss of HEP output shall also be verified. Proper functioning of the load shed and load drop systems at the specified voltages shall be conducted. The ability to check the battery fluid levels and refilling shall be demonstrated.
- (2) Utilizing a heat gun or approved simulated heat source, proper functioning of the over temperature protection of the batteries shall be demonstrated.

vi). Battery capacity

- (1) Battery on each car type shall be tested to demonstrate specification compliance.

vii). Battery/battery charger performance

- (1) The performance of the battery charger connected to the battery and a simulated carload, shall be tested to verify correct operation.

This shall include battery charger self-test, verifying correct voltage control and current control modes of the charger, operation of the temperature sensor, load shed and drive to any external indicators. This shall include: 24-hour charge with DC loads active; discharge to load shed; recharge for 24 hours. Strip chart instrumentation shall monitor battery voltage and carload and battery current over the entire interval. The system shall be tested to verify fault coordination between battery charger, battery and main DC circuit breakers and the ability to support large step loads on car, such as door operators cycling. Proper load shed and load drop at the specified voltages shall be demonstrated. The test shall also verify proper operation of the equipment during:

- (a) Loss of input phase (component supplier Proof of Design test)
- (b) Reversed phase rotation (component supplier Proof of Design test)
- (c) Reversed battery connections (component supplier Proof of Design test)
- (d) Fault coordination between battery charger system, battery and main DC circuit breakers (car level Proof of Design test)

viii). Battery tilt and shock

- (1) Verify each battery type complies with the 45 degree tilt and 8/4/4g acceleration requirements of 49 CFR Part 238.115.
- (2) reserve time of at least eight (8) hours per Section 15.5.f.

I). Food Service

i). The following food service equipment tests shall be performed as required to verify the design:

ii). Structural performance

- (1) Verify crashworthiness structural requirements for retaining carts, chillers, and appliances are met. Tables and booth seating shall meet APTA PR-CS-S-016-99.

iii). Refrigeration system performance

- (1) A complete car set of Food service refrigeration equipment for each food service car type shall be assembled and connected to operate. Particular concern is that the system might slowly lose capacity over time, with buildup of ice on the evaporators, etc. Room in which the test is conducted shall have a relative humidity of at least 60% at the 70° condition. The following shall be verified:

- (a) Pull down capacity at rated conditions with nominal condenser inlet air temperature of 70°F and 110°F

CONFIDENTIAL — DO NOT DISTRIBUTE

- (b) Hot-soak pull down: cases soaked > 95°F rated high ambient
 - (c) Operation at light load
 - (d) Operation of condenser environmental controls
 - (e) Ability to maintain cases to required values, including minimal temperature gradient within case
 - (f) Ability of thermometer on units to accurately track air temperature
 - (g) Operation of protective devices, such as pressure switches.
- (2) Instrumentation and measurement shall include:
- (a) Inlet and outlet air temperature of each galley cart
 - (b) Inlet and outlet air temperature of evaporator of each freezer and/ or refrigerator box.
 - (c) For large units, such as stand-up freezer, several locations within the unit are required.
 - (d) Evaporator surface temperature inlet and & outlet of each coil
 - (e) Expansion valve bulb temperature of each valve
 - (f) Chiller conditioned air inlet and outlet air temperature each unit
 - (g) Condenser air inlet and outlet temperature each unit, also including chillers
 - (h) Suction and discharge pressures each unit, also including chillers
 - (i) Compressor current each unit, also including chillers
 - (j) Activation of chiller thermostat
 - (k) Activation of chiller defrost cycle
 - (l) Activation of each box thermostat and solenoid valve
 - (m) Activation of each freezer defrost function
 - (n) Activation of environment controls
- (3) All food service equipment shall be installed and shall be operated in a test simulating revenue service to verify the proper operation of the appliances, cases, power distribution system (including proper operation of the battery), HVAC, lighting, and the water and waste systems.

- iv). Food Service Appliances
 - (1) Correct operation of all modes of all appliances and any interfaces shall be demonstrated. The effects of interruption of HEP and its restoration shall be demonstrated to verify compliance. Any wireless functions shall also be included. Tests shall also verify EMI/EMC requirements are met.
- v). Point of Sale System
 - (1) Correct operation of all modes of the complete point of sale system and any interfaces shall be demonstrated. The effects of interruption of HEP and its restoration shall be demonstrated to verify compliance. Any wireless functions shall also be included. Tests shall also verify EMI/EMC requirements are met.
- m). Water and Waste
 - i). A set of equipment that simulates the fresh water distribution and waste retention systems on a car shall be assembled and connected to operate. The system shall be piped to simulate actual car piping.
 - ii). The proper operation of the following shall be verified:
 - (1) Performance of all system components and controls
 - (2) System pressures, temperatures and flow rates
 - (3) Safety controls
 - (4) Backflow prevention devices
 - (5) Tank level indications
 - (6) Vacuum/pressure levels attained and maintained
 - (7) Valve sealing
 - (8) Protection mechanisms
 - (9) Flush valve life cycle
 - (10) Water fill and capacity
 - (11) Freedom from backflow
- n). Diagnostics and Test Equipment
 - i). The Contractor shall demonstrate fully functionality of the diagnostic and test equipment. The Central Diagnostic Unit shall display, record, and upload any failure within the car.

- ii). The Contractor shall develop acceptance and qualification tests for all systems identified as diagnostics and test equipment, including but not limited to the central diagnostics unit, the portable test units, the car temperature monitoring, and any bench testers. The tests shall verify all features and components are in compliance with the requirements of this Technical Specification.
 - (1) Verification that all faults that are configured for all sub-systems to be displayed on the CDU are displayed properly.
 - (2) Verification that all faults that are configured to be reported to the CDU are so reported.
 - (3) Verification that fault logs of all systems in the car are accessible from the maintenance screen of the CDU in any of the cars.
 - (4) Verification that the software version numbers on all non-communications subsystems in the car can be accessed from the CDU of any car.
 - (5) Verification that all software changes made as a result of the CDU Factory Qualification Test have been implemented on all systems connected to the CDU.
 - (6) Any faults from each and every system shall be simulated and demonstrated to display properly.
 - (7) Simulate fault data upload and alarming.
 - (8) Access to system level fault information and current status parameters through the CDU terminal, the PTUs, and the online portal.
 - (9) Proper operation of the data recording functionality.
 - (10) Verification that all PTUs and bench test equipment properly connect, function, and diagnose system-level equipment.
- o). Emergency Equipment
 - i). The performance of the Fire and Smoke Detection System and any Fire Suppression systems shall be verified for specification compliance on each relevant car type. Each type of sensor, alarm, indicator, control and annunciator, as well as all inputs and outputs, shall be demonstrated. All functions and modes of operation shall be demonstrated. The effects of interruption of HEP and its restoration shall be demonstrated to verify spec. compliance. Operation of the complete system from its battery shall be demonstrated from full charge down to fully discharged condition and then recharge. Time the system is supported on battery and the duration of the recharge shall be recorded with a data recorder.

20.6 Installation, Removal, and Maintainability of Equipment

CONFIDENTIAL — DO NOT DISTRIBUTE

- a). This test shall measure the time it takes as well as demonstrate that it is possible to successfully install and remove without interference large components as well maintain frequently serviced pieces of car equipment. These items shall be demonstrated on a fully assembled car, unless otherwise agreed in writing by Amtrak. Items include:
- i). Car Exterior: Removal/Installation
 - (1) Side Loading Doors, gap fillers and operators – each unique location
 - (2) End Doors – each unique type and location
 - (3) Diaphragms
 - (4) Undercar and sidewall access door change-out (each type)
 - (5) Tread brake unit and disc brake unit: worst-case location(s)
 - (6) Brake valves, including wheel slide dump valves
 - (7) All other equipment located on the exterior of the Car unless otherwise agreed to by Amtrak.
 - ii). Removal/ Installation
 - (1) HVAC unit: - each unique site
 - (2) Refrigeration condenser tray (if used)
 - (3) Waste System including complete waste tank assembly
 - (4) Water heater (each type)
 - (5) All other equipment installed on the car unless otherwise agreed to by Amtrak
 - iii). Coach Car – Interior: Removal/Installation
 - (1) Seats (all configurations of each type, i.e., single seats, double seats, left-hand, right-hand, coach, premium coach, etc.)
 - (2) Interior Doors – each unique type and location
 - (3) Restroom with associated assemblies – each type and each unique location
 - (4) Lighting
 - (5) Digital Displays (all locations)
 - (6) All other equipment located in the interior of the coach and premium coach cars unless otherwise agreed to by Amtrak.

iv). Food Service Cars – Interior: Removal/Installation

- (1) All Food Service appliances
- (2) Booth Seats
- (3) All other equipment located in the interior of the Food Service cars unless otherwise agreed to by Amtrak.

v). Food Service Preparation Areas – Removal/Installation

- (1) Dishwashers (all locations)
- (2) Freezers (all types and locations)
- (3) Refrigerators (all types and locations)
- (4) Chillers (all types and locations)
- (5) Each appliance: TurboChef, coffee makers, steam tables, microwaves, etc.
- (6) Point of Sale system
- (7) All other equipment located in a food service preparation area unless otherwise agreed to by Amtrak.

vi). Car Exterior – Servicing:

- (1) Change brake shoes and brake pads, all locations, without the use of a pit
- (2) All other equipment that requires servicing in the exterior of the car unless otherwise approved by Amtrak.

vii). Equipment – Servicing:

- (1) Clean HVAC unit evaporator drains, each drain on each unit
- (2) Clean HVAC unit condenser coil, each unit
- (3) Clean refrigeration unit condenser, if supplied
- (4) All other equipment that requires servicing in the exterior of the car unless otherwise approved by Amtrak.

viii). Interior - Servicing

- (1) HVAC air filters
- (2) Air duct cleaning
- (3) Removal of diffusers and grilles

- (4) Seat cushion removal/ installation – each type
 - (5) Booth seat cushion removal/ installation – each type
 - (6) Curtain/Shade removal/ installation- each type
 - (7) Toilet shroud – each type
 - (8) Toilet bowl assembly - each type
 - (9) Waste lines – to clear blockage in line – all unique locations
 - (10) Drains – to clear blockage in line- each type – all unique locations
 - (11) Trash receptacle container - each type
 - (12) Restrooms – each type
 - (13) All other equipment that requires servicing in the exterior of the car unless otherwise approved by Amtrak.
- b). Tests shall also demonstrate that all 49 CFR 238 calendar day inspections and Class I brake inspections shall be capable of being performed without the use of a pit or elevated track.

20.7 Pilot Car Testing

- a). Roll Angle (Lean) Tests
- i). The first pilot car, in both the AW0 and AW3 load conditions, shall be placed upon a superelevated track up to a maximum of 7 inches in one-inch increments. The test shall be performed in both lean directions to determine compliance with:
 - ii). Clearance requirements by verifying the Contractor's clearance diagram despite any body roll and lateral shifting of the car body.
 - iii). Static lean (maximum cant deficiency and maximum cant excess) limits for wheel unloading and carbody roll angle.
 - iv). Tests shall measure body roll and wheel unloading to verify compliance with 49 CFR Part 213.57 and 213.329. The Contractor shall provide a test report providing all data required by 49CFR Part 213.329 and shall fully support Amtrak's submission to the FRA with additional information as requested by the FRA. This test must be simulated on all cars and performed on each representative car type.
- b). Pilot Cars
- i). General
 - (1) Pilot car testing refers to the test of the first car of each type at the Contractor's final assembly facility prior to shipment. To implement

pre-delivery testing of the pilot cars, the Contractor shall provide at its assembly facility a test site on which the specified tests can be conducted. In addition, this site shall be equipped with locomotive HEP power simulation with which it shall be possible to test performance.

- (2) All tests listed in this Chapter are in addition to the testing required for Production units, road brake tests, and post-delivery testing of pilot cars with other equipment, called out in other sections of this Chapter.
- (3) All pilot cars shall be weighed and verified for proper weight distribution by wheel and maximum total weight.

ii). Pilot car testing

- (1) After the pilot cars have undergone and passed all applicable proof-of-design and production testing requirements, the cars shall be combined for car-to-car operational, compatibility and coupler tests.
- (2) All pilot car testing shall be performed at a dedicated facility that has the capability of testing the cars operations of up to 125mph for uninterrupted 8-10 hours per day.
- (3) All trainline functions shall be tested and verified, including:
 - (a) Door control, door system status and door summary circuits
 - (b) End of train identification
 - (c) Locomotive control
 - (d) PA, IC, and OTIS communications
 - (e) If equipped, DTL and Wi-Fi data transfer, including wireless and cellular connectivity at all seating or standing locations within the car without interference
 - (f) HEP, power distribution, and power balancing
 - (g) Air brake application and release in ECP mode
- (4) The pilot cars shall be tested to confirm compliance with track geometry requirements, including curve and crossover negotiation. All car-to-car connections shall be verified as performing in compliance with the track geometry requirements, including:
 - (a) Carbody clearance
 - (b) Truck swing
 - (c) Coupler swing

- (d) MU, COMM, DTL, ECP, and HEP cables
- (e) Brake pipe and main reservoir air hoses
- (f) Diaphragms and buffer plates
- (5) The clearances between the carbody and the trucks, between the carbody and the couplers, and between cars shall be checked on all pilot cars by methods which place the relevant components in the correct angular relationship corresponding to the worst case conditions to be incurred by operation in the static car envelope. In addition to demonstrating adequate mechanical clearance of the major elements involved, this test shall demonstrate that no interferences or potentially damaging contacts or stress conditions occur between or to any parts of the cars, including stops, wires, cables, or enclosures. Trainline cables shall not droop when under slack conditions such that they can potentially contact the ground, the top of rail, or other obstructions below the car's operating envelope.
- (6) The cars, with springs loaded statically to AW0 and AW3 conditions, shall be demonstrated by either testing (measured against a template, plumb line or other approved method) or analysis to confirm that the car conforms to the Contractor's designs and that all the specified clearances and static car envelope requirements have been met, both to wayside and rail. This test shall be performed successfully with each end of each car coupled to another car. Test results must verify compliance with the Contractor's clearance calculations and diagrams for the cars under all operating conditions. Test cars shall be selected so that all variations of car end configuration can be covered.

iii). Pilot car compatibility testing

- (1) After the pilot cars have undergone and passed the above, existing Viewliner I or II cars will be coupled to one end of the equipment and an Amtrak ALC-42 locomotive will be coupled to the other end of the equipment.
- (2) All trainline functions shall be tested and verified, including:
 - (a) Door control, door system status and door summary circuits
 - (b) End of train identification
 - (c) Locomotive control
 - (d) PA, IC, and OTIS communications
 - (e) If equipped, DTL and Wi-Fi data transfer
 - (f) HEP, power distribution, and power balancing

- (g) Air brake application and release in Emulation
 - (3) The compatibility test train shall be tested to confirm compliance with track geometry requirements, including curve and crossover negotiation. All car-to-car connections shall be verified as performing in compliance with the track geometry requirements, including:
 - (a) Carbody clearance
 - (b) Truck swing
 - (c) Coupler swing
 - (d) MU, COMM, DTL, ECP, and HEP cables
 - (e) Brake pipe and main reservoir air hoses
 - (f) Diaphragms, buffer plates and curtains
 - (4) The clearances between the carbody and the trucks, between the carbody and the couplers, and between cars shall be checked on the pilot cars and existing cars and locomotives by methods which place the relevant components in the correct angular relationship corresponding to the worst case conditions to be incurred by operation in the static car envelope. It shall be possible to couple and connect cars and wiring throughout the range of worst case angular relationships based on track curvature. In addition to demonstrating adequate mechanical clearance of the major elements involved, this test shall demonstrate that no interferences or potentially damaging contacts or stress conditions occur between or to any parts of the car, including stops, wires, cables or enclosures. Trainline cables shall not droop when under slack conditions such that they can potentially contact the ground, the top of rail or other obstructions below the car's operating envelope.
 - (5) If equipped, for any ECP system used, testing shall be performed in both Normal and Emulation modes per APTA PR-M-S-020-17 and PR-M-S-021-17.
- iv). Vehicle/Track System Qualification
- (1) General
 - (a) The Pilot cars shall be tested in accordance with the applicable requirements of 49 CFR Part 213.345 for vehicle testing at speeds up to 125 mph on the track and cant deficiency of a qualified test facility to be selected by the Contractor. After the completion of vehicle testing at the selected test facility, the official qualification testing shall be performed on Amtrak's Northeast Corridor (NEC). Testing shall begin at a speed of no less than 80 mph and test speeds will be incrementally increased

as described below. Test results shall be made available on the Pilot Cars immediately after the completion of each test trip and will be reviewed by Amtrak before the decision is made to proceed to the next higher speed increment. The maximum test speed shall be per 49 CFR 213.345 using the Pilot Cars with a minimum of one instrumented car of each car type to be tested. Vehicles with minor variations in their physical properties that do not result in significant changes to their dynamic characteristics are considered to be of the same type for testing purposes.

- (b) As track class, signal, propulsion and other required infrastructure becomes available on the route intended for service to support speeds of 125 mph, the equipment shall be tested in accordance with 49 CFR Part 213.345. Should the infrastructure to achieve speeds of 125 mph (test speed to be 5 mph greater) become available at the time of delivery of the vehicle order, the Contractor will be responsible for the conduct of these tests. On all train routes identified by Amtrak where car operation is planned for a speed of 125 mph, the Contractor will be responsible to conduct Pilot Car tests using a car over the identified route segments to enable car operation at the maximum allowable timetable track speed.

(2) Test instrumentation

- (a) Test instrumentation shall be provided by the Contractor to record all data necessary to demonstrate compliance with the acceleration limits identified in 49 CFR Part 213.345. Each of the instrumented Pilot cars shall be provided with one truck equipped with two Instrumented Wheelset (IWS) axles. The truck with the worst performance per the simulation shall be equipped with the IWS-equipped truck. Tests shall be conducted in both directions of movement. Friction brakes on the IWS-equipped truck shall be cutout for the duration of testing. The location of the IWS truck is dependent on the worst performing position identified by the MCAT analysis. The consist configuration under test shall be equal to the worst performance in the car simulation.
- (b) Each truck on each instrumented car shall be equipped with two lateral accelerometers, mounted on the truck frame at diagonally opposite locations along the vertical line passing through the center of the journal bearing. All instrumented cars shall also be equipped with three carbody lateral and vertical accelerometers. They shall be located on the interior floor, on the car longitudinal centerline, above each carbody bolster and at the middle of the car.
- (c) A GPS location system shall be used during testing to accurately report the location of the IWS trucks. This shall be done by a separate GPS system for testing, in which case the GPS

antenna shall be located on the roof of the IWS-equipped car. An accurate speed signal shall be provided in the data. This signal may be provided by the locomotive or by separate test instrumentation. The speed signal data and the cab speedometer display shall agree to within 1 percent across the entire speed range.

(3) Data collection and reporting

- (a) The Contractor shall provide carborne test equipment capable of recording all data required, analyzing these data for compliance with FRA criteria and reporting results to test train personnel in graphical form. Real time operational safety must be provided. Results will be reviewed on the test train for acceptability by Amtrak before the decision is made to move to the next higher test speed. Reports for a given test trip may be generated as a series of data packages, each covering a distance of approximately 2 to 5 miles.
- (b) The reporting software shall be capable of generating the following for each data package:
- (c) A time and date stamp.
- (d) A graphical depiction of train location and speed by railroad milepost.
- (e) A graphical depiction of the various wheel/rail force signals and the truck acceleration and carbody acceleration signals. It shall be possible to directly correlate these signals with the location, speed and time/date data. The location of the worst case data in each data set shall be indicated.
- (f) A summary report of the worst case values recorded for the IWS wheel/rail force criteria, and the truck acceleration and carbody acceleration data. Any values which are in excess of those allowed by FRA shall be flagged as exceptions.
- (g) Exception reports shall be provided for all events flagged as exceptions. These reports shall include the values recorded plus a close-up time history view of the data signal associated with each exception.
- (h) Data packages shall be available within 5 minutes or less after collection of test data. Simultaneous data collection and report generation shall be required. All necessary calibration data, sign conventions, sampling rates, headers, etc. required to process the data shall be included in the report. Data shall be provided to Amtrak in both paper and electronic media which shall include all software required to format, process and graphically view the test data.

- (4) Failure to Satisfy Requirements
 - (a) Should the car fail to satisfy the vehicle/track interaction requirements, a program for correcting the deficiencies shall be submitted to Amtrak for approval. The Contractor shall submit to Amtrak, within 60 calendar days, a program containing mathematical analysis of the problem and a course of action for its correction. If Amtrak approves the analysis and corrective measures, those corrective measures shall be made effective on the pilot cars within 90 calendar days at the expense of the Contractor, the car shall be retested, and if the measures are successful, they shall be applied to all the cars. If not, the analysis and correction steps shall be repeated, resubmitted and retested until success is attained.

- (5) Test reports

- (a) The Contractor shall prepare the required final test reports for submission to the FRA by Amtrak. This shall include the track geometry data for the test zones, which accurately reflects the state of the track condition at the time of test. Amtrak reserves the right to require additional vehicle modeling, instrumentation and/or testing if test results show failure to comply with the FRA requirements for operation at any speed below 125 mph, or if additional dynamic behavior which may present a safety issue is observed.

- v). Noise and vibration tests

- (1) The interior and exterior noise levels and vibration levels of the pilot cars shall be measured to prove compliance with all specification requirements. Interior noise measurements shall be made with all car systems operational while operating on level tangent track in an open area, from standstill to 125 miles/hour and back to zero speed using full service braking. The sound level meter shall conform, as a minimum, to the requirements of ANSI Standard S1.4, Type 2, and set to an A-weighted slow response or with an audio dosimeter of equivalent accuracy and precision.
 - (2) In conducting interior sound level measurements with a sound level meter, the microphone shall be oriented vertically and positioned to simulate the location of a seated passenger or train Engineer's ear. Measurements with an audio dosimeter shall be conducted in accordance with manufacturer's procedures as to microphone placement and orientation.
 - (3) Vibration tests shall be made with all car subsystems operating, with the car stationary.

- vi). Friction brake performance tests

- (1) The friction brake system on one of the pilot cars shall be tested to demonstrate that it meets the requirements. The brake disc, brake pad, brake shoe and wheel temperature shall not exceed the supplier's working range, defined as that within which the material is capable of meeting the specified performance and tolerances. Successful completion of all of the preceding tests and acceptance of the test results by Amtrak will be required for final approval of the friction brake system.

vii). Ride quality tests

- (1) To verify conformance to the ride quality requirements, one of the first pilot cars shall be subjected to ride quality road tests. At a minimum, the ride quality tests shall consist of testing of one or more cars on minimally compliant track that conforms with all FRA track standards for the classes of track over which the cars are designed to operate. The car or cars shall also be tested on a major segment of track over which the cars are intended to operate in revenue service, making all local stops while operating at normal scheduled speed, under AW0 and AW1 load conditions. The Contractor shall prepare a ride quality testing plan for submittal to Amtrak for review and approval, specifying the start and end points, speeds, test methodology, measurement parameters and criteria, and method of instrumentation for the ride quality tests. Results from previous ride quality tests that closely simulate Amtrak's revenue service environment may, at the sole discretion of Amtrak, be accepted in lieu of additional ride quality testing. The results of these tests shall be compared to the results from the modeling performed as specified in Chapter 7.
- (2) Instrumentation capable of measuring and charting (for permanent record) the magnitude and frequency of the vertical and lateral shocks expected, up to 5g and 0.5 to 80 Hertz, shall be provided and operated by the Contractor, who shall reduce the raw data for presentation to Amtrak. Sensing units shall be located on the car floor above the intersection of the car longitudinal center line and each truck transverse center line. Weights used in simulating the AW1 load, as well as their loading and unloading, shall be provided by the Contractor.
- (3) In the event that the dynamic behavior of the cars is non-compliant in any respect with the requirements, the Contractor shall submit to Amtrak, within 60 calendar days, a program containing mathematical analysis of the problem and a course of action for its correction. If Amtrak approves the analysis and corrective measures, those corrective measures shall be made effective on the pilot cars within 90 calendar days at the expense of the Contractor, the car shall be retested, and if the measures are successful, they shall be applied to all the cars. If not, the analysis and correction steps shall be repeated, resubmitted and retested until success is attained.

viii). Wheel Spin/Slide Control System Performance

- (1) In order to provide a test of the operation of the wheel slide protection system under actual operating conditions, facilities shall be provided for a test of this system during the friction brake performance brake tests. Instrumentation shall be maintained on this train at all times ready to record the following quantities simultaneously:
 - (a) Individual axle speeds (all cars in the consist)
 - (b) B.C.P. (after each wheel slide dump valve and car command level)
 - (c) Time intervals
 - (d) Tractive effort / braking effort command level
 - (e) longitudinal acceleration of train
- (2) Recording shall be by means of multiple-channel recording digital chart recorders. Personnel assigned to observe the test shall be prepared to run this instrumentation at any time that adverse adhesion conditions may occur. This test shall be continued until recordings have been obtained showing three stops and starts during which slides and slips were successfully corrected. In the event that sufficiently adverse rail conditions to obtain such recordings do not occur during the test, the Contractor shall induce slips and slides with artificial rail wetting equipment (soap or other material to induce slippery conditions that represent leaves on the rails with a 6% - 8% adhesion level) to demonstrate the performance of this system. The slip/slide test can be run in conjunction with the track test.
- (3) The test consist size shall be determined based on consist configurations selected by Amtrak and shall include the following sections:
 - (a) Braking Performance (Friction only and blended for propulsion equipped cars)
 - (i) baseline (dry): full service braking at 15, 30, 60, 75 110, and 125 mph
 - (ii) reduced adhesion: full service braking at 15, 30, 60, 75 110, and 125 mph using the lubricant
 - (iii) very low adhesion: same speeds, with dry rail for 650 feet, 65 feet heavily lubricated rail, followed by dry rail
 - (b) Propulsion Performance
 - (i) Baseline (dry): Full Acceleration from zero to 30, 60 mph

CONFIDENTIAL — DO NOT DISTRIBUTE

- (ii) Reduced Adhesion: Full Acceleration from zero to 30, 60 mph
 - (iii) Very Low Adhesion: from zero - 65 feet heavily lubricated rail, followed by dry rail for 650 feet followed by heavy lubricated rail for 65 feet followed by dry rail. Acceleration till the train reaches steady state acceleration
- (4) For all adhesion levels above 5% the system shall regulate brake cylinder pressure, dynamic braking and tractive effort to achieve a minimum slide control efficiency of 80% under continuous full service braking and continuous tractive effort. "Worst-case" conditions shall be simulated by use of a compressed air powered spray device, with a solution of dish-washing soap and water or water-soluble cutting oil and water, as agreed between the Contractor and the Railroad, sprayed in front of the wheels on the leading axle to lower wheel-to-rail adhesion. Slide protection shall be verified by full service brake applications from initial speeds of 15, 30, 40, 60, and 70 mph. Test shall be performed both with and without dynamic braking. A similar set of tests shall be performed under full acceleration.

ix). Water Tightness Tests

- (1) Each pilot car shall be tested for watertightness in both the completed shell and assembled car stages prior to pre-shipment.
- (2) The entire carbody and all weather sealing around the doors, gangways, windows, any exterior screens, and all other penetrations through the carshell shall be tested during water tightness test similar to AMAA 501.1. A fan or turbine shall be set up that will provide 125 mph air speed longitudinally along the car body. 8" per hour of simulated rain water shall be applied to the area and the fan shall run for no less than 15 min showing no signs of leakage. This shall be repeated again but this time the fan shall be set up so that it will provide 50 mph of air speed at a perpendicular direction with respect to the car body with simulated 8" of rain per hour. This test is to be completed for all side doors, trap doors, folding steps, and windows and shall closely mimic the test conditions spelled out in AMAA 501.1.
 - (a) During the shell watertightness test, all areas of the sides, ends and roof of each car shall be given a complete test for watertightness. The tests shall be made before installation of sound deadening material, thermal insulation and interior finish.
- (3) Each completed car shall be sprayed with water, simulating the conditions at the rated speed of the car, to verify there are no leaks. Of special interest are the door, window openings, and any roof penetrations, such as those for antennae.

- (a) All weather sealing around the doors, gangways, windows, any exterior screens, and all penetrations through the carshell shall be tested during water tightness test similar to AMAA 501.1. A fan or turbine shall be set up that will provide 125 mph air speed longitudinally along the car body. 8" per hour of simulated rain water shall be applied to the area and the fan shall run for no less than 15 min showing no signs of leakage. This shall be repeated again but this time the fan shall be set up so that it will provide 50 mph of air speed at a perpendicular direction with respect to the car body with simulated 8" of rain per hour. This test is to be completed for all side doors, trap doors, folding steps, and windows and shall closely mimic the test conditions spelled out in AMAA 501.1. Door weather sealing shall meet the latest version of EN 14752.

20.8 Production Tests

a). General

- i). As a minimum, the tests listed in this Chapter shall be performed on each car (including all pilot cars) prior to the issuance of a release for shipment document by Amtrak. The Contractor's production conformance test shall include all tests and adjustments which can be made prior to delivery in order to keep car acceptance testing and adjustments at Amtrak to a minimum.
- ii). Prior to performing each production test for witness by Amtrak, the Contractor shall successfully perform the test internally. Amtrak may request the results of the internal test prior to attending the witness test.
- iii). After completion of each car, the Contractor shall demonstrate that each car subsystem is operational.
- iv). The following static tests where power is required on the car shall be conducted by applying a supply voltage to the trainline cables to the car and functionally testing all car systems.
- v). The test procedure shall include and use a check-off list that shall become a record that all systems have been actuated and have functioned as required. This is particularly required for all protective and safety related devices. All equipment final adjustments shall be made prior to car shipment. After completion of each car, the Contractor shall demonstrate that all discrepancies logged against the car during its construction and test period, by either the Contractor's own inspection forces or Amtrak inspectors, have been suitably resolved to Amtrak's satisfaction.
- vi). After the installation, connection and cleaning of all piping as specified, the piping shall be pressure tested in accordance with the latest edition of the Code for Pressure Piping, ANSI B31.1. All leaks which appear during pressure testing shall be repaired, after which the system shall be retested until leak-free.

- vii). All air, water, waste system and HVAC pipe work, hoses and fittings shall be properly cleaned, purged checked for leaks with all systems in operation and any faults rectified.
- viii). All equipment on each car (including all pilot cars) shall be given tests for proper operation and conformance, at the manufacturer's facility prior to shipment to the Contractor. All equipment shall also be given a functional test (pre-delivery) on the completed car to test for proper operation, by the Contractor prior to issuance of a release for shipment document by Amtrak. The test to be performed by each manufacturer and the Contractor on each car component or subsystem shall be in accordance with the applicable industry standards listed in this Technical Specification and the approved test plan. The following tests in this Chapter list some but not all of these tests to be performed; all Technical Specification requirements must be achieved in any case. The test reports of all tests shall become the property of Amtrak and be included in each vehicle history book as specified. This is in addition to, and is not to replace, the Contractor's and suppliers' QA plans.
- ix). The Contractor shall conduct an acceptance test for each car of the cars provided. The test shall verify that each device in the assembly is adjusted correctly and operates properly, both mechanically and electrically. All wiring shall be verified and, as appropriate, tested for insulation resistance and dielectric strength. All cars shall be weighed to verify overall weight and distribution. Leak tests and pressure tests shall be conducted. All modes of operation shall be verified, with every switch and control, staging and input and output exercised, and motor currents measured. At a minimum, acceptance tests shall be conducted on the following systems:
 - (1) Powered body end, Side doors, Trap doors, and Folding Steps operators and controls
 - (2) Temperature controls
 - (3) HVAC system, controls, and remote diagnostics
 - (4) Air circulation fans & controls
 - (5) Lighting components
 - (6) Independent Power Sources (for emergency lights)
 - (7) Public Address/Intercom System (PA/IC)
 - (8) Onboard Train Information System (OTIS)
 - (9) Passenger Emergency Intercom (PEI)
 - (10) Reservation Display System (if equipped)
 - (11) Video Surveillance System (if equipped)
 - (12) Car and Train Networks

- (13) Electrical panels and electronic equipment
 - (14) Battery and Battery Charger
 - (15) Brake Equipment
 - (16) Wheelslide control system
 - (17) Food Service Appliances
 - (18) Water Heaters
 - (19) Waste System
 - (20) Fire and Smoke Detection System
 - (21) Lifts (if equipped)
- b). Carbody
- i). Watertightness tests
 - (1) General
 - (a) Each car shall be tested for watertightness in both the completed shell and assembled car stages prior to pre-shipment.
 - (b) The entire carbody and all weather sealing around the doors, windows, any exterior screens, and all other penetrations through the carshell shall be tested during water tightness test similar to AMAA 501.1. A fan or turbine shall be set up that will provide 50 mph air speed at a perpendicular direction along the car body. 8" per hour of simulated rain water shall be applied to the area and the fan shall run for no less than 15 min showing no signs of leakage. This test is to be completed for all side doors, trap doors, folding steps, and windows and shall closely mimic the test conditions spelled out in AMAA 501.1.
 - (c) During the shell watertightness test, all areas of the sides, ends and roof of each car shall be given a complete test for watertightness. The tests shall be made before installation of sound deadening material, thermal insulation and interior finish.
 - (d) The entire carbody shall be watertightness tested in two stages during production:
 - (i) Stage 1: Bare carshell with windows and doors installed
 - (ii) Stage 2: Complete assembled car: all doors with gaskets including but not limited to side loading doors, junction boxes, access panels and maintenance doors shall be verified to be free from water ingress as part of stage 2.

- (2) Water spray – bare car shell (watertightness test)
 - (a) Each car shell shall be sprayed with water, simulating the conditions at the rated speed of the car, to verify there are no leaks in the joints. All surfaces shall be sprayed. This shall be done before the application of any sound deadening material or thermal insulation. Openings, such as doors, windows, etc., shall be closed off by suitable means, such as blanking plates, during testing. All spray applications shall run ten minutes before and continuously during the inspection. Test arrangement is subject to Amtrak approval.
 - (3) Water spray – completed car
 - (a) Each completed car shall be sprayed with water, simulating the conditions at the rated speed of the car, to verify there are no leaks. Of special interest are the door, gangway, and window openings and any roof penetrations, such as those for antennae.
 - (b) All weather sealing around the doors, gangways, windows, any exterior screens, and all penetrations through the carshell shall be tested during water tightness test similar to AMAA 501.1. A fan or turbine shall be set up that will provide 50 mph air speed at a perpendicular direction with respect to the carbody along the car body. 8" per hour of simulated rain water shall be applied to the area and the fan shall run for no less than 15 min showing no signs of leakage. This test is to be completed for all side doors, trap doors, folding steps, and windows and shall closely mimic the test conditions spelled out in AMAA 501.1. Door weather sealing shall meet the latest version of EN 14752.
- ii). Onboard wheelchair lift (if equipped)
 - (1) Verify all functions, interlocks, safety features and timing
 - (2) Demonstrate lifting range
 - (3) Demonstrate manual operation of lift and timing
- iii). AEI tag
 - (1) A tag reader shall be used to verify that each AEI tag on each car operates correctly and contains the correct data.
- c). Truck Tests
 - i). All trucks
 - (1) Trucks (including the frame, bolster and any primary structural members) shall have their fabrication techniques qualified by means of a complete radiographic inspection of the entire structure. If determined by the Contractor and agreed to by Amtrak

that radiographic methods are not practical for some areas, then the inspection in these areas shall be performed using both ultrasonic and magnetic particle inspection or destructive sectioning methods approved by Amtrak. Castings shall be radiographed in accordance with requirements. Radiographs shall be made in accordance with ASTM Standards E94, E446 or E186 as may be applicable. The radiographic inspection quality level shall be selected by the truck manufacturer to be consistent with the truck design but shall not be of lesser quality than that required by Section 6.12.2 of AWS Standard D1.1. If the first truck fails the radiographic/ultrasonic inspection, then the second shall be inspected, and this process shall continue until a truck passes the inspection. The production variables for the succeeding trucks shall duplicate those for the truck which passes the above inspection.

- (2) After qualification of the fabrication and casting techniques as per the above method, 4% of each production lot, randomly chosen by Amtrak, shall be inspected using radiographic, ultrasonic, and magnetic particle inspection methods as proposed by the Contractor and approved by Amtrak.

ii). Truck weight

- (1) Each completed truck assembly shall be weighed, and the weight of the truck assembly recorded on a truck weight certificate, prior to installation of the trucks under the carbody. The completed truck shall include all truck-mounted equipment, including handbrake linkage if so equipped, but shall not include secondary suspension components or truck-to-carbody air hoses. The serial number of the truck frame shall be included on the truck weight certificate.

iii). Carbody leveling and floor height

- (1) Each completed car shall be leveled and measured to verify correct truck setup adjustments, that the car is level, has the correct floor and gangway buffer plate heights and gangway curtain heights. Measurements shall be taken with the car on calibrated track.

iv). Truck attachment, leveling and coupler height tests

- (1) All mechanical, electrical, pneumatic and hydraulic connections between the trucks and the carbody shall be checked. The AW0 car floor height/car level and the end car coupler height shall also be verified.
- (2) The height of each corner of the carbody shall be measured from the top of rail on a level section of track to check for proper carbody level with all suspension components at proper design height. Side-to-side differences in height shall not exceed 0.25 in. End-to-end differences in height shall not exceed 0.5 in.

d). Couplers

- i). Coupler height and operation of each car shall be verified, including clearance and operation of the uncoupling apparatus. All couplers and drawbars shall be gauged according to applicable FRA, APTA, and manufacturer standards.

e). Brakes

i). Single car brake and pneumatic system operation

- (1) The brake system and auxiliary air system of each car shall be tested for leaks. The AAR S-471 Brake Pipe Restriction Test shall be conducted on the Brake Pipe. A functional test that exercises each function of all brake system valves, trainline, and components shall be conducted in accordance with the OEM recommendations. Brake applied indicators and the brake applied/released indicators shall be tested. Tests shall include auxiliary air system functions, such as the governor and regulator for water rising (if equipped). In addition, all requirements of APTA Standard PR-M-S-005-98 shall be met.
- (2) For any ECP system used, testing shall be performed in both Normal and Emulation modes per APTA PR-M-S-020-17 and PR-M-S-021-17.
- (3) The Contractor shall perform on its test track a complete functional test of the friction brake system prior to shipment of each car. This shall include, as a minimum, a single-car air test, in compliance with FRA requirements, as well as, a test of brake cylinder pressure settings, control and indicator checks, leakage tests, cut-out functionality tests, and handbrake test.

ii). Hand brake operation

- (1) The hand brake of each car shall be tested to verify that, when applied, the brake shoe is in contact with the wheel and that the hand brake indicator properly displays the hand brake status.

iii). Wheelslide control system operation

- (1) The wheelslide control system shall be tested on each car to verify correct speed sensor air gaps, correct end-for-end wiring of sensors and dump valves, and self-test functions of the controller, with the car on air to exercise the brakes. Speed signal interfaces for the door system shall also be tested. Dynamic testing shall also be performed to ensure the wheelslide control system is operating as intended. The contractor is responsible for providing the dynamic test procedures for review and approval by Amtrak prior to dynamic testing.

f). Door System Tests

i). General

- (1) All doors and their operating systems shall be checked and adjusted on all cars to assure smooth functioning, proper fit, attainment of the specified speed of operation and proper functioning of controls, signals and interlocks. This shall also include all body end, side doors, trap doors, and folding steps. All power operated doors shall be operated a minimum of 1000 consecutive, separate successful cycles in each of the applicable control methods. Initiation of the cycling through the trainline external from the car and initiation from a local control stand or push button shall be tested separately. Proper adjustments for opening and closing shall be checked on every door before and after the above test. Improper adjustment at the end of a test shall require the test to be repeated. Any door or door control failure occurring prior to completion of the test will nullify the test, requiring that it be repeated from the beginning following correction and documentation of the failure. Tests shall include, but not be limited to verification of:

(a) All doors:

- (i) door hangs vertically; verify correct relationship between carbody plane and door plane
- (ii) seal is attached properly
- (iii) proper open travel
- (iv) proper fully closed position
- (v) seal is aligned properly with door and seals the door all the way around the periphery, with no gaps
- (vi) the door moves freely on the door track or hinges
- (vii) the door hinges do not have excessive sloppiness at any hinge
- (viii) door does not drag on floor or other surface
- (ix) proper engagement of hold-open device
- (x) door latch engages smoothly at each site and with correct depth of engagement
- (xi) lock operates smoothly and without undue effort

(b) Additionally for all passenger and crew doors:

- (i) proper location of threshold on the trap/ floor
- (ii) proper attachment of threshold to the trap/ floor

- (iii) proper engagement of bottom of door with the threshold (vertically and laterally)
- (iv) that the mechanical lock is adjusted properly so it can lock the door leaf closed
- (v) that the secondary door latch or dog operates properly
- (vi) dogs shall remain distinctly open when in that position (not close on their own, even resulting from train motion.
- (vii) that the drain for the door threshold is clear
- (viii) doors equipped with a door closer close reliably by themselves and engage the latch each time the door closes.

ii). Door safety systems

- (1) All doors shall be individually tested to confirm correct operation, including all indicators, audible signals and interlocks, from the cab of a locomotive, from the individual local door pushbuttons, and when obstructions are placed in the door. Tests shall also be performed to confirm correct operation of all interior and exterior manual door opening/passenger emergency facilities, interlock bypass switches and crew door switches.

g). Interior

i). Interior doors and hardware

- (1) All interior doors and hatches shall be functionally checked on each car to verify: smooth movement, latching, locking, unlocking from external side of door, correct latch engagement/release, proper operation of detente, non-interference, freedom from sticking or excessive looseness (rattles) and proper switch activation. Force to overcome the detente used on sliding toilet room doors shall be measured.
- (2) Proper engagement of the ceiling hatch safety catches shall be checked.
 - (a) Safety catches shall be self-engaging when closing panels.

ii). Seats

- (1) Operation of each movable function of each seat and table on each car shall be tested to verify:
- (2) Recline, footrest, tray table, workstations, and any deployable ADA tables shall be level when in the fully extended position and shall deploy and retract smoothly without binding.

h). HVAC

i). Air Distribution

- (1) Each car shall be measured, and the results recorded to verify correct air distribution, including:
 - (a) fresh air flow rate
 - (b) return air flow rate
 - (c) exhaust air flow rate
 - (d) car pressurization
 - (e) uniformity of supply air flow

ii). Temperature Control

- (1) Proper thermostatic operation of the air conditioning and heating equipment shall be verified on each car for compliance with the specified values. This shall include, but not be limited to:
 - (a) integration with HVAC unit- every input/ output verified
 - (b) demonstration in all possible modes of operation (day/ night, layover, as well as partial and full cool, partial & full heat, etc.)
 - (c) ramp up and ramp down of all temperature inputs: fresh air, return air and car air
 - (d) demonstration of all logic functions, input and output, including:
 - (e) control and power circuits
 - (f) operation of all safety circuits
 - (g) fault conditions- representative examples
 - (h) indicators/ display(s)- representative examples
 - (i) fault displays - representative examples
 - (j) Portable Test Unit (PTU), including all modes of operation
- (2) The test shall include operation of the controls using car temperature sensors/ thermostats as follows:
 - (a) use override to warm car to 80° F minimum (est. value). Then, under thermostatic control, verify car cools to setpoint.
 - (b) use cool override to chill car to 60° F maximum (est. value). Then, under thermostatic control, verify the car heats to setpoint.

- (c) verify car temperature gradient meets specified requirements
- iii). Heater circuit tests
 - (1) Each heater circuit shall be high potential tested in accordance with IEEE Standard number 16.
- iv). Heating tests
 - (1) General
 - (a) The heating system, including doorway and protective heaters, shall be functionally tested in all cars. The operation of the thermostatic control system and layover heating shall be demonstrated by test. Controls shall be checked and adjusted for even distribution and proper volume of heat.
 - (2) Duct heater operation
 - (a) Duct heat of each car shall be verified for function, uniform temperature distribution and correct current draw.
 - (3) Duct heater shunt trip operation
 - (a) Proper operation of each safety interlock of the duct heat control system shall be verified on each car. In addition, operation of the shunt trip feature of the circuit breaker shall be exercised by applying heat directly to the high limit thermostat of each heater assembly.
 - (4) Floor heat operation
 - (a) Floor heat of each car shall be verified for function, uniform temperature distribution and correct current draw.
- v). Air conditioning unit tests
 - (1) Each refrigerant compressor shall be given an air pressure test. Each evaporator and condenser coil shall be proof pressure tested and each complete unit shall be vacuum tested, leak checked with an electronic sniffer, and pressure tested to the requirements. All pressure vessels shall have ASME certificates. Compliance to the random starting timing requirements in Chapter 10 shall be verified. Unit shall be tested for proper sealing against weather. Unit shall pass subcontractor qualification test for shock and vibration.
 - (2) All cars shall have proper air balancing performed, and smoke testing shall be used to verify ducting is free from leaks. Amtrak may re-evaluate this requirement once repeatability is demonstrated.
- vi). Air conditioning system tests

(1) General

- (a) The air conditioning system shall be functionally tested in all cars. The thermostatic control system operation shall be demonstrated by test. All controls and dampers shall be checked and adjusted for even distribution and proper circulation of air. Refrigerant charge and compressor oil levels shall be verified. The initial fine mesh liquid line strainer shall be replaced with the proper mesh at the conclusion of testing.

(2) Air conditioning system operation

- (a) The air conditioning equipment on each car shall undergo an evacuation and leak test. For package units, this may be done at the supplier plant; however, a "sniff" type leak test shall be done on the car to verify no leaks have occurred as a result of shipping damage. The equipment on each car shall be checked to verify proper control response and function for all operational modes (partial cool, full cool, partial heat, full heat, etc.). In addition, motor currents shall be recorded for:
 - (i) Blower fan
 - (ii) Condenser fan(s)
 - (iii) Compressor
 - (iv) Exhaust fan(s)

vii). Freeze Protection

- (1) Proper operation of all freeze protection equipment shall be verified on each car, verifying that each heater heats and that the current draw is proper. Heaters employing a local thermostat shall have cycling by the thermostat verified.

viii). HVAC Diagnostics Remote Access

- (1) The HVAC diagnostics remote access functionality shall be validated.

i). Lighting

i). Lighting operation

- (1) Proper function of all interior and exterior lighting fixtures and all their controls shall be verified on each car. This shall include operation in each lighting mode: normal, quiet car, standby, load shed and emergency modes as well as night. Adjustment of all limit switches controlling lighting shall be included. Test shall include verification operation of Independent Power Source functions.

- ii). Marker lights
 - (1) Proper operation of marker lights shall be verified.
- j). Communication/OTIS
 - i). General
 - (1) The performance, installation, and integration of all components which combine to meet the requirements of Chapter 14 shall be tested to verify proper installation and operation.
 - ii). PA/IC system performance
 - (1) The performance of the public address and passenger intercom system shall be tested to verify that all aspects of the system perform as intended:
 - (a) Control terminal function and indication
 - (b) PA announcements to each identified zone, including verification of the functionality and control of each speaker (interior and exterior)
 - (c) PA announcements received from other cars in the train including legacy equipment.
 - (d) Intercom function between IC stations within the car and between the car and other cars in the train
 - (e) Communication along analog COMM/MU lines (where equipped) and communication on the Ethernet Train Backbone
 - (f) Passenger Emergency Intercom functionality
 - (g) Speaker volume, including interior and exterior speakers, and in both Normal and quiet modes
 - (h) Attendant Call control and indication
 - (i) Inductive Audio Loop
 - (j) Bluetooth LE Broadcast
 - iii). OTIS system performance
 - (1) The performance of the automatic announcements, sign, and train map portions of the system shall be verified for specification compliance on each car type. All modes of operation shall be demonstrated, as well as interaction with the PA/IC system, Attendant Call, and diagnostic systems.

- (2) Performance and indication of each interior and exterior Display Sign, including that each display sign can appropriately indicate messages specific to each individual sign location.
- (3) Simulated power drops and restarts shall be tested to ensure the system returns to proper operation without abnormal behavior.
- (4) System shall be loaded with the Amtrak route and display profiles and demonstrated to properly function per the manufacturer's recommended test plan.

iv). Data Communication System and Global Positioning System

- (1) The Data Communication System functionality including on-board cellular and Wi-Fi connections, shall be shown to demonstrate communication between the car and representative wayside equipment, to properly connect to representative user devices, and to properly function through intermittent connectivity or power.
- (2) The Global Positioning System (GPS) capabilities of the communications system shall be verified.

v). Video Surveillance System (if equipped)

- (1) The proper aiming and operation of each video surveillance camera shall be verified. The aiming of each surveillance camera shall be compared against the approved coverage design, and a screenshot shall be included in the vehicle history book.
- (2) The NVR shall be tested for proper operation, including proper recording of all cameras and interface with onboard signals and networks for the purpose of metadata recording.

k). Electrical

i). Electrical apparatus tests

- (1) Each component that is separately assembled, housed and wired into a package unit prior to installation shall be tested at its point of manufacture and a certified test report, signed by the responsible Quality Assurance representative of the manufacturer, shall be furnished to the Contractor with a copy to Amtrak. Tests shall be in accordance with IEEE Standard number 16 for control apparatus as appropriate.

ii). Battery tests

- (1) Battery and battery charger operation
 - (a) The overall DC power system of each car shall be tested to verify correct operation. This shall include battery charger self test, verifying correct charge voltage and current of the charger, operation of the temperature sensor, load shed and all external

CONFIDENTIAL — DO NOT DISTRIBUTE

indicators. The test shall include operation in which the battery supports the car loads for a minimum time, (i.e. 30 minutes)

(2) Battery capacity

- (a) Verify battery meets 5 hour name-plate rating.

(3) Battery/battery charger performance

- (a) The performance of the battery charger connected to the battery and a simulated car load, shall be tested to verify correct operation. The test shall also verify proper operation of the equipment during:

- (i) Sustained low input voltage (component supplier Production test)
- (ii) Overload or shorted battery charger output (component supplier Production test)
- (iii) Battery ground fault (vehicle level Production test)
- (iv) Temperature sensor fault (vehicle level Production test)
- (v) System overload (component supplier Production test)
- (vi) Ability to support large step loads on car, such as door operators cycling (vehicle level Production test)

- (b) Each battery shall be given a capacity test at the point of manufacture in accordance with APTA Standard PR-E-RP-007-98 (component supplier Production test).

iii). Car wiring tests

(1) Continuity

- (a) On each car, all wiring shall undergo a continuity test in which wire labeling, continuity of conductor and proper connection point are verified.

(2) Power distribution

- (a) Power distribution of each car shall be tested including phase rotation, correct voltage of each transformer-derived voltage, polarity of DC at the load and correct feed by the respective bus.

(3) Electrical insulation testing

- (a) Electrical insulation tests shall be conducted on all applicable electrical components to verify the state of the insulation to the case, between wiring of different voltage classes, and between the input and output circuit of high voltage line switches and

circuit breakers. Semiconductor devices may be protected against the test voltage by means of shorting jumpers if they are not inherently protected by the circuit in which they are used.

(4) Network testing

- (a) Every Ethernet cable installed on each car shall be certified to ISO/IEC 11801-1 – Class F after installation, demonstrating channel suitability for IEEE 802.3an-2006 10GBASE-T. The results shall be recorded and submitted as a part of the vehicle history book.

iv). Insulation testing

- (1) All wiring on each car shall undergo a Megger and high potential test, in accordance with APTA Standard PR-E-S-001-98.
- (2) Insulation resistance tests shall be conducted before high potential tests are conducted.
- (3) On items with double insulation, such as grid resistors mounted on an insulated frame, each set of insulation shall be individually tested. (i.e., resistors to frame and frame to carbody.)

v). Trainline tests

(1) General

- (a) The Contractor shall verify the accuracy of the trainline connections by use of a test panel which is connected to the trainline connectors at each end of the car. The test panel shall use the illumination of lights or other appropriate means to confirm that only the proper trainline wires are energized when the various car controls (public address system, doors, etc.) are operated, and that there are no shorted, crossed, incorrect or open circuits. This test shall exercise the controls on all door control panels, PA controls, etc. All spare trainline circuits shall also be tested.

(2) 480V HEP trainline

- (a) The 480V trainline wiring shall be tested at each end of the car to verify continuity of each power and control conductor and grounding of control contacts.

(3) 27-Point communication trainline

- (a) Through the use of a test fixture, the 27-point communication trainline shall be tested at each end of the car to verify continuity of each conductor, freedom from unintended cross-connections and shorts. Proper operation of any device which interrupts a circuit, such as pressure switches or relays, shall be

demonstrated. Operation of end-of-train relays shall be verified. Transmit/receive functions of equipment that is controlled by the trainline, such as side doors, shall be demonstrated by the respective system test.

(4) 27-Point MU trainline

- (a) Through the use of a test fixture, the 27-point MU trainline shall be tested at each end of the car to verify continuity of each conductor and check for unintended cross-connections and shorts. Transmit/receive functions of equipment which is controlled by the trainline shall be demonstrated by the cab system test.

(5) Digital Trainline / Ethernet Train Backbone (if equipped)

- (a) Through the use of a test fixture, the digital trainline and all switches shall be tested at each end of the car to verify continuity of each cabling run and check for unintended cross-connections and shorts. Transmit/receive functions of equipment which is controlled by the trainline shall be demonstrated.

vi). Convenience outlets

- (1) All 120VAC receptacles shall be tested for proper polarity, grounding and the trip action of any associated GFCI devices on each car. All USB ports shall be tested for proper operation. Operation of DC receptacles shall likewise be verified.

vii). Auxiliary circuits and equipment tests

- (1) All auxiliary circuits and equipment shall be tested for proper operation and adjusted or corrected as required.

I). Food Service

i). Doors and hardware

- (1) All food service doors, hatches and quarter-turn latches shall be functionally checked on each car to verify: smooth movement, latching, locking, correct latch engagement/release, non-interference, freedom from sticking or excessive looseness (rattles) and proper switch activation. Secure gates and latching mechanism shall be tested for correct operation.

ii). Food service appliance operation

- (1) Each appliance shall receive a functional test to verify operation. Coffee makers shall operate through a complete brew cycle.

iii). Other Devices

- (1) The unit shall be tested to verify proper operation of all controls, limit switches, timing and safety functions.
- iv). Refrigeration/chiller
 - (1) Refrigeration equipment shall undergo testing to verify:
 - (a) Freedom from refrigerant leaks (evacuation and "sniff test" if split system)
 - (b) Operation/calibration of each control device: pressure switches, thermostat, etc. - operation of each device in the defrost function: thermostats, heaters, timer, etc. - correct superheat setting
 - (c) No-load pull down time for each refrigerated space
 - (d) Correct thermostat settings for each refrigerated space
 - (e) Correct tracking of chiller thermometer with chilled space
 - (f) Correct operation of environmental controls for the condenser (if split system): damper, room exhaust fan, etc.
- v). Point of Sale System
 - (1) Correct operation of all functions
- m). Water and Waste
 - i). Water and waste piping
 - (1) All car water and waste piping shall be pressure tested for leaks on all cars. Testing may be done in sections if desired. Movement of all valves and freedom from interference shall be checked. All faucets, showers, and drinking water spigots shall be tested for correct temperature adjustment range, water flow rate and freedom from splashing. All sinks, showers, and drinking water alcove shall be tested for proper operation.
 - ii). Water fill and capacity
 - (1) Starting with the water tank empty, the water tank shall be filled while measuring the fill time and water pressure of the fill line statically. After the tank has been filled, it shall be drained while measuring the time, using the tank manual drain valve and the volume of water leaving the tank measure to verify the effective water tank capacity, The use of Amtrak SMP #47601 "Water Tank Flush" shall be demonstrated.
 - iii). Water raising and distribution operation

- (1) The water raising system of each car shall be tested, including the correct operation pressure of each regulator in the distribution system.
 - (2) Freedom from backflow shall be demonstrated to verify that when the water tanks are filled and then air slowly bled off from the main reservoir, no water back-flows from the water tanks into the water-raising system.
- iv). Water heater operation
 - (1) Correct operation of each water heater shall be verified, including thermostat and hot water delivery temperature. If a mixing valve is used, correct adjustment shall be verified with input supply water at two different temperatures. Polyphase water heaters shall have the correct current value of each phase verified.
- v). Toilet operation
 - (1) Correct operation shall be verified on each toilet of each car though 1000 cycles in a qualification test. This shall include verification that each control device is calibrated and operates correctly: pressure switches, level controls, switches, water and air pressure regulators, solenoid valves and indicators. Timing of each step of the flush sequence shall be checked. Operation of the collection tank controls, including drain and rinse cycles shall be tested. Freedom from vacuum leaks shall be verified to OEM recommendations.
- vi). Waste System
 - (1) Waste system performance shall be verified by the following:
 - (a) Performance: flush times, vacuum attained and maintained, etc.
 - (b) Controls
 - (c) Safety controls
 - (d) effective capacity of the waste tank
- n). Diagnostics and Test Equipment (where equipped)
 - i). The Contractor shall demonstrate fully functionality of the diagnostic and test equipment. The Central Diagnostic Unit shall display, record, and upload any failure within the car.
 - ii). The Contractor shall develop acceptance and qualification tests for all systems identified as diagnostics and test equipment, including but not limited to the central diagnostics unit, the portable test units, the car temperature monitoring, and any bench testers. The tests shall verify all features and components are in compliance with the requirements of this Technical Specification.

- (1) Verification that all faults that are configured for all sub-systems to be displayed on the CDU are displayed properly.
 - (2) Verification that all faults that are configured to be reported to the CDU are so reported.
 - (3) Verification that fault logs of all systems are accessible from the maintenance screen of the CDU in car.
 - (4) Verification that the software version numbers on all non-communications subsystems in the car can be accessed from the CDU.
 - (5) Verification that all software changes made as a result of the CDU Factory Qualification Test have been implemented on all systems connected to the CDU.
 - (6) Any faults from each and every system shall be simulated and demonstrated to display properly.
 - (7) Simulate fault data upload and alarming.
 - (8) Access to system level fault information and current status parameters through the CDU terminal, the PTUs, and the online portal.
 - (9) Proper operation of the data recording functionality.
 - (10) Verification that all PTUs and bench test equipment properly connect, function, and diagnose system-level equipment. Fire and Smoke Detection
 - (11) Tested per manufacturers specifications
- o). Completed Car
- i). Weighing
- (1) The Contractor shall weigh each car at the time of shipment. All cars shall be measured empty and dry, with no fresh water, waste or consumables, and with no leftover tools or materials from the production process. All parts shall be properly installed on each car prior to weighing. Each car shall be weighed by measuring the weight on each of the car's wheels. A weighing device which provides a permanent printed record of the weight shall be used, and the weight tickets shall be submitted to Amtrak and copies thereof included in the vehicle history book.
 - (2) The weighing device shall be maintained within an accuracy of 0.2%. If the weighing device is electronic, it shall be calibrated at intervals of no more than 60 days. If mechanical, it shall be calibrated immediately prior to weighing the first car and annually thereafter.

- (3) Any total car weight deviation in excess of the maximum allowable weight specified in Chapter 1, or any car with a weight distribution not in compliance with the provisions of Chapter 1 must be documented on a nonconformance report and explained to the satisfaction of Amtrak prior to shipment. Amtrak may require that the Contractor reduce the weight of any cars exceeding the overall weight or weight distribution limits.

ii). Clearance tests

- (1) Each car shall be measured to prove compliance with the Contractor's approved clearance diagram for the as-built car configuration, to verify that the car clearances while in operation will meet the requirements. In addition, the centering of the carbody with respect to the trucks shall be measured and corrected if necessary. The completely assembled truck shall not exceed the clearance limits specified between the truck and the carbody, and the limits between the truck and the rail.

20.9 Acceptance Tests

a). Car Acceptance Tests

- i). The tests specified in this Chapter are to be performed by the Contractor on Amtrak railroad, or as otherwise designated by Amtrak. The tests shall be satisfactorily completed as a condition of acceptance. All tests shall be performed on all cars (including the pilot cars) unless otherwise specified by Amtrak.
- ii). After receipt of each car at Amtrak site and before it is operated, it shall be carefully inspected jointly by Amtrak and the Contractor, and any part, device or apparatus which requires adjustments, repair or replacement shall be noted by the Contractor who shall make such adjustment, repair or replacement before acceptance testing is begun. All expenses and costs incurred in any necessary removal of cars from the designated delivery point and their return there for correction of defects shall be borne by the Contractor.

b). Functional Tests

- i). A complete, orderly and comprehensive check of each and every vehicle system shall be made to verify its proper operation before commencement of revenue operation. A set of diagnostic test equipment owned by the Contractor of the same design provided to Amtrak shall be used for these tests to the extent possible, but devices bypassed by the use of the DTE's (door open and door close buttons for example) shall also be checked. All aspects of wayside communications shall be tested for proper operation. All software files required for the destination sign system, automatic vehicle location system, GPS and other communications systems shall be loaded and verified for proper operation.

c). Road Brake Test/Stop Distance and Coast-Down

CONFIDENTIAL — DO NOT DISTRIBUTE

- i). The test shall be conducted on a consist to be determined by Amtrak based on configurations selected, ready to run, both with no passenger load, to simulate actual operational performance. Other configurations may be proposed. Selected car brakes shall be disabled so as to provide a total of 80% braking capacity on the passenger cars. The test shall be conducted on flat, tangent track, with the brake application made at the same site for each test run. If necessary, to conduct the test on a slight grade, the entire braking distance shall occur at constant grade; calculations shall be made to correct the stop distance for the effect of the grade. The test shall be conducted in both directions: locomotive leading and trailing. Train brake pads/ shoes shall be worn in before conducting the test.
- ii). The full set of tests shall be conducted in the following conditions:
 - (1) Full Service, Blended Braking
 - (2) Full Service, Friction Braking Only
 - (3) Emergency, Friction only
 - (4) Speeds of 125, 110, 90, 75, 60, 45, 30 and 20 mph
- iii). Two stops shall be made from each speed, with sequence controlled to minimize wheel heating. Wheel and disk temperatures shall be measured to verify adequate brake system thermal capacity and to ensure the stop distance is not influenced by beginning the test with hot brake components. Thermal imaging equipment shall not be used for this.
- iv). If time and track availability permit, a coast-down test shall also be conducted to determine non-braking frictional losses of the train. The test shall be conducted from the rated speed of the train, with the train allowed to coast down to a near stop.
- v). Instrumentation shall include:
 - (1) Means to determine distance
 - (2) Train Speed
 - (3) Brake cylinder pressure of each truck on the locomotive/Multiple Unit
 - (4) Blended brake current on locomotive/Multiple Unit
 - (5) Brake cylinder pressure of each truck
 - (6) Longitudinal acceleration of train
 - (7) Switch to detect movement out of release position of automatic brake valve from the locomotive
 - (8) Brake pipe pressure on both ends of the train

- vi). At the completion of this test, the brakes shall be reactivated, except those on the instrumented wheelsets.

20.10 Post-Delivery Testing of Pilot Cars with Other Equipment

- a). After the Pilot cars have been delivered to Amtrak's facility and have undergone and passed all applicable acceptance inspections and tests, it shall be combined with other rail equipment as designated by Amtrak to verify operational, compatibility and coupler tests with other car and locomotive types that may constitute part of Amtrak's existing rail service. The specific types of rail equipment with which the Pilot Cars shall be tested for compatibility includes:
 - i). P32, P40, P42, ACS-64, SC-44, ALC-42 and ALC-42E Charger locomotives, as owned by Amtrak.
- b). All trainline functions shall be tested and verified, including:
 - i). End of train identification
 - ii). Locomotive control
 - iii). HEP, power distribution, and power balancing
 - iv). Air brake application and release in ECP and Emulation
 - v). EMI/EMC requirements
- c). The pilot test train shall be tested to confirm compliance with track geometry requirements, including curve and crossover negotiation. All car-to-car connections shall be verified as performing in compliance with the track geometry requirements, including:
 - i). Carbody clearance
 - ii). Truck swing
 - iii). Coupler swing
 - iv). MU, COMM, DTL/ETB, ECP, and HEP cables
 - v). Brake pipe and main reservoir air hoses
 - vi). Diaphragms, buffer plates and Diaphragm curtains
 - vii). ECP brake inter-car cables
- d). All equipment shall be tested to be fully functional on Amtrak-supplied wayside HEP power.

20.11 Reliability and Post-Delivery Tests

- a). The complete operational car fleet shall be monitored by the Contractor to demonstrate conformance with the reliability requirements.

- b). On a monthly basis, the Contractor shall issue a report detailing the performance of the car fleet and its equipment with regard to maintenance actions (which shall be detailed in an appendix by type) and the calculated period and cumulative Mean Distance Between Failures (MDBFs) and Mean Time Between Failures (MTBFs) as appropriate. Any component(s) or system(s) found to be causing and/or related subsystem and/or whole car MDBF/MTBF to fall below the required performance level shall be subject to redesign and modification. During the period such efforts are carried out, failures due to these component failures shall not be counted. However, upon completion, the modified car and/or subsystem shall be monitored for a period of no less than an additional 6 months or the remaining base period, whichever is greater, and the MDBF/MTBF shall be acquired. If the use or failure of the component or system is weather or temperature related, the 6 month period shall include those calendar months during which such use or failure is incurred. It shall be understood that the total test time period shall not be assumed to be 365 consecutive calendar days in the event that modification is required.
- c). Following a satisfactory completion of the test for all subsystems, the Contractor shall issue a final report summarizing the results and with all interim reports appended for completeness. **[CDRL 20-07]**
 - i). If a satisfactory completion cannot be obtained before the end of the specified warranty period, the Contractor and Amtrak shall resolve any outstanding issues in accordance with the Contract terms and conditions.

20.12 CDRLs

CDRL	Description	Due
CDRL 20-01	Trainset testing matrix	NTP + 90 days
CDRL 20-02	Master Test Plan	First submittal NTP + 180 days
CDRL 20-03	Test Procedures	Per Figure 20-1
CDRL 20-04	Test Results (Reports)	Within 5 days of test completion
CDRL 20-05	Contractor shall provide a single volume incorporating all required engineering tests associated with the pilot program, all copies of all test procedures, reports and approvals.	30 days after successful completion of testing
CDRL 20-06	All material certification and proof-of-design test procedures and reports in a single, binder for of each car type.	Prior to shipment of each car type
CDRL 20-07	Reliability and Post-Delivery Test Report	30 days after successful completion of testing

* End of Chapter 20 *

Amtrak Single Level Fleet Replacement Technical Specification

21. Tools, Consumables and Spare Parts

Revision 0

Table of Contents

21.1	Overview	21-1
21.2	Specialized Tools	21-1
21.3	Consumables	21-3
21.4	Spare Parts	21-4
21.5	CDRLs.....	21-5

21.1 Overview

- a). This Chapter details the requirements for the Contractor to identify and provide the specialized tools, spare parts and consumables that will be needed to operate, maintain and repair the cars to be delivered to Amtrak.
- b). Most of this Chapter shall be covered in the Technical Support, Spares and Supplies Agreement (TSSSA) SOW; however, in the event that the TSSSA is not executed or upon termination of the TSSSA, the following sections shall be the responsibility of the Contractor.
- c). The detailed information identified in the following sections will be provided to Amtrak in a timely fashion during design review or prior to the first batch of cars delivered, but the physical delivery of materials where applicable shall only occur in the absence of or at the conclusion of the TSSSA.
- d). Amtrak shall retain all specialized tools, consumables, spare parts and any subsystem mock-ups as detailed in this Chapter.
- e). All information required in this Chapter shall also be included in the appropriate operating and maintenance documentation as identified in Chapter 23, including:
 - i). Operating Manual
 - ii). Running Maintenance Manual
 - iii). Heavy Maintenance Manual
 - iv). Illustrated Parts Catalogue
 - v). Troubleshooting Guide

21.2 Specialized Tools

- a). The Contractor shall provide to Amtrak a complete set of all specialized tools, gauges, meters, diagnostic equipment (including laptop computers), etc. for each of the seven (7) Amtrak shops that will be maintaining the single level fleet that will be necessary to operate, maintain, inspect, test, troubleshoot and repair all car type configurations or subsystems throughout their forty (40) year design life.
- b). These tools and equipment shall be delivered to Amtrak at all specified maintenance locations and shall be delivered to Amtrak prior to the Conditional Acceptance of the first car of each type, but no sooner than thirty (30) days prior to the submission of the first car for Conditional Acceptance.
- c). All specialized tools shall be included in the base warranty as specified.
- d). See Chapter 24 for additional details regarding portable test equipment.
- e). Any diagnostic equipment will include spare copies of all software and source code licensed to Amtrak.

- i). The license shall allow Amtrak to modify and duplicate this code without limit.
- f). Throughout the vehicle design process, the Contractor shall work to minimize the number of special tools required for the maintenance of the vehicles.
- g). As part of the design review process, the Contractor shall submit a list of specialized tools and drawings if applicable and diagnostic equipment that will be provided to Amtrak.
 - i). This list shall identify the item description, manufacturer, part number and purpose, and shall include a cross-reference to the maintenance manuals as to the tasks that require the use of the tools.
 - ii). This list shall include all specialized tools and diagnostic equipment required to operate, maintain and repair the cars throughout their design life, and shall include:
 - (1) Specialized tools for inspecting, repairing, removing, installing, maintaining or measuring components and systems on the cars;
 - (2) Diagnostic equipment to troubleshoot problems, determine component or system status or condition, or interpret diagnostic information;
 - (3) Portable computer equipment required to view, change or monitor the operating parameters, downloadable recorded data, service history or digital programming for computerized or microprocessor-controlled components or systems; and
 - (4) All cables, connectors, software, power supplies, carrying cases and peripherals as required for use with the portable computers or Portable Test Unit (PTU).
 - (5) All diagnostic download and programming software shall be provided in the Microsoft Windows professional level operating system format identified by Amtrak with no use restrictions, so that Amtrak can install the software on additional computers as needed.
- h). The Contractor shall provide drawings, schematics, specifications, part numbers and prices for all special tools and maintenance equipment to enable Amtrak to purchase additional quantities.
- i). Drawings shall be provided for any component or special not produced by a supplier not owned in whole or part by the Contractor.
 - i). Drawings shall provide sufficient information to facilitate the manufacture of the required components or special tools should the manufacturer cease to support the component or special tool.
- j). During the production of the pilot cars, the Contractor shall demonstrate the usage and validate the successful operation of each proposed special tools.

- i). During this validation, Amtrak shall identify any of the proposed special tools that are determined to be unsuited or incapable of performing their intended function.
- ii). The Contractor shall redesign such tools until they can successfully serve their intended purpose.
- k). The Contractor shall supply complete sets of each type of bench type shop test equipment to each of the seven (7) facilities that will be maintaining this Single Level fleet.
- l). Training on the use of the Special Tools shall be included in the delivered Training Program (See Chapter 23).

21.3 Consumables

- a). The Contractor shall provide a list of all service consumables needed to support the cars throughout its service design life.
 - i). Consumables are identified as those items replaced as a function of normal operation, whether the replacement is on a periodic basis or as they wear out.
 - ii). This list shall be provided as a component of the final design review. **[CDRL 21-01]**
- b). This list should include items such as but not limited to:
 - i). Brake pads and shoes
 - ii). Filters - Heating, Ventilation and Air Conditioning (HVAC), air, water
 - iii). Lamps/Light Emitting Diodes (LEDs), marker lamps, indicators lamps
 - iv). Fuses, Diodes and Resistors
 - v). Air hoses
 - vi). All rubber / polymer components
 - vii). Shock absorbers
 - viii). Air brake and other pneumatic component overhaul kits
 - ix). Truck and draft gear elastomers
- c). This list shall include the following information as it relates to these parts:
 - i). Contractor part number
 - ii). Part description
 - iii). Original Manufacturer name

- iv). Original Manufacturer part number
- v). Quantity required by car type
- vi). Frequency of replacement

21.4 Spare Parts

- a). As a part of final design review, the Contractor shall provide to Amtrak a list of strategic spare parts that Amtrak should acquire and maintain to support the fleet of equipment after the end of the warranty period. **[CDRL 21-02]**
- b). This list shall include, but is not limited to the following:
 - i). Parts that are critical to the safe operation of the equipment;
 - ii). Parts with a moderate to high failure rate, based on the Contractor's reliability analysis (see Chapter 4);
 - iii). Parts located on the vehicle exterior or undercar and therefore subject to damage from debris strikes or accidents;
 - iv). Parts installed in a high-wear environment; and
 - v). Parts that require troubleshooting and repair off of the car, such as electronic components or LRU assemblies.
- c). This list shall include the following information as it relates to these parts:
 - i). Contractor part number
 - ii). Part description
 - iii). Original Manufacturer name
 - iv). Original Manufacturer part number
 - v). Quantity required by car type
 - vi). Shelf life/maximum storage period
 - vii). Recommended quantity to have on hand
- d). The Contractor shall be responsible to provide replacement parts for those failing under the terms of the warranty.
 - i). Amtrak shall not be responsible for supplying replacement parts to the Contractor for the purposes of fulfilling warranty provisions.
 - ii). Amtrak shall not be responsible for supplying cores or subcomponents to the Contractor for the purposes of fulfilling warranty provisions.

21.5 CDRLs

CDRL	Description	Due
CDRL 21-01	List of all service consumables needed to support the cars throughout its service design life	FDR
CDRL 21-02	List of strategic spare parts recommended to support the fleet of equipment after the end of the warranty period	FDR

* End of Chapter 21 *

Amtrak Single Level Fleet Replacement Technical Specification

22. Shipping Preparation

Revision 0

Table of Contents

22.1	Overview	22-1
22.2	Requirements for Shipping Vehicles	22-1

22.1 Overview

- a). This Chapter describes the requirements for preparing completed cars for shipment from the Contractor's final assembly facility to the Contractor's field site, where vehicle acceptance will take place by Amtrak.
- b). All vehicles must receive approval for shipment from Amtrak before they can be shipped to the field site. Minimum shipment quantity is defined in Exhibit V.
- c). The Contractor is responsible for all costs and arrangements associated with the shipment of the completed vehicles to the Contractor's field site.
- d). The car clearance for all cars shipped shall be verified with all involved railroads for the delivery routing.

22.2 Requirements for Shipping Vehicles

- a). All completed vehicles shall be prepared for shipping as follows:
 - i). All hoses and inter-car cables shall be connected between vehicles.
 - ii). A Single Car Air Test shall be successfully conducted within 30 days of shipment.
 - iii). Brake control valve selector plate shall be set to graduated release if being moved in passenger service and a transport control valve shall be installed if required for normal Brake Pipe brake control without HEP electrical power being supplied to the cars (see Chapter 9).
 - iv). Automated Equipment Identification (AEI) tags shall be properly programmed and installed. The Contractor is responsible for ensuring that the car's technical data is entered into the Umler/EMIS (Equipment Maintenance Information System) system prior to the release of the car (see Chapter 6).
 - v). New air filters shall be installed in Heating, Ventilation and Air Conditioning (HVAC) system (see Chapter 10).
 - vi). All required inspections must be complete, including inspections and approvals from the FRA, the FDA and Amtrak.
 - vii). As part of the shipping process, the following documents must be completed and signed, and be installed in the document holders in each car and in the cab of the locomotive as applicable.
 - (1) Amtrak MAP 100, Equipment Condition Report
 - (2) Amtrak MAP 1173, Class 1 Brake/Calendar Day Test
 - (3) Amtrak MAP 10C, Passenger Car Daily Inspection

- viii). The Water and Waste systems, and Food Service Area equipment shall be drained, blown out with compressed air and winterized (see Chapter 17). All water fill ports shall be tagged as out of service.
 - ix). All doors and windows shall be closed but means shall be provided to access the handbrake during shipment.
 - x). Shipping labels and warning signs shall be applied as needed (such as do not hump, do not couple to shelf couplers, instructions for operation of parking brake, etc.)
 - xi). Loose jumper cables shall be included for shipment (see Chapter 15).
 - xii). The Contractor shall perform other shipping-related tasks as required by Amtrak.
 - xiii). The Contractor shall comply with the requirements of the Association of American Railroads (AAR) Specification M-1006 and Recommended Practices RP-2001 and RP-2002 regarding railroad shipping information and shall be considered the Point of Contact for additional information.
- b). The following shall be set up at the discretion of Amtrak in accordance with the requirements for each shipment of cars:
- i). If HEP and main reservoir trainlines are being used for shipment, fresh water may be supplied from the potable water tank for use of the toilet system while in transit. If no water is needed, the tank shall be drained and all water supply lines shall be blown dry and tagged.
 - ii). All circuit breakers shall be on. The main 480VAC Head End Power (HEP) breaker may be on if power will be needed while the car is in transit, or shall be off if no power will be required. Battery power may be needed for wheel slide protection during shipment.

* End of Chapter 22 *

Amtrak Single Level Fleet Replacement Technical Specification

23. Training and Documentation

Revision 0

Table of Contents

23.1	Overview	23-1
23.2	General Requirements	23-1
23.3	Mock-Up Training Cars	23-4
23.4	As-Built Drawings	23-4
23.5	Photographs	23-7
23.6	Conformed Specification	23-8
23.7	Manuals	23-8
23.8	Car History Books	23-25
23.9	Training	23-27
23.10	Equipment Summary Report	23-38
23.11	CDRLs	23-41

23.1 Overview

- a). This chapter describes the requirements for the development and delivery of project documentation and for the implementation of a post-delivery training program.
- b). The Contractor shall be fully responsible for the completeness, accuracy and readability of all documentation, and for ensuring that these documents and the associated parts, components, systems, subsystems, vehicles and the operation thereof meet the specification requirements for the contractually required duration.
- c). The Contractor shall develop and provide a training program that accurately and completely reflects the requirements of the manuals. **[CDRL 23-01]**
 - i). The training program shall familiarize operating, mechanical, supervisory and administrative personnel with all aspects of the operation, inspection, maintenance, repair and supply of parts for the cars.
 - ii). The training program shall be structured and implemented so that Amtrak and any designated maintenance and/or operations providers have access to all necessary resources to properly and successfully operate, maintain, repair and administer the equipment as required by Amtrak, the Contractor, the FRA and others.

23.2 General Requirements

- a). Organization
 - i). The material in the manuals, troubleshooting guide, and the illustrated parts catalog shall be organized and sequenced with a standard numbering system or alternative numbering system as approved by Amtrak.
 - (1) Chapter numbers shall be consistent for all documents.
 - ii). A complete table of contents shall be given at the beginning of each publication, and a complete page-numbered index at the end.
- b). Illustrations
 - i). Sharp, clear drawings shall be used throughout the documents for illustration.
 - (1) Photographs may be used only where explicitly approved by Amtrak.
- c). Language
 - i). All correspondence, drawings, data, manuals or other written communications pertaining to this Contract shall be in the English language.
- d). Dimensions

- i). All dimensions shall be shown in standard imperial units of inches and decimals, with a metric equivalent shown in parentheses adjacent to the imperial dimension.
 - ii). If a component or subassembly uses metric units as the primary system of measurement, then imperial equivalents shall be provided in parentheses.
- e). Updates
 - i). As information becomes available and changes occur, the Contractor shall incorporate the changes and supply the information in updated electronic editable and Portable Document Format (PDF) files in an organized, timely manner based on a regular schedule to be approved by Amtrak.
 - ii). Each updated information submittal shall be accompanied by a file containing a revised list of effected pages for the manual set being changed.
- f). Engineering Change Service Bulletins (ECSBs)
 - i). Engineering changes that affect any potential safety issue, or may significantly affect car operation in scheduled service, shall be published in the form of an Engineering Change Service Bulletin (ECSB).
 - ii). ECSBs shall be used in the interim until the official changes in the operator's manual, maintenance manual and illustrated parts catalog have taken place.
 - iii). The creation of ECSBs shall be included within the Contractor's engineering change procedures and engineering change proposal system.
 - iv). ECSBs shall be stand-alone documents, provided in both editable document and PDF formats.
 - v). Each ECSB shall detail the reason, instructions and illustrations to make the change. Associated parts information shall also be included.
 - vi). A system to control ECSBs shall be developed between the Contractor and Amtrak to control ECSBs, such as using note tools on the existing electronic PDF versions and/or the development of master lists of outstanding ECSBs.
- g). Contractor Responsibility
 - i). The Contractor shall provide documents such as drawings, SolidWorks models, photographs and a family of operating and service manuals which shall provide Amtrak with the information necessary to properly operate and provide all maintenance functions for the vehicles.
 - ii). These include drawings and manuals to safely and properly conduct:
 - (1) Operation
 - (2) Service and inspection
 - (3) Troubleshooting

- (4) Running maintenance
 - (5) Heavy repair/overhaul (vehicle and system/component level)
 - (6) Part identification (to the lowest repairable level)
 - (7) Wreck repairs
 - (8) Modification of equipment (documenting as-built configuration)
- iii). All publications must be reviewed in detail by the Contractor to ensure completeness and accuracy of information and quality prior to any submittal to Amtrak for approval.
- h). Rights To Technical Data
 - i). The Contractor and all of its subcontractors shall grant to Amtrak in connection with this Contract the right to use, duplicate or disclose, in whole or in part and without charge, all technical data required by Amtrak to install, operate, understand, maintain, modify, replace, test, repair or overhaul the cars and their equipment.
 - (1) This shall not include financial information or information of a contract administrative nature.
 - ii). Amtrak shall not disclose proprietary information and data being supplied under this Contract except for the limited purpose of obtaining individual part repairs or specialized testing or repair services outside the ability of its shops, and then only on a confidential basis.
 - iii). Technical data means information of a scientific or engineering nature, regardless of form or characteristics, to be furnished by the Contractor pursuant to this Contract. Examples are:
 - (1) research and engineering data,
 - (2) engineering drawings and associated lists,
 - (3) as-built drawings (regardless of restrictions contained therein),
 - (4) specifications,
 - (5) standards,
 - (6) process sheets,
 - (7) manuals,
 - (8) technical reports,
 - (9) catalog item identifications or related information.

- iv). The Contractor shall not patent or copyright any original materials or information created by this procurement which will be submitted to either the Engineer or Amtrak, as per Federal procurement regulations.

23.3 Mock-Up Training Cars

- a). As an option, the Contractor shall be responsible to provide instructional full system mock-ups in the design of at least two full training cars (one Coach and one Café/Lounge) that are fully functional and can be used for training and troubleshooting for repair personnel and onboard crews, independent of any spares required for car maintenance.
- b). The systems shall be kept up to date with all applicable software and hardware during the warranty time frame.
- c). Applicable systems shall include at a minimum:
 - i). Air brake
 - ii). Waste/water/toilet
 - iii). HVAC
 - iv). Door Systems and controllers
 - v). Trucks
 - vi). Food Service equipment including appliances and carts
 - vii). Seats and other seating accommodations
 - viii). Lighting
 - ix). Communication System
 - x). Digital Technology Systems
- d). The training cars should be provided at a central location for training purposes determined by Amtrak.

23.4 As-Built Drawings

- a). General
 - i). The Contractor shall provide Amtrak with a full set of sub-component, component, system, arrangement and installation drawings, schematics and specifications for all parts and assemblies as provided on each type of car, from both the Contractor and all of its suppliers.
 - (1) These drawings shall be in an Amtrak-approved 3-D CAD format utilizing the latest major version of Solid Works (SLDDRW for Mechanical and DWG for Electrical) which includes a SMART searchable index and all material characteristics.

- ii). This also includes providing a complete set of all as-built drawings for top assemblies, subassemblies and detail drawings used to manufacture all equipment used therein.
 - (1) All assemblies and subassemblies are to be fully detailed.
 - (2) Outline drawings of boxes, components and devices will not be sufficient.
- iii). The drawing package shall also include:
 - (1) Drawings of every special gage, tool, jig or fixture used to correctly install these items or to maintain the cars.
 - (2) Circuit board level detail, installation and connection drawings.
 - (3) General arrangement drawings for each car type, color schedules and clearance drawings.
- iv). Each assembly, subassembly and arrangement drawing shall include a complete bill of material and parts list describing all items (including weight, original component manufacturer name and part number of the actual supplier of the part) that form a part of the assembly, and the next higher assembly.
- v). A drawing template shall be approved by Amtrak prior to submittal of any drawing.
 - (1) The Contractor's title block must include wording that explicitly grants Amtrak full rights to use the drawing contents.
- vi). Electrical schematic drawings shall indicate all wire numbers, references to other drawings of any and all manufacturers to which connections are made, nominal voltages, currents and frequencies, significant resistance values, and the rating of all loads.
- vii). Devices shall be labeled in agreement with the identification appearing on the actual device, and their locations on the cars shall be shown.
- viii). Pneumatic schematic drawings shall be prepared in a similar fashion.
- ix). All dimensions shall be shown in standard imperial units of inches and decimals, with a metric equivalent shown in parentheses adjacent to the imperial dimension.
 - (1) If a component or subassembly uses metric units as the primary system of measurement, then imperial equivalents shall be provided in parentheses.

b). Drawing Availability

- i). Preliminary as-built drawings needed to perform maintenance, repairs, testing or measurements shall be supplied 180 days prior to the delivery of the first completed batch of cars. **[CDRL 23-02]**
- ii). A complete set of as-built drawings shall be delivered within 30 days after the delivery of the first batch of cars. **[CDRL 23-03]**
- iii). A complete bill of material for each car type, in standard 8.5 in. by 11 in. size, and electronically, covering all major components and hardware, shall also be provided within 30 days after the completion of the last batch of cars of the base order.
- iv). Updates to any drawings must be provided to Amtrak once every quarter (3 months) unless otherwise directed by Amtrak until the final delivery of cars.
- v). The Contractor shall make available, for the life of the equipment, and without charge, hard copy drawings or electronic files that are required by Amtrak to conduct equipment modifications, conduct overhauls or make extraordinary repairs, such as those arising from accidents, etc. The contractor shall upload all drawings to the Enterprise Product Data Management (EPDM) system, Product Lifecycle Management (PLM) system and/or the latest document control system utilized by Amtrak at the acceptance of the first batch of cars.
- vi). All electronic and hard copies of drawings shall be marked with a statement of "Printed Documents are Uncontrolled" to ensure personnel check the latest electronic version for updates to any drawing. The contractor shall also provide a complete set of electronic drawings in Portable Document Format (PDF) within 30 days after the delivery of the first batch of cars. PDFs shall maintain an electronic parent/child relationship to the associated Solid works drawing.

c). Drawing Originals

- i). The Contractor shall submit to Amtrak for review and approval, the as-built drawings and 3-D CAD models of all assemblies, sub-assemblies and arrangements in accordance with this chapter. These shall be submitted as follows:
 - (1) within 30 days after completion of first car of each base type, and
 - (2) after completion of all modifications
- ii). If the Contractor decides not to maintain the drawing originals, they shall be supplied to Amtrak at no cost.
- iii). Likewise, if the Contractor terminates operations, all drawings pertaining to this project, CAD files or any other Amtrak approved media shall be provided to Amtrak free of charge.

d). Electronic Delivery

- i). Within 30 days of the delivery of the last car of the base order, the Contractor shall provide an electronic file of all the drawings, 3-D CAD models and Finite Element Models (FEMs), the bill of material, as-built specification training materials and operation and maintenance manuals and car history books. **[CDRL 23-04]**
- ii). The car number(s) shall be included in the filing system for car-specific data such as the history books.

23.5 Photographs

a). Photographs of Car Assembly

- i). For each car type, the Contractor shall take not less than 50 different digital color photographs, large format, showing the progression of vehicle construction. **[CDRL 23-05]**
- ii). Special emphasis shall be made to illustrate hidden areas which are later concealed, such as carbody structure, floor pans, ceiling structure, ducting, and electrical lockers.
- iii). The views shall be approved by Amtrak.

b). Photographs of Completed Cars

- i). For each car type, the Contractor shall take not less than 50 different digital color photographs, large format, showing the interior and exterior of the fully completed and painted vehicle. **[CDRL 23-06]**
- ii). Photographs shall include at least the following views of each car type:
 - (1) Exterior full broadside view,
 - (2) Exterior 3/4 side view,
 - (3) Exterior top,
 - (4) Exterior rear view
 - (5) Overall interior view
 - (6) Detail views of the passenger area interior surfaces,
 - (7) All lockers,
 - (8) Rest room details,
 - (9) Galley,
 - (10) Vestibules,

- (11) Open and closed side and body end doors,
- (12) Water and waste servicing areas.
- (13) High quality exterior views (broadside and 3/4 side view) of each car type against a non-distracting background, suitable for publicity purposes.

iii). The photograph views shall be approved by Amtrak.

c). Digital Format

- i). All photographs shall be taken in digital format (jpeg), at high resolution (2400 x 3000 pixels).
- ii). All photographic files will be submitted to Amtrak within 30 days following completion and acceptance of the first car of each base type.

23.6 Conformed Specification

- a). Within 30 days after completion of each car type, the Contractor shall update and revise this Specification to provide an as-built specification and contract document. **[CDRL 23-07]**
- b). The revised document shall require Amtrak review and approval.
- c). One reproducible electronic copy in Adobe PDF format of the approved version shall be provided.
- d). The conformed specification shall include all changes to the specification made via approved waivers, variances and change orders.
- e). Subsequent changes to the specification made prior to the end of the warranty period shall require the conformed specification be revised.

23.7 Manuals

a). General

- i). The Contractor shall provide a complete family of operating and maintenance manuals. The following manuals are required:
 - (1) Operator's Manual
 - (2) Service and Inspection Manual
 - (3) Troubleshooting Guide
 - (4) Running Maintenance Manual
 - (5) Heavy Maintenance Manual
 - (6) Integrated Schematic Manual

- (7) Illustrated Parts Catalog
- ii). The manuals shall include full descriptions of all systems and components requiring maintenance or servicing.
- iii). Description of systems shall be included in the nomenclature of all digital files.
- iv). The manuals to be supplied shall contain information required for effectively understanding operation of all car types as well as performing scheduled maintenance including general servicing, lubrication and inspections, system equipment testing, troubleshooting and adjustments, and repair/replacement of components and major subassemblies.
- v). The Contractor is responsible for ensuring that subcontractors comply with this Specification and that they also provide the appropriate manuals. Contracts between the Contractor and subcontractors shall include appropriate language to ensure these documents are provided as required.
- vi). All manuals shall have at a minimum, the following information on the front cover:
 - (1) Contractor name
 - (2) Amtrak name
 - (3) Type of equipment
 - (4) Car numbers
 - (5) Date and level of revision
- vii). Contractor manuals shall be provided electronically in an editable Adobe PDF format or other Amtrak approved language.
- viii). The front of each volume of any manual type shall include a listing of the Chapter numbers and title for the complete manual.
- b). Manual Review and Availability
 - i). Manual Development Plan
 - (1) The Contractor shall develop a master plan and schedule for the development and completion of the manuals. **[CDRL 23-08]**
 - (2) It shall include the Contractor's plan for the development and acquisition of the manual content from suppliers and vendors, the schedule for the major completion points of the manuals, and a method to track the development of each manual that can be reviewed at the periodic project management meetings.
 - (3) This manual development plan shall be submitted to Amtrak no more than 180 days after NTP.

- ii). First Draft of Manuals
 - (1) A full set of first draft manuals, including those provided to the Contractor by suppliers, shall be submitted for Amtrak review no less than 90 days prior to the completion of the first car. **[CDRL 23-09]**
 - (2) If the manuals require revision, as determined by Amtrak, the Contractor shall revise and resubmit the draft manuals until all requirements are met.
 - (3) The first car shall not be released from the Contractor's facility until Amtrak has approved the first draft of the manuals.
 - (4) The Contractor shall provide 10 full sets of manuals, in electronic format, to Amtrak prior to Amtrak acceptance of the first batch of cars.
- c). Manual Updates
 - i). A digital copy of all manuals shall be provided and updated for the duration of the warranty period.
 - ii). Manual information shall be kept up-to-date with the car configuration and operation during the full period of the Contract.
 - iii). After delivery of the first car, and continuing through the end of the warranty period, should any changes to the car, components or maintenance requirements occur, the Contractor shall revise and update all affected manuals and shall submit hard and electronic copy manual updates to Amtrak.
 - iv). Upon the completion of the warranty period, the Contractor will issue 10 sets of finalized manuals to Amtrak, reflecting all changes made to the vehicles during production, delivery and operation, and the status of all cars at the time of warranty expiration. **[CDRL 23-10]**
 - v). Revisions to final draft and approved manuals shall be recorded on a control list in the front of each manual.
 - vi). The list shall be issued with each revision and shall show the date of each revision and the page reference. Updated lists and revisions shall be maintained in the manuals by the Contractor until the warranty period expires.
- d). Work Management System
 - i). The manuals will be used electronically in Amtrak's Work Management System (WMS) or successor maintenance tracking database.
 - ii). The Contractor shall work with Amtrak to ensure that this is implemented successfully. **[CDRL 23-11]**

e). Operator's Manual

- i). The Contractor will develop operating manuals for use by train operating personnel, including the Engineer, Conductor and food service Lead Service Attendant (LSAs).
- ii). Operator's manuals shall contain all information needed for the operation of each car type, including definitions giving nomenclature, function, location and operation of all indicators, controls, components and subsystems utilized in the operation of the equipment.
 - (1) This shall include preparing the equipment for operation, securing the equipment from operation and operation of each car type individually.
- iii). Normal and rescue locomotive coupling/ uncoupling procedures to both ends of the cars shall be provided, along with coupling to equipment with completely dead batteries, and deadhead movement of equipment in freight train service.
- iv). Emergency procedures and safety precautions of a specific nature applicable to the equipment shall be included.
 - (1) This shall include all passenger evacuation methods.
- v). The manual shall give troubleshooting and diagnostic procedures sufficient to isolate faults and problems which are capable of repair by the operator and train crew, arranged in a format to allow ease of use under emergency and time-sensitive situations.
- vi). The operator's manual shall be divided into chapters as follows:
 - (1) Introduction
 - (2) Communications
 - (3) Inspecting
 - (4) Operating
 - (5) Fault Isolation
 - (6) On-the-Road Repair
 - (7) General Description
- vii). The fault isolation and on-the-road repair sections of the operator's manual shall include, in summary form, all fault isolation and on-the-road repair procedures. These two sections shall include:
 - (1) Index
 - (2) Safety instructions

- (3) Instructions for communications during fault isolation
 - (4) Authorized fault isolation procedures
 - (5) Authorized on-the-road repairs
 - (6) Equipment location diagrams
- viii). The operator's manual shall accurately portray and clearly illustrate all information required by the operator and train crew to correctly, efficiently and safely carry out their duties on the equipment in all possible configurations.
- ix). Illustrations shall include layouts of the equipment, showing major components and controls referenced in the text and their locations on each type of car.
 - (1) This shall include all electrical, pneumatic, water and waste system cutouts and bypasses.
- x). An alphabetical index of subjects and equipment not mentioned in the table of contents shall be provided.
- xi). All operating conditions shall be taken into account by the manual's description of unit functions.
- xii). A fault isolation section shall be provided to list all possible unit or system malfunctions that are detectable by the train crew without the aid of test equipment.
 - (1) This shall include fault codes and corrective information supplied by the diagnostic system.
 - (2) This information shall be presented in tabular format listing each symptom with corresponding potential causes, test, checks and corrective actions.
 - (3) The goal of these fault isolation tables shall be to allow the train crew to identify operational problems and, where possible, isolate faults from consists to car, car to system and, in some cases, from system to subsystem.
- f). Service and Cleaning Manual & Maintenance and Inspection Manual
 - i). The Service and Cleaning (S&C) manual as well as the Maintenance and Inspection Manual (M&I) shall contain all pertinent information that operating and maintenance personnel will require in order to perform all periodic inspections on the vehicles as required by the Contractor, subcontractors, Amtrak, the FRA and FDA. **[CDRL 23-12]**
 - (1) All daily inspection items shall be in the S&C manual.

- (2) As Amtrak transitions to Continuous Maintenance (CM), all inspections required during a periodic inspection period shall be included, i.e. those occurring every 92 days, every 184 days and annually (every 368 days) and shall be in the M&I manual.
 - (3) Inspections and servicing activities occurring on an interval that is not used by Amtrak may be included in the tasks shown for the next more frequent interval.
 - (4) The weight of each car type, and instructions for water system flushing and draining/winterization of the equipment shall be included in both manuals.
- ii). The inspection tasks described in these manuals shall include, but are not limited to the following:
 - (1) Item or system requiring inspection
 - (2) Frequency or period of inspection
 - (3) Inspection procedure, including location and description of system being inspected
 - (4) Pass/fail criteria for inspection
 - (5) Special tools, conditions or other requirements for inspection to be performed
 - (6) Source of inspection requirement (Contractor, Amtrak, FRA, FDA, etc.)
 - (7) Reference for inspection requirement (CFR, maintenance manual, etc.)
- iii). For both manuals, a summary table in order of frequency shall be provided for quick reference that lists the item or system, frequency, source and reference for all required inspections.
- iv). The M&I manual will also provide complete instructions for all pertinent maintenance activities for the routine operation of the cars that are required every 92 days, or more frequently, including:
 - (1) Fresh water filling
 - (2) Waste tank draining
 - (3) Removal of trash and recyclables
 - (4) Installation and replacement of consumables
 - (5) Inspection and replacement of filter elements
 - (6) Cleaning and lubrication

(7) Replacement of brake shoes and pads

g). Troubleshooting Guide

- i). This manual shall contain detailed troubleshooting procedures, including those requiring the use of diagnostic test equipment and those that do not require such equipment, for all major systems, subsystems and components in the following categories:

- (1) Carbody
- (2) Trucks
- (3) Coupler and Draft Gear
- (4) Brakes
- (5) Door System
- (6) Interior
- (7) HVAC
- (8) Lighting
- (9) Communications
- (10) Electrical System
- (11) Food Service
- (12) Water and Waste
- (13) Digital Technology
- (14) Emergency Equipment
- (15) Diagnostics System
- (16) Software and Microprocessors
- (17) Cyber Security
- (18) Onboard lifts (if provided)

- ii). This manual shall provide procedures for the identification, diagnosis and proper correction of car failures and malfunctions.

- (1) Procedures shall be organized so that maintenance personnel can isolate faults down from consist to car, from car to system, and from system to subsystem, assembly, subassembly or component.

- (2) These procedures shall include determination of the cause and isolation of the fault to replaceable parts, interface wiring or mechanical linkage.
 - (3) Diagrams of the relationships shall be provided to enhance comprehension.
 - (4) Troubleshooting procedural format shall include fault codes for each system with built-in diagnostics and fault information and corrective actions displayed by the diagnostic system.
 - (5) All fault codes are to be included, and diagnosed, in the troubleshooting manual.
 - (6) When there is more than one probable cause for a system or equipment malfunction, the most likely to have failed shall be considered first; however, consideration shall be given to accessibility and ease of replacement when the likelihood is equally shared by two or more causes.
- iii). Each chapter of the troubleshooting procedures shall contain the following sections:
- (1) Introduction, including general information, safety precautions, and definition of warnings, cautions, and notes with specific details
 - (2) Operational and functional system descriptions
 - (3) Troubleshooting
 - (4) Use of diagnostic test equipment
 - (5) Corrective maintenance procedures
- iv). When there is more than one probable cause for a system or equipment malfunction, the most likely to have failed shall be considered first; however, consideration shall be given to accessibility and ease of replacement when the likelihood is equally shared by two or more causes. The troubleshooting and corrective maintenance procedures shall contain:
- (1) Identification of the system covered
 - (2) A concise explanation of the troubleshooting format and how to use the procedure
 - (3) Test equipment and tools required
 - (4) Safety precautions that must be taken
 - (5) A reference to the supporting block diagrams
 - (6) Preliminary tasks that must be performed prior to initiating troubleshooting

- v). When applicable, each section shall indicate and list the applicable safety warnings and precautions, test equipment required, special tools required, and any consumables required.
 - vi). The manual shall include a listing of every type of diagnostic software used on the equipment, including instructions for their use including cable connections.
 - vii). The manual format shall utilize diagrams and illustrations as required to enhance understanding.
 - viii). All procedures shall be proven in the field on the first car and shall be revised as necessary.
- h). Running Maintenance Manual
- i). Definition
 - (1) Running maintenance is defined as that maintenance that can be performed on the inspection track or does not require taking the equipment out of service.
 - ii). Contents
 - (1) The running maintenance manual shall contain an overview of the vehicle operation and a detailed description and analysis of the vehicle and its assemblies/subassemblies.
 - (2) The manual shall also contain, in a convenient form, all information required for on-car testing, troubleshooting, servicing and replacement of equipment down to the lowest level replaceable item.
 - (3) The running maintenance manual shall provide technicians with the maintenance procedures that are performed at the running repair level.
 - iii). Illustrations
 - (1) Running maintenance manual procedures shall be supported by illustrations. They shall be used to simplify, clarify or shorten the text.
 - (2) Illustrations shall be located on the same page or facing page of the text they support.
 - (3) A sequence of illustrations may be used in order to clarify or simplify a complex procedure.
 - (4) When one of several possible positions is described by text for a device, the position described shall be the same as the one shown by the illustration.
 - (5) Unless the location and access to the item is obvious, a locator view shall be included, or the assembly diagram provided at the beginning

of the chapter may be referenced to ensure that the equipment orientation is clearly described.

iv). Test Procedures

- (1) Functional post-inspection testing and checkout test procedures shall be provided to verify serviceability or to detect failures of a system, subsystem, assembly, subassembly or component.
 - (a) Pretest setup instructions shall be included.
- (2) Test procedures shall be used as a prerequisite for the generation of fault isolation procedures to fault isolate to a system, subsystem, assembly, subassembly or component.
- (3) The types of tests that can be performed fall into the following categories:
 - (a) Operational Test
 - (i) An operational test procedure shall be provided, it is required to ascertain only that a system or equipment is operable.
 - (ii) These tests should require no special equipment or facilities other than that installed on the car and shall be comparable to the tests performed by the Operator.
 - (iii) It is not intended that the operational test of the unit meet the specifications and tolerances ordinarily established for overhaul or major maintenance periods.
 - (b) Functional Test
 - (i) A functional test procedure shall be provided, it is required to ascertain that a system or equipment is functioning in all aspects in accordance with minimum acceptable system or unit design specifications.
 - (ii) These tests may require supplemental support equipment and shall be more specific and detailed than an operational test.
 - (iii) The test shall contain all necessary information to ensure system or unit operational reliability, without reference to additional documents.
 - (c) System Test
 - (i) A system test procedure shall be provided, containing all adjustment specifications and tolerances required to maintain system and unit performance at maximum efficiency and within design specifications.

- (ii) The test shall be self-contained and may duplicate other tests.
- v). Instructions & Procedures
 - (1) Instructions shall be provided for the removal, addition, or rearrangement of car types.
 - (2) The weight and instructions for the lifting and jacking of each car type shall be provided.
- i). Heavy Maintenance Manual
 - i). Definition
 - (1) Heavy maintenance is defined as the maintenance that may be performed on the shop track or one of the heavy maintenance tracks if the equipment is taken out of service.
 - (2) Heavy maintenance tasks will generally require more than one 8-hour shift to complete.
 - ii). Contents
 - (1) The Heavy Maintenance Manual shall contain a detailed description and analysis of all mechanical, electrical and electronic assemblies/subassemblies so that Contractor overhaul facilities can effectively and safely service, inspect, adjust, troubleshoot, repair, overhaul and test these assemblies.
 - (2) The Contractor and sub-suppliers shall provide all information needed for comprehensive repair and overhaul work, at least as comprehensive as that used by the suppliers' own service and repair shops, whether the car parts were manufactured by them or purchased from others.
 - (3) The manual shall provide information for the test, repair and overhaul of each repairable component of the assembly.
 - (4) No component shall be considered disposable or deemed non-repairable except where agreed to by Amtrak.
 - iii). Functional Descriptions
 - (1) The manual shall include descriptions of how each assembly/subassembly operates within the car system. Each shall include:
 - (a) Block diagrams
 - (b) Signal flow diagrams
 - (c) Simplified schematics

- (d) Functional wiring and piping diagrams
 - (e) Completely detailed overhaul procedures
- iv). Instructions & Procedures
 - (1) Procedures shall be provided for installation and removal of equipment in full detail, down to the lowest level of replacement items (assembly, subassembly or component).
 - (2) Prerequisites and Safety Information
 - (a) Prerequisite operations, inclusive of access panel or plate openings, removal of other obstructing components, and deactivation of power and other pertinent safety precautions and/or warnings shall be included or appropriately referenced.
 - (3) Removal Procedures
 - (a) The procedures shall clearly describe the step-by-step operation in a logical, work flow sequence to safely gain access to, and subsequently remove the item.
 - (b) Exact quantities of attaching hardware to be removed shall be included in the procedures.
 - (c) The statement "reverse of removal" may only be used judiciously.
 - (i) Installation procedures that are basically the same as the removal procedure, but require some additions, such as torque values for bolts, replacement of O-rings and lubrication of a component, can be handled within highlight statements to that effect in the removal procedure. If this is done, the statement "reverse of removal" may still be used.
 - (ii) If, during the prove-out or validation of a "replace" task, the highlighted data do not enable the maintenance technician to correctly install the subject item, the highlighted information shall be deleted from the removal procedure and a step-by-step installation procedure shall be added to the "replace" task.
 - (4) Installation Procedures
 - (a) Installation instructions must be provided for procedures that are complex and require additional step-by-step detail or are significantly different from that of removal procedures.
 - (i) Exact quantities of hardware shall be identified.

(5) Adjustments

- (a) Step-by-step procedures shall be provided for any adjustment or alignment required as a result of replacement of any equipment, or to determine that a system, subsystem, assembly, subassembly or component meets required standards.
- (b) Detailed procedures shall be provided to determine the accuracy of, and to correct and adjust instruments, diagnostic equipment and test measuring devices used for precision measurement.
- (c) Calibrations are to be performed with an instrument that is certified to a standard of known accuracy to detect and adjust any discrepancy in the accuracy of the instrument being calibrated.

(6) Rewinding Procedures

- (a) Rewinding procedures shall be provided in full detail for all rotating and wire-wound apparatus, except as agreed to otherwise by Amtrak.

(7) Disassembly/Assembly Procedures

- (a) Procedures shall be provided for the disassembly and assembly of assemblies, subassemblies and components at the heavy repair level of maintenance shall be provided.
- (b) Assembly instructions shall include all pertinent assembly criteria, including clearances, backlash dimensions, torque values and similar data.
- (c) Final testing, with pass/fail criteria, of the end item shall be provided by reference.

(8) Test and Evaluation Procedures

- (a) Test and evaluation procedures equivalent to that performed by the original manufacturer, including the requirements for specialized test equipment.
- (b) The Contractor is to procure or fabricate and provide to Amtrak all such specialized test equipment and their drawings.

v). Overhaul

- (1) For overhauls, the maintenance action required to restore an item to a completely serviceable and operational condition shall be indicated.
- (2) Overhaul is not normally performed in the car and does not necessarily return an item to like-new condition.

vi). Rebuilds

- (1) Rebuilds include those services and actions necessary for the restoration of equipment to like-new condition in accordance with original manufacturing standards.
- (2) Rebuild is the highest degree of material maintenance applied.
- (3) The rebuild operation allows returning to zero those age measurements including, but not limited to, hours and miles, considered in classifying Amtrak's equipment and components.

vii). Special Tools

- (1) Complete instructions for use, drawings and parts information for all special tools that are required to be provided to Amtrak by the Contractor.

viii). Component and Assembly Weights

- (1) The weights of all components and assemblies that weigh more than 50 lbs. shall be indicated.
- (2) In addition, the weights of major component assemblies shall be supplied such as the truck, air conditioning compressor, HVAC module, etc.

ix). Diagnostic Test Equipment

- (1) Maintenance, calibration and adjustment, repair and overhaul of all diagnostic test equipment.

j). Integrated Schematic and Wiring Manual

- i). The integrated schematic manuals shall include all electrical, hydraulic, pneumatic, mechanical, refrigerant, water and waste water system schematic diagrams as used on each car type, broken down by major system.
- ii). The manual shall provide schematic and wiring diagrams including (but not limited to) the following:
 - (1) Electrical power distribution
 - (2) Trainline assignments and connections to car-borne equipment
 - (3) Door control system
 - (4) Lighting system (interior and exterior, in normal, standby and emergency modes)
 - (5) Communications system, including PA, intercom and passenger information system

- (6) HVAC system, including refrigeration units in the food service car (electrical, refrigerant and air flow schematics)
 - (7) Brake system (electrical, mechanical and pneumatic)
 - (8) Main reservoir air distribution system
 - (9) Fresh water distribution and waste retention systems (electrical, pneumatic and water routing)
 - (10) Onboard mobility device lift (electrical and hydraulic, if used)
 - (11) Food service equipment, including all appliances (electrical, water distribution)
- iii). All schematic drawings will be provided electronically per Amtrak Standard 700 unless otherwise approved by Amtrak.
- iv). The schematics shall include all required information for maintenance, troubleshooting and repairs, including specific identification of wires (size, type and label), circuits, components, junction boxes and termination points, locations of components, voltages and pressures, hoses and pipes (size, type and rating), filters, adjustment points, direction of flow, function, and other information as necessary.
- v). The integrated schematic manual shall be supplied in tabloid format, 11 in. tall by 17 in. wide, horizontal format, spiral bound with a protective laminated cardstock front and back cover.
- k). Illustrated Parts Catalog (IPC)
 - i). The Illustrated Parts Catalog (IPC) shall enumerate, illustrate and describe every item used on the cars, along with the diagnostic test equipment and special tools with its related parts, down to the Lowest Level Replaceable Unit (LLRU). **[CDRL 23-13]**
 - (1) The LLRU is defined as the lowest level of component assembly which consists of a separate individually fabricated part, including all hardware items required to assemble, disassemble, repair or overhaul the component.
 - ii). Parts Information
 - (1) Each listing must include the accepted generic modified noun-name description, the original supplier, the original supplier's part number and name, the Contractor's part number, and space reserved for the Amtrak 10 digit internal catalog number.
 - (2) Identical parts within the equipment, regardless of where used in the car types, shall use only one part number.
 - (a) Common bulk materials such as weather strip or hose used in several locations, but which is cut to specific application length

for an individual application may use one common part number, but the specific location application must identify the length in the text description.

- (3) In the case of hardware such as nuts, bolts, washers, etc., information relative to material, coating if any, all dimensions and types shall be included.
- (4) Providing the original supplier and its own part number for all components is of great importance to Amtrak.
- (5) If provided to the Contractor, Amtrak part numbers shall be included in the IPC.
- (6) An appendix giving the original supplier's contact information responsible for parts ordering shall be included.
- (7) Amtrak shall have the right to make direct purchase from the sources listed by the Contractor.

iii). Assembly Break-downs

- (1) Complete piece-part breakdowns of all subcontractor assemblies shall be provided, regardless if the Contractor only purchased completed assemblies.
- (2) Each component that can be disassembled, including all printed circuit board components and items which may have been purchased by the Contractor as a subassembly, must be broken down in exploded view illustrations to fully indexed parts.
- (3) Each part or other item shall be identified as being part of the next higher assembly.
- (4) All assemblies shall be listed alphabetically by name with reference to corresponding figure number.

iv). Cross Reference Lists

- (1) The IPC shall include two cross-reference lists that sort all listed parts as follows:
 - (a) Sorted alphanumerically by part number
 - (b) Sorted alphabetically by part name
- (2) These cross-reference lists shall include the part name, manufacturer part number, manufacturer or supplier, Contractor part number, and the page and illustration number where found in the IPC.

v). Illustrations

- (1) Illustrations shall be exploded view and located on the same page or facing page of the text they support.
- (2) A sequence of illustrations must be used in order to clarify or simplify a complex assembly.
- (3) All illustrations shall be properly scaled in order to show each individual part being called out.
- (4) When one of several possible positions is described by text for a device, the position described shall be the same as the one shown by the illustration.
- (5) Unless the location and access to the item is obvious, a locator view shall be included, or the assembly diagram provided at the beginning of the chapter may be referenced to ensure that the equipment orientation is clearly described.
- (6) If the same drawing is used in both the illustrated parts catalog and either the running maintenance or heavy maintenance manual, the reference index in both manuals must identify the same parts.

l). Hardcopy Formats

- i). The operator's manual binder shall be lightweight plastic, which can be easily opened for page revisions.
- ii). Plastic coated tabs shall be used to segregate sections within each publication.

m). Manual Quantities to be Provided

Name	Quantity
Operator's Manual	250
Service and Inspection Manual	50
Running Maintenance Manual	15 sets
Troubleshooting Manual	15 sets
Heavy Maintenance Manual	15 sets
Illustrated Parts Catalog (IPC)	15 sets
Integrated Schematic Manual	15 sets
Manual quantities are subject to change.	

n). Software

- i). The Contractor shall also supply 10 sets of every type of software used on the equipment, from the Contractor and its suppliers, in an agreed-upon format.
- ii). This shall include diagnostic tester software, any passenger information and Wi-Fi system software, and databus software.

- iii). All such software shall be licensed in Amtrak's name and include master passwords to allow future changing of system parameters by Amtrak when necessary.
- o). Inspection, Testing and Maintenance Plan
 - i). The Contractor shall be responsible for the creation and maintenance of the Inspection, Testing and Maintenance Plan annually in accordance with 49 CFR 238.107.
 - ii). The Plan shall include all detailed inspection, testing and maintenance requirements for each car.
 - iii). The list of activities shall be considered an all-encompassing and complete list of every inspection, testing and maintenance requirement throughout the life of the equipment.
 - iv). Inspection, Testing and Maintenance Plan shall be provided to Amtrak for submittal to the FRA on an annual basis.
 - v). This plan shall include a detailed description of the following:
 - (1) Inspection procedure, intervals and criteria;
 - (2) Test procedures and intervals;
 - (3) Scheduled preventive maintenance intervals;
 - (4) Maintenance procedures; and
 - (5) Special testing equipment or measuring devices required to perform inspections and tests.

23.8 Car History Books

- a). General
 - i). The Contractor shall produce a car history book for each completed car. **[CDRL 23-14]** The car history books shall be a specific record of production, testing, inspection and relevant documentation for each individual vehicle.
 - ii). The car history book shall contain original documents unless specified otherwise.
 - iii). All documents for a car shall be marked with all carshell serial numbers, the production sequence numbers or the road numbers for the completed car.
 - iv). The Contractor shall provide one electronic set and one paper set of originals of the car history book for each car. The electronic set shall be color scanned at high resolution. The printed car history books shall be provided in three-ring binders. Documents shall be copied double-sided where practical.
 - v). At a minimum, each car history book shall contain the following:

- (1) Table of contents
- (2) Production control cross-reference sheets, listing:
 - (a) Carshell serial numbers
 - (b) Shop order/production sequence numbers
 - (c) Final car reporting marks and road numbers
- (3) Production schedule for each car showing start and end dates for each major stage of manufacturing
- (4) List of all production drawings by number and revision status (release date, current revision, and outstanding engineering change requests at time of production)
- (5) List of all parts by supplier and part number (bill of material)
- (6) List of all serialized components
- (7) Truck records (separate set of records for each truck)
 - (a) Inspection records and component serial numbers
 - (b) Truck assembly sequence
 - (c) Truck assembly weight certificate
 - (d) Wheel/axle pressing graphs
 - (e) Truck to carbody attachment record
- (8) Log of all non-conformances including status
- (9) Component test certificates
- (10) Test records:
 - (a) Master test plan
 - (b) Test procedures
 - (i) Production tests
 - (ii) Acceptance tests
- (11) Record of measurements and results
- (12) Critical dimensional inspection report
 - (a) Carshell dimensional inspection (prior to production)
 - (b) Carbody leveling, balancing and centering record

- (c) Carbody overall dimension measurement, including compliance with clearance diagram
 - (d) Coupler height measurement
 - (e) Scale certificate for each completed car (dry weight)
- (13) Records of all required inspections
- (14) USPHS Certification forms (originals are to be installed in the appropriate certificate holder in the food service car)
- (15) FRA documentation
 - (a) Record of compliance with FRA regulations
- (16) Completed pre-shipment checklist
- (17) Shipping approval form
- (18) Amtrak acceptance form
- (19) Transfer of title of the car from Contractor to Amtrak (with original blue-ink signature of Contractor's representative).
- vi). The car history book shall be produced in an electronic format as either as a Microsoft Word, Excel, FileMaker Pro or an Adobe PDF file on a DVD. Procedures, electronic signatures and controls shall be established to ensure the validity of information in this document at all times.
- vii). Each car history book shall be fully completed and presented to Amtrak prior to the car being released from the Contractor's facility.

23.9 Training

a). General

- i). The Contractor shall organize and present formal instruction programs for personnel who will operate, maintain, repair and troubleshoot the equipment.
- ii). In addition, the Contractor shall provide instruction and training materials for Amtrak personnel who shall train others in the future.
- iii). Training shall take place at four locations designated by Amtrak.
- iv). All training shall meet the requirements of the FRA contained in 49 CFR Part 243 regarding the training and qualification of safety-related Amtrak employees. This shall include all:
 - (1) Train operating staff (Engineers and Conductors),
 - (2) Customer service personnel (On-Board Service and Lead Service Attendants),

- (3) Mechanical Department maintenance personnel,
 - (4) Digital Technology personnel and
 - (5) Amtrak Police Department.
- v). The regulation requires that the training plan:
 - (1) categorize all 'safety-related railroad employees' (SRREs);
 - (2) identify all training (subject to FRA regulation) that each category receives; and
 - (3) provides outlines for each training course, that includes learning objectives, instructional method(s), and assessment approach.
- vi). All training shall also be compliant with Section 5 of Railway Passenger Handling Safety Rules from Transport Canada O-0-16.
- b). Method of Presentation
 - i). At the choice of the Contractor, the direct training of the Amtrak employees identified above shall be performed either:
 - (1) by the Contractor, using a training plan which it has directly submitted to the FRA for review and approval; or
 - (2) by the Amtrak Safety and Technical Training Department, which shall be fully based upon a Contractor-developed and supplied training plan.
 - ii). The Contractor's proposal must therefore identify whether the Contractor will either be submitting a stand-alone training plan to the FRA for their approval, or if the Contractor would be requesting that Amtrak adopt the Contractor-supplied training plan.
 - iii). The training plan in any case must be fully approved by the FRA and ready to be presented to Amtrak personnel prior to the delivery of the first car.
- c). Contractor Training Plan to FRA
 - i). If the Contractor intends to submit a training plan directly to the FRA for its approval, the Contractor must submit a copy of that plan to the Amtrak's Safety and Technical Training Department no less than 90 days prior to training any Amtrak employee.
 - ii). Amtrak will not review, comment, or approve the plan, but will rely on FRA's approval.
- d). Amtrak Adopts Contractor Training
 - i). If the Contractor will be relying on Amtrak to adopt its training into Amtrak's own plan, the Contractor must submit fully completed draft training materials

to the Amtrak's Safety and Technical Training department no later than 180 days prior to training any Amtrak employee.

- ii). Amtrak will review the materials and provide comments within 30 calendar days.
 - iii). The Contractor will be expected to incorporate any comments/changes and return the materials to Amtrak within 30 days.
 - iv). This process will continue until the Amtrak Safety and Technical Training Department determines that the training materials meet the FRA Part 243 requirements.
- e). Annual Review
- i). Whichever party that performs the training (Contractor or Amtrak) is also required to perform an Annual Review, using operating rule violations, FRA inspections, NTSB incident findings, etc., to determine if the identified training was effective.
 - ii). If knowledge and/or skills gaps are identified in the Annual Review process, the training plan is to be suitably updated or modified, and the changes reported to the FRA.
- f). General Training Requirements
- i). The following provides the general requirements for the content and level of details of the training materials that shall be prepared and submitted by the Contractor.
 - ii). This submittal shall include the hours of classroom and "hands-on" training projected per subset, final course content, the qualifications of the instructors, a listing of training aids to be used and a description of the scope of instruction, on an individual subset level, to fulfill the program requirements.
 - iii). Course Contents
 - (1) The Contractor shall provide a program to train and educate personnel in all details of the equipment as required to enable Amtrak to satisfactorily operate, service, and maintain the equipment.
 - (a) The Contractor shall assume no knowledge of the features of the supplied equipment on the part of Amtrak personnel.
 - (b) However, the Contractor may assume that maintenance personnel have the basic skills pertinent to their crafts.
 - (2) The manuals shall be used as the major element of the training program.

- (3) The training shall be designed to be delivered by an instructor in the classroom and, when appropriate, in the field or shop when actual equipment is used.
- (4) Field instruction may also be provided in locations approved by Amtrak using actual cars or training mock-ups to provide hands-on instruction in the maintenance and operation of the equipment.
- (5) The Contractor's program shall include formal and informal instruction, training mock-ups, models, manuals, diagrams and component catalogs.

iv). Training Duration and Classes

- (1) Amtrak shall advise the Contractor as to how many individuals of each discipline are to be trained at each location.
- (2) The program shall include 1,500 Contractor hours of classroom training at designated sites; 400 of which shall be for operations, 400 for Train the Trainer, and the remainder for maintenance.

v). Video Recordings

- (1) Amtrak shall have the right to video record any classroom training sessions. Amtrak will retain ownership of the video recordings, following a final editing as mutually agreed with the Contractor and will have the right to use video recordings for future training sessions.

vi). Train the Trainer

- (1) A primary objective of the program shall be to develop within Amtrak the capability to perform similar training under its own training program subsequent to the Contractor's involvement.
- (2) Additional Train the Trainer classes shall be provided which is supplemental to the Contractor hours of classroom training.

vii). Training Materials

- (1) All informative material, audio and video training aids and notes shall be supplied beyond that given in the instruction manuals to clearly explain all systems and subsystems that the work force will maintain.
- (2) Color copies must be used where it is needed to communicate the training concepts in the document / course.
- (3) An editable electronic copy of the training presentation must be provided to Amtrak after the training is approved and delivered by the contractor.
- (4) Training materials shall be updated as required during the course of instruction.

- (5) All instructional materials will become property of Amtrak.
 - (6) All materials used in the programs, such as models, manuals, mock-ups, video recordings and drawings, shall be of durable construction and shall become the property of Amtrak.
 - (7) Training Plan
- viii). Virtual Reality Training
- (1) The Contractor shall provide Virtual Reality training designed to simulate real-world operational, maintenance and emergency scenarios for the Cars. The VR system shall be used to supplement classroom and simulator-based instruction and must be compatible with Amtrak's Learning Management System (LMS).
 - (2) The VR system shall provide immersive, interactive 3D environments replicating interiors, equipment bays and control interfaces for each of the car types while including modules for pre-trip inspections, fault diagnostics and troubleshooting, emergency response procedures and component replacement/maintenance.
 - (3) The Contractor shall deliver a complete VR training curriculum, including instructor guides, student manuals and assessment tools. All content must be reviewed and approved by Amtrak's Training and Development department prior to deployment.
 - (4) The Contractor shall provide initial setup, calibration and testing of the VR system at designated Amtrak training facilities. A minimum of two (2) Train-the-Trainer sessions shall be conducted for Amtrak instructors.
- ix). Before delivery of the first car, the Contractor shall provide Amtrak with a proposed training plan incorporating the following elements:
- (1) Description of the training program, including program goals and objectives, sequence of activities, course outlines, evaluation methods, required resources and time required for each part of the program.
 - (2) Schedule of instruction at each location.
 - (3) State of the Contractor's experience in organizing and delivering similar training programs and qualifications of the designated instructors.
 - (4) List of training materials to be provided by the Contractor to support the training program.
 - (5) Instruction guides for each course to be taught within each program.
 - (6) Student workbooks for each course, each workbook including a syllabus, objectives, schedule, outlines, figures, lesson summaries and any other appropriate instructional information.

- (7) Train the Trainer classes which is supplemental to the Contractor hours of classroom training.
- g). User Training
 - i). The Contractor shall provide a user training program, designed for Amtrak operating, maintenance and training personnel. **[CDRL 23-15]**
 - (1) This is to acquaint them with the equipment in order to provide sufficient working knowledge to safely operate, inspect, service and maintain it.
 - (2) The training program shall include formal classroom instruction, as well as practical demonstrations and activities on the actual new vehicles.
 - (3) The Contractor and/or suppliers shall provide appropriate training aid in the classes as required.
 - ii). Class audience will be:
 - (1) Operating personnel
 - (2) Maintenance personnel
 - (3) Food service personnel
 - (4) Supervisors and management
 - (5) Training department personnel
 - (6) Amtrak representatives
 - (7) Amtrak Police Department and Emergency Management personnel
 - (8) Others as required
- h). Training Requirements
 - i). General
 - (1) The courses listed below shall be accompanied with training manuals, guides, training aids, student and instructor workbooks, and operator and maintenance manuals.
 - (2) It is the desire of Amtrak that the content and structure of the manuals be used as direct input into the training course materials where applicable.
 - ii). Course 1: System Operation Instruction Training Course
 - (1) This course shall include:
 - (a) General vehicle familiarization;

- (b) Location, function, and operation of pertinent controls, gauges, indicators, and switches;
 - (c) Subsystem operation, inspection, setup, and shutdown procedures;
 - (d) Trouble symptoms diagnostic and troubleshooting procedures for isolating and correcting minor faults including, at a minimum, techniques for the following:
 - (i) Release of brakes;
 - (ii) Door isolation and cut-out;
 - (iii) Circuit breaker and/or fuse reset or replacement;
 - (iv) Water and waste system failure recovery;
 - (v) On-Board Mobility Lifts (if equipped);
 - (vi) Any other techniques that would assist operators in quickly bypassing non-critical safety subsystems, allowing trains to safely depart the main line to a convenient service location;
 - (vii) Towing and rescue, including with completely dead batteries.
 - (e) Emergency Procedures including, at a minimum, techniques to respond to fire on board or emergency evacuation.
 - (2) This class shall be conducted four times (twice for operations personnel, twice for maintenance personnel). The first class shall be conducted at the time of the arrival of the first car. Subsequent classes shall be scheduled as approved by Amtrak. This class shall include at least 40 hours of training.
- iii). Course 2: Repair and Maintenance Training Course
- (1) Course 2 shall include and expand on the information furnished in course 1 and shall include basic schematic and block diagrams to provide fault diagnosis information and training appropriate for in-service maintenance.
 - (2) Course 2 shall provide the training needed for the following:
 - (a) Troubleshooting in-service failures as described in course 1
 - (b) Performing running maintenance including:
 - (i) General servicing
 - (ii) Lubricating

- (iii) Inspecting
 - (iv) Adjusting
 - (3) The training shall include maintenance instructions on the use of the integrated wiring diagrams.
 - (4) Participation shall include up to 20 electricians, mechanics and foremen. This class shall be conducted twice. The first class shall occur immediately following course 1 and be attended by maintenance personnel. The second class shall be scheduled as approved by Amtrak. This class shall include a minimum of 80 hours.
- iv). Course 3: Workshop Training
- (1) The workshop training course shall provide the training for in-shop repair and trouble diagnosis of each LRU to the level of the lowest replaceable component.
 - (a) The training shall contain detailed explanation of flow charts, schematic drawing and detailed analyses related to each LRU, so that Amtrak maintenance personnel will be able to effectively service, inspect, maintain, adjust, troubleshoot, repair, replace and overhauled the LRU.
 - (b) The flow charts, schematic drawings and detailed analyses shall be included in the training manuals.
 - (2) The training shall include maintenance instructions on the use of the integrated wiring diagrams and shall include reference to the manuals.
 - (3) The major sections of the workshop training course will address, at a minimum the following subsystems and products, as defined above:
 - (a) Carbody
 - (b) Trucks
 - (c) Coupler and Draft Gear
 - (d) Brakes
 - (e) Door System
 - (f) Interior
 - (g) Onboard Mobility Device Lifts (if equipped)
 - (h) HVAC
 - (i) Lighting
 - (j) Communications

- (k) Electrical System
- (l) Food Service
- (m) Water and Waste
- (n) Emergency Equipment
- (o) Digital Technology
- (p) Microprocessor-based products
- (4) Participation shall include, up to 25 Amtrak Mechanical Maintenance Personnel. This class will be conducted twice. It shall follow the first course 2; others shall be conducted at dates to be scheduled as approved by Amtrak. Each class shall include a minimum of 120 hours.
- v). Course 4: Diagnostic Test Equipment (DTE) and Special Tools Course
 - (1) This course shall provide instruction on the proper use of DTE and special tools during application, operation, usage, adjustment, inspection, maintenance, troubleshooting, repair and storage instructions.
 - (2) It shall be conducted twice. It shall be conducted upon the delivery of the test equipment and special tools and as agreed upon by Amtrak. It shall be a minimum of 20 hours.
 - (3) Subjects addressed shall include:
 - (a) Introduction
 - (b) General description of the equipment
 - (c) Description of controls and indicators
 - (d) Operation of equipment
 - (e) Operation of safety and emergency equipment
 - (f) Troubleshooting
 - (g) Introduction and use of operator and maintenance manuals
 - (h) Review
- vi). Course 5: Material Control Training Course
 - (1) This course shall provide Amtrak Material Control personnel instruction on the use of the Illustrated Parts Catalog.
 - (2) Participation shall include, up to 15 Amtrak Material Control Personnel and will be conducted twice. Other classes shall be conducted at dates

to be scheduled as approved by Amtrak. Each class shall include a minimum of 16 hours.

vii). Course 6: Amtrak Police and Emergency Management Training Course

- (1) This course shall provide Amtrak Police Department and Emergency Management personnel with a detailed understanding of the new equipment as outlined by a Train the Trainer type syllabus.
- (2) Emergency equipment and all procedures shall be provided to aid in the training of all internal department personnel as well as outside first response agencies.

viii). Course 7: Specialty Training Courses

- (1) The Contractor shall be responsible for arranging specialty training courses utilizing the sub-supplier for training.
- (2) Systems such as lifts would be expected to be instructed by the sub-supplier.

i). Training Materials

i). General

- (1) Draft copies of the training materials shall be provided for Amtrak review and approval, with sufficient time to allow review and Contractor revision. **[CDRL 23-16]**
 - (a) Open discussion is encouraged early in the development process between the Suppliers, Contractor and Amtrak.
- (2) The Contractor shall provide materials to support each course in the training program, including:
 - (a) instructor guides,
 - (b) training aids,
 - (c) student workbooks
 - (d) operator manuals
 - (e) maintenance manuals.
- (3) Instructor guides and student workbooks shall be submitted for Amtrak's approval 60 days in advance of the start of the first class for each category of training.
- (4) All training materials shall become the property of Amtrak.
- (5) Format

- (a) The instructor guides and student workbooks shall be submitted as camera-ready copy in a form that allows easy reproduction, such as, loose-leaf bound, black ink on 8.5 in. by 11 in. white paper, printed on both sides and numbered sequentially within units of training.
- (b) Any Power Point presentations used in training will be supplied along with camera-ready, paper copy.
- (c) Master copies of slides and other audiovisual materials shall also be provided to allow for reproduction as necessary.
- (d) An editable electronic copy of the training presentation must be provided.
- (e) Color copies must be used where it is needed to communicate the training concepts in the document / course.

ii). Instructor Guides

- (1) The Contractor shall provide an instructor guide for each training course. **[CDRL 23-17]**
- (2) The guides shall include:
 - (a) course agendas;
 - (b) course objectives;
 - (c) procedures for managing training sessions;
 - (d) resources and facilities required;
 - (e) guidelines for preparing for training;
 - (f) detailed lesson plans, including scripted or outlined presentations and discussion guides;
 - (g) training aids and job aids;
 - (h) pre-tests and post-tests;
 - (i) criteria and methodology for measuring performance in the classroom and in the shop/field;
 - (j) instructions for using any audiovisual support, training mock-ups, and scale models;
 - (k) detailed instructions for managing any on-the job training.

iii). Training Aids

- (1) The Contractor shall provide training aids, such as training mock-ups, scale models, PowerPoint presentations, video recorded demonstrations, diagnostic testing equipment and any special tools required. **[CDRL 23-18]**
 - (2) These training aids shall become the property of Amtrak upon the completion of the training program.
 - (3) Any training mockups shall be separate and distinct from mockups provided during design review unless explicitly approved for training purposes by Amtrak.
 - (4) If Contractor proposes to provide a full size completed car in lieu of the mockups required in Chapter 3, Contractor must still meet the training aid requirements unless otherwise approved by Amtrak.
- iv). Student Workbooks
- (1) The Contractor shall provide, for each course, a student workbook **[CDRL 23-19]**, which shall include course agenda, course objectives, schedule of sessions, paper copies of PowerPoint presentations, lecture outlines, lesson summaries and any other information that will facilitate the learning process.
 - (a) The Contractor shall provide a copy of any course materials in the workbook.
 - (b) Color copies must be used where it is needed to communicate the training concepts in the document/course.
 - (2) The training program shall be conducted prior to the start of the new equipment in revenue service.
 - (3) The Contractor shall develop a training action plan and schedule and submit it to Amtrak within 90 days of Notice to Proceed (NTP), and shall update it periodically, to be submitted with program meeting minutes. **[CDRL 23-01]**
 - (4) Contractor shall provide paper and electronic (editable and PDF) copies of all training materials at the completion of the training program and shall become the property of Amtrak for unrestricted use for future training purposes.

23.10 Equipment Summary Report

- a). In support of Amtrak providing critical information regarding the new rolling stock supplied under this contract to both host railroads and private car owners, the Contractor shall develop and submit for Amtrak review and approval an Equipment Summary Report during Final Design Review. **[CDRL 23-21]**
- b). Thirty (30) days prior to the start of Final Design Review, the Contractor shall submit an outline for the Equipment Summary Report for Amtrak review and

approval. **[CDRL 23-20]**

- i). The outline shall list all content topics which shall be included in the Equipment Summary Report.
- c). The Equipment Summary Report shall compile all information with regarding to operation of equipment including clearance, trainlines and backward compatibility.
- d). The Equipment Summary Report shall also include any information require for the modification of a private railcar for operation in consist with the new equipment.
- e). At a minimum, the Equipment Summary Report shall include the following:
 - i). A high-level description of the cars, presenting overall capacities, accommodations, and door locations.
 - ii). The range of road numbers for each car type.
 - iii). Any waivers requested from or granted by the Federal Railroad Administration (FRA), or other Federal safety regulations required for the testing or revenue service operation of this equipment.
 - iv). A detailed description of the equipment, including:
 - (1) Clearance Outline
 - (2) Allowable top speed
 - (3) Braking control, compatibility, and performance
 - (4) Structural strength and crashworthiness characteristics
 - (5) Noise and vibration limits
 - (6) Cybersecurity implementation
 - (7) Track negotiation (e.g. minimum radius curve (both vertical and horizontal, cant deficiency, super elevation, FRA track classes)
 - (8) Compliance with Regulatory Agencies and Industry Standards and Recommended Practices.
 - (9) Trainlines including HEP, discrete and digital.
 - (10) Coupler and diaphragm.
 - v). The Equipment Summary Report shall also include a brief summary of the qualification and routine testing performed on the equipment to validated suitability for service.
 - (1) The testing summary shall include a description of all track testing performed both on and off Amtrak property.

- vi). The Equipment Summary Report shall include a high level summary of the Quality Control program for the equipment.
- vii). The Equipment Summary Report shall summarize the development and submittal of operations and maintenance manuals, plans and training.
 - (1) This shall cover work to be provided by both the rolling stock and the TSSSA contracts.
- viii). The Equipment Summary Report shall include an annotated plan view and elevation for each car type including outline dimensions, interior arrangement and external livery.

23.11 CDRLs

CDRL	Description	Due
CDRL 23-01	Training Action Plan	90 days after NTP with on-going updates
CDRL 23-02	Preliminary As-Built Drawings	180 days prior to the delivery of the 1 st batch of cars
CDRL 23-03	As Built Drawings	30 days after delivery of first batch of cars
CDRL 23-04	Electronic Documentation Delivery	Within 30 days after the last car of the base order is shipped
CDRL 23-05	Photographs-Car Assembly	30 days after completion and acceptance of first of each car type
CDRL 23-06	Photographs-Completed Car	30 days after completion and acceptance of first of each car type
CDRL 23-07	Conformed Specification	30 days after completion of each car type
CDRL 23-08	Master Manual Plan	90 days before completion of first car
CDRL 23-09	First Draft of Manuals	90 days before completion of first car
CDRL 23-10	Manual Updates	After delivery of the first car, and continuing through the end of the warranty period
CDRL 23-11	WMS Implementation	360 days prior to shipment of first batch of cars
CDRL 23-12	Service and Cleaning Manual & Maintenance and Inspection Manual	30 days prior to IDR with on-going updates
CDRL 23-13	Illustrated Parts Catalog	30 days prior to shipment of first batch of cars
CDRL 23-14	Car History Book	30 days prior to shipment of first batch of cars
CDRL 23-15	User Training Program	360 days prior to shipment of first batch of cars
CDRL 23-16	Draft copies of Training Material	360 days prior to shipment of first batch of cars
CDRL 23-17	Instructor Guide	360 days prior to shipment of first batch of cars
CDRL 23-18	Training Aids	360 days prior to shipment of first batch of cars
CDRL 23-19	Student Workbooks	360 days prior to shipment of first batch of cars
CDRL 23-20	Equipment Summary Report Outline	30 days prior to the start of Final Design Review
CDRL 23-21	Equipment Summary Report	Prior to the completion of Final Design Review

* End of Chapter 23 *

Amtrak Single Level Fleet Replacement Technical Specification

24. Diagnostics and Test Equipment

Revision 0

Table of Contents

24.1	Overview	24-1
24.2	Subsystem Integration	24-2
24.3	Central Diagnostics Unit (OPTION)	24-4
24.4	Car Temperature Monitoring (OPTION).....	24-6
24.5	Portable Test Equipment.....	24-8
24.6	Bench Test Equipment.....	24-10
24.7	Air Brake Test Rack Adapters.....	24-11
24.8	CDRLs.....	24-11

24.1 Overview

- a). This chapter defines the hardware and software requirements and describes the basic structure that shall form the diagnostic and fault reporting system used on each car.
- b). The system shall supply two levels of diagnostic information.
 - i). A simplified system using indicator lights, fault status and system status screens shall inform the train crew of failures affecting train operation, and a detailed diagnostic level shall be used by maintenance personnel which shall include detailed fault and system status information. Special consideration may be required in order to outfit each delivery batch with the minimum amount of equipment needed for a functioning diagnostic system.
- c). Faults and status information shall be downloadable utilizing standard connectors which shall function as a Portable Test Unit (PTU).
- d). Fault information from the individual car systems shall be sent to the central database location on each car for storage and display, which shall allow remote status access through an online portal, downloading of the reported faults via wireless or wayside connection, or hardwire downloading via standard connections.
- e). The CDU and HMI screens shall also allow control software and database updates to car level systems and the monitoring of certain system level parameters on a real-time basis.
- f). The Contractor shall submit a detailed functional description of the Diagnostic System to Amtrak for review and approval. **[CDRL 24-01]**
- g). The CDU, HMI and car-level connector for the PTU shall be in Amtrak-approved interior locations, to be finalized during design review.
- h). The diagnostic and fault reporting system shall provide sufficient information to enable operations and maintenance personnel to assess the operational readiness and suitability for service of each car and shall provide detailed failure information sufficient to enable maintenance personnel to troubleshoot and isolate failures down to the lowest replaceable unit level and confirm proper operation upon replacement.
- i). PTU shall not be required for routine maintenance or routine replacement of components.
- j). Tests, resets, or configuration adjustments during any routine maintenance activity shall be able to be accomplished through the Diagnostic System HMI displays.
- k). As part of the acceptance testing of the test equipment, the Contractor shall fully demonstrate the function of each type of test equipment being supplied, once delivered and setup in the shop facility.
- l). All on-board test equipment and the Central Diagnostics Unit and HMI screen shall

be tested as part of the car-level First Article Inspection.

- i). This shall include the demonstration of the ability to change password-protected program parameters in all available car systems.
- m). Portable test equipment shall be tested on the first batch of cars following delivery.
- n). All diagnostic connection ports for the PTUs throughout all cars, regardless of subsystem, shall make use of standard connections.
- o). No proprietary cables, connectors, accessories or wiring shall be required to run or copy diagnostic programs, or to copy or upload new software to any piece of equipment on the cars, including at the Central Diagnostics Unit.
- p). The CDU shall serve as the source of network time for all microprocessor systems connected via Ethernet, with time synchronized between CDU systems throughout the train network.
- q). All carborne equipment clock time shall use the GPS obtained Coordinated Universal Time (UTC).
 - i). It shall be the responsibility of the Contractor to enforce this requirement for all car systems.
- r). The Contractor shall make all modifications to test equipment specified herein which are required because of changes and modifications made to the cars or any of its systems or subsystems to meet the requirements of this Contract.
- s). The Contractor shall maintain a master database of all software and its current revision level used for each type of diagnostic and test equipment being supplied for the fleet replacement program, including onboard and shop equipment, until the conclusion of car warranty.
- t). All shop support equipment shall be covered in Exhibit G, Technical Support, Spares and Supplies Agreement (TSSSA); however, in the event that the TSSSA is not executed or terminated, the Contractor is responsible for providing all shop support equipment to Amtrak as outlined in this Chapter.

24.2 Subsystem Integration

- a). Each intelligent subsystem shall include status monitoring, self-diagnostic, fault-detection, recording, and troubleshooting capability including, but not limited to, the following systems:
 - i). Air Brake/Wheelslide
 - ii). Truck/Ride Quality
 - iii). Powered Doors
 - iv). HVAC
 - v). Lighting Controllers

- vi). OTIS/PA/Train Information
- vii). Battery/Chargers/Power Systems
- viii). Food Service Equipment (appliances)
- ix). Water and Waste (tank levels, etc.)
- x). Automatic Vehicle Location System/GPS
- xi). Car Temperature Monitoring
- xii). Smoke Detectors
- b). On-board testing shall be either internal, using self-contained diagnostic routines, or external, using a portable tester, or may be a combination of both techniques.
 - i). Systems which are microprocessor-based shall use both techniques, incorporating an internal self-test routine which can be initiated and monitored through the CDU HMI, without use of a portable tester.
- c). The built-in diagnostic test routines shall be used for the testing of all power circuit devices.
- d). All power circuit devices shall be testable without the need to remove any connections to the device from the circuit.
- e). The on-board test routine shall apply high current or high voltage to the device as appropriate to check calibration and perform failure diagnosis.
 - i). Provisions shall be supplied to accept a clamp-on current sensor for high current-in circuit calibration checks and jacks for high voltage isolated probes for in-circuit calibration checks.
- f). The systems shall constantly monitor their own system health and report problems as a fault to the CDU.
- g). Faults shall be stored at the CDU for remote access or later retrieval using the PTU.
- h). Each stored fault shall contain car status information at the time of the fault, such as, handle position, speed, temperature, etc., in addition to the actual problem or failure.
- i). The CDU shall also be designed to include a real-time data recorder capable of recording no less than one weeks' worth of status information from all subsystems listed above.
- j). The data recorder shall have both pre-trigger and post trigger recording capabilities and shall be fully configurable from the PTU.
 - i). It shall record both analog and digital channels selectable by the PTU.

- k). Triggers shall utilize the pre-assigned system faults and it shall also be possible to trigger on configurable equations based on one or more analog or digital channels when a selected threshold has been exceeded, or at a specified time interval.
- l). Sampling rates shall be selectable and based on the actual sampling capabilities of the subsystem hardware, with 20 Hz being the minimum.
- m). All signals, including all subsystem inputs and outputs as well as calculated values shall be transmitted to the CDU to facilitate real-time data recording.
- n). Set-up parameters and data shall be stored in non-volatile memory. Recorded data shall be downloadable to the PTU, which shall convert the data into a chart recorder type display format that can be displayed, printed and saved to removable media.
 - i). The system design shall be approved by Amtrak during design review.
[CDRL 24-02]

24.3 Central Diagnostics Unit (OPTION)

- a). The Contractor shall supply a Central Diagnostics Unit (CDU) and HMI touch screen on each car for use by Amtrak personnel.
- b). The HMI touch screen shall display train and car status, event and failure information useful to operations, maintenance, and engineering personnel.
- c). Faults downloaded by the PTU shall not be automatically deleted from memory, so that they can be downloaded and included into the maintenance database.
- d). Using the CDU and HMI screens, it shall be possible to ascertain the current software version of all software configuration items installed on the train, as approved by Amtrak.
- e). From the CDU and HMI screens, it shall be possible to upload new control software to all microprocessors on a train basis (except the systems as deemed safety sensitive during design review, which require update via the subsystems local PTU port).
 - i). The proposed design shall allow updates to the OTIS content via methods approved by Amtrak.
- f). The CDU shall also be capable of providing train-level information over the digital trainlines to the train crew using an HMI touch screen in an approved location.
- g). The contractor shall utilize the HMI touch screen devices defined in Chapter 14.
- h). The HMI screen shall alert the train crew of major system faults, such as brake problems, HVAC failures, HEP problems, water/waste problems, door problems, and/or other major failures, as approved by Amtrak.
 - i). It is intended that this data supplied to the train crew be simplified in nature.
- i). Fault information shall be given for all major system failures which require that they

- be reported to the Amtrak Operations Center (CNOC) or that require a change in operating procedure, as approved by Amtrak.
- j). The HMI screen shall also provide train wide subsystem status information to operations and maintenance personnel.
 - k). The Contractor shall submit for Amtrak review and approval a Fault Management Plan. **[CDRL 24-03]**
 - i). The Fault Management Plan shall include a fault listing, detailed description of each fault, detailed description of the triggering condition for each fault, conditions required to reset the fault, details of any lockout imposed by the subsystem for the fault, and attributes for each fault.
 - ii). Attributes shall include whether a fault will be recorded by the subsystem and/or CDU, whether a snapshot will be triggered, the criticality of the fault, if the fault will trigger an alarm for the operator or crew, whether the fault is accessible to crew or maintainers, or if the fault should trigger immediate message to the wayside server.
 - iii). Additional attributes may be defined by Amtrak during design review. Faults shall be able to be added by use of equation base on subsystem signals and faults for multiple systems similar to the fault trigger requirements listed in section 24.2.k.
 - l). It is the intent to have maintenance personnel review the faults from the CDU to determine if a problem exists on a car and/or train.
 - i). The Central Diagnostics Unit shall provide the capability to monitor system status, faults and data in real time by maintenance personnel.
 - ii). The system data to be monitored shall be selectable by use of the PTU or through configuration on the CDU HMI screen. An approved touch screen display shall be provided to view the selected system data in real time.
 - iii). The CDU shall be designed to be extensible, with the understanding that additions and subtractions of systems on the vehicle will occur throughout the life of the vehicle.
 - iv). The CDU shall be configurable to add or remove systems using a defined interface. The car builder shall be responsible for developing and providing a CDU system interface document that can be used for future additions or subtractions to the system.
 - m). The Contractor shall provide a highly available database backed web-based Wayside Server system for installation at an Amtrak datacenter.
 - n). The CDU shall interface with the wayside and shall be capable of communication to the server enroute.
 - o). This system shall enable Amtrak personnel to download faults remotely and view live status information on the cars remotely through an online portal.

- p). The system shall allow automatic, scheduled, and manual requests for transfer of status, fault, software configuration and real-time data recorder information.
 - i). It shall be capable of configuring condition-based alerts and alarms of differing severities to various distribution lists, subject to design review.
- q). Cars shall be capable of automatically reporting car number and faults at set locations for car tracking and repair.
 - i). This system shall also allow uploading and updating OTIS content.
 - ii). The system shall be utilized through an approved multi-carrier cellular and WiFi communication device which shall be configured and integrated in the vehicle which shall be as transparent to connected systems as practical to allow future technology upgrades or changes with minimal impact to ancillary systems.
 - iii). Wireless data communications shall be encrypted and protected against intrusion.
 - iv). The design and capabilities of the wayside server system and design of train to wayside interface shall be submitted to Amtrak for review and approval. **[CDRL 24-04]**
- r). The Contractor shall provide an analysis of the potential effects of various possible security attacks on network transmissions and the operation and effectiveness of the measures taken to ensure the security and safety of the networks and equipment.
 - i). The security analysis shall be guided by IEC/ISO 27000 series standards. This document shall be submitted for Amtrak review and approval. **[CDRL 24-05]**
- s). Information on the Amtrak server, communication protocols, and cyber security shall be provided.
- t). For enroute communication in areas with limited communication capability, faults and diagnostic information shall be stored for transmission when communication capability returns.

24.4 Car Temperature Monitoring (OPTION)

- a). Each food service car shall be outfitted with a remote temperature monitoring system.
 - i). This system shall operate as a semi-independent portion of the CDU or shall be a separate system.
 - ii). The temperature monitoring system shall have power provided to it by the car when Head End Power (HEP) is present and have an internal rechargeable and replaceable battery back-up power supply capable of powering the unit and transmitter for at least 12 hours without power from the HEP or car batteries.

CONFIDENTIAL — DO NOT DISTRIBUTE

- iii). The design of the Car Temperature Monitoring system shall be submitted to Amtrak for review and approval. **[CDRL 24-06]**
- b). The temperature monitoring system shall include global positioning information, a sensor to monitor whether HEP is being provided to the car, a sensor to detect whether the main water supply tank is empty, two temperature inputs, and a carbody based accelerometer.
 - i). One temperature input shall measure water temperature in a relatively cold location characteristic of where water would be most likely to freeze on the car.
 - (1) This may be on the outside of a water pipe as long as the area is well insulated outside the sensor and it is measuring the pipe temperature.
 - ii). The other temperature input shall be the ambient air temperature inside the car.
- c). The power sensor shall include a delay feature that only signals that the HEP power is off when longer than three (3) minutes.
- d). An exterior temperature sensor or Global Positioning Information shall be used to determine local ambient air temperatures.
- e). The temperature monitoring system shall have a communication system to transmit data from the car via cellular and WiFi communication links.
 - i). It shall send the car number, location, speed, direction, temperatures, HEP on/off status, and water tank status every thirty (30) minutes.
 - ii). When the outside temperature is below 32 F, it will transmit every fifteen (15) minutes.
- f). While a proprietary database and tracking system may be provided by the Contractor for installation on Amtrak infrastructure, the database and tracking system shall be capable of communicating all information over to the same server utilized by the CDU.
- g). The interface control document and a means to adjust the destination for the temperature monitoring system messages shall be provided for Amtrak review and approval.
- h). The tracking system shall allow alerts to be sent to different distribution lists of personnel developed by Amtrak, such that when a car is at a facility and in danger of freezing, an urgent alert may be sent by text and/or email to the relevant Mechanical personnel at just that location.
 - i). It shall be possible to trigger the alert based on the status of any variable sent, or by how long any of the variables has been in a certain state or below a set threshold.

- ii). Amtrak shall have the ability to change the criteria and thresholds for alerts, car makeup, and the lists they are sent to, without requiring Contractor or sub-contractor assistance.

24.5 Portable Test Equipment

- a). The Contractor shall furnish eight complete sets for each Terminal Depot (including cables, connectors, associated equipment required to interface with the car, instructions, software, chargers, etc.) of all portable test equipment required to perform in-service testing necessary to verify proper operation of all car subsystems prior to the delivery of the first batch of cars. **[CDRL 24-07]**
- i). Eight additional sets of all portable test equipment shall be delivered during production delivery. **[CDRL 24-08]**
- b). All parts used in the construction of diagnostic test equipment shall be sufficiently rugged for a railroad shop environment and approved by Amtrak during design reviews.
 - i). Where necessary, it shall include cases and water-resistant seals and switches.
 - ii). It shall have prior successful experience in similar railroad or transit car workshops and shall use the latest version of Microsoft Windows operating system at time of delivery or approved equal.
- c). Each PTU shall be supplied with a carrying case which includes a communications cable and two extra sets of extended-life rechargeable batteries.
- d). The PTUs generally shall be of the highest performance level systems available in the commercial marketplace at the time of the first batch of car delivery and shall be approved by Amtrak.
 - i). All equipment shall be registered by the Purchaser in Amtrak's name, as directed by Amtrak.
- e). The Contractor shall provide drawings of the test equipment.
 - i). Each piece of test equipment, excluding the PTU itself, shall be accompanied with the complete diagrams, schematics and maintenance, parts information and calibration instructions for the device and its intended use and repair.
 - ii). These shall be supplied as part of the maintenance manuals.
- f). All portable testers shall be rugged and suitable for the shop environment.
 - i). Weight shall not exceed 20 pounds.
 - ii). There shall be no high voltage connections (greater than 150 volts) required between the car and any portable test device.

- iii). It shall not be necessary to remove, dislodge, dismount or disconnect any component in order to use or connect the portable test devices.
- g). The function of the portable test devices shall be to produce all of the operating commands and other input signals necessary to fully exercise all functions and components of the particular system under test, and to measure or indicate all of the signals, responses and outputs produced by a system by means of indicators such as lamps, meters, oscilloscopes, gauges, etc.
 - i). It will be acceptable to require a visual check for system response such as closure of a contactor or a relay, or lighting an indicator, provided that the responding item of equipment does not require the test device engineer to move more than 15 feet to make the required observation.
- h). The portable testers will supplement the built-in diagnostic features specified herein for particular subsystems and in those cases shall not duplicate the specified features but shall complement them by providing deeper and more comprehensive diagnostic capability.
 - i). The portable test device shall not be used to calibrate high-current and high-voltage devices.
- i). It shall not be permissible to require connection of external apparatus to the portable test devices without the prior written approval of Amtrak.
 - i). In such cases, terminals shall be provided to allow connection of the required apparatus to the portable test device.
 - ii). However, such apparatus shall be considered part of the portable test device and shall be supplied with it on a one-to-one basis.
 - iii). Portable test equipment shall be supplied for, but not limited to, the following:
 - (1) Air Brake/Wheelslide
 - (2) Truck/Ride Quality
 - (3) Powered Doors
 - (4) HVAC
 - (5) Lighting Controllers
 - (6) OTIS/PA/Train Information
 - (7) Battery/Chargers/Power Systems
 - (8) Food Service Equipment (appliances)
 - (9) Water and Waste (tank levels, etc.)
 - (10) Automatic Vehicle Location System/GPS

(11) Car Temperature Monitoring

(12) Smoke Detectors

24.6 Bench Test Equipment

- a). To allow the proper testing, troubleshooting and calibration of car components on a test bench in a specialized workshop environment, the Contractor shall supply 1 (one) complete sets of each type of bench type shop test equipment for each Terminal Depot, to be delivered by the fifth car. **[CDRL 24-09]**
 - i). Each tester shall be delivered as a completely wired and assembled unit and use shop electrical power and/or compressed air.
 - ii). Each tester shall have a receptacle for connecting to the device under test.
 - iii). The connections to the device under test, if not contained in the receptacle, shall be from the front of the tester and shall have provisions to neatly store out of the way when not needed.
 - iv). The Contractor shall coordinate to ensure compatibility with maintenance facilities.
- b). Testers shall be used for the purposes of testing, troubleshooting, and calibrating electric, electronic, mechanical, pneumatic and electro-mechanical components of each car subsystem.
 - i). They shall contain provisions for the rapid testing, troubleshooting and calibration of each system LRU.
 - ii). Design of the testers shall be such that all inputs can be varied over the full working range of the device.
- c). The bench test equipment shall be automated to the extent possible.
 - i). If the unit under test is defective, the bench test unit shall allow the technician to troubleshoot the unit to determine which component is defective.
 - ii). It shall also include a manual mode to allow application of inputs to the unit under test as selected by the technician for troubleshooting.
- d). Shop test equipment shall be provided for, but not limited to, the following:
 - i). Wheelslide control unit
 - ii). Low voltage power supplies
 - iii). Brake units and controls
 - iv). All printed circuit boards
 - v). Plug-in relays

- vi). Lighting Controllers
- vii). OTIS/PA
- viii). Battery/Chargers/Power Systems
- ix). Food Service Equipment
- x). Water and Waste
- xi). Automatic Vehicle Location System/GPS
- xii). HVAC units
- xiii). Car wiring
- xiv). Microprocessor, EPROM, EEPROM's and other electronic device reprogramming for all car systems, except as approved by Amtrak
- xv). All electronic units not identified above

24.7 Air Brake Test Rack Adapters

- a). The Contractor shall supply by delivery of the fifth car of two (2) sets of brake rack adapters at each Terminal Depot to allow the mounting of each car's friction brake and pneumatic system valve or control device (and coupler pneumatic control devices, if necessary) to the existing Amtrak brake test racks.
 - i). Each adapter shall be a complete, unitized assembly for each valve, without the need to assemble loose hoses, fittings, etc. for use.
- b). The Contractor shall inspect the Amtrak current air brake test racks and inventory all current brake rack adapters.
- c). Complete parts lists, drawings and tabulations giving the proper adapter for each device shall be provided.
- d). The air brake system test rack adapters and its details shall be approved by Amtrak. **[CDRL 24-10]**

24.8 CDRLs

CDRL	Description	Due
CDRL 24-01	Central Diagnostics System detailed Functional Description	30 days prior to Diagnostics System PDR meeting
CDRL 24-02	Subsystem Integration Details	30 days prior to Diagnostics System PDR meeting
CDRL 24-03	Fault Management Plan	30 days prior to Diagnostics System IDR meeting.
CDRL 24-04	Wayside Server and Train to Wayside Details	30 days prior to Diagnostics System IDR meeting

CDRL 24-05	Security and Safety Analysis of the Network	30 days prior to Diagnostics System IDR meeting
CDRL 24-06	Car Temperature Monitoring system	30 days prior to Diagnostics System IDR meeting
CDRL 24-07	Eight additional sets of all portable test equipment	30 days prior to Brake System IDR meeting
CDRL 24-08	Eight additional sets of all portable test equipment	With 5 th Car Delivery
CDRL 24-09	Six complete sets of each type of bench type shop test equipment	With 5 th Car Delivery
CDRL 24-10	Air Brake System Test Rack Adapters	With 5 th Car Delivery

* End of Chapter 24 *

Amtrak Single Level Fleet Replacement Technical Specification

25. Safety

Revision 0

Table of Contents

25.1	Overview	25-1
25.2	General Safety Design Requirements.....	25-1
25.3	Safety Certification Program	25-3
25.4	System Safety Program Plan	25-3
25.5	Preliminary Hazard List (PHL).....	25-5
25.6	Preliminary Hazard Analysis (PHA)	25-5
25.7	Hazard Tracking Log (HTL).....	25-5
25.8	Failure Modes, Effects and Criticality Analysis (FMECA)	25-5
25.9	Fault Tree Analysis (FTA)	25-6
25.10	Subsystem Hazard Analysis (SSHA)	25-6
25.11	Operating and Support Hazard Analysis (O&SHA).....	25-6
25.12	Probability, Severity Risk	25-7
25.13	Hazard Resolution Process.....	25-10
25.14	Fire Safety	25-11
25.15	CDRLs.....	25-13

Table of Figures

Figure 25-1: Hazard Severity Categories.....	25-8
Figure 25-2: Hazard Frequency Levels.....	25-9
Figure 25-3: Risk Matrix.....	25-10

25.1 Overview

- a). Safety is of primary importance in the design of these cars.
- b). The cars shall present a safe, hazard-free environment to passengers, crew members and the public.
- c). Compliance to the specification, as well as all applicable laws, regulations and standards must be achieved.
- d). The Contractor shall research NTSB Amtrak passenger train accident reports and ensure the past mistakes relevant to train design are avoided. Passage from car to car shall be easy and safe.
- e). No sharp edges or corners or pinch points shall occur where passengers, crew, or maintenance personnel may come into contact with them.
- f). Adequate handholds shall be provided throughout the car. Handhold placement shall consider the needs of semi-ambulatory individuals, and the risks associated with walking in a moving train.
- g). Passengers and crew shall not be exposed to tripping hazards, exposed electrical voltage, toxic materials or similar hazards.
- h). Location, illumination levels, colors, graphics and surface finishes shall be selected to maximize visibility of door thresholds, controls and other objects with which the passengers and crew must interface.
- i). Normal and emergency equipment and controls which the passenger or crew may operate shall be clearly identified, and operating procedures shall be presented in both text and graphic formats.
- j). Passenger emergency signs shall also be embossed in Braille raised typeface unless otherwise approved.
- k). Power capacitors shall self-discharge.
- l). Refer to signage requirements in Chapters 11 and 29.

25.2 General Safety Design Requirements

- a). The general safety design requirements and the guidelines listed below shall be incorporated into the design of all car systems affecting safety.
- b). Only components with high reliability and predictable failure modes, and which have been proven in conditions similar to the projected service shall be utilized.
- c). Whenever possible, all systems are to be designed to prevent single point failures from negating the ability of such systems to perform safely as intended.
- d). All systems that passengers or crew members interact with shall be designed with ergonomic best practices, taking into consideration human factor principles.

- e). All electronic circuits shall be assumed capable of failing in permissive modes.
- f). Software shall be considered capable of failing in an unsafe mode unless it is safety verified while operating in the proposed hardware.
- g). All safety circuits not wholly within an enclosure shall be of a double-wire, double-break design.
- h). Systems shall be based on closed circuit principles in which energized circuits result in permissive conditions, while interrupted or de-energized circuits result in restrictive conditions.
- i). Any component or wire becoming grounded shall not cause a permissive condition. Safety circuits shall be kept free of any combination of grounds that will permit a flow of current equal to, or in excess of 75% of the release value of any safety device in the circuit.
- j). Circuit impedance, signal encoding, shielding, layout and isolation shall be selected to reduce the effects of interference to the extent that safety is maintained under all conditions.
- k). Commands that result in permissive conditions shall be propagated by no less than two independent signals, both of which must be present before the permissive condition can occur. The lack of either signal shall be interpreted as a restrictive command.
- l). Systems controlled by variable level signals shall be arranged such that zero signal level results in the most restrictive condition. At least one enabling signal, however, independent from the variable control signal, shall be present before the control signal can modulate the system to a more permissive level.
- m). Wires for safety critical trainline functions shall not be located at the bottom pins of cable connectors mounted in areas where water incursion may occur.
- n). The location of pins and wires of safety critical circuits in connectors shall be designed to minimize the possibility of unsafe conditions resulting from shorts to adjacent pins or wires.
- o). Circuit breakers shall be guaranteed by the manufacturer to successfully interrupt rated currents. Circuit breakers shall be applied such that the maximum circuit fault currents cannot exceed the manufacturer's guaranteed operating ranges.
- p). Systems that rely on structural integrity for safety shall have sufficient safety factors such that failures are not possible within the life of the car under all possible normal conditions.
- q). Systems and devices subject to wear shall not wear to unsafe or permissive states within a period that is no less than three times the specified periodic maintenance interval under the worst-case combination of duty cycle, environment and all other influences. Such systems and devices shall be clearly indicated in the maintenance manuals.

- r). Mechanical systems which apply force to achieve safe states shall not depend upon the application of fluid pressure or electrical energy, unless specifically approved.
- s). All locks, catches, and similar devices affecting safety shall be passive with no other effort required to achieve the safe state.
- t). All systems shall function safely under all combinations of supply voltages, fluid pressures, shock, vibration, dirt accumulation and the railroad environment.
- u). All safety related systems, and devices within those systems, shall be clearly identified in all operation and maintenance manuals, procedures, and training materials.
- v). Exposure of maintenance personnel to lethal or injurious voltages shall be minimized through compartmentalization, interlocks and similar measures.
- w). Exposure of maintenance personnel to occupation injury/illness risks shall be minimized through ergonomic measures.
- x). All equipment containing hazardous materials, lethal or injurious voltages, or other risks shall be clearly labeled on both the outside and inside of the equipment.
- y). No sequence of operations, or the simultaneous activation of any controls, shall result in unsafe conditions.
- z). All systems shall protect against unsafe conditions resulting from human error.
- aa). The Amtrak maintenance facilities and storage yards only have ground-level access at track bed height. It is required that the cars have the capability for ground-level access for maintenance access, passenger emergency evacuation and fire/rescue access to the car interior.
- bb). Contractor shall identify all safety enhancements to improve situational awareness and overall passenger and crew safety. Additional safety enhancements may be proposed based on emergent technologies (i.e.: alerts for locational awareness or fatigue/attention) or on innovative approaches in vehicle design.

25.3 Safety Certification Program

- a). The contractor shall conduct a Safety Program throughout new design, manufacturing, testing, pre-revenue operations, and warranty to ensure that the vehicle achieves a level of safety consistent with the Amtrak network.
- b). The Safety Program shall identify potential hazards and initiate actions to eliminate or control them to an acceptable level.
- c). It is Amtrak's intention to conduct a Safety Certification Program. The Contractor and sub-suppliers shall support Amtrak in the Safety Certification process.

25.4 System Safety Program Plan

- a). The Contractor shall develop, implement and maintain a comprehensive System

CONFIDENTIAL — DO NOT DISTRIBUTE

Safety Program Plan (SSPP) conforming to the Federal Transit Administration (FTA) Handbook for Transit Safety and Security Certification (FTA-MA-90-5006-02-01), Final Report," November 2002; the latest Amtrak System Safety Program Plan; and any other applicable Federal guidelines or requirements. **[CDRL 25-01]**

- b). This SSPP shall assess, analyze and document the safety aspects of all components, systems, managements and materials used on the cars, and the operation, maintenance, repair and performance of those components, materials and systems, from the viewpoint of crews and passengers.
- c). The SSPP shall identify all hazards related to the cars and shall impose design requirements and management controls, in addition to those identified in this Technical Specification, to prevent unsafe conditions by eliminating hazards or reducing risk to levels acceptable to Amtrak.
- d). The SSPP shall be developed in the earliest phases of the Contract and shall be continuously maintained throughout, as design and construction evolve.
- e). The formats for reports, listings, analyses and other required submittals shall be jointly determined between Amtrak and the Contractor.
- f). The SSPP shall include a software safety section which applies to any embedded or external software or firmware which controls or monitors safety-critical functions.
- g). Software safety requirements shall treat software as an integral part of a hardware/software system.
- h). Functions accomplished through the use of software shall be considered safety critical unless an independent redundant hardware means is also provided to accomplish the same function. Refer to Chapters 26, 27 and 28 for more details.
- i). Features of the software safety program shall include a description of how the following shall be accomplished: definition, implementation and oversight of the software design and verification process, integrity of the documentation, software hazard analysis, software safety reviews, software hazard monitoring, reporting and tracking, and software integration with hardware at each stage of the design and testing process for components, subsystems, systems, and cars. incorporating software for safety-critical functions. Refer to Chapter 26, 27 and 28 for more details.
- j). All systems affecting safety shall undergo a thorough safety review as part of the design review process, with emphasis on credible faults, results, risk, etc. Requirements of 49 CFR 238.105 and other applicable parts of 49 CFR 238 Subpart - B shall be met as part of this review. It shall include, but not be limited to:
 - i). Brake control/Anti-Wheel Slide
 - ii). Truck
 - iii). Smoke/Fire Alarm system
 - iv). Emergency access & egress

- v). Door system
- vi). Windows
- vii). Communication (Radios & Public Address Systems)
- k). The completed SSPP shall be submitted to Amtrak for review and approval within 60 days of NTP.

25.5 Preliminary Hazard List (PHL)

- a). The Contractor shall within 60 days of NTP provide an initial Hazard list.
- b). This hazard list shall identify all potential hazards associated with the vehicle including those caused by, mechanical failures, electrical/electronic component failures, software errors or defects, environmental impacts, human error, maintenance, and operational conditions. **[CDRL 25-02]**

25.6 Preliminary Hazard Analysis (PHA)

- a). Based on the approved Hazard list the Contractor shall provide a Preliminary Hazard Analysis which defines the potential cause of the hazards, the probability of the hazard, the severity of the hazards, potential or proposed mitigation and the residual probability and severity.
- b). The PHA shall be submitted 30 days prior to any Preliminary Design Reviews. **[CDRL 25-03]**

25.7 Hazard Tracking Log (HTL)

- a). Based on the approved PHA the contractor shall develop a Hazard Tracking Log.
 - i). The HTL shall use Amtrak's preferred hazard tracking log methodology, definitions and system of entry.
- b). This HTL shall track the status of all supporting documentation for each of the hazards.
- c). All hazards in the Hazard Tracking Log must be closed for Safety Certification to be closed.
- d). The HTL shall be submitted 30 days prior to any Final Design Reviews and be updated monthly until approved. **[CDRL 25-04]**

25.8 Failure Modes, Effects and Criticality Analysis (FMECA)

- a). The Contractor shall provide a comprehensive FMECA(s) for all components on the vehicle.
- b). For the purpose of this section, components shall be defined as hardware, electronic/electronic components and software at a minimum it shall be to the level of an assembly (i.e. relay, contactor, actuator, valve, switch etc.) but may be to sub assembly level if required by the authority in order to more clearly define the

hazard.

- c). The FMECA shall also identify if the failure is annunciated.
- d). In the event that the failure is not announced, the analysis shall be extended to include subsequent failures until the subsequent failure is annunciated.
- e). The FMECA shall be submitted as part of the IDR and FDR submittals. **[CDRL 25-05]**
- f). Information provided in the FMECA shall include:
 - i). A system overview including schematics.
 - ii). A complete list of system and subsystem components that will be analyzed.
 - iii). Identification of the “modes” or ways the components can fail.
 - iv). Assessment of the effects of the failure on the system.
 - v). Determination of the severity and probability of failure.
 - vi). Determination whether the failure is a single-point failure.
 - vii). Determination of methods to eliminate or control the identified failure.
 - viii). Identification of single-point failures and hazard-level categorization, which should confirm the adequacy of fail-safe design features.

25.9 Fault Tree Analysis (FTA)

- a). The Contractor shall provide a quantifiable Fault Tree Analysis for all Category/Severity one and two hazards.
- b). These fault trees analyses shall be fully integrated across sub system such that if events span multiple sub systems the top event vehicle level hazard reflects all sub system events.
- c). The FTA shall be submitted prior to FDR. **[CDRL 25-06]**

25.10 Subsystem Hazard Analysis (SSHA)

- a). The Contractor shall submit a subsystem hazard analysis for each vehicle subsystem.
- b). These subsystems safety analysis shall include subsystem Hazard Tracking log, FMECA, and FTA.
- c). The documents shall be submitted as part of the IDR and FDR submittals. **[CDRL 25-07]**

25.11 Operating and Support Hazard Analysis (O&SHA)

- a). The Contractor shall submit an Operating and Support Hazard Analysis (O&SHA)

CONFIDENTIAL — DO NOT DISTRIBUTE

to identify and assess hazards introduced during system operation, maintenance, and support activities.

- b). The O&SHA shall be submitted prior to FDR. **[CDRL 25-08]**
- c). At a minimum, the analysis shall consider:
 - i). Hazards associated with personnel and procedures during operations, maintenance, and emergencies.
 - ii). Human interface during the on-car, off-car and facility-level support activities.
 - iii). Operations and maintenance tasks against human engineering factors, such as task complexity, system criticality, task frequency, new technology, known problems, etc.
 - iv). The context in which Operators and maintainers work.

25.12 Probability, Severity Risk

- a). For the purpose of this Chapter, the Contractor shall utilize the following definition for hazard severity category, hazard frequency levels and acceptable risk.
- b). For software failure probability rates used in the safety analysis, it shall be assumed that all software has a Safety Integrity Level (SIL) of zero as defined by EN-50128. For common mode failure of comingled or redundant software a BETA or common mode failure rate of one shall be assigned. Alternatively, if the Contractor can provide independent certification (i.e. TÜV certification) for a higher SIL level this may be used if approved by Amtrak. Refer to Chapters 26 and 27 for additional details.
- c). Unless it is shown otherwise through daily test or preventative maintenance inspection the “Time at Risk” for all failures probabilities shall be design life of the vehicle. All time at risks shall be approved by Amtrak.
- d). At a minimum, emergency brake application, emergency power removal, door opening, door/propulsion interlock and no motion detection shall be required to meet requirements for of Category I or II hazards for elimination of hazard or reduction of risk to an acceptable level.
- e). Emergency brake control shall be fail-safe. No detectable single point failure in the friction brake system, or series of common-mode or common-cause failures added to any combination of undetected failures, can result in the availability of less than 75 percent of emergency braking effort in a train.

Figure 25-1: Hazard Severity Categories

Severity	Value	Meaning
Catastrophic	1	Risk realization expected to result in one or more of the following: death, permanent total disability, loss of passenger/crew occupied volume with equipment damage causing separations in structure, infrastructure damage due to railroad operations/activities that suspends service through the affected area for greater than 24 hours.
Critical	2	Risk realization expected to result in one or more of the following: permanent partial disability, injuries/illness that results in hospitalization, loss of passenger/crew occupied volume with equipment damage that causes openings but no separations in structure, infrastructure damage due to railroad operations/activities that suspends service through the affected area for greater than 2 and up to 24 hours.
Marginal	3	Risk realization expected to result in one or more of the following: injury or illness resulting in one or more lost workday(s), loss of passenger/crew occupied volume with equipment damage that causes no separations/openings in structure, infrastructure damage due to railroad operations/activities that suspends service through the affected area for more than 30 minutes and up to 2 hours.
Negligible	4	Risk realization expected to result in one or more of the following: injury or occupational illness that does not result in a lost workday, equipment damage that does not result in neither loss of passenger/crew occupied volume nor separations/openings in structure, infrastructure damage due to railroad operations/activities that does not suspend service or cause a delay through the affected area for more than a maximum of 30 minutes.

Figure 25-2: Hazard Frequency Levels

Likelihood	Value	Qualitative Meaning	Quantitative Meaning
Frequent	A	Opportunity for risk to be realized expected to occur often.	Probability of occurrence greater than or equal to 10^{-1} (10%) Continuously experienced throughout system life.
Probable	B	Opportunity for risk to be realized expected on a recurring basis.	Probability of occurrence less than 10^{-1} (10%) but greater than or equal to 10^{-2} (1%) Will occur frequently throughout the life of the system.
Occasional	C	Opportunity for risk to be realized expected to occur.	Probability of occurrence less than 10^{-2} (1%) but greater than or equal to 10^{-3} (0.1%) Will occur several times throughout life of the system.
Remote	D	Opportunity for risk to be realized not expected to occur but possible.	Probability of occurrence less than 10^{-3} (0.1%) but greater than or equal to 10^{-6} (0.0001%) Unlikely but can be reasonably expected to occur.
Improbable	E	Opportunity for risk to be realized not expected and almost inconceivable.	Probability of occurrence less than 10^{-6} (0.0001%) Unlikely to occur in the system life, but possible.

Figure 25-3: Risk Matrix

Risk Likelihood	Risk Severity			
	Catastrophic 1	Critical 2	Marginal 3	Negligible 4
Frequent – A	1A (Red)	2A (Red)	3A (Orange)	4A (Yellow)
Probable – B	1B (Red)	2B (Red)	3B (Orange)	4B (Yellow)
Occasional – C	1C (Red)	2C (Orange)	3C (Yellow)	4C (Green)
Remote – D	1D (Orange)	2D (Yellow)	3D (Yellow)	4D (Green)
Improbable – E	1E (Yellow)	2E (Yellow)	3E (Yellow)	4E (Green)
Hazard Risk Index (HRI)				
Red	1A, 2A, 1B, 2B, 1C		CEO/President approval required.	
Orange	3A, 3B, 2C, 1D		CSO and Dept E3-Level approval required.	
Yellow	4A, 4B, 3C, 2D, 3D, 1E, 2E, 3E		Dept E2-Level and VP Operations Safety approval required.	
Green	4C, 4D, 4E		Dept E1-Level approval required	

25.13 Hazard Resolution Process

- a). The overall goal of a system safety program is to design systems that do not contain hazards. However, the nature of most complex systems makes it impossible or impractical to design them completely hazard-free. As hazard analyses are performed, hazards will be identified that will require resolution. Risk management is a decision-making process consisting of evaluation and control of the severity and probability of a potentially hazardous event.
- i). By assigning a Hazard Risk Index (HRI), a determination can be made as to whether hazards should be eliminated, controlled, or accepted. System safety precedence is a methodology that can be used by the Program Manager to define the order to be followed for satisfying system safety requirements and reducing risks. Alternatives for eliminating the specific hazard, or for controlling its associated risk, will have to be evaluated so that an acceptable method for risk reduction can be pursued.
- b). It is not possible to remove all potential hazards from the railroad, and therefore a means for determining which hazards are acceptable is required. In general, the more severe the hazard, the more unlikely it should be.
- c). For these cars, the following requirements have been established:

- i). Hazards with an initial Hazard Risk Index of red or orange should be mitigated such that the Hazard Risk Index is reduced to HRI of yellow or green.
- ii). Where it is not possible to reduce the risk to Level yellow or green, specific detailed analysis shall be provided by the Contractor to obtain approval of Amtrak. It should be noted that Amtrak would normally expect the Contractor to introduce design changes to reduce the risk to an acceptable level.
- iii). Items with an HRI of red shall not be accepted.
- iv). Items with an HRI of orange will only be accepted when it is proven to the satisfaction of Amtrak that the Contractor has exhausted all reasonable alternative approaches.

25.14 Fire Safety

- a). Fire safety shall be achieved through adherence to the following requirements:
 - i). Those materials and products generally recognized to have highly toxic products of combustion shall not be used.
 - ii). All non-metallic components used on the vehicle shall be smoke, flame, and toxicity tested to NFPA 130, 49 CFR part 238, and BSS 7239.
 - (1) Maximum smoke developed, maximum flame spread indices, and toxicity emission limits shall be detailed in the specification.
 - iii). Materials used to fabricate miscellaneous, discontinuous small parts that will not contribute materially to fire growth in end-use configuration may be exempt from smoke, flame, and toxicity testing requirements with waivers approved by Amtrak.
 - iv). Exempt parts shall be less than 16 in² (100 cm²) in surface area in end-use configuration and may include, but are not limited to, the following:
 - (1) Knobs
 - (2) Rollers
 - (3) Fasteners
 - (4) Clips
 - (5) Grommets
 - (6) Small electrical parts
 - v). The Contractor shall submit for approval a list of all adhesives to be used on the vehicle, with a description of the physical, chemical, and fire safety properties of each. **[CDRL 25-09]**

- (1) This requirement does not apply to adhesives used in extremely small quantities.
- vi). The Contractor shall furnish a combustible material matrix including all combustible materials used in the vehicles showing all combustible properties, weight (density), total surface area, total weight per vehicle, heat value per pound and per vehicle, flame spread, and flashpoint, and documentation references. **[CDRL 25-10]**
- vii). All FST Test reports shall be within five years of Notice to Proceed (NTP). Any test reports that are older than five years, the contractor shall submit a letter from the material manufacturer stating the composition of the material has not changed. The material must be approved by Amtrak before use.
- viii). All heat sources on the vehicle shall be protected with redundant levels of protection so that circuits are open before unsafe temperatures exist.
- ix). Smoke Detectors shall be located in each fresh/return air mixing plenum and supply duct. Automatic dampers shall prevent external smoke from entering the vehicle.
- x). Smoke Detectors shall be mounted on the central ceiling panel. The smoke detector used in this location shall be identical to the smoke detectors used in other locations for ease of maintenance and replacement.
 - (1) All the smoke detectors shall have a strobe light and a sounder.
- xi). Smoke Detection systems shall report alerts and failures to the diagnostic system.
- xii). Protection from smoke and fire originating under the vehicle floor shall be proven through successful completion of a 30-minute floor fire test in accordance with ASTM E-119, NFPA 130, and 49 CFR, part 238.
- xiii). Emergency egress shall be provided through vehicle end doors to adjacent cars.
- xiv). One fire extinguisher shall be located in each car.
- xv). Windows intended for emergency escape or emergency access shall be designed for easily removable by a passenger, employee or rescuer and shattering of the glazing must not be required to remove the window.
- xvi). Trash containers shall be fire containing and prevent the propagation of fire outside of the enclosure.
- b). The Contractor shall develop a Fire Safety Analysis compliant with 49 CFR 238.103(c) for the new equipment. The Analysis shall be submitted to Amtrak for Review and approval as part of FDR. **[CDRL 25-11]**

25.15 CDRLs

CDRL	Description	Due
CDRL 25-01	System Safety Program Plan (SSPP)	NTP + 60 days
CDRL 25-02	Preliminary Hazard List (PHL)	NTP + 60 days
CDRL 25-03	Preliminary Hazard Analysis (PHA)	30 days prior to PDR
CDRL 25-04	Hazard Tracking Log (HTL)	30 days prior to FDR
CDRL 25-05	Failure Modes, Effects and Criticality Analysis (FMECA)	30 days prior to IDR
CDRL 25-06	Fault Tree Analysis (FTA)	30 days prior to FDR
CDRL 25-07	Subsystem Hazard Analysis (SSHA)	30 days prior to IDR
CDRL 25-08	Operating and Support Hazard Analysis (O&SHA)	30 days prior to FDR
CDRL 25-09	List of all adhesives	30 days prior to IDR
CDRL 25-10	Combustible material matrix	30 days prior to IDR
CDRL 25-11	Fire Safety Analysis	30 days prior to FDR

* End of Chapter 25 *

Amtrak Single Level Fleet Replacement

Technical Specification

26. Digital Technology

Revision 0

Table of Contents

26.1 Overview.....	26-1
26.2 System Continuity, Criticality and Disaster Recovery.....	26-2
26.3 Engagement	26-3
26.4 Operational Support	26-6
26.5 Onboard System Requirements	26-8
26.6 Train-to-Amtrak Integration Requirements	26-15
26.7 Identity Requirements.....	26-17
26.8 CDRLs	26-17

Table 26-1 System Assessment Categorization	26-3

26.1 Overview

a). Background

- i). Amtrak shall be provided with direct access to onboard, and offboard information in near-real-time via machine-to-machine communications with as little human involvement as possible. Each car shall be accessed independently as interoperability with the legacy fleet is required.
- ii). In the rare circumstance of a railway incident, Amtrak has a statutory obligation to provide information to regulatory authorities in support of their post-incident investigative activities.
- iii). Contractor shall provide a secure, robust and standardized API-based Information Technology platforms to facilitate Amtrak access to all data generated by and for the rolling stock, its onboard systems, as well as any and all wayside components of this contract.
- iv). These APIs shall provide standardized integration points between any car and Amtrak's systems for the purpose of onboarding and offboarding information.
- v). These APIs shall facilitate Amtrak design and development of all aspects of the customer experience solutions within its own content management and other programming facilities.
- vi). The rolling stock and its systems shall support receiving content updates via these Amtrak systems or intermediary vendor services via APIs.
- vii). The Amtrak system shall be capable of retrieving telemetry, performance, events and other data from the trains or intermediary vendor services via APIs on a push, request, near real-time and streaming basis.

b). Required APIs

- i). At a minimum, the following data integrations shall be provided in these APIs:
 - (1) Journey programming for the On-Train Information System (OTIS) and any outputs from that system.
 - (2) Journey performance, including GPS track, announcements made, performance of on-board display screens, and errors identified after a completed journey is detected by the OTIS.
 - (3) Train handling including all events in the cab, by conductor staff, and by passengers.
 - (4) Train telemetry and events, including access to one-time and streamed process data from all onboard networks both in response to on-demand requests, configurable periodic transmissions from the train, and configurable event-based transmissions.

- (5) Video surveillance system real-time and recorded video (if equipped)
- (6) Event Recorder and Positive Train Control (PTC) data
- (7) All other safety-related information
- (8) Equipment faults, events and occurrences
- (9) Train performance
- (10) Automated measurements and readings
- (11) Passenger Emergency Intercom requests and calls
- (12) Attendant call requests and responses
- (13) Reservation Display System
- (14) Electronic Room Accommodation Door Lock System
- (15) Data Communication System
- (16) Network Intrusion Detection System
- (17) HVAC Telemetry Data

c). Data & Information Ownership

- i). All Information Technology components including applications, integrations, data and the corresponding infrastructure shall be delivered according to Amtrak Standards.
- ii). The Solution Architecture, Designs, and Specifications shall be submitted for review and approval by Amtrak throughout the design reviews, with approval a condition of an acceptable Final Design Review (FDR). **[CDRL 26-01]**
- iii). All data collected or generated by the system is the property of Amtrak and can be reused at Amtrak's discretion.
- iv). All Information Technology components shall support both Operational and Security monitoring in alignment with Amtrak Standards.

26.2 System Continuity, Criticality and Disaster Recovery

a). Amtrak System Assessment Methodology

- i). Amtrak assesses and categorizes all systems according to impact on safety and business operations based on the matrix in Figure 26-1.
 - (1) Contractor shall indicate which *operational continuity* tier they support, as well as any *disaster recovery* (if applicable) and the overall *criticality level* of provided on-board and wayside systems.

- (2) Systems that require real-time train movement or passenger safety shall conform to C1 criticality, and systems that support customer experience shall be at a C2 criticality level.

Table 26-1 System Assessment Categorization

Operational Continuity (Planned & Unplanned Downtime)					Disaster Recovery			Criticality Level
Adjusted Availability Ceiling*	Planned Downtime Acceptable	Acceptable Recovery Time (Hours)	Acceptable Data Loss (Hours)	Reduced Performance Acceptable (AZ Loss)	Recovery Time Objective (Hours)	Recovery Point Objective (Hours)	Reduced Performance Acceptable (Large Scale)	
Up to 99.999%	N	0	0	N	N/A	N/A	N/A	C1
Up to 99.99%	N	1	0	N	4	1	N	C2
Up to 99.9%	Y	4	0	N	24	1	Y	C3
Up to 99.8%	Y	24	1	Y	48	24	Y	C4
Up to 99.7%	Y	Best Effort	24	Y	Best Effort	24	Y	C5

26.3 Engagement

a). Program/Project Management

- i). Contractor shall work with Amtrak IT to establish appropriate elements to properly manage effort including:
- (1) Schedule and Key Milestones
 - (2) Primary Deliverables Definition and Success Criteria
 - (3) Resource Plan with:
 - (a) Contact List
 - (b) Working Groups Definition
 - (c) Roles & Responsibilities
 - (4) Scope Definition with Backlog/Requirements
 - (5) Status Reporting Mechanisms including
 - (a) Status Reporting Definitions
 - (b) Artifacts
 - (c) Status Meeting Cadence
 - (6) Meeting/Workshop Plans for Information Sharing/Discovery

b). Working Team

- i). Contractor shall work with Amtrak IT to ensure Resource Plan is comprehensive including representatives from third parties providing Software or Services to the solution.
- ii). Third party providers shall be required to participate in working groups unless Contractor can provide expertise, information, and documentation for the solution.
- iii). Amtrak reserves the right to request direct access to third parties if deficiencies are identified in the delivery of the solutions.

c). Hosting & Environment Support

- i). Amtrak recognizes four primary approaches for the operation of systems or solution:
 - (1) Installed and Operated in Amtrak environments
 - (2) Installed and Operated by the Contractor directly within Contractor's environment
 - (3) Installed in Third Party environments and Operated by Contractor
 - (4) Installed and Operated in Third Party environments on behalf of Contractor
- ii). Each approach has specific requirements for utilization at Amtrak for Delivery and Operations.
- iii). Contractor shall be expected to work with Amtrak to understand and align with these requirements where appropriate as agreed upon between parties.
- iv). Non-Production Systems (Option)
 - (1) Along with a Production environment aligned to System Criticality as defined in Section 26.2, the Contractor shall support the delivery of appropriate Non-Production environments sufficient to support Delivery and ongoing Operations.
 - (2) This includes the establishment of Test Labs for testing onboard systems without the need to disrupt train operations.
 - (3) Non-Production systems shall replicate relevant Production Capabilities and Functions.
 - (4) Contractor and Amtrak will mutually agree to the level of support and additional compensation related to the delivery of appropriate Non-Production environments sufficient to support Delivery and ongoing Operations.

d). Testing Support

- i). Contractor shall support relevant aspects of testing, as agreed upon by all parties, including:
 - (1) Unit Testing
 - (2) Integration Testing
 - (3) End to End (E2E) Testing
 - (4) Smoke/Business Acceptance Testing
 - (5) Performance Testing
 - (6) Security/Vulnerability Testing (A Full Test will be completed to Qualify Design and subsequent testing will be based on new releases and the systems impacted by the change)
 - (7) Regression Testing
 - (8) Continuity Testing (A full test will be completed as part of Factory Testing, and subsequent testing will be defined as part of the Design effort as agreed upon by all parties.)
 - (9) Continuous uptime testing for electronic equipment, demonstrating the equipment remains functional without user action in the context of Amtrak long distance operations
- ii). For systems utilizing third party software or services, Grey Box testing may be required to validate underlying components operate to specification.
- iii). Testing shall be aligned to best practices for execution and documentation of results, where appropriate.

e). Delivery Training & Change Management

- i). Contractor shall work with Amtrak IT to establish a comprehensive training and change management plan aligned to systems and/or working groups as well as business users impacted by the program.
- ii). Contractor shall utilize Train-the-Trainer approach, and the training will be part of the initial training scope with the delivery of the railcars (as per Chapter 22).
 - (1) Optional approaches of training such as videos, graphics, etc. can be utilized with approval.
- iii). Any further training will have to be priced and compensated separately. This plan shall include, but not be limited to:
 - (1) Communications Structure & Plan

- (2) Comprehensive Documentation for relevant Systems for Utilization and Administration
- (3) Training Plans & Materials, as agreed upon by all parties.
- (4) Additional collateral, such as graphics, images, videos to support Change Management & Training work throughout the program.

26.4 Operational Support

a). Operational Support Shared Responsibilities

- i). Per Section 26.3.3, the way that the platform is delivered and operated can vary by hosting method.
- ii). Contractor shall work with Amtrak IT to define a clear Operating Model for the solutions that:
 - (1) Work with Amtrak IT to establish Service Level and Operating Level Agreements for systems aligned to best practices, as agreed upon by all parties.
 - (2) Define clear roles & responsibilities for all aspects of the solution aligned with Section 26.3.1.
 - (3) Establish mutually agreed upon Operational and Support processes that include:
 - (a) Incident, Problem, and Change Management aligned to best practices
 - (b) Notification criteria and methods of escalation
 - (c) Reporting necessary to support SLA and OLA compliance, as well as failure analysis
 - (d) Services provided as software as a service (SAAS) remain within Contractor's responsibility
- iii). The Contractor shall identify all Contractor or Contractor sub-supplier maintenance or operation support agreements available related to the on-going support of equipment, services, or licenses of on-board and wayside software. **[CDRL 26-02]**
- iv). The Contractor shall prepare and submit for Amtrak review and approval a transition to operations plan and schedule that provides a clear path for transitioning support throughout all phases of the procurement, including pre-revenue service, revenue-service, and from Contractor-maintained maintenance and licensing included as a part of the base procurement, to on-going maintenance, support, and software licensing at the conclusion of any such periods. The plan shall provide any expectations required for Amtrak support of the transition. **[CDRL 26-03]**

- b). Operations & Security Monitoring
 - i). For services offered as SAAS with the focus to ensure continuity and performance of solutions, the contractor shall implement monitoring and logging based on the recommendations in ISO/IEC 27017 and NIST 800-53 and as required in Chapter 28 of this specification.
 - (1) Based on the tenancy configuration and capabilities of the Contractor's SASS solutions, security alerts shall be forwarded to Amtrak's Cyber Fusion Center.
 - ii). Contractor will work with Amtrak and report any vulnerabilities as they are related to Amtrak data.
 - iii). Contractor shall work with Amtrak IT to define data lifecycles and classifications for relevant logged information and establish testing that validates compliance to these best practices where appropriate.
- c). Third Party Software & Services
 - i). Contractor shall disclose relevant use of third-party software and services.
 - ii). If Contractor identifies issues with third party software or services, Amtrak IT must be notified per the defined notification process in Section 26.4.1.
- d). Defect & Vulnerability Management
 - i). Relevant defects and vulnerabilities must be disclosed, logged, and remediated per the defined Incident and Problem management processes in Section 26.4.1.
 - ii). Relevant modifications to delivered products must tested to the same test cases as defined in Section 26.4.4. with identified defects and vulnerabilities remediated or provided an exception before release.
- e). Software Management
 - i). Contractor shall provide sufficient methods and/or tools for the troubleshooting and administration of relevant software provided. These capabilities should be aligned to best practices and Amtrak tools as mutually agreed upon in Section 26.4.1.
 - ii). Contractor shall work with Amtrak IT to ensure relevant software is maintained to the latest version as mutually agreed upon in Section 26.4.1.
- f). Ongoing Training & Change Management
 - i). For relevant updates to delivered products, Contractor shall work with Amtrak IT to support required training and change management related to the update aligned to methods and deliverables as defined in Section 26.4.5.
 - ii). Additional training required from software/feature updates will be jointly assessed and priced separately.

g). Technology & Performance Audits/Reviews

- i). Contractor shall work with Amtrak to complete regulatory audits and reviews as required by Amtrak or applicable Regulatory bodies and assist in the remediation and response of these audits and review.

26.5 Onboard System Requirements

a). Onboard Train Information System (OTIS)

- i). Amtrak's goal is to provide customers with a holistic experience including near-real-time travel information about their journey from Amtrak's operational and onboard train systems. To the greatest extent possible, Amtrak prefers that all new railcars should deliver these capabilities via commercial, off-the-shelf systems rather than customized solutions.

(1) Contractor shall deliver a solution that:

- (a) Provides critical train and journey information to customers in an ADA-compliant manner and that conform to the ADAAG standards for Transportation Vehicles.
- (b) Show seat assignments dynamically based on reservation city pair, including individual updates per seat.
- (c) Reduces conductor workload by automating the delivery of routine passenger messages.
- (d) Utilizes on-board cellular capabilities for onboard communications, and that provides provisions for utilizing the latest available cellular technology throughout the life of the vehicle. The selection of the cellular technology (e.g., 5G, 6G) shall be based on the latest available commercial networks at the time of design review.
 - (i) Optional Ethernet Train Backbone (ETB) to be included if exercised. Contractor to propose appropriate speed and architecture based on system performance needs.
- (e) Provides two-way connection to/from back-office systems to exchange data between train and ground.

b). General Capabilities

- i). OTIS shall be an out-of-box COTS package with an established track record in revenue service trains.
- ii). Open Standards shall be used (HTML5, JavaScript, etc.).
- iii). Programming in OTIS shall have access to all displays, independently addressable and by Amtrak-defined groups.

- iv). Access to all Contractor APIs shall be provided to facilitate programmatic access in addition to the use of Contractor supplied user interfaces.
- v). All OTIS components shall be capable of being monitored remotely, and problems should be capable of being validated locally as well as alerts and detailed errors send to remote monitoring systems.
- vi). OTIS shall be able to log and store events with enough detail to analyze and diagnose root cause of faults.
- vii). In the event of loss of the train to ground interface, the OTIS shall be able to continue operation with the pre-load mission data. Dynamic updates such as seat assignments and train statuses should automatically re-commence when T2G communication is restored.
- viii). Access to On-Board Variables
 - (1) Amtrak experienced programmers should be able to reference and display train mission variables based on a variety of contexts (for example, in-service at origin station, in-service at a station, in-service between stations, in-service at a terminal station, under daily test, under maintenance).
 - (2) Through a template system, to be approved by Amtrak, displays shall be capable of being programmed to accept and display on-board variables. The list of on-board variables shall be submitted for approval by Amtrak. The variables shall include at a minimum:
 - (a) Velocity
 - (b) GPS Location
 - (c) Line Map with Current Location, direction of travel, intermediate stops, and destination in a variety of scales
 - (d) Origin, Current, Next (including full sequence) and Final stops
 - (e) Date & Time
 - (f) Restroom status, to facilitate identification of nearest working and unoccupied restroom to that particular sign
 - (g) Status of PA/IC system, including status of audio broadcast, functioning of hearing loop, PEI call information, and intercom status
 - (h) Smoke detector status
 - (i) Seat reservation system variables
 - (j) Relevant maintenance information – including onboard system status - which could be incorporated into a special workshop

display templates to facilitate maintenance and operations staff in daily, scheduled, and unscheduled maintenance.

- (3) In addition, the OTIS system shall support data pushes from the ground-based systems in near-real-time to facilitate weather updates, news, and service updates.
- (4) To accommodate a long-distance network that has periods of cellular carrier outages, the onboard systems shall be capable of storing data pushes for replay, contingent upon a configured data validity and expiration.

ix). Triggers

- (1) Amtrak expects to be able to program the on-board experience in an event-driven fashion. Events shall include at minimum:
 - (a) Mission start and end
 - (b) Geolocation with geofences to trigger events
 - (c) Time since or time-projected-before a geofence
 - (d) State of operations (start of movement, cruise, emergency stop, etc.)
 - (e) Manual operation

x). Off-Board Customer Experience Simulation (Option)

- (1) Amtrak must be able to simulate and validate the complete customer experience prior to loading the programming to railcars, and to diagnose issues identified in the field with communication system operation, including content.
- (2) The Contractor shall deliver a turn-key content management lab which shall include the full complement of onboard equipment necessary to fully simulate the on-board communication system operation.
- (3) All OTIS equipment necessary to simulate all car types shall be supplied as a part of the off-board customer experience simulation lab.
- (4) For clarity, this includes minimally the following equipment:
 - (a) All types of displays, of type and quantity necessary to simulate all car types
 - (b) PA/IC controllers
 - (c) PEI units
 - (d) amplifiers

- (e) speakers
 - (f) cameras
 - (g) HMI displays, including Control Terminals (if option included)
 - (h) reservation display system components
 - (i) attendant call system components
 - (j) data communication system
 - (k) electronic room accommodation and door lock system components
 - (l) control units which make up the OTIS system
 - (m) Video Surveillance System / Network Video Recorders
- (5) The Contract shall also deliver ancillary hardware which provides the capability to perform automated, semi-automated, and manual route simulations.
- (6) The system shall support mission simulation with playback of telemetry and events from a recorded from actual on-board journeys, and through manually prepared journeys.
- (7) The system shall support:
- (a) Interfacing with the same production systems used for the revenue fleet that facilitate the upload of programming and content, such that the same APIs as production are used.
 - (b) Playback of telemetry and event logs to animate the simulation in real-time, accelerated, and slow modes.
 - (c) Simulation of customer experience for samples of all interaction types (all display types, audio).
- (8) The simulation shall incorporate the capability to simulate end users interaction with the on- and off-board system during all stages of the train's operation, including:
- (a) Train staff operation of the Control Terminal and on-board HMIs (if option included), including authentication, and operation of system integrations with the Video Surveillance System (if equipped), Public Address System, Intercom System, Attendant Call, and PEI.
 - (b) Train staff operation of Amtrak electronic devices, and their interaction with the OTIS equipment.

- (9) The Off-Board Customer Experience simulation lab shall be implemented in a modular and extensible fashion, allowing future modifications and upgrades which will occur on the vehicles to be implemented in the lab.
- (10) The Contractor shall be responsible for delivery and setup support to a location specified by Amtrak.
- (11) It is Amtrak's expectation that the Contractor and Amtrak will negotiate a mutually acceptable on-going maintenance and support agreement with Amtrak for the lab proximate to the delivery and setup of the lab.
- (12) The detailed system description, functionality, and infrastructure requirements shall be submitted to Amtrak for review and approval.
[CDRL 26-04]

c). Train Telemetry

- i). Data telemetry includes data generated by operator inputs, onboard sensor data, event recorder data and other diagnostic and status information.
- ii). Train Control and Monitoring
 - (1) Amtrak's assumption is that train data will first flow to Contractor's back office systems that analyzes the data and shall trigger maintenance and other actions based on analysis.
 - (2) In addition, Contractor shall provide a set of services that allow Amtrak to retrieve all data generated by the train using a set of API's/Services that allow Amtrak to pull data in near real-time or to push the data in near-real time to Amtrak.
 - (3) This does not preclude Contractor from providing a portal for Amtrak personnel to review any data analysis or data visualizations provided to enhance operational awareness of a train's condition.
 - (4) A data dictionary of the data feed is required. This shall include definition of all data fields, all possible data values, conditions that generate each value and/or the trigger for each field and data value.
- iii). Safety/Event Related Information and Video
 - (1) Today Amtrak collects data in real-time during extraordinary events to understand and assess the impact of those events.
 - (2) Specifically, Amtrak sets trigger types based on specific input from the operator or sensors to trigger an event. When an event is triggered, the event record data and user defined segment of video data is immediately relayed to Train Operations to provide situational awareness.
 - (3) A typical example is when emergency braking is activated, the event recorder and video for a limited time before and after the incident are

CONFIDENTIAL — DO NOT DISTRIBUTE

sent via the cellular network to Amtrak's network operations center for immediate review.

- (4) The triggers and video lengths should be configurable as well as the type of information needed. A data dictionary of the data feed is required. This should include definition of all data fields, all possible data values, conditions that generate each value and/or the trigger for each field and data value.
- (5) Refer to Chapter 14 for additional specific requirements.

iv). Data Definition

- (1) Complete data dictionaries and schema shall be provided for all data recorded on the train, along with the format of any data transmitted to the wayside.
- (2) Data dictionary shall provide full access to the complete fidelity of the recorded information.
- (3) In addition to user operated PTU, DTE, and other software packages provided by the contractor, utilities to export all binary data into an open, machine-readable format (e.g., CSV, JSON, XML), with full fidelity of the data represented, in a way that can be interpreted by end users (e.g., in engineering units) shall be supplied by the Contractor.
- (4) The tool shall provide all means necessary to decrypt and/or decode the data.
- (5) The details of the data dictionaries and documentation of the tools shall be submitted along with the utilities for review and approval by Amtrak 90 days prior to delivery of the first vehicle. **[CDRL 26-05]**
- (6) Updates of the data dictionaries, documentation of the tools, and the utilities shall be provided prior to the deployment of software which modifies the data formats.

d). System Extensibility and Upgrades

- i). Amtrak recognizes that many onboard systems will require technology refresh throughout the life of the rail vehicles.
- ii). Display screens, data communication systems, system controllers, cameras, control terminals, passenger compartment equipment, and other customer facing onboard equipment will go through multiple upgrades or refreshes.
- iii). The on-board and wayside systems provided as a part of this shall be designed in a flexible and extensible method in order to minimize the impact of these anticipated changes.

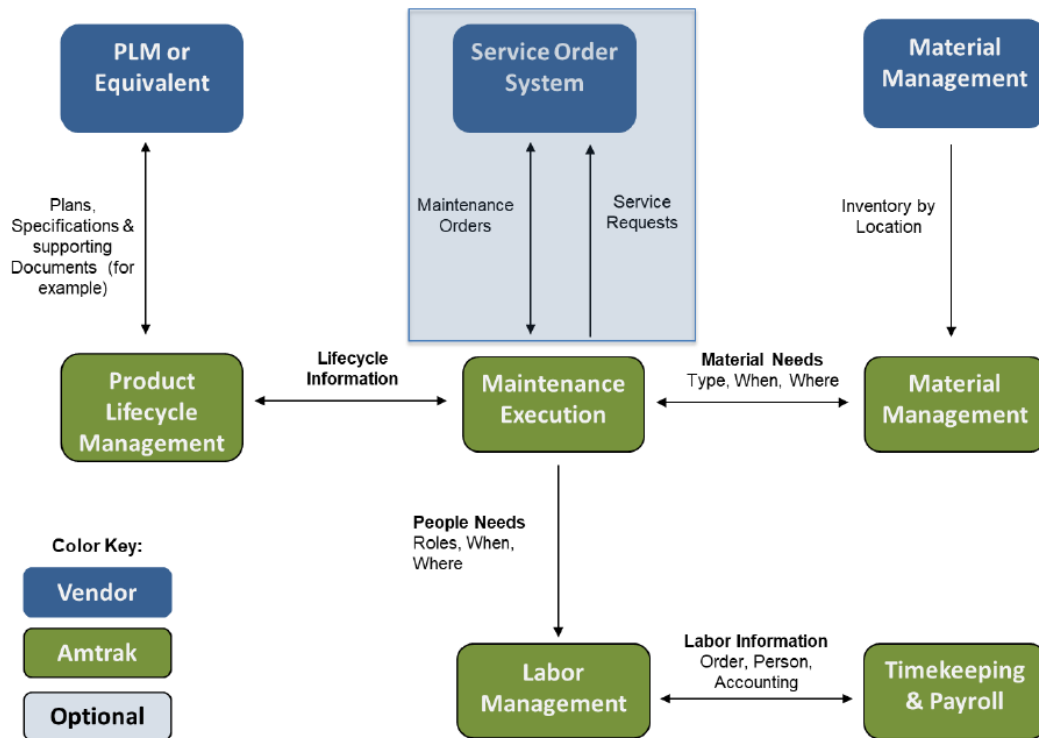


Figure 26-1: Business Process Viewpoint

- iv). As shown, this is business view of the TSSSA process, with service order creation from Contractor optionally being created in their own systems.
- e). Service/Work Order
 - i). If maintenance orders originate from Contractor, there shall be enough information provided to Amtrak to complete the work without directly referencing Contractor's systems.
 - ii). If Contractor will not integrate their service order system to Amtrak, work orders shall be created in Amtrak's maintenance execution system.
 - iii). Work order status shall be provided to Contractor.
 - iv). Job plans (task lists, tools, materials) should be provided with the maintenance orders.
- f). Material Availability
 - i). Since Contractor shall provide materials to complete maintenance requests, it is assumed Contractor shall ensure materials will be available prior to the execution date(s) of the work order.
- g). Back Office

- i). Additional interfaces shall be required to integrate billing. These are not included in the diagram since this may differ based on the technologies used by Contractor.
- h). Technical considerations
 - i). The following technologies are in use at Amtrak:
 - (1) PLM – Siemens Teamcenter
 - (2) Workorder Management – Maximo & EAMS Braid Mainline Rail
 - (3) Warehouse & Material Management – SAP
 - (4) Financial Systems – SAP
 - (5) Integration/Service Bus – MuleSoft AnyPoint
 - (6) EDW/Analytical Capabilities - Amazon Redshift/Tableau
 - (7) EDW/Analytical capabilities are available to support insights into asset condition.
 - (8) Genetec Security Center (Video Surveillance System, see section 14)

26.6 Train-to-Amtrak Integration Requirements

- a). General Integration Requirements
 - i). To support the Amtrak IT vision of centralizing and standardizing information management for journey systems across the entire fleet, we prefer to securely communicate with railcars via APIs wherever possible.
 - ii). In this regard, Amtrak supports the following two API-based integration patterns.
 - iii). Depending on the capabilities of the proposed solution, Amtrak can support a combination of the following sections.
 - iv). Whatever solutions are proposed shall conform to Amtrak's overarching Architectural Principles, Identity and Security standards.
 - (1) All digital technology initiatives must align with business strategies and demonstrate measurable outcomes with emphasis on maintaining supported versions, reducing tech diversity and evaluating total cost of ownership while encouraging modular, scalable designs using MACH (Microservices, API-first, Cloud-native, Headless) architecture to support rapid change.
 - v). Amtrak must be notified in advance of any software or system changes that will result in changes to the approved interface specifications.

b). Train Systems as Client

- i). The below diagram depicts the model where the train systems function as the client of Amtrak APIs for the purposes of both disseminating information from the train and retrieving information to be used by the train.

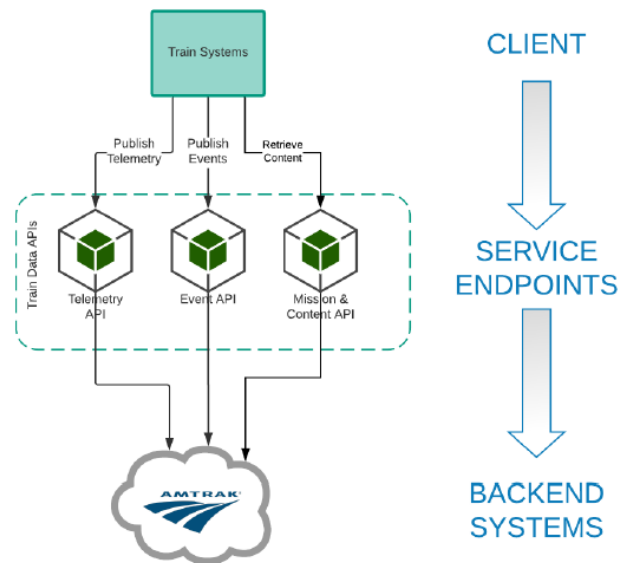


Figure 26-2: Train Systems as Client

c). Train Systems as Service Provider

- i). The below diagram depicts a pattern where the train systems are exposed as services and Amtrak develops a middleware orchestration layer to serve as an intermediary between Contractor APIs and Amtrak's APIs.

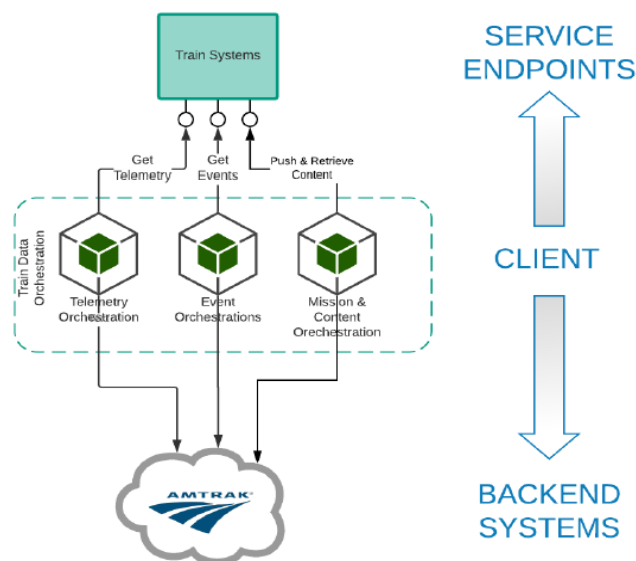


Figure 26-3: Train Systems as Service Provider

26.7 Identity Requirements

a). General Identity Requirements

- i). Amtrak has an adopted identity standard for all authentication and authorization scenarios. Amtrak's core identity solution is Microsoft Azure AD and all solutions shall conform to patterns as supported by that platform.
- ii). Contractor supplied software and systems requiring authentication of Amtrak users shall incorporate Amtrak's Microsoft Azure AD for identity. This shall include:
 - (1) Contractor supplied SAAS applications
 - (2) Contractor's sub-supplier SAAS applications
 - (3) Software supplied to run in/on Amtrak's environments
 - (a) Contractor to propose alternate options for On-board OT Equipment that may not have access to Amtrak's Microsoft Azure AD. These options may be considered by Amtrak.
- iii). Amtrak requires the IT solution for this solicitation to conform this standard including:
 - (1) Amtrak Employee or Contractor logins
 - (2) Non-Amtrak Personnel logins
 - (3) Machine-to-Machine Communications
- iv). Microsoft Azure AD Reference is located at the following URL:
<https://docs.microsoft.com/en-us/azure/active-directory/fundamentals/>

26.8 CDRLs

CDRL	Description	Due
CDRL 26-01	Provide Solution Architecture, Designs, and Specifications for review and approval by Amtrak throughout the design reviews.	30 days prior to PDR, on-going updates
CDRL 26-02	Identify all Contactor or sub-supplier maintenance and operation support agreements related to the on-going support of equipment, services, or licenses of on-board and wayside software.	30 days prior to PDR, on-going updates
CDRL 26-03	Provide an operations plan and schedule for transitioning support throughout all phases of the procurement.	30 days prior to PDR, on-going updates
CDRL 26-04	Provide detailed system description, functionality, and infrastructure requirements for off-board customer experience simulation.	30 days prior to PDR, on-going updates

CDRL 26-05	Provide details of the data dictionaries and documentation of tools.	90 days prior to delivery of the first car

* End of Chapter 26 *

Amtrak Single Level Fleet Replacement Technical Specification

27. Software and Microprocessor-Based Systems

Revision 0

Table of Contents

27.1	General	27-1
27.2	Software Systems Justification	27-1
27.3	Software Systems Requirements	27-1
27.4	Software	27-2
27.5	Hardware	27-12
27.6	Reliability	27-15
27.7	Safety	27-15
27.8	CDRLs	27-16

Table of Figures

Figure 27-1: Required Software Documentation (Option 1)	27-6
Figure 27-2: Required Software Documentation (Option 2)	27-7

27.1 General

- a). This section applies to all software, microprocessor-based systems supplied for this project, including vehicle subsystem controls, test equipment, data analysis, fault analysis and training deliverables.
- b). This section shall also apply to the programming of all programmable devices, including microprocessors, microcontrollers, Programmable Logic Devices (PLD), Application-Specific Integrated Circuits (ASIC), or Field Programmable Gate Arrays (FPGA), etc.

27.2 Software Systems Justification

- a). Suppliers shall submit a life cycle cost justification for each software application not explicitly required by this specification.
- b). This justification shall include, but not be limited to, a comparison between a hardware (e.g. relays, and discrete electronic) and a software based system.
- c). For this calculation, the supplier shall use an "end of life" or obsolescence of the hardware (microprocessor and associated ICs) of 10 years and Military Handbook (MIL-HDBK)-217, Ground Mobile.
- d). Based on this analysis, Amtrak will approve or disapprove the use of additional software systems.

27.3 Software Systems Requirements

- a). Software System Classification
 - i). Hardware and software requirements depend on the degree to which the hardware and/or software is custom designed for or applied to this project.
 - (1) "Commercially available" or "Commercially Off The Shelf" (COTS) hardware or software shall be readily available in the US through retail and wholesale sources and shall be subject to all requirements, except as noted in this section.
 - (2) "Non-commercially available" hardware or software shall be developed or modified according to the requirements in this section.
 - (3) Hardware shall be viable for a railway application in terms of robustness and security.
- b). Time and Date Processing
 - i). All software and hardware delivered or developed under this Contract shall be capable of handling dates in the range from 2000 to 2099.
 - ii). The date data processing shall not experience abnormal ending and/or invalid or incorrect results from the hardware, software, data repository or firmware in operation as part of Amtrak's business processes.

- iii). Each hardware, software, data repository or firmware's date data interface shall support a four-digit year format.
- iv). The master real time clock for all subsystems that are connected to the vehicle network shall be provided by the Central Diagnostics Unit (CDU).
- v). All subsystems shall synchronize to the master clock.
- vi). All time displayed to the train crew, maintenance personnel, or passengers shall be adjusted to the local time and shall automatically be adjusted to daylight saving time.
- vii). The start and end dates for daylight savings time for all systems shall be adjustable by Amtrak via a configuration of the CDU.

27.4 Software

a). Software Development Process

- i). All Non-COTS software shall be in accordance with IEEE Std 1558-2004, Standard for Software Documentation for Rail Equipment and Systems, and the requirements stated within this specification.
- ii). The IEEE Std 1558 requirements shall be for a "Type 5" procurement as defined within that standard except as noted below.

b). General Features

- i). Software shall perform the following basic functions:
 - (1) Implement the desired control scheme such that the specified performance is achieved.
 - (2) Monitor all inputs for unsafe, erroneous, or unknown conditions or combinations of conditions.
 - (3) Sample all input conditions at rates sufficient to detect and remedy all unsafe or damaging conditions in the shortest possible time.
 - (a) Sampling rates and program execution times shall be such that the control system is not the limiting factor in response to unsafe or damaging conditions.
 - (b) All software shall be designed to ensure that the timing requirements for safety related tasks are always met.
 - (4) Limit all output commands to safe levels for all combinations of input conditions, to avoid equipment damage and hazards to personnel.
 - (5) Perform system self-diagnostic routines and respond promptly, safely, and predictably to detected faults.

- (a) The self-diagnostics shall include tests for program corruption and integrity in read/write memories such as (Electrically Erasable Programmable Read Only Memory) EEPROM and flash Programmable Read Only Memory.
 - (6) Respond safely and predictably when powering up or recovering from power interruptions.
 - (a) All power interruptions likely to have corrupted temporary storage shall be detected and cause the system to reinitialize all affected routines and temporary data.
 - (b) Detection of power interruptions may be by hardware.
 - (7) Permit thorough interrogation of all input, output, and internal conditions (values calculated or computer by software or logic) by internal, system level, vehicle level and external diagnostic equipment.
- ii). Undocumented software features are prohibited.
- c). Contractor Activities
 - i). The Contractor, as system and software integrator, shall be responsible for the overall quality of all software supplied as part of this contract.
 - (1) If the Contractor also develops software, it shall consider the team that develops software as a supplier.
 - ii). Quality Control Plan **[CDRL 27-01]**
 - (1) The Contractor shall develop a car level software quality control plan which defines how it will manage and oversee the software development of its suppliers.
 - (2) The software quality control plan may be a section within the Contractor's Project Quality Plan.
 - iii). Software Quality Audits
 - (1) The Contractor shall conduct periodic software quality audits of all Non-COTS suppliers.
 - (a) Amtrak reserves the right to attend any audit along with the Contractor.
 - (2) Amtrak reserves the right to conduct a software quality audit at any time during the software design and development phase.
 - (3) At a minimum, the suppliers shall plan for an audit to be performed at the Final Design Review (FDR). **[CDRL 27-02]**
 - (4) The results of all audits shall be submitted to Amtrak for review and acceptance. **[CDRL 27-03]**

- (5) Remedial action for all open comments from any audit shall be submitted to Amtrak for review within 90 days of the audit. **[CDRL 27-04]**
- (6) The audit shall include:
 - (a) A software process audit – on each software supplier and its sub suppliers which shall include at a minimum
 - (i) Project management
 - (ii) Requirement Tracing
 - (iii) Configuration Control
 - (iv) Coding standards
 - (v) Change process and Defect tracking
 - (b) Physical audit as defined by IEEE, Std 730 on each SCI – This report shall be submitted with **[CDRL 05-04]**.
- iv). Software Testing
 - (1) The Contractor shall witness all software verification and validation testing (STPr/SD) prior to the release of any software.
 - (2) Amtrak reserves the right to attend these tests along with the Contractor.
- v). Configuration Control
 - (1) The Contractor shall develop a Software Configuration Control Plan (SCCP) **[CDRL 27-05]** for tracking software changes to individual cars on Amtrak property until the end of the warranty period and all retrofits are complete.
 - (a) This plan shall be submitted for review and acceptance by Amtrak.
 - (b) The SCCP shall also control software on non-car equipment such as PTU's, BTE's, and the like, and shall include a mechanism to ensure continuing compatibility between car software and non-car software.
 - (c) It shall be consistent with the Contractor's approach to configuration control of hardware and require similar approvals and tests.
 - (2) The Contractor shall maintain a database of the software version of every software item on each car and in each piece of non-car equipment.

- (a) The database shall be kept current by the Contractor at all times and be submitted each time software is updated on any system. **[CDRL 27-06]**
 - (3) The software version status of every software item on the car shall be provided in the Car History Book. **[CDRL 27-07]**
 - (4) The software version status of every software item on each piece of non-car equipment shall be provided by the Contractor with the delivery of the equipment. **[CDRL 27-08]**
- vi). Delivery of Software
 - (1) At the end of the warranty period and for each software release thereafter, the Contractor shall provide to Amtrak on Compact Disc Read-Only Memory (CD-ROM), USB Drive, Digital Video Disc (DVD), or an acceptable technology at the time:
 - (a) All executables **[CDRL 27-09]**
 - (b) Updated software documentation **[CDRL 27-10]**
 - (c) Updated user documentation **[CDRL 27-11]**
 - (d) Software Version Description (SVD) **[CDRL 27-12]**
 - (2) The requirement for CD-ROM, USB Drive or DVD copies and documentation shall apply to every delivery of software for non-car equipment.
 - (3) The SVD shall contain a description of problems addressed, known problems yet to be addressed, features added, requirements added or changed, design changes, compatibility between other versions of software, other system and other cars in the train, changes to related software documents and evidence of document review, test plan, and test results.
- d). Software Developer Documentation
 - i). All suppliers who develop software shall submit for Amtrak's review and approval, documentation to ensure a mature software development process that has been fully verified and validated, and can be maintained in the future. **[CDRL 27-13]** Amtrak offers two paths listed below:
 - (1) Submit all the documentation as required by IEEE, Std 1558, for type 5 software.

Figure 27-1: Required Software Documentation (Option 1)

Document Name	Software Type	PDR	IDR	FDR	New Software Releases
Software Project Management Plan (SPMP)	All	Yes	No	No	No
Software Quality Assurance Plan (SQAP)	All	Yes	No	No	No
Software Configuration Management Plan (SCMP)	All	Yes	No	No	No
Software Verification and Validation Plan (SVVP)	All	Yes	No	No	No
Software Verification and Validation Report (SVVR)	All Non-COTS	No	No	No	Yes
Software Requirement Specification (SRS)	All Non-COTS	Yes	Yes	Yes	Yes
Interface Control Document (ICD)	All	Yes	Yes	Yes	Yes
Software Design Description (SDD)	All Non-COTS	No	No	No	Yes
Database Design Description (DBDD)	All	Yes	Yes	Yes	Yes
Software Requirement Traceability Matrix (SRTM)	All Non-COTS	Yes	Yes	Yes	Yes
Software Test Plan (STP)	All Non-COTS	Yes	No	No	No
Software Test Procedure (STPr)	All Non-COTS	No	Yes	Yes	Yes
Software Test Report (STR)	All Non-COTS	No	No	No	Yes
Software Version Description (SVD)	All	No	No	No	Yes
Software User Manual (SUM)	All Non-COTS PTU/BTE	Yes	Yes	Yes	Yes

- (2) In order to reduce the amount of submittals, the Contractor may combine the documents by IEEE, Std 1558, for type 5 software as follows:

- (a) The SPMP, SQAP, SCMP, SVVP, and STP shall be combined into one document entitled Software Development Plans (SDP). This SDP shall include all the requirements of the individual documents.
- (b) The SRS, SDD, DBDD, STPr, STR, and SVVR shall be combined into one document entitled Software Documentation (SD). This SD shall include all the requirements of the individual documents.
 - (i) It is expected that this document would be developed as a database and would be expanded and updated as the software is developed and tested.
- (c) The ICD and DBDD shall be combined into one document entitled Software Interface Document (SID).
 - (i) This SID shall include all the requirements of the individual documents.
- (d) The SVD and SUM, if required, shall be stand-alone documents.

Figure 27-2: Required Software Documentation (Option 2)

Document Name	Software Type	PDR	IDR	FDR	New Software Releases
Software Development Plan	All	Yes	No	No	No
Software Documentation (SD)	All Non-COTS	Yes	Yes	Yes	Yes
Software Interface Document (SID)	All Non-COTS	Yes	Yes	Yes	Yes
Software Version Description (SVD)	All	No	No	No	Yes
Software User Manual (SUM)	All Non-COTS PTU/BTE	Yes	Yes	Yes	Yes

- ii). Regardless of which path is chosen, the Contractor or software supplier shall develop the SRS based on the technical specification requirements.
 - (1) The SRS shall fully link to each technical requirement.
 - (2) The contractor shall submit an SRTM with the first release of the SRS to Amtrak.
 - (3) The SRTM shall use the technical section reference identification numbers as defined in the technical specification as the reference to link to the SFD, SRS, SDD, and STPr or SD.

- (4) The Contractor shall update and submit an updated version of the SRTM with each document released, strictly following the software life cycle process.
 - (5) The Contractor and supplier shall not proceed in the software development until the SRS document is reviewed and approved by Amtrak.
 - (6) The Contractor shall submit software documentation to Amtrak based on the software life cycle.
- iii). In order for Amtrak to update, modify, or replace a system on the cars at a later date, the following documents shall be marked "Non-Proprietary": ICD, DBDD, SID and SUM.
- iv). The Contractor shall perform a demonstration to ensure that the ICD and DBDD or SID is complete and accurate. **[CDRL 27-14]**
- e). Operating Systems and Languages
 - i). Software may be written in a high or low-level language; however, high-level languages such as C/C++ are preferred.
 - ii). The language, compiler, and its implementation for the selected microprocessor system shall be commercially available in English.
 - iii). All languages and operating systems shall have an acceptable customer base and be in widespread use.
 - iv). Use of commercial operating systems such as Windows™ for onboard applications is prohibited, unless approved by Amtrak on a case-by-case basis. Commercially off the shelf available software is categorized as software that can be purchased, leased, or licensed by the general public.
 - v). Where approved for non-onboard applications such as PTU and BTE, software running on Windows™ shall include a Windows™ format help file to provide context sensitive help to the user of the software.
 - vi). All compilers shall be approved by Amtrak based on previous service history.
 - vii). The suppliers shall have a software coding standard for each programming language which shall define header information, comment requirements, module size, etc., similar to NASA C Style Guide SEL-94-003 or MISRA C.
- f). Commercial Off-the-Shelf Software
 - i). Some software supplied under this contract may be commercial-off-the-shelf when approved by Amtrak such as operating systems supplied for PTU and BTE.
 - ii). For Commercially Available Software, the following shall be supplied:

- (1) The original data storage/transfer media functional and usage details **[CDRL 27-15]**
- (2) All manuals and instructions to configure and install the software **[CDRL 27-16]**
- (3) All licenses required for Amtrak's site use **[CDRL 27-17]**

g). Software Testing

- i). Software testing shall be a prerequisite to higher level testing, such as system level and vehicle level tests.
- ii). All system or subsystem level features and functions of software systems which implement system or subsystem-level requirements of the Technical Specification that are allocated to software shall be testable.
- iii). Field testing shall use the PTU and procedures provided under this Contract.
- iv). For features which are only testable off the car with special equipment, all such equipment shall be supplied by the Contractor as test equipment and become the property of Amtrak.

- (1) This equipment shall provide the logic, sequencing, and emulation necessary to verify that the software functions as intended.
- (2) In lieu of separate equipment, appropriate test functions may be provided within the PTU.

v). Unit and Module Interaction Testing

- (1) The supplier shall perform unit and module interaction testing on all software components.
- (2) This unit testing shall provide 100% coverage, unless approved by the Engineer.
- (3) Automatic test tools, such as Vector Cast or LDRA may be used.
- (4) As a minimum, full branch testing, data range and boundary testing, and error trap testing shall be completed.
- (5) All unit testing results shall be fully documented in a unit testing report which shall be submitted to Amtrak for review and approval. **[CDRL 27-18]**

vi). Software Type Testing

- (1) Type tests of all software systems shall verify the proper operation of all software features, including diagnostics.
- (2) The type tests shall demonstrate that the system under test can successfully recognize and report all faults listed in the CDU Fault

Management Plan and all other events and parameters reported to the CDU.

- (3) The Contractor shall submit the results of the type tests to Amtrak for review and approval. **[CDRL 27-19]**
- (4) Where such tests may result in damage to the system hardware, the fault or event may be simulated to avoid damage to the hardware.
- (5) Such testing shall be performed any time the software is changed, prior to putting it into service.

vii). Software Validation Test Procedures

- (1) Software validation test procedures must be approved by Amtrak prior to the execution of the tests. **[CDRL 27-20]**

viii). Testing of Software Revisions

- (1) After the initial version of software is installed on the cars, all software revisions shall be tested by the supplier in the supplier's facilities (laboratory) in accordance with its testing processing and procedures.
- (2) After successful completion of such tests, a test version of the software revision shall be placed on a limited number of cars and dynamically tested for a period of time as approved by Amtrak.
- (3) Only after results of the dynamic tests on a limited number of cars have been approved by Amtrak shall a new software revision be applied to the fleet or any portion of the fleet.
- (4) Application of any software revision to any portion of the fleet at any time shall be in conformity with the approved Configuration Control Plan of this Section 27.c.v.

h). Software Version Numbers

- i). Software version numbers shall be included within the firmware code and shall be accessible via laptop Portable Test Unit (PTU), the CDU, and on the system's display.
- ii). Every change to software shall be reflected in an update to the version number.
- iii). If the software includes data or parameter files which can be modified by the suppliers or by Amtrak, a modification to such files must be reflected in a change to the software version number or a separate data/parameter file version number.

i). Software Security

- i). The Contractor, as the systems and software integrator, shall implement disciplined security practices.

- ii). These security practices shall align with industry best practices and ensure the confidentiality, integrity, and availability of the delivered software systems.
- iii). To demonstrate its capability, the Contractor shall submit:
 - (1) The results of a current, independent, BSIMM and/or OWASP SAMM software security assessment **[CDRL 27-21]**.
 - (2) The assessment shall evaluate the security controls, vulnerabilities, and overall security posture of the software systems implemented by the Contractor, including but not limited to, the following areas:
 - (a) Authentication and access control
 - (b) Data protection and encryption
 - (c) Secure coding practices
 - (d) Security testing and vulnerability management
 - (e) Incident response and recovery
 - (f) Security documentation and training
- j). Software Update
 - i). It shall be possible to update all application software with the exception of approved programmable devices (E.g. ASIC, CPLD, etc.) via the PTU connected to the system directly.
 - ii). Any partial or interrupted software update shall automatically return the system to the previous version of software and not leave the system in an unconfigured state.
 - iii). The time required to upload the entire software complement for a given system, including time to replace firmware embedded in FPGAs, CPLDs, etc., shall be no more than fifteen (15) minutes.
 - iv). The Contractor shall provide detailed instructions/procedure to install and configure the software.
- k). Transfer of Software to Replacement Devices
 - i). In order to ensure the long-term maintainability of programmable devices, the Authority requires that to Contractor provide:
 - (1) Master copies of the compiled executable for all programmable devices such as ASICS, CPLD's, FPGA's and Read Only Memory Devices. **[CDRL 27-22]**

- (2) Six (6) sets of the necessary equipment and software to transfer the compiled software to new devices and to verify the integrity of the copy. **[CDRL 27-23]**
 - ii). If the requirements of part i of this subsection are not possible to meet for any programmable device, the Contractor shall provide Amtrak with a sufficient number of replacement preprogrammed devices to supply the fleet for 30 years of service.
- I). Software Escrow
- i). The Contractor shall maintain in escrow all proprietary source code for all software used on the vehicle and the compilers, linkers, etc. used to develop it. **[CDRL 27-24]**
 - ii). The source code held in escrow shall be the latest version installed on the vehicles.
 - iii). The Contractor shall demonstrate that the source code held in escrow compiles to produce the same executive with the same CRC or checksum as installed on the vehicles. **[CDRL 27-25]**
 - iv). The contractor shall submit a Software Executable Generation Procedure (SEGP) **[CDRL 27-26]** that details the steps required to build the workstation and generate the executable file.
 - v). Should the compilation process prohibit matching of the CRC or checksum, additional techniques to inspect difference in the generated executive including the use of comparison software and functional testing on the BTE can be employed to prove equivalency.
- (1) Such techniques are to be approved by Amtrak.
- vi). Full instructions to assist in installation and configuration of the software development workstation, as well as building and verifying the executable software shall be provided. **[CDRL 27-27]**
 - vii). The Contractor shall provide sufficient documentation of the source code to allow Amtrak to maintain it, troubleshoot it and adjust parameters. **[CDRL 27-28]**
 - viii). The development software held in escrow, including any operating system used with the licensed development tools, shall be of the same version used to develop the software currently installed on the vehicle.

27.5 Hardware

- a). Hardware Platform
 - i). All car borne and custom computer hardware shall be designed and constructed in accordance with the general electronic design principles of Chapter 15 Electrical System.

- ii). Any computers, whether portable or not, and any microprocessor hardware shall be readily available through retail and/or wholesale outlets in the U.S.
 - iii). The microprocessor-based systems shall be based on an established family of microprocessors in wide use in the control system industry and the rail industry.
 - iv). The type and availability of each microprocessor shall be included in the design review package.
 - v). Any use of commercially available computer boards for on car applications must be specifically approved by Amtrak on a case-by-case basis.
 - vi). Such approval will be based upon a technical review of the product's suitability for use in a transit rail environment, product documentation and proof that a supply will be available for the expected life of the vehicles.
- b). Microprocessor Systems Shutdown
- i). A special algorithm **[CDRL 27-29]** shall be provided to ensure that:
 - (1) Computer shutdown and restart occur in a safe and predictable manner.
 - (2) Spurious faults are not generated during shutdown or restart.
 - (3) Stored diagnostic data is not lost during shutdown or restart.
 - (4) Time stamp integrity is maintained on all diagnostic data through any shutdown and restart process, including immediately after restart.
- c). Program and Data Storage
- i). All onboard microprocessor-based systems shall store software and diagnostic data in non-volatile flash memory, or EEPROMS.
 - ii). The use of mechanical hard drives or optical disks is prohibited for data storage on all systems, except the network video recorders.
 - iii). All flash memory and other memory devices with a finite number of read/write cycles shall be implemented in such a way that one sector or memory location is not written to repeatedly, thus shortening the life expectancy of the device.
 - iv). The life expectancy of such devices as used on the vehicle shall not be less than 30 years.
 - v). The memory and processor capacity shall be designed to allow program expansion without hardware modification.
 - vi). Expandability and capacity requirements are as follows:

- (1) The memory needs of the installed software, backup copy, if required, during software update and data files shall not utilize more than 50 percent of the installed memory capacity at Type Test.
 - (a) This requirement applies individually to each type of memory installed, whether it is EEPROM, Flash PROM, or RAM.
 - (2) Peak processing time demands shall not be greater than 75 percent of the available processor capacity.
- d). Electrical Isolation and Pre-Processing
 - i). All processor system input and output signals shall be isolated. High voltage inputs and outputs shall be isolated external to the microcomputer card rack.
 - ii). Low voltage (battery and logic voltage level) inputs and outputs shall be isolated from the supply power.
 - iii). The isolation for the outputs can be external to the microcomputer card rack.
 - iv). The isolation shall accomplish the following:
 - (1) Protect and isolate the system from damage due to over-voltage, under-voltage, transients, shorts and open circuits
 - (2) Perform necessary voltage translations
 - (3) Remove noise and undesired signals
 - (4) Pre-processing to limit, discriminate and format those signals that would otherwise require excessive processor time
 - v). Isolation devices shall consist of optical isolators, transformers, relays, and other circuits appropriate to the application.
- e). Batteries and Super Capacitors
 - i). The use of super capacitors is acceptable for real time clock or other requirements typically performed by a battery, provided the super capacitor can maintain clock or data for a minimum of 90 days.
 - ii). The use of batteries within control units for maintenance of a real-time clock, or for safe shutdown must be approved by Amtrak.
 - iii). If approved by Amtrak, all batteries shall be implemented as follows:
 - (1) Batteries shall be sized to retain data for at least six months without charging and shall be located such that leakage cannot damage any control system components.
 - (2) Battery life shall be no less than 5 years, regardless of type.

- (3) Systems using standby or back-up batteries shall annunciate the need for battery replacement such that the battery continues to perform its function until it can be replaced at the next periodic maintenance.
 - (4) Batteries shall not be connected by soldering.
 - iv). Necessary RAM control data shall not depend on battery back-up but shall be stored in non-volatile memory and "shadowed" to RAM for use.
- f). Maintenance and Related Tools
 - i). Portable Test Unit (PTU) and Bench Test Equipment (BTE)
 - (1) For custom software that is resident in test computers, Amtrak shall be given a license for unlimited use of the software for the approved purposes of this Contract. **[CDRL 27-30]**
 - (2) Licenses shall not be linked to specific hardware serial numbers.
 - (3) In addition, PTU and BTE equipment software documentation, compliant with this chapter, shall be furnished. **[CDRL 27-31]**
 - (4) PTU and BTE software shall be subject to the approved Configuration Control Plan of this Section.
 - (5) The operating system employed for the PTU shall be the most-advanced, user-friendly system available at the time of system design and development.
 - (6) While it is anticipated that the system will be Microsoft Windows™ based, advances in technology may preclude this from being the best choice.
 - (7) Accordingly, identification of the system to be used will be made by Amtrak at the time of design review.

27.6 Reliability

- a). If more than two unplanned maintenance releases of any individual software configuration item (SCI) are required during formal type testing through the end of the warranty, Amtrak may require the Contractor to perform a full independent software quality review.
- b). This review shall include all aspects of a software audit as listed in this section plus a full independent software verification and validation of the software.

27.7 Safety

- a). The use of software in safety-critical or related applications must be approved by Amtrak.
- b). If Amtrak approves the use of software in a safety-critical or related application, it shall be developed in compliance with EN-50128 SIL4, unless approved by

Amtrak.

- c). In addition to the requirements of this chapter, any software, firmware, processing device or computer providing a safety-critical function shall comply with the requirements of Chapter 25, Safety.

27.8 CDRLs

CDRL	Description	Due
CDRL 27-01	Software Quality Control Plan	NTP + 60 days
CDRL 27-02	Non-COTS Software Supplier Quality Audits	FDR
CDRL 27-03	Non-COTS Software Supplier Quality Audit Results/Reports	Within 30 days of each audit
CDRL 27-04	Non-COTS Software Supplier Quality Audit Remedial Action for Open Comments	Within 90 days of each audit
CDRL 27-05	Software Configuration Control Plan (SCCP)	30 days prior to IDR
CDRL 27-06	Database of Software Versions – Cars & Non-vehicle Equipment	30 days prior to IDR, then ongoing updates
CDRL 27-07	Software Version - Cars	In Car History Book
CDRL 27-08	Software Version - Non-vehicle Equipment	With delivery of equipment
CDRL 27-09	Software – all executables	At the end of warranty period for each software release
CDRL 27-10	Software – Updated software documentation	At the end of warranty period for each software release
CDRL 27-11	Software – Updated user documentation	At the end of warranty period for each software release
CDRL 27-12	Software – Software Version Description (SVD)	At the end of warranty period for each software release
CDRL 27-13	Software Developer Documentation	30 days prior to IDR, then ongoing updates
CDRL 27-14	Demonstration to ensure that the ICD and DBDD or SID is complete and accurate	FDR
CDRL 27-15	COTS Software – Original data storage/transfer media functional and usage details	30 days prior to IDR, then ongoing updates
CDRL 27-16	COTS Software – All manuals and instructions to configure and install the software	30 days prior to IDR, then ongoing updates
CDRL 27-17	COTS Software – All licenses required for Amtrak's site use	30 days prior to IDR, then ongoing updates
CDRL 27-18	Test Reports for Software Unit Tests	30 days after performance of tests
CDRL 27-19	Test Reports for Software Type Tests	30 days after performance of tests

CDRL	Description	Due
CDRL 27-20	Software Validation Test Procedures	30 days prior to IDR, then ongoing updates
CDRL 27-21	Results of a current, independent, BSIMM and/or OWASP SAMM software security assessment of Contractor	360 days prior to shipment of first cars
CDRL 27-22	Transfer of Software to Replacement Devices – Master copies of the compiled executable for all programmable devices	180 days prior to shipment of first cars, then ongoing updates
CDRL 27-23	Transfer of Software to Replacement Devices – Six (6) sets of equipment and software to transfer the compiled software	180 days prior to shipment of first cars then ongoing updates
CDRL 27-24	Escrow of Proprietary Source Code	180 days prior to shipment of first cars, then ongoing updates
CDRL 27-25	Demonstration that source code in Escrow is same as on vehicles.	180 days prior to shipment of first cars, then ongoing updates
CDRL 27-26	Software Executable Generation Procedure (SEGP) to use Escrowed files	30 days prior to FDR, then ongoing updates
CDRL 27-27	Full Instructions for Workstation to use escrowed files	30 days prior to FDR, then ongoing updates
CDRL 27-28	Documentation of Escrowed Source Code to allow for maintenance, troubleshooting and adjustment	30 days prior to FDR, then ongoing updates
CDRL 27-29	Microprocessor System Shutdown Special Procedure	30 days prior to IDR, then ongoing updates
CDRL 27-30	License for unlimited use of software in test computers	360 days prior to shipment of first cars, then ongoing updates
CDRL 27-31	PTU and BTE software documentation	30 days prior to IDR, then ongoing updates

* End of Chapter 27 *

Amtrak Single Level Fleet Replacement

Technical Specification

28. Cybersecurity

Revision 0

Table of Contents

28.1 General.....	28-1
28.2 Cybersecurity Practices.....	28-7
28.3 Software and Firmware Vulnerability Mitigation	28-16
28.4 Software Security Lifecycle	28-21
28.5 CDRLs	28-24

28.1 General

a). Overview

- i). Amtrak places a high priority on cybersecurity and recognizes the inherent complexities and evolving challenges associated with safeguarding both IT and OT assets.
- ii). The security of Amtrak's train network, which serves as a vital transportation lifeline for millions of passengers each year, is of paramount importance to Amtrak and its customers.
- iii). To ensure the utmost protection, Amtrak has established a specialized organization of cybersecurity experts dedicated to preserving the security, integrity and resilience of their systems.
- iv). Amtrak expects the same dedicated commitment from the Contractor and its Suppliers and sub-suppliers.
- v). By maintaining a dedicated commitment to cybersecurity, Amtrak strives to uphold the trust and confidence of their passengers, partners and stakeholders taking proactive measures to ensure availability, reliability and safety of the train network while safeguarding sensitive information entrusted to Amtrak.

b). Requirements

- i). This section defines cybersecurity requirements for all hardware, software, software services and firmware (hereinafter referred to as the "products" for purposes of this section) to be provided under this Contract, whether resident within a microprocessor-controlled system, provided as part of test or interface equipment, provided for the purpose of post-download data analysis and processing, incorporated within training technology and manuals, Bench Test Equipment (BTE) or supplied as a part of a software based service.
- ii). These requirements apply to all systems that include processors or other programmable components such as Programmable Logic Devices (PLDs).
- iii). All products that consist of programmable components, software or data for this Contract are subject to these same requirements. Contractor shall respectively transmit and enforce these requirements to all subcontractors and require that these subcontractors flow these requirements down to all of their subcontractors and sub-suppliers that handle programmable components, software or data, regardless of the tier.
- iv). Thus, where the word "Contractor" is used, it includes all subcontractors and sub-suppliers, at every tier.

c). Failure to meet requirements

- i). If the Contractor fails to comply with any of the requirements set forth herein, and fails to remedy such non-compliance upon demand from Amtrak, Amtrak may exercise all available legal, contractual and administrative remedies for such non-compliance, up to and including a default termination in accordance with the Termination for Default article in the Contract.
 - ii). This applies not only to Contractors as defined in the above paragraph, but to manufacturers of all hardware, software, and firmware installed in the railcar.
 - iii). Further, if the results of any penetration testing, vulnerability assessment or other examination or audit of the Contractor's cybersecurity protections yields any results that either the Federal Government or one of Amtrak's jurisdictional partners determines to require further examination and/or audit, Amtrak may share the results of such testing with Federal, state or local authorities for the purpose of protecting national security interests, the safety and security of the riding public, or personal and real property.
- d). Minimum Requirements
 - i). These requirements represent the minimum set of security requirements and additional security requirements may be called out in other chapters of this contract.
 - ii). In the following text, the terms "cybersecurity" and "security" may be used interchangeably to meet the intention of the specific requirement.
 - iii). Where security or cybersecurity are referenced, they are inclusive of data privacy considerations where applicable.
- e). Security Governance
 - i). The Contractor shall define, document, and provide to Amtrak for review and approval a listing of Contractor personnel involved in the car's development, maintenance, and operation who will be accountable for security-related decisions and actions. **[CDRL 28-01]**
 - ii). The document shall include:
 - (1) Personnel roles.
 - (2) Qualifications per person, including:
 - (a) any security industry certifications
 - (b) years of experience in IT and/or OT security
 - (c) years of experience in car security
 - (d) formal training in IT and/or OT security
 - (e) previous and current security positions held.

- (3) Responsibilities per role for security-related decisions and actions.
 - (4) Accountabilities per role for security-related decisions and actions.
- f). Risk Management Framework
 - i). The NIST SP 800-53 Framework shall be used as the underlying risk management framework to identify, detect, protect from, respond to and recover from security risks associated with the cars over their lifecycle, evolving to maintain concurrency with current versions.
 - ii). If the NIST SP 800-53 Framework becomes obsolete during the term of this contract, Amtrak will determine an appropriate and compatible replacement.
 - iii). This risk management framework shall be used as the basis for all specified security initiatives within this contract (e.g., assessments and testing, application of controls, risk mitigation, etc.), unless alternate frameworks are approved by Amtrak on a case-by-case basis.
 - iv). In the case of alternate frameworks being referenced within this contract on a case-by-case basis, NIST SP 800-53 and the named alternate framework shall be leveraged, with the Contractor's ability to combine testing where the requirements of each framework are compatible.
 - v). Security Compliance Frameworks: "Security Compliance Framework" or "framework" shall imply law, regulation, specification, directive, framework or other as applicable.
 - vi). In certain scenarios, demonstrating compliance with a specific framework other than NIST SP 800-53 may become necessary, such as requiring compliance to PCI-DSS, HIPAA, and/or other more granular security compliance frameworks.
 - vii). Where demonstrating compliance to a specific framework becomes necessary based on the type of data in that environment and/or basis of the framework, the Contractor shall demonstrate compliance to the specific framework in addition to meeting all other security requirements of this contract, unless they conflict with the security compliance framework.
 - viii). If a conflict arises, the Contractor shall notify Amtrak, discuss the conflict, provide a recommended resolution, and Amtrak shall either approve the recommendation or provide a counter recommendation.
 - ix). Demonstrating compliance to specialized security compliance frameworks shall be required even if not specifically called out in any other chapter of this contract when the impact of the security compliance framework's basis on Amtrak is evident.
 - x). Consideration for ISA/IEC 62443 Security Compliance Framework:
 - (1) There are well-known security compliance frameworks for Control Systems such as ISA/IEC 62443 that can be applied to rail.

- (2) Should the Contractor already align with one of these frameworks, they may submit a mapping of the designated framework against NIST SP 800-53 for Amtrak's review and consideration as an alternative to using NIST SP 800-53 as the primary risk management framework.
- g). Supply Chain Security
 - i). The Contractor shall conduct a thorough assessment of all entities involved in its collective underpinning.
 - (1) These assessments shall follow the Shared Assessments Standard Information Gathering (SIG) questionnaire and utilize the Agreed Upon Procedures to implement and manage third-party risk assessment and management and ensure compliance with applicable security and privacy laws, regulations, frameworks.
 - (a) Alternate methods of assessment such as existing audits from an acceptable source or certification to an acceptable alternative will be considered if already existing (i.e. ISO 27001 certification).
 - (b) Where applicable the SIG Lite form may be considered based on the product being provided.
 - (2) The Contractor shall disqualify any Supplier and/or sub-supplier that poses an unacceptable level of risk, unless approved by Amtrak.
 - (3) Unacceptable risk levels shall be determined as moderate or higher, and detailed risk information shall be presented to Amtrak for consideration and approval if the Contractor wishes to proceed with the Supplier or sub-supplier.
 - (4) Any Supplier or sub-supplier engaged in any portion of this contract from sanctioned countries shall be identified as a critical risk.
 - (5) The comprehensive third-party security risk management scoring on any Supplier and sub-supplier approved for use in the car's development, maintenance, and operation shall be made available to Amtrak upon their request.
 - ii). Throughout the procurement and manufacturing process, the integrity and authenticity of car components shall be continuously validated.
 - (1) The Contractor shall implement measures to ensure that all components used in the cars are obtained from trusted sources and are free from any tampering or unauthorized modifications.
 - (2) This includes rigorous checks and controls at each stage of the supply chain to maintain the security and reliability of the car's components. Alternatives may be proposed regarding a chain of custody approach to be reviewed and approved by Amtrak.

iii). Software Bill of Materials / Hardware Bill of Materials

- (1) The Contractor shall maintain a Software Bill of Materials (SBOM) and Hardware Bill of Materials (HBOM) throughout the design process, with regular updates throughout the warranty period.
- (2) The Contractor shall submit the SBOM and HBOM format for Amtrak review and approval prior to the first design review. **[CDRL 28-02]**
- (3) SBOM and HBOM shall be submitted at the following intervals:
 - (a) at each design review
 - (b) at FAI
 - (c) prior to the delivery of the first vehicle, and
 - (d) annually throughout the warranty period
- (4) The SBOM shall detail all software components used to provide the required functionality of this technical specification, including all on-board software, and software supplied to support required off-board functionality.
- (5) Each SBOM entry shall include:
 - (a) the system name
 - (b) the part name
 - (c) the software configuration item name
 - (d) the software component's name
 - (e) the version number and
 - (f) a cryptographic hash of the software.
- (6) The SBOM shall identify any known vulnerabilities associated with each software component, referencing the Common Vulnerabilities and Exposures (CVE) identifiers where applicable.
- (7) The SBOM shall be provided in an industry standard format as approved by Amtrak, such as SPDX, SWID, or CycloneDX.
- (8) The HBOM shall be a comprehensive list of all hardware components which include microprocessors, programmable logic devices, or other memory and executable code. Each entry shall include the system, the component manufacturer, the component name, model, revision and any unique identifiers.
- (9) The HBOM entry shall include supply-chain information including manufacturer location and places of origin for key sub-components.

iv). Country of Origin

- (1) The Contractor shall identify the country (or countries) of origin of all products to be provided under this Contract, or any subcontracts, at any tier.
- (2) The Contractor shall identify the countries where the development, manufacturing, maintenance, and service for the product are provided or will be provided.
- (3) The Contractor must submit a list of the proposed products identifying the country of origin ("List" hereinafter) to Amtrak for approval. **[CDRL 28-03]**
- (4) The Contractor shall notify Amtrak of any changes to the List no less than 90 days prior to the date that the change will be implemented.
 - (a) This is a mandatory requirement for all products that will be used on the project.
 - (b) The Contractor shall not be entitled to an equitable adjustment to the Contract for any costs incurred based upon any approved changes to this List.

h). Training and Awareness

- i). All personnel performing work related to the development, operation, or maintenance of the equipment supplied as a part of this technical specification shall undergo adequate security training.
- ii). This training shall cover their specific roles and responsibilities in delivering the equipment and services and effectively mitigating security risks.
- iii). The Contractor shall ensure that all personnel are equipped with the necessary knowledge and skills to uphold the highest standards of security throughout the equipment's lifecycle.
- iv). Regular refresher training and awareness programs shall be conducted to keep personnel up to date with evolving security practices and requirements.
- v). A listing of all security training conducted with a roster of who completed the training shall be provided to Amtrak upon their request.

i). Conflict of Requirements

- i). If any security requirement of this contract conflicts with a safety and/or regulatory function of the cars or any other specific contract requirement, the conflict shall be promptly raised to Amtrak.
- ii). The Contractor shall provide a detailed explanation of the conflict along with a recommended approach for resolution, which will be subject to Amtrak's review, approval, and/or counter-recommendation.

28.2 Cybersecurity Practices

a). General

- i). The Contractor shall adhere to the specified cybersecurity practices detailed below.
- ii). In the event that the Contractor knows that it cannot comply with a requirement at the time of its proposal, it shall specify in sufficient detail the justification for non-compliance and its proposed alternative method for meeting the requirement.
- iii). The Contractor has the affirmative duty to seek and identify any and all information that would result in actual or potential non-compliance during the course of Contract performance.
- iv). The Contractor shall immediately notify Amtrak so that corrective action can be taken.
- v). Appropriate security controls shall be implemented for all aspects of the cars that are susceptible to security risks, adhering to a minimum of NIST 800-53.
- vi). These controls shall encompass a broad range of security measures and practices to ensure the protection of the cars' assets.
- vii). In addition to implementing security controls based on NIST 800-53 or agreed alternative, appropriate security controls shall be implemented for all aspects of the cars that are susceptible to security risks, following industry-specific guidance where available.
- viii). This guidance may include TS/CLC 50701 for Rail, Cloud Security Alliance for cloud-based assets, CIS for system hardening/benchmarking, OWASP for software security hardening, and other applicable standards and best practices.
- ix). By considering and implementing these explicit security controls, the cars' assets shall be optimized for enhanced safeguarding and protection.

b). Software and Services

- i). The Contractor shall remove and/or disable, through software, physical disconnection, or engineered barriers, all services and/or ports in the product not required for routine operations, emergency operations, or troubleshooting.
 - (1) This will include communication ports and physical input/output ports (e.g., USB docking ports, video ports, UART ports, and serial ports).
 - (2) The Contractor shall provide documentation of disabled ports, connectors, and interfaces to Amtrak **[CDRL 28-04]**.

- ii). The Contractor shall provide summary documentation of the product's security features and security-focused instructions on maintenance, support, and reconfiguration of the product's default settings. **[CDRL 28-05]**
- iii). The Contractor shall disclose the existence of all known methods for bypassing computer authentication contained in the product, often referred to as "backdoors," and provide written documentation that all such backdoors have been permanently deleted from the product. **[CDRL 28-06]**
- c). Access Control
 - i). The Contractor shall configure each component of the product to operate using the "Principle of Least Privilege" (POLP).
 - (1) This includes operating system permissions, file access, device access, device/user accounts, and communications/data transfer.
 - ii). The software shall deny access by default and allow access by specific permissions.
 - iii). The Contractor shall provide, for each system relying on a human interface device, user accounts with configurable access and permissions associated with one or more defined user role(s).
 - (1) The Contractor shall provide, for the subject systems, a mechanism for changing users' roles (e.g., group) or associations.
 - iv). The Contractor shall document options for defining access and security permissions, user accounts, and applications with associated roles. The Contractor shall configure these options, as specified by Amtrak. **[CDRL 28-07]**
 - v). The Contractor shall recommend methods for Amtrak to prevent unauthorized changes to the Basic Input/Output System (BIOS) and other firmware.
 - (1) If it is not technically feasible to protect the BIOS to reduce the risk of unauthorized changes, the Contractor shall document this and provide mitigation recommendations when complying with this requirement.
 - vi). The Contractor shall install physical barriers on any network equipment that is public or crew accessible and hosts one or more Ethernet Ports so as to prevent Physical Access to the subject ports from unauthorized personnel.
 - vii). The Contractor shall secure any equipment connected to any railcar network in cabinets that use tamper resistant locking hardware.
 - (1) This requirement excludes any equipment that will require a direct interaction with the operator during the operation of the Railcar (e.g. operator displays, communication system HMI).

- viii). The Contractor shall verify and provide documentation for the product, attesting that unauthorized logging devices are not installed (e.g., key loggers, cameras, and microphones), as specified by Amtrak **[CDRL 28-08]**
 - ix). The Contractor shall deliver a product that enables Amtrak to configure its components to limit access to and from specific locations (e.g., security zones, business networks, and demilitarized zones [DMZs]) on the network to which the components are attached, where appropriate, and provide documentation of the product's configuration as delivered.
- d). Authentication / Password Policy and Management
- i). The Contractor shall document the levels, methods, and capabilities for authentication and authorization of passwords.
 - ii). The Contractor shall deliver a product that adheres to standard authentication protocols which conforms to Amtrak Authentication and Authorization standards.
 - iii). The Contractor shall propose an authentication method (e.g., password based, multi-factor, IP-based, Certificate based authentication) subject to review and approval by Amtrak for the following types of connections:
 - (1) Wired connections
 - (a) Local connection: temporary Connection between external equipment and a railcar subsystem (e.g., Portable Test Equipment connected to a subsystem).
 - (b) Network connections between railcar subsystems and railcar networks.
 - (c) Network connections between external equipment and railcar networks (e.g., Portable Test Units connected through Ethernet Diagnostic Port).
 - (2) Wireless connections – remote access
 - (a) Mechanisms for secure remote access shall be implemented to ensure that only authorized individuals can access the cars remotely.
 - (b) Strong authentication methods, such as multi-factor authentication, shall be used to verify the identity of remote users.
 - (c) All remote access sessions shall be encrypted using industry-standard encryption algorithms and secure communication protocols that meet strong security and integrity requirements (e.g., FIPS compliant).
 - (d) Logging mechanisms shall be in place to record and monitor remote access activities for audit and forensic purposes.

- iv). The Contractor shall protect all passwords, including, but not limited to the following methods:
 - (1) Contractor shall not store passwords in clear text.
 - (2) Contractor shall not hardcode passwords into software or scripts.
 - (3) All default passwords shall be changed in all components.
 - (4) the use of blank/null password shall not be supported unless explicitly agreed upon by Amtrak for specific component types.
- e). Logging and Auditing
 - i). The Contractor shall provide logging capabilities or the ability to support Amtrak's logging system requirements, including transmission to Amtrak's Cyber Fusion center relevant on-board logs associated with cybersecurity.
 - ii). Logging capabilities provided by the Contractor shall be configurable by Amtrak and support security auditing requirements. As specified by Amtrak, the product shall cover the following events, at a minimum (as appropriate to their function):
 - (1) Information requests and device responses
 - (2) Successful and unsuccessful authentication and access attempts
 - (3) Account changes
 - (4) Privileged uses
 - iii). The Contractor shall time-stamp audit trails and log files, as specified by Amtrak.
 - iv). The Contractor shall provide comprehensive security protection of log files.
 - v). The Contractor shall implement an approach for collecting and storing security log files on the railcar. The Contractor shall also implement an approach for transferring security log files from the railcar to the wayside.
 - vi). The Contractor shall provide a list of all log management activities that the product is capable of generating and the format of those logs. This list shall identify which of those logs are enabled by default. **[CDRL 28-09]**
- f). Cryptography and Encryption
 - i). Cryptography/Encryption: Encryption shall be used as a security control to maintain confidentiality, verify authenticity or integrity, and provide non-repudiation.
 - ii). The use of encryption shall consider all relevant aspects, including but not limited to:

- (1) Key Management: Procedures and controls for key generation, distribution, storage, and revocation shall be implemented.
 - (2) Protection of Cryptographic Keys: Measures shall be taken to protect cryptographic keys from unauthorized access, loss, theft, or compromise.
 - (3) Recovery of Encrypted Information: Procedures shall be implemented to enable the recovery of encrypted information in the event of key loss or compromise. Processes for key recovery shall be established.
 - (4) Compliance with Industry Standards: Encryption algorithms and protocols employed must adhere to industry standards for strong security and integrity. Compliance with relevant standards, such as FIPS (Federal Information Processing Standards), shall be ensured to maintain the highest level of encryption security.
- g). Communication Security & Restrictions
- i). Robust security measures shall be implemented to protect data transmitted between the cars' onboard systems and/or external entities. This requirement encompasses various avenues of communication including but not limited to network, wireless, satellite, cellular, and analog.
 - ii). The Security controls shall be implemented to include, but not be limited to, the following:
 - (1) Network Security
 - (a) A comprehensive network infrastructure shall be established, incorporating secure architectures and technologies such as firewalls, intrusion detection/prevention systems, secure gateways, and network segmentation.
 - (b) The network shall be continuously monitored to identify and address sensitive traffic.
 - (c) Access controls shall be enforced to prevent unauthorized network access.
 - (d) Encryption algorithms and secure communication protocols, compliant with industry standards for strong security and integrity (e.g., FIPS compliant), shall be employed for all networks utilized within the cars.
 - (2) Wireless Security
 - (a) Strong encryption algorithms and secure communication protocols, meeting industry standards for security and integrity (e.g., FIPS compliant), shall be employed for all wireless networks used within the cars.

- (b) Wireless access points shall be securely configured, and regular firmware updates shall be performed to mitigate potential vulnerabilities.
- (3) Satellite Security
 - (a) Encryption algorithms and secure communication protocols, compliant with industry standards for strong security and integrity (e.g., FIPS compliant), shall be implemented to safeguard data transmitted over satellite links.
 - (b) Physical security measures shall be established to protect satellite communication equipment, and regular patching and firmware updates shall be conducted to mitigate potential vulnerabilities.
- (4) Cellular Security
 - (a) Robust encryption algorithms and secure communication protocols, meeting industry standards for security and integrity (e.g., FIPS compliant), shall be implemented to protect data transmitted over cellular communication.
 - (b) Cellular devices and modules shall be configured with secure settings, including the disabling of unnecessary services and features that may introduce vulnerabilities.
 - (c) Regular updates of firmware and security patches shall be applied to mitigate potential vulnerabilities.
 - (d) Access control mechanisms, such as strong authentication and SIM card security measures, shall be employed to prevent unauthorized use of cellular devices and/or SIM cards.
- (5) Analog Security
 - (a) Measures shall be implemented to protect analog communication signals from unauthorized interception, interference, or disruption.
 - (b) This may involve the use of encryption devices attached to the analog communication line or frequency hopping techniques to change the frequency of the analog signal at regular intervals.
 - (c) Physical access to analog interfaces and communication equipment shall be controlled to prevent unauthorized tampering or connection of malicious devices.
 - (d) Physical transmission lines shall be protected against unauthorized tapping, tampering and signal interference.

- (e) Analog communication ports and infrastructure (e.g., antennas, transceivers) shall be physically secured from unauthorized access, tampering and sabotage.
 - (f) Analog communication networks shall be segmented from other networks and isolated from digital networks.
- (6) Network Segmentation
 - (a) A secure network architecture and segmentation strategy shall be implemented to isolate critical systems and components from less critical ones, preventing unauthorized access, limiting lateral movement within the E, and mitigating potential attacks.
 - (b) Secure communication channels shall be established between car components to protect sensitive data and ensure secure interaction between systems.
- iii). The Contractor shall provide information on all communications (e.g., protocols) required between Amtrak's network security zones whether inbound or outbound and identify each. **[CDRL 28-10]**
- iv). The Contractor shall provide a method to restrict communications traffic between different network security zones.
- v). The Contractor shall provide documentation on any method or equipment used to restrict communications traffic.
- vi). The Contractor shall provide Amtrak with access, including administrative access as needed, to the network components of the product.
- vii). The Contractor shall document all remote access entry pathways and ensure that they can be enabled or disabled by Amtrak. **[CDRL 28-11]**
- viii). The list of IP addresses assigned to each subsystem on the fleet is subject to approval by Amtrak.
- ix). Asset tags, resource ids, and cloud providers of cloud-hosted Amtrak digital assets shall be provided to Amtrak.
- x). The Contractor shall provide a method for managing the network components of the product and changing configurations. (e.g., addressing schemes).
- xi). The Contractor shall certify that all interfaces which implement administrative management capabilities of onboard devices is secure. **[CDRL 28-12]**
- h). Data Protection
 - i). Robust measures shall be implemented to protect sensitive data, including passenger information, maintenance records, and operational data.

- ii). Encryption of data at rest and in transit shall be implemented, meeting industry standards for strong security and integrity (e.g., FIPS compliant).
- iii). Backup and recovery capabilities shall be established to ensure data availability and resilience.
- iv). Data loss prevention mechanisms shall be in place to safeguard against unauthorized access, disclosure, or alteration of data.
- v). Secure data disposal processes shall be implemented to permanently remove sensitive data when it is no longer required.
- vi). Compliance with data privacy laws, regulations, frameworks, and directives that are impactful to Amtrak shall be demonstrated.
- vii). Databases used for the cars shall undergo regular updates and patching to mitigate potential vulnerabilities.
- i). Hardware Security
 - i). Comprehensive procedures and controls shall be implemented to address all aspects of hardware security.
 - ii). This includes secure hardware design practices that consider protection against tampering, unauthorized physical access, and theft.
 - iii). Critical hardware components shall be physically secured and access shall be restricted to authorized personnel only.
 - iv). A trusted supply chain shall be established to ensure the integrity and authenticity of hardware components.
 - v). Hardware integrity verification processes shall be implemented to validate the integrity of hardware prior to installation.
 - vi). Only authorized configurations and firmware/software versions shall be deployed on the car's hardware.
 - vii). Tamper-evident and/or tamper detection mechanisms shall be employed on critical hardware components to detect unauthorized modifications.
 - viii). Secure hardware lifecycle management practices, including the secure disposal of hardware, shall be established.
 - ix). Physical security measures shall be implemented to protect hardware from physical attacks and theft.
- j). Bluetooth Security
 - i). The Contractor shall ensure the security of Bluetooth-enabled devices through the implementation of comprehensive procedures and controls, addressing the following aspects as required by Amtrak:

- (1) Encryption: Industry-standard encryption algorithms and secure encryption modes shall be implemented (e.g., FIPS compliant) to protect data exchanged between Bluetooth-enabled devices. The encryption mechanisms shall provide strong security and integrity to safeguard the confidentiality and integrity of the transmitted data.
 - (2) Secure Authentication: Bluetooth devices shall implement secure authentication mechanisms to ensure that only authorized devices can connect and communicate. Robust authentication methods shall be employed to verify the identity and trustworthiness of connecting devices.
 - (3) Strong Pairing Methods: Devices shall use strong pairing methods to establish secure connections. These methods should employ cryptographic mechanisms to generate and exchange secure keys during the pairing process, ensuring the confidentiality and integrity of the communication.
 - (4) Access Control: Bluetooth devices shall employ access control mechanisms to restrict connections to trusted devices only. Unauthorized or untrusted devices shall be prevented from establishing connections with the car's Bluetooth devices to mitigate the risk of unauthorized access.
 - (5) Updated Bluetooth Versions: Devices shall use the latest Bluetooth version supported by the devices, avoiding the use of older Bluetooth versions that may have known vulnerabilities or weaknesses.
 - (6) Limited Visibility: Devices shall be configured to limit their visibility and unnecessary Bluetooth services, or profiles, shall be disabled.
 - (7) Secure Firmware and Software Updates: Bluetooth devices shall have a mechanism to receive and install firmware and software updates. All security patches, bug fixes, and updates provided by the device manufacturers shall be applied.
- k). IoT (Internet of Things) Security
- i). Robust procedures and controls shall be implemented to address the unique security challenges posed by IoT devices.
 - ii). These measures include the support for strong authentication mechanisms, such as unique credentials or cryptographic certificates, to ensure that only authorized entities can access and interact with IoT devices.
 - iii). Each IoT device shall have a unique identifier to maintain its integrity and prevent unauthorized device impersonation and tampering.
 - iv). Secure provisioning and configuration practices shall be followed, including changing or disabling default passwords.

- v). Regular security updates and patches shall be applied to ensure ongoing protection of the devices.
- vi). Additional physical security measures shall be implemented for devices deployed in public or vulnerable areas to mitigate the risk of theft or unauthorized removal.

28.3 Software and Firmware Vulnerability Mitigation

a). General

- i). The Contractor must demonstrate that the software products that will be delivered as a part of this procurement do not constitute a security threat to Amtrak.

b). Secure Software Coding Practices

- i). The Contractor and suppliers shall ensure, by integrating robust procedures and controls and specific software security activities into their Software Development Life Cycle(s) (e.g., see Secure Software Development Framework (SSDF) Version 1.1: Recommendations for Mitigating the Risk of Software Vulnerabilities, February, 2022), that security vulnerabilities are identified and removed prior to the delivery of the source code for the Independent Assessment of Software and Firmware Quality (see Section 28.3.5, Independent Assessment of Software and Firmware Quality).
 - (1) These activities shall be described in the Contractor and Supplier Software Project Management Plans. These activities are subject to audit during Software Quality Assurance Audits.
- ii). Code reviews, static analysis, dynamic analysis, software composition analysis, secrets scanning, and other comprehensive application security testing techniques shall be employed to identify and remediate potential security issues.
 - (1) While application security testing engines may leverage basic rule engine configurations during development to streamline DevOps cycles, application security testing tools shall leverage comprehensive rule engine configurations prior to functional testing and production and resolve all moderate and higher level security findings unless otherwise agreed upon by Amtrak.
- iii). Secure configuration management practices shall be implemented to maintain the security of software configurations and settings.
 - (1) Access to software repositories shall be secured to prevent unauthorized modifications or tampering.
 - (2) A secure software supply chain shall be established, ensuring that only third-party software that has undergone thorough vetting and testing is used.

- (3) Code signing and integrity checks shall be employed to verify the authenticity and integrity of software components.
 - (4) Prompt response procedures shall be in place to address any identified security issues or vulnerabilities in the car's software, including timely patching and updates.
- c). NIST Checklist(s)
 - i). Where applicable, all software included within this procurement shall be configured in alignment with the NIST National Checklist Program.
 - ii). This requirement will be applied to all software components where NIST National Checklists are applicable.
 - (1) If no applicable checklist exists for a given system or component the Contractor may propose alternative checklists/guidelines for Amtrak's review and approval.
 - iii). The repository for NIST National Checklist can be found at <https://nvd.nist.gov/ncp/repository>. The Contractor and suppliers shall submit and identification of each system, each system SCI, and applicable NIST checklists (s) for Amtrak Review and approval prior to the first design review. **[CDRL 28-13]**
 - iv). The Contractor shall provide completed NIST checklists prior to the Final Design Review. **[CDRL 28-14]**
 - v). If it is agreed that a supplier may utilize another security framework such as IEC62443 or ISO 27001 the contractor may provide a mapping and evidence in lieu of a NIST checklist.
- d). Date / Time Dependent Functions
 - i). For all source code that is subject to the Independent Assessment of Software and Firmware Quality (see Section 28.3.5, Independent Assessment of Software and Firmware Quality), the Contractor and suppliers shall confirm that the subject source code does not include date/time-dependent functions.
- e). Independent Assessment of Software Security
 - i). The results of a current, independent, BSIMM and/or OWASP SAMM software security assessment shall be provided by the contractor. **[CDRL 28-15]**
 - (1) Also acceptable, upon approval by Amtrak are existing Contractor and vendor certifications such as IEC 62443 SDLA or ISO 27034.
 - ii). The assessment shall evaluate the security controls, vulnerabilities, and overall security posture of the software systems implemented by the Contractor, including but not limited to, the following areas:

- (1) Authentication and access control
 - (2) Data protection and encryption
 - (3) Secure coding practices
 - (4) Security testing and vulnerability management
 - (5) Incident response and recovery
 - (6) Security documentation and training
- iii). If the results of a current, independent, BSIMM and/or OWASP SAMM software security assessment are unavailable for the Contractor, supplier, or any entity providing software, submit:
 - (1) The full vulnerability reports from application security scans (SAST, DAST, SCA, secrets scanning, etc.) and manual and/or penetration testing along with a detailed description of software security practices and any technology used for the purpose for Amtrak's evaluation. For any vulnerabilities detected during application security testing, an action plan shall be provided that discusses:
 - (a) Finding(s) (i.e., verbatim finding text)
 - (b) Impact Description (i.e., a textual description of the negative consequences to the Project if the practice(s) is not implemented by a process used on the Project)
 - (c) Project-Specific Action
 - (d) Responsible Individual
 - (e) Progress Completion Percentage
 - (f) Due Date
- iv). The independent BSIMM and/or OWASP SAMM appraisal shall include the use of an industry recognized assessor (e.g., Synopsys, etc.).
- f). Independent Assessment of Software and Firmware Quality
 - i). The Contractor shall procure an independent third-party assessment of the application security lifecycle for the following categories of software and firmware:
 - (1) Software specifically developed or modified for this project; this requirement applies to all software provided on this project.
 - (2) Software re-used for this project; this requirement applies to software-based subsystems functioning on operationally critical networks only.

- ii). The subject security assessment and corresponding requirements specified in this section shall be implemented as per the requirements of NIST SP 800-53.
 - (1) Also acceptable, upon approval by Amtrak are existing Contractor and vendor certifications such as IEC 62443 SDLA or ISO 27034.
- iii). The assessment shall be performed by a qualified, independent organization.
- iv). The Contractor shall provide the name of the independent assessment organization for Amtrak review and approval. **[CDRL 28-16]**
- v). The Contractor shall ensure that the third-party software security and quality assurance provider shall check software and firmware to ensure that critical application security weaknesses (including SANS' Top 25 Most Dangerous Software Errors and OWASP's Top 10 as applicable) are addressed.
- vi). The Contractor shall ensure that the third-party software security and quality assurance provider shall check software and firmware to ensure that the cybersecurity requirements of this contract have been met.
- vii). The Contractor shall ensure that the third-party quality assurance provider performs the software security assessment using a range of security assessment testing techniques including Fuzz, Dynamic, and Static testing.
- viii). The Contractor shall provide the third party's Software Security Assessment Plan for Amtrak's review and approval prior to performing the assessment **[CDRL 28-17]**
- ix). The Contractor shall ensure that the results of any independent software and firmware quality assurance assessment are sent directly from the third-party provider to Amtrak and the Contractor **[CDRL 28-18]**
- x). The Contractor shall provide a response to the third-party's assessment including plans to correct identified vulnerabilities. The Contractor's response and corrective action plan shall be sent to Amtrak for approval. **[CDRL 28-19]**
- xi). This independent assessment of software and firmware quality (including the Contractor's response and Corrective Action Plan) is to be performed at any time of Amtrak's choosing, as follows:
 - (1) One assessment after delivery of the first set of cars, but before their conditional acceptance;
 - (2) One assessment prior to completion of conditional acceptance of all base order cars; and
 - (3) One assessment for each option exercised and additional quantities ordered

- xii). The Contractor shall be responsible for implementing corrective actions to address any vulnerabilities that are identified during an independent assessment of software and firmware quality that would prevent the final product from meeting the security requirements defined in this Chapter.
- g). Independent Penetration Test
 - i). To demonstrate compliance with specified functional and cybersecurity requirements relating to this Contract, the Contractor shall procure an independent third-party penetration test and vulnerability assessment.
 - ii). The Contractor shall provide the name of the independent third-party penetration test provider for Amtrak review and approval. **[CDRL 28-20]**
 - iii). The subject penetration test and vulnerability assessment and corresponding requirements specified in this section shall be implemented in accordance with NIST SP 800-115.
 - iv). This shall include tests both onboard the railcar, as well as tests on all services and software which interface with the railcar, and other services and software that are otherwise supplied to meet the Technical Specifications. Tests onboard the railcar shall include all vehicle components, including control systems, communication devices, diagnostic systems, onboard computers, sensors, and all other microprocessor or programmable devices.
 - v). This penetration test/vulnerability assessment shall be performed by a qualified, independent organization with a demonstrated history of performing independent penetration tests in similar passenger rail environments.
 - vi). The Contractor shall provide the independent third-party's test plan and associated procedures. **[CDRL 28-21]**
 - vii). The penetration test/vulnerability assessment shall cover all products included in or incidental to this procurement, as described in the other sections of the Technical Specifications.
 - viii). The Contractor shall ensure that any and all results (including trip reports, draft reports, and final reports) of any independent penetration test/vulnerability assessment are sent directly from the third-party provider to Amtrak and the Contractor. **[CDRL 28-22]**
 - ix). The Contractor shall provide Amtrak with a response to the third-party assessment, including a Corrective Action Plan to correct identified vulnerabilities subject to Amtrak's approval. **[CDRL 28-23]**
 - x). This independent penetration test/vulnerability assessment is to be performed at any time of Amtrak's choosing as follows:
 - (1) One assessment after delivery of the first set of cars, but before their conditional acceptance;

- (2) One assessment prior to completion of conditional acceptance of all base order cars; and
- (3) One assessment for each option exercised and additional quantities ordered.
- xi). The Contractor shall be responsible for implementing corrective actions to address any vulnerabilities that are identified during Independent Penetration Test that would prevent the final product from meeting the security requirements defined in this Chapter.

28.4 Software Security Lifecycle

a). General

- i). The onboard microprocessor equipment which includes software must be designed and delivered with consideration to the evolving cybersecurity threats, regulations, and operational requirements of Amtrak.
- ii). The objective of the following technical specifications is to ensure that the software and equipment supplied as a part of the technical specification provide are built on a robust, comprehensive and resilient security architecture that provides the necessary tools and safeguards necessary to protect against security incidents, protects sensitive information, and ensures compliance with legal and regulatory obligations throughout the equipment lifecycle.

b). Asset Management

- i). Comprehensive procedures and controls shall be implemented for the appropriate and secure handling of assets throughout their lifecycle.
- ii). This includes processing, storing, communicating, and removing assets.
- iii). For assets that are no longer required and that contain sensitive information (e.g., device with personally identifiable information), specific procedures shall be implemented and followed to ensure the secure destruction of the asset and/or its sensitive contents.
- iv). These procedures shall comply with applicable privacy laws, regulations, directives, and best practices to safeguard sensitive information and prevent unauthorized access or disclosure.
- v). Proper documentation and records shall be maintained to track the status and disposition of assets throughout their lifecycle.

c). Incident Response and Management

- i). The Contractor shall deploy comprehensive mechanisms and capabilities shall be implemented to support the effective management of security incidents and breaches.

- ii). These measures include robust detection systems to identify security incidents, efficient reporting mechanisms to promptly notify relevant stakeholders, thorough investigation procedures to determine the nature and scope of incidents, and effective mitigation strategies to contain and remediate security breaches.
- d). Operations Security
 - i). The Contractor shall implement procedures and controls to ensure the secure operation of the cars.
 - ii). These measures include backup and recovery processes to ensure data and system availability in the event of disruptions or incidents.
 - iii). Robust malware protection mechanisms shall be deployed to safeguard against malicious software and unauthorized access.
 - iv). Endpoint security measures, such as secure configurations, regular patching, and secure remote access controls, shall be implemented to protect endpoints from security threats.
 - v). System monitoring capabilities shall be established to detect and respond to anomalies and potential security incidents.
- e). Continuous Monitoring and Intrusion Detection (Onboard)
 - i). As an option, the Contractor shall provide a facility to perform continuous monitoring of network traffic to detect anomalies and potential security breaches.
 - ii). Intrusion detection and prevention systems, as well as security event logging, shall be implemented on all on-board networks incorporating communication between Software Configuration Items (SCIs) supplied by different vendors, as well as between all network security zones, to promptly identify and respond to security incidents.
 - iii). The monitoring infrastructure shall leverage advanced technologies and techniques to detect both known and emerging threats.
 - iv). Regular audits of the monitoring system shall be conducted to ensure its effectiveness throughout the warranty period.
 - v). The on-board monitoring, detection, and response systems shall be integrated with Amtrak's Cyber Fusion Center (CFC).
 - vi). In addition to Contractor-supplied on-board network logging and detection, provisions shall be provided for an on-board IDS solution selected by Amtrak.
 - (1) Provisions shall include power, space, software connections for Amtrak specified and supplied hardware.

- (2) Connectivity shall be provided for each on-board network for passive monitoring of transmissions between devices.
 - (3) Connectivity to Amtrak's CFC shall be provided through the on-board Data Communication System identified in Chapter 14.
 - (4) The contractor shall provide the ability for the Amtrak to identify and configure specific network devices, network ports, and network traffic to be spanned and forwarded.
 - (a) Identification and configuration may be through direct configuration of the on-board equipment, or
 - (b) through an API provided by onboard network devices to the Amtrak on-board IDS solution.
 - vii). The Contractor shall submit their design for on-board monitoring and intrusion detection and provisions for an Amtrak on-board IDS solution for Amtrak review and approval **[CDRL 28-24]**
- f). Compliance and Issue Reporting
 - i). Robust mechanisms shall be established to monitor and verifying compliance with security requirements outlined in this contract.
 - ii). These mechanisms shall also facilitate timely and effective notification and reporting of security incidents, vulnerabilities, and breaches to Amtrak. Regular audits and assessments shall be conducted to ensure adherence to security requirements and relevant laws, regulations, frameworks, and directives.
 - iii). Any security incidents or breaches shall be promptly reported to Amtrak, providing comprehensive details and remediation actions.
- g). Business Continuity Management (Onboard)
 - i). Procedures and controls shall be implemented to enable the continuity of operation of the vehicle and its critical assets during adverse conditions.
 - ii). In situations where existing security controls may not be sufficient to secure information during adverse conditions, alternate controls shall be implemented to maintain an acceptable level of security coverage until optimal conditions are restored.
- h). Software Updates and Maintenance
 - i). A comprehensive process for software/system updates, patching and maintenance shall be implemented to ensure the integrity and authenticity of updates installed on the vehicle components.
 - ii). The Contractor shall establish a robust system for verifying the source and integrity of updates before installation, including the use of digital signatures from authorized entities.

- iii). This verification process shall guarantee that updates are legitimate and have not been tampered with, maintaining the overall security and reliability of the equipment and software supplied with this contract.

28.5 CDRLs

CDRL	Description	Due
CDRL 28-01	Listing of Contractor personnel involved in the cars' development, maintenance, and operation who will be accountable for security-related decisions and actions	NTP+90
CDRL 28-02	Software Bill of Materials (SBOM) and Hardware Bill of Materials (HBOM) format	30 days prior to PDR
CDRL 28-03	List of the proposed products identifying the country of origin	NTP+90
CDRL 28-04	Documentation of disabled ports, connectors, and interfaces	30 days prior to PDR, on-going updates
CDRL 28-05	Summary documentation of the product's security features and security-focused instructions on maintenance, support, and reconfiguration of the product's default settings	30 days prior to PDR, on-going updates
CDRL 28-06	List of all known methods for bypassing computer authentication contained in the product and provide written documentation that all such backdoors have been permanently deleted from the product	30 days prior to PDR, on-going updates
CDRL 28-07	Document options for defining access and security permissions, user accounts, and applications with associated roles	30 days prior to PDR, on-going updates
CDRL 28-08	Provide documentation for the product, attesting that unauthorized logging devices are not installed	30 days prior to IDR
CDRL 28-09	List of all log management activities that the product is capable of generating and the format of those logs	30 days prior to PDR, on-going updates
CDRL 28-10	Information on all communications (e.g., protocols) required between Amtrak's network security zones whether inbound or outbound and identify each	30 days prior to PDR, on-going updates
CDRL 28-11	List of all remote access entry pathways and ensure that they can be enabled or disabled by Amtrak	30 days prior to PDR, on-going updates
CDRL 28-12	Certification that all interfaces which implement administrative management capabilities of onboard devices are secure	30 days prior to FDR, on-going updates
CDRL 28-13	Preliminary NIST checklist	30 days prior to PDR
CDRL 28-14	Final completed NIST checklists	30 days prior to FDR
CDRL 28-15	The results of a current, independent, BSIMM and/or OWASP SAMM software security assessment shall be provided by the Contractor.	30 days prior to FDR, on-going updates

CONFIDENTIAL — DO NOT DISTRIBUTE

CDRL 28-16	Name of Independent Assessment Organization	30 days prior to PDR
CDRL 28-17	Software Security Assessment Plan	30 days prior to IDR, on-going updates
CDRL 28-18	Results of any independent software and firmware quality assurance assessment	30 days prior to FDR, on-going updates
CDRL 28-19	Contractor's response to the findings of the software and firmware quality assurance assessment	30 days prior to FDR, on-going updates
CDRL 28-20	Name of Independent Third-Party Penetration Test Provider	30 days prior to PDR
CDRL 28-21	Independent third-party's penetration test plan	30 days prior to FDR, on-going updates
CDRL 28-22	Results of the independent third-party's penetration test plan	30 days after
CDRL 28-23	Contractor's response to the findings of the independent third-party's penetration test plan	60 days after
CDRL 28-24	Design for on-board monitoring and intrusion detection and provisions	30 days prior to PDR, on-going updates

* End of Chapter 28 *

Amtrak Single Level Fleet Replacement Technical Specification

29. Accessibility

Revision 0

Table of Contents

29.1 Overview.....	29-1
29.2 Regulations.....	29-1
29.3 Maintenance of Accessible Features	29-1
29.4 Accessibility – Mobility.....	29-2
29.5 Accessibility – Visual	29-5
29.6 Accessibility – Audio.....	29-6
29.7 CDRLs	29-7

29.1 Overview

- a). This chapter defines the minimum accessibility accommodations for the cars and serves as an index or reference guide to specific chapters in the rest of this specification for more information.
- b). This is not intended to be an all-encompassing or exhaustive list of regulations listed in the Law. Please refer to specific standards listed for complete information and requirements.

29.2 Regulations

- a). Regulatory Agencies and the specifications listed below must be referenced for complete understanding of the accessibility requirements by law.
 - i). ADA
 - (1) Vehicles must accommodate persons with disabilities in accordance with the requirements of the Americans with Disabilities Act (ADA) of 1990, the ADA Accessible Guidelines (ADAAG), FTA Circular 4710.1, 36 CFR 1192, and 49 CFR 27, 37 and 38.
 - ii). FRA
 - (1) Vehicles must accommodate persons with disabilities in accordance with the requirements of the FTA Circular 4710.1, 36 CFR 1192, and 49 CFR 27, 37 and 38.
 - iii). RVAAC
 - (1) The Contractor shall submit a proposal to incorporate as much of the recommendations presented in the Final Report of the Rail Vehicles Access Advisory Committee (RVAAC) as is feasible.
 - (2) Within 60 calendar days of NTP, the Contractor shall provide a summary of the recommendations it will incorporate and those it finds to be not feasible. **[CDRL 29-01]**

29.3 Maintenance of Accessible Features

- a). Accessible features outlined in this section shall be properly maintained to minimize 'down-time' for replacement and/or repair as outlined in 49 CFR 37.161.
- b). From the Contractor's perspective, this means that maintenance requirements shall be clearly outlined and agreed upon, repairs and fixes shall require minimal time to repair/replace, all special tools for repair/replacement of items are made readily available.
- c). Damage or maintenance to one accessibility feature shall not require that other features are also unusable.

29.4 Accessibility – Mobility

a). Accessible Path

- i). The clear width of an accessible path shall be incorporated according to the recommendations from RVAAC Chapter 4, III in the Café/Lounge cars.
- ii). The floor surface shall be incorporated according to the recommendations from RVAAC Chapter 5, VI to the extent possible.
- iii). The floors along the accessible path shall be high contrast flooring to help the visually impaired follow the path through the car.
- iv). Thresholds along the accessible path at each passageway between cars shall have tactile feedback built into the floor to alert a visually impaired person of the transition in floor type.
 - (1) This tactile feedback shall be raised such that the top of the ridge is level with the flooring surface though out the cars.
 - (2) The indentation shall be lower than the flooring surface to provide ridged tactile feedback for canes.

b). Entrances

- i). Boarding and alighting accommodations shall be incorporated according to the recommendations from RVAAC Chapter 3 to the extent possible.
 - (1) Features to eliminate the gap between the car and the steps when boarding shall be incorporated.
- ii). Doors
 - (1) Doors, steps, and thresholds shall comply with 49 CFR 38.113 and 49 CFR 38.117 within the train. This includes doorways and passageway requirements for clear openings, slip resistant floorings, and clear contrast of all steps.
 - (2) Lighting for entrances and doors shall comply with 49 CFR 38.119.
 - (3) Doors shall be incorporated according to the recommendations from RVAAC Chapter 4 to the best extent possible.
 - (4) Doors and passageways along the accessible path shall be wide enough to accommodate powered wheelchairs.
 - (5) Specific doors requirements for this fleet can be found in Chapter 12.
- iii). Lifts
 - (1) As an option, on-board mobility lifts shall be provided on all car types.

- (a) On-board mobility lifts shall comply with 49 CFR 38.113 (d) and 38.125 for boarding the train from any station platform.
 - (b) The design load for this lift shall be at least 800 lbs.
 - (c) The controls shall be easily operated by a crew member and emergency operation mode is required.
- c). Grab Handles
 - i). All passageways, entryways and doors shall be equipped with appropriate handrails or stanchions. Handrails and stanchions shall comply with 49 CFR 38.115.
 - ii). Handrails and Stanchions path shall be incorporated according to the recommendations from RVAAC Chapter 4, VI to the extent possible.
 - iii). Specific handrail requirements for this fleet can be found in Chapters 6 and 11.
- d). Diaphragms
 - i). Between car barriers shall be provided at a minimum according to the recommendations from RVAAC Chapter 3 to the extent possible.
 - ii). Vertical grab handles shall be provided for ease of access for all passengers.
- e). Emergency
 - i). An evacuation chair shall be provided in the cafe/lounge car.
 - ii). Egress plans for passengers who have mobility and visual impairments shall be presented by the Contractor for Amtrak alignment and approval during the design review process.
- f). Coach
 - i). Seating
 - (1) Accessible seating, transfer seats, wheelchair or mobility aid seating, and storage locations for mobility devices shall be provided in compliance with 49 CFR 38.125 (d).
 - (2) Mobility Aid Seating Locations shall be incorporated according to the recommendations from RVAAC Chapter 4, IV to the extent possible including clear space, number of seats and locations, and securement. Additionally, transfer seats shall be incorporated according to the recommendations from RVAAC Chapter 4, V to the extent possible.
 - (3) Seats shall be reconfigurable to account for a group of passengers using wheeled mobility devices. This shall be incorporated according

to the recommendations from RVAAC Appendix B, 2, to the extent possible.

- (4) Accessible seating locations shall be provided near but not necessarily adjacent to accessible restrooms. Passengers requiring accessible seating locations shall not be forced to always sit adjacent to restrooms as this provides an inequity for passengers to be subjected to restroom noises and smells.
- (5) Accessible seating shall be arranged such that two passengers, one using a wheeled mobility device and the other not using a device, can sit next to each other in at least one location in coach.
- (6) Accessible seating shall be arranged such that a wheeled mobility device user can select to sit on either the right or left side of the train based on lateral dominant strength of the passenger to the best extent possible.
- (7) Specific seating requirements for this fleet can be found in Chapter 11.

ii). Tables

- (1) Adjustable height workstation tables shall be provided in all accessible seating locations throughout the cars.
- (2) The adjustable height workstation tables shall range from 27" to 34" and should be presented to Amtrak during PDR.

g). Access to Amenities

i). Standards

- (1) General outlines and information regarding access to amenities within the train are outlined in 49CFR 38.111. The configuration of the fleet shall dictate which sections under 49 CFR 38.111 will apply.
- (2) In general, all controls for passenger comfort shall be provided in an accessible manner according to the recommendations from RVAAC Chapter 5, V to the extent possible. This includes all manner of controls, control locations, buttons, and door opening.

ii). Restrooms

- (1) Accessible restrooms shall be provided and equipped with all amenities listed in 49 CFR 38.123. This includes space for maneuvering and turning, height of all amenities from the floor, required grab bars, controls, doorways, and proximity to seating accommodations.
- (2) Restroom locations shall follow the quantity and location recommendations from RVAAC Chapter 4, VIII and Chapter 5, I, to the extent possible.

- (3) Specific ATR requirements for this fleet can be found in Chapters 11 and 17.

iii). Café/Lounge

- (1) The Café/Lounge shall be located along the accessible path of the train.
- (2) The Café/Lounge shall have an ADA service counter that is a maximum 36" tall.
- (3) The area adjacent to the ADA service counter shall have a turnaround circle for passengers using wheeled mobility devices to turn around and travel back to their seating location.
- (4) Accessible seating areas within the Café/Lounge car shall be incorporated according to the recommendations from RVAAC Chapter 5, IV to the extent possible.

iv). Miscellaneous

- (1) Designs shall incorporate accommodations and provisions for passengers of all sizes including larger passengers to fit in tight spaces such as restroom compartments, aisles, etc.
- (2) As provided in the Intercity Trainset (Airo) fleet, six (6) RVAAC recommended seating locations shall be provided within an accessible path of the Café/Lounge car with two (2) being provided in each car adjacent to the Café/Lounge car and two (2) being provided in the Café/Lounge car.
- (3) As an option, the Contractor shall provide provisions for up to four (4) RVAAC accessible seating locations in each car type which shall be modular in design which includes any restraints, adjustable height tables, call systems, outlets, reading lights and any associated wall panels.

29.5 Accessibility – Visual

a). Signage

i). Standards

- (1) Symbols, Signs, and Videos shall be incorporated according to the recommendations from RVAAC Chapter 2, IX, X, and XI to the extent possible.
- (2) Specific signage requirements for this fleet can be found in Chapter 11.

ii). Accessible Entrance

- (1) All locations equipped with accessible entrances onto the train shall be marked and indicated according to 49 CFR 38.113 (e).
- b). Braille
 - i). Where practical and appropriate, signage shall incorporate Grade 2 Braille and/or raised lettering to accommodate visually impaired passengers.
- c). Lighting
 - i). In addition to the lighting requirements for entrances listed in 49 CFR 38.119, lighting of other areas in the vehicle shall be considered. Lighting shall be incorporated according to the recommendations from RVAAC Chapter 2, V to the extent possible.
 - ii). Lighting shall be capable of being adjusted to less than 3000K in coach reading lights.
 - iii). Specific lighting requirements for these cars can be found in Chapter 13.
- d). Warning Alerts and Communications
 - i). Standards
 - (1) Visual warning, alerts, and public information shall be announced with a public information system that complies with 49 CFR 38.121.
 - ii). Route information
 - (1) Variable Message Signs (VMS) shall be incorporated according to the recommendations from RVAAC Chapter 2, II and VIII to the extent possible.
 - iii). Emergency Alerting
 - (1) Visual indication of emergency notification announcements shall be incorporated according to the recommendations from RVAAC Chapter 2, VI to the extent possible.
 - (2) Specific PIS requirements for this fleet can be found in Chapter 13.
 - iv). Call Buttons
 - (1) Visual indication that a call button has been depressed and the alert signal has been sent shall be incorporated according to the recommendations from RVAAC Chapter 2, VII to the extent possible.

29.6 Accessibility – Audio

- a). Hearing Assistive Technology

- i). As an option, cars shall incorporate the latest innovative technology for hearing assistive technology (inductive hearing loops, Bluetooth, etc.) as of Preliminary Design Review.
 - ii). Hearing assistive technology shall be incorporated according to the recommendations from RVAAC Chapter 2, IV to the extent possible.
- b). Warning Alerts and Communications
 - i). Audible warning, alerts, and public information shall be announced with a public information system that complies with 49 CFR 38.121.
 - (1) Route Information
 - (a) Audible announcements for Speech to Text shall be incorporated according to the ADA accessible guidelines and to the extent possible per the recommendations from RVAAC Chapter 2, III and VIII.
 - (2) Emergency Alerting
 - (a) Audible indication of emergency notification announcements shall be incorporated according to the recommendations from RVAAC Chapter 2, VI to the extent possible.
 - ii). Specific PIS requirements for this fleet can be found in Chapter 14.
- c). Call Buttons
 - i). Audible indication that a call button has been depressed and the alert signal has been sent shall be incorporated according to the recommendations from RVAAC Chapter 2, VII to the extent possible.

29.7 CDRLs

CDRL	Description	Due
CDRL 29-01	RVAAC Compliance Summary	NTP + 60 days

* End of Chapter 25 *

Amtrak Single Level Fleet Replacement

Technical Specification

30. High-Capacity Coach Cars

Revision 0

Table of Contents

30.1 Overview 30-1

30.2 Specification Changes 30-1

30.1 Overview

a). General

- i). The intent of this section is to identify any differing requirements from the previous chapters of this technical specification in relation to High Capacity Coach cars.
- ii). Passenger capacity shall be increased on the High Capacity Coach cars to accommodate higher ridership demand.
- iii). As stated several times throughout this specification, all car types shall be reconfigurable to accommodate other classes/types of service; however, for the purpose of these High Capacity Coach cars, Amtrak intends for the following additional car types to be included as part of the base contract:
 - (1) High-Capacity Coach Car
 - (a) Utilizing the same carshell design, a standard coach car with 2 entry doors per side. Seat pitch may be adjusted to maximize capacity with review and approval by Amtrak. The minimum seat pitch requirement is 37".
 - (b) Amtrak intends to utilize the same 2x2 seat design as the Standard Coach car listed throughout this technical specification.
- iv). Amtrak requests that any additional concepts to increase passenger capacity be proposed by the Contractor. Additionally, the Contractor shall propose additional modifications to the base scope of work for concepts that would be advantageous to Amtrak.

30.2 Specification Changes

a). Chapter 1: Scope

- i). Paragraph 1.6). is replaced by the following:
 - (1) Amtrak intends to have a High-Capacity Coach car that may operate with existing Amtrak equipment. Target capacities and requirements for this car type will be outlined in additional section(s) within this chapter.
 - (2) The High-Capacity coach car shall have 2x2 seating with a minimum seat pitch of 37" unless otherwise approved by Amtrak.
 - (3) The target capacities are outlined for each car type in Figure 30-1.

Figure 30-1; Target Revenue Capacities

Car Type	High-Capacity Coach
Coach Seats (2x2)	76
Standard Restroom	1
Accessible Restroom 60" turning circle	1
RVAAC Accessible Seating Location*	1*
Number of doors per car side	2
Seat Width	Minimum 20"
Seat Pitch	37"

- b). Chapter 6: Carbody
 - i). Paragraph 6.6.a) is modified by adding the following:
 - (1) The requirements for the B-End of the car shall apply to the A-end of the car to ensure that the High-Capacity car type has 2 side loading doors per each side to expedite boarding and alighting from the vehicle.
- c). Chapter 11: Interior
 - i). High Capacity Coach Seating will be identical to Café/Lounge Car Seats described in Chapter 11.
- d). Chapter 12: Door Systems
 - i). Paragraph 12.1.b) is modified by adding the following:
 - (1) The side entrance doors for the High-Capacity car shall be located on the A and B-end of the car.

* End of Chapter 30 *

Amtrak Single Level Fleet Replacement

Technical Specification

31. Sleeper, Diner, and Bag Dorm Cars

Revision 0

<RESERVED FOR FUTURE USE>

Table of Contents

31.1	Overview	31-1
31.2	Mock-up Requirements	31-1
31.3	Sleeper	31-4
31.4	Baggage/Dorm	31-9
31.5	Diner.....	31-10
31.6	Car Arrangements	31-11
31.7	Interior Module Design Requirements.....	31-18
31.8	Sleeper Interior Design	31-23
31.9	Baggage / Dorm Interior Design.....	31-93
31.10	Diner Interior Design	31-101
31.11	Interior Surface Materials and Colors.....	31-115
31.12	Floor Coverings.....	31-116
31.13	Window Shades and Tracks	31-120
31.14	Signage and Labels	31-121
31.15	Passenger Information Racks	31-121

31.1 Overview

- a). It is Amtrak's intention to develop car types that would become the replacement fleet of the Viewliner I and Viewliner II cars that are operated on the single level long distance network.
 - i). The Viewliner I and II fleets primarily consist of single level Sleepers, Diners and Bag Dorm cars that are coupled to coach and café/lounge cars to serve our Eastern long distance routes.
 - ii). These option cars would be intended to be interoperable with the coach and café/lounge cars manufactured in the base order of this contract.
- b). The requirements listed in Technical Specification #1132 are generally intended to be met with these option cars to the best extent possible as Amtrak would strongly prefer to have the same design for sleeping and dining accommodations, where similar, to increase the commonality between all of the cars in the Amtrak network.
- c). The cars shall be designed utilizing Universal or Trans-generational design, addressing the needs of a broad range of passengers.
- d). In the event that the business needs change over time, these car types shall be designed to be reconfigurable to include accommodation types that may meet a new direction for Amtrak.

31.2 Mock-up Requirements

- a). The Contractor shall present for Amtrak review and approval, full size mockups of designated areas which follow the general requirements outlined in Chapter 3 of this technical specification. The following requirements are in addition to the requirements outlined in Chapter 3.
- b). Soft Mock-ups
 - i). Soft mockups shall be used to convey initial concepts and the general arrangement of equipment in full size. Such mock-ups are generally not "durable". Where seated human interface is required, a weight supporting component shall be constructed. Soft mockups shall be neutral in color and shall not represent specific color schemes. Colors shall be used only to represent the range of motion of components. Soft mockups shall include all appropriate simulated signage. The operating envelope of each moveable component shall be defined. All component deployment positions shall be demonstrated.
 - ii). Soft mockups shall be made of inexpensive, easy-to-work materials such as plywood, wood battens, cardboard, foam core panels, and foam plastics. Alterations shall be simple through use of a saw or knife. Components shall be secured with nails, tape, or adhesive.
- c). Hard Mock-ups

- i). Hard mockups shall be full size, durable and shall be used to convey final concepts and equipment arrangements. All components shall be operable to the extent that their operating mechanisms, controls, and range of operation can be demonstrated unless otherwise approved. Lighting shall be fully functional. Colors and tactile surfaces of materials shall be representative of the finished product. All signage shall be provided in production form and location. Actual components and finishes shall be used where practical.
 - ii). To validate the design, actual crewmembers as well as management and invited guests (such as the accessibility community) will review the designs, especially for ergonomics. This shall include sitting on passenger seats of each type and the toilet seats. Accordingly, the mockup must be sufficiently durable to tolerate this handling without consequential damage. Maintenance access will also be evaluated.
 - iii). After review and comment, mock-ups shall be modified as required and re-evaluated. This process shall continue until Amtrak approves the design. Manufacturing drawings shall then be developed from the approved mockup.
- d). Required Mock-ups of these cars
- i). Mock-ups of portions of the car interiors are required as follows. The Contractor shall submit preliminary drawings of the mock-ups for approval. Where wheeled mobility device access is required, the interior mock-ups shall be able to demonstrate the compatibility of the interior arrangement and appointments with wheeled mobility devices. Mockup activities for the basic Dining car interior shall be coordinated with those of the food service installation as identified in Chapter 16. To the extent practical, modules or systems that are inter-related by function and/or space shall have mockup joint demonstration and review. The Contractor shall provide auxiliary mockup evaluation equipment as necessary to, for example food serving trays and dinner ware for Diner car mockup review, standard Amtrak carry-on and checked baggage, and bicycle for Baggage/Dorm car mockup review. The following mockups are required:

Item #	Area	Soft Mock-up Req'd	Hard Mock-up Req'd
	Sleeper/Bag Dorm		
1.	Vestibule area, with side, body end and collision post doors	X	
2.	Roomette, complete (walls, doors, ceiling, seats, berths, functional lighting, windows, furnishings, sinks, grab handles, etc. Needs real seats, and to be sufficiently robust to	X	X

	allow climbing into berths, etc to evaluate detailed ergonomics of room in all modes of operation)		
3.	Solo Suite, complete (walls, doors, ceiling, seats, ottoman, functional lighting, windows, furnishings, sinks, grab handles, divider, etc. Needs real seat, ottoman, and be sufficiently robust to evaluate detailed ergonomics of suite in all modes of operation)	X	X
4.	Bedroom and toilet/ shower & vanity, complete (walls, doors, ceiling, seats, berths, functional lighting, windows, furnishings, sinks, grab handles, ladders etc. Needs real seats, and to be sufficiently robust to allow climbing into berths, etc. to evaluate detailed ergonomics of room in all modes of operation)	X	X
5.	Accessible bedroom with restroom annex, complete; passage from vestibule (walls, doors, ceiling, seats, berths, functional lighting, windows, furnishings, sinks, grab handles, ladders etc. Needs real seats, and to be sufficiently robust to allow climbing into berths and moving wheeled mobility device within room, etc to evaluate detailed ergonomics of room in all modes of operation; also ADA path from vestibule)	X	X
6.	Attendant room area showing indicator panels only	X	
7.	Public restroom (walls, door, ceiling, toilet seat, controls, functional lighting, furnishings, etc. Needs structural toilet seat, and to be sufficiently robust to allow sitting, etc to evaluate detailed ergonomics of room in all modes of operation)	X	X
8.	Public shower (walls, door, ceiling, toilet seat, controls, functional lighting, furnishings, etc. Needs structural seat, and to be sufficiently robust to allow sitting, etc to evaluate detailed ergonomics of room in all modes of operation)	X	X
9.	Transition hallway between bedrooms & roomettes	X	
10.	Beverage Station & relation to hallway	X	
11.	Electric/ switch locker	X	
12.	Trash receptacles (each type)	X	X
13.	ADA accessible path – transition from vestibule to ADA room	X	

CONFIDENTIAL — DO NOT DISTRIBUTE

14.	Overhead water piping enclosure and access		X
15.	Hallway access to water and waste piping		X
16.	Baggage loading doors and adjacent luggage racks both sides of area on both sides of car	X	X
17.	One complete baggage rack section with moving shelves & bike racks	X	X
18.	Doors and relation to baggage racks on both ends of baggage room (to simulate loading real-sized cargo)	X	
19.	Transition from Dorm to Baggage		X
	Diner		
20.	Accessible seating area, wheeled mobility device storage and accessible path through body end door	X	X
21.	Dining room to show each type of booth/ table and each unique part of the pathway through the room (walls, doors, ceiling, seats, functional lighting, windows, furnishings, etc. Needs structural seats & tables, and to be sufficiently robust to allow sitting in each type of booth, etc. to evaluate detailed ergonomics of room in all modes of operation)	X	X
22.	Service areas that are outside galley	X	
23.	Trash receptacles (each type)	X	
24.	Hallway past galley, including galley entrances at both ends	X	
25.	Stocking door area, both sides, showing door swing, cart paths	X	X
26.	Galley	X	X

- e). The Contractor may request a waiver for specific mockups if the proposed design is the same as a previously built car and/or that car can be used as a mockup. If Amtrak reviews the existing car/vehicle and does not approve its use as a mockup, the Contractor will prepare the mockup as specified.

31.3 Sleeper

a). Overview

- i). The car interior will reflect its first-class status. The design will balance modern, clean shapes with finishes indicative of first class with blends of wood, metal, stone, patterns and solids. Utility, form and function will be appropriately balanced.

b). Vestibule and Passage

- i). Entry/exit to the car from train side are from the single vestibule located at the B-end of the car. It is equipped with manual side doors, trap door and folding steps.
- ii). A collision post door is provided to seal the vestibule from weather when it is oriented at the end of the consist.
- iii). Power operated body end doors at both the vestibule and blind ends of the car provide access to the car interior.
- iv). Ceiling lighting in the vestibule illuminates not only the vestibule, but also the station platform outside the car, meeting ADA requirements.
- v). Ceiling lighting is provided along the passageway, as well as low-location exit path marking.
- vi). Hinged ceiling panels shall act as cover for the overhead water distribution piping.

c). Electric/Switch Locker

- i). The car electric/switch locker shall be located within the car interior. It shall contain crew temperature and lighting controls as well as circuit breaker panels and electrical equipment.
- ii). The car PA system shall be located in close proximity to the electric/switch locker.

d). Emergency Tools

- i). The cars shall contain an Emergency Tool Locker recessed into the exposed face unless otherwise approved by Amtrak to meet the configuration of other car types.

e). Common Room Features

- i). All rooms are equipped with both upper and lower windows to the best extent possible, which provide natural light, visibility to the outside and an airy feel to the sleeping accommodations. In addition, both the sliding door to the passage, as well as the adjacent wall dividing the room from the hall, is provided with a window to enhance this feeling.
- ii). Adjustable window shades are to be provided on all windows, to control exterior light as well as provide privacy.
- iii). A folding, retractable table is provided adjacent to the window to provide passengers a work surface as well as a location for in-room meals.
- iv). Room lighting includes ceiling light (with night light), an area light over each seat, mirror light and individually controlled LED reading lights for each seat as well as the upper berth.

- v). An attendant call system is provided to summon the car attendant, as well as providing a wake-up buzzer.
 - vi). All rooms and car types with passenger facing outlets shall incorporate 120VAC receptacles with USB or most current outlets that reflect the latest technology at time of the car type being designed.
- f). Accessible Bedroom
 - i). This room is an enlarged form of the bedroom, with sufficient space provided for maneuvering a wheeled mobility device within the room including a 60" turning circle in the room area and attached accessible restroom with a 60" turning circle for maneuverability around the restroom.
 - ii). The wheeled mobility device user may remain in the wheeled mobility device, or transfer to the room seating and store the wheeled mobility device in a dedicated storage area inside the room.
 - iii). The attached restroom is accessible and includes a toilet as well as sink and vanity. The room shall also function as an accessible shower. All details shall meet the latest regulations of the CFR, ADA and to the best extent possible, the recommendations from RVAAC
 - iv). The accessible room entrance shall be located directly in line with the vestibule body end door, for easy access.
- g). Bedrooms
 - i). The car should include bedrooms; each equipped with a vanity/sink with mirror unit adjacent the combined toilet/shower room.
 - ii). The two in-line sofa type seats fold down to form the lower berth, while the upper berth is stored against the ceiling and hinged downward for use.
 - iii). A folding occasional seat is also provided. An enclosed closet is provided for hanging coats.
 - iv). The two rooms can be en-suited through the use of a crew-enabled retractable sliding door.
 - v). The toilet/shower room includes an overhead light, equipped with a night light.
 - vi). The mechanism to convert the room into the sleeping arrangement shall not require more than 10 lbf.
- h). Roomettes
 - i). The car should include double-occupancy Roomettes.

- ii). The two facing seats fold down to form the lower berth, while the upper berth is stored against the ceiling and lowered vertically for use.
 - iii). As an option, each room is equipped with a folding sink with hot and cold running water and a mirror with light.
 - iv). Luggage storage is provided above the hallway ceiling (within the room), with some additional space for low profile items below the seats.
 - v). An open hanging area is to be provided for coats and jackets.
- i). Attendant Room
 - i). This is essentially a roomette, assigned permanently to the car attendant.
 - ii). In addition, it also incorporates an attendant call/ smoke-fire detection/annunciator panel used to identify the site of a passenger requesting service.
- j). Solo Suite
 - i). The car should include Solo Suites.
 - ii). The Solo Suite is a unique, single passenger compartment that provides enhanced comforts over the roomette.
 - iii). The Solo Suite includes a seat that converts to a sleeping berth and a working table on the opposing side.
 - iv). A padded footrest lies under the opposing side that is offset to allow the nesting feature to work with the opposite Solo Suite compartment.
 - v). When the seat is converted to 'bed mode', the footrest forms the foot end of the bed.
 - vi). A mirror image Solo Suite is installed adjacent to the Solo Suite compartment.
 - vii). An additional feature of the Solo Suite compartments shall be the ability to combine two of the Solo Suites for face-to-face discussions but can then be closed for privacy and sleeping privately.
 - viii). The dividing panels shall be easily opened and stored when the two compartments are twinned but can easily be closed and locked when privacy is desired.
 - ix). The partition panel shall be attached in a way that prevents one passenger from being able to remove it without the opposing passenger's permission and shall be free of any rattling.
- k). Public Restrooms

- i). The car shall be equipped with modular unisex restrooms designated for use by passengers accommodated in the roomettes and solo suites.
 - (1) Fixtures and Features
 - (a) Each restroom shall include the following:
 - (i) Toilet
 - (ii) Vanity with integrated mirror
 - (iii) Sink with hot and cold water supply
 - (iv) Waste receptacle
 - (v) Baby-changing table
 - (2) Standard amenities
 - (a) Restrooms shall be equipped with the following consumable and hygiene-related amenities:
 - (i) Hand Soap Dispenser
 - (ii) Toilet Paper Dispenser
 - (iii) Toilet Seat Cover Dispenser
 - (iv) Paper Towel Dispenser
 - (v) Sharps Receptacle
 - (vi) Feminine Hygiene Product Receptacle
 - (3) Lighting Controls
 - (a) Overhead (ceiling) light and integrated mirror lighting shall be provided.
 - (b) An emergency call button shall be installed within each restroom for emergency or service requests.
 - (4) Occupancy Indication System
 - (a) The door latch mechanism shall incorporate a switch to activate a "Toilet Occupied" indicator light, visible both inside and outside the restroom.
 - (b) The external indicator light shall be positioned in a conspicuous location to prevent unintended operation of the latch while the restroom is in use.

l). Public Shower

- i). A public shower is provided for use by the roomette and solo suite occupants. The shower unit is divided into two areas, the shower stall and changing area.
 - (1) Changing Area Features
 - (a) Mirror
 - (b) Coat Hooks
 - (c) Shelf
 - (d) Storage Compartments for Dry and Used Towels
 - (e) Fixed Seat
 - (2) Shower Stall Features
 - (a) User-adjustable Water Temperature Controls
 - (b) Hand-held Shower Wand
 - (c) Fixed Seat
 - (d) Raised threshold at the entrance to contain water within the shower stall.
- ii). A door shall separate the shower and changing areas to enhance privacy and water containment.
- iii). Lighting provisions shall include overhead illumination in the shower area and mirror lighting in the changing area.
- iv). The room door latch incorporates a switch to activate an “occupied” light both inside and outside the room. The light shall be located in a conspicuous location such that it precludes the passenger working the latch while the shower is occupied.
- m). Beverage Station
 - i). A small, self-service beverage station is provided where passengers can obtain juices, ice, coffee & hot water from the coffee maker.
 - ii). The area includes a sink with hot and cold-water faucets.
 - iii). A trash receptacle is provided below, with dry storage above and below.
- n). Linen/Towel Locker
 - i). A linen/ towel locker is provided to store spare bedding, shower towels and other miscellaneous car supplies.

31.4 Baggage/Dorm

a). Baggage Room

- i). The baggage room occupies the A-end half of the car and is divided from the dormitory area with a reinforced hinged locked door to provide security to the room. Likewise, a lockable-hinged collision post door is provided at the blind end of the room to access an adjacent car. Outside access is provided by hinged side loading doors (equipped with a ladder for access from low-level platforms) located near the center of the baggage area on both sides of the car.
- ii). Provided in 8 sections, folding tubular luggage racks are provided along both sides of a central aisle. Under the racks, a raised perforated platform places luggage slightly above floor level to keep it dry, etc. These platforms are typically down but shall be hinged and foldable against the side walls. In each section, two robust tubular racks fold outward from the wall (similar to the Viewliner II) to accommodate luggage of varying sizes, or if retracted, to expose bicycle racks, two per each rack section. All folding devices shall be secured by passive latches, which cannot be accidentally deployed. Dividers are included between the rack sections to compartmentalize cargo so it does not shift. The side loading doors have fixed windows in the upper half of the door panel. Ceiling lighting is provided. The room has limited heating to maintain the room to above 50°F and limited cooling to keep the room under 80 degrees.
- iii). One Gun Case Module (GCM) shall be provided in the baggage room. The Gun Case module shall be McMaster Carr part number E.33.54.601. The GCM shall Measure approximately 78" H x 48" W x 24" D. The final arrangement of the GCM and the application to the car will be submitted to Amtrak for review and approval during the design review process.

b). Dormitory Area

- i). The Dormitory Area of the car is essentially a simplified version of the Sleeper. It includes the same B-end vestibule, body end door, electric/switch locker and emergency tools. Likewise, the center aisle is similar, with up to nine (9) roomettes or some combination of Solo Suites and Roomettes located along both sides of the car. These room types may be utilized by on-board personnel to the maximum extent possible.
- ii). The roomettes and Solo Suites shall be identical to those in the sleeper.
- iii). The car is likewise equipped with two (2) public unisex restrooms and one (1) public shower, similar to the sleeper. It also incorporates a linen/towel locker as in the Sleeper car.

31.5 Diner

a). Overview

- i). The car interior will reflect the car's first-class status. Similar to a restaurant, the car will offer a high-quality environment that consumers expect, punctuated by the charm of dining by rail. The colors, materials and finishes will be maintainable and functional without sacrificing quality. The car is divided into two basic areas: dining room and galley.
- b). Entrance and Passage
 - i). Passenger entry into the diner is via the power operated body end door located at both ends of the car. There is no vestibule. The car shall be accessible throughout unless otherwise approved by Amtrak, with compatible table seating adjacent the car end next to the Sleeper allowing the passenger to remain in the wheeled mobility device or transfer to transfer seat.
- c). Dining Room
 - i). The dining room is intended to seat at least 46 passengers. The dining room features a high ceiling space with both upper and lower windows unless otherwise approved by Amtrak. Four person booth type table seating is provided along both sides of a central aisle, allowing seating in groups of up to 4 at a table. At least one (1) wheeled mobility device accessible table shall provide seating for a minimum of 2 persons and shall be adjustable in height similar to the requirements for the work station tables described previously in the technical specification. Lighting is provided by indirect overhead as well as scone lighting, in addition to low-level emergency path marking along the floor.
- d). Service Area
 - i). A service area is provided adjacent to the galley for locating a Point-of-Sale/ cash drawer system, counter and PA station. Storage cabinets shall also be provided.
- e). Galley
 - i). The galley, equipped for cart-based stocking, occupies about one half of the car length in a similar fashion as the Café/Lounge car. Servers enter the galley from a manual lockable door at the dining room end and crew has access from the far end via a lockable door. Outside access, for food stocking is provided by hinged side loading doors (equipped with a ladder for access from low-level platforms) located near the center of the area on both sides of the car.

31.6 Car Arrangements

- a). Area Arrangement Flexibility/ Modularity
 - i). The basic car interior shall be standardized to the greatest extent possible and shall be capable of having installed in it a limited number of interior variations.

b). Sleeper

i). Accommodation types:

- (a) Roomettes
- (b) Solo Suites
- (c) Bedrooms
- (d) Accessible Bedroom
- (e) Attendant Room

ii). Arrangement

- (1) Single vestibule at B-end of car which shall be accessible
- (2) Manual Side doors, diaphragm, body end door and path to Accessible Bedroom
- (3) Accessible Bedroom with adjoining accessible restroom/ shower
- (4) Bedrooms, (double occupancy) with Toilet / shower room, vanity & sink
- (5) Roomettes, (double occupancy)
- (6) Solo Suites
- (7) Public unisex restrooms
- (8) Public shower
- (9) Beverage Station (Coffee, hot water, ice, juices, etc.)
- (10) Linen locker
- (11) Electric/ switch locker
- (12) Emergency tools compartment

c). Baggage / Dorm

i). Accommodation types:

- (a) Roomettes
- (b) Solo Suites
- (2) Baggage Capacity:
 - (a) Center aisle, with 3 tiers of shelves along each sidewall

ii). Arrangement

- (1) Single vestibule at B-end
- (2) Roomettes and Solo Suites, (single occupancy)
- (3) 2 – Public unisex restrooms
- (4) Public shower
- (5) 1 – Linen locker
- (6) Electric/ switch locker
- (7) Emergency tools compartment
- (8) Baggage room at A-end of car
- (9) Side loading doors both sides of car with proper entry from low level platforms

d). Diner

i). Capacity Targets

- (1) Dining Seating Capacity: 46

ii). Arrangement

- (1) A-end of car ADA accessible
- (2) Accessible seat at A-end
- (3) Booth seating at tables with seating for 4
- (4) Side galley loading doors both sides of car
- (5) Service area with Point-of-Sale
- (6) Galley (cart-based, full service) –
- (7) Electric & switch lockers
- (8) Emergency tools compartment

e). Floor

i). Concerns

- (1) Plymetal, plywood, diamond tread metal and honeycomb panels are prohibited for use in floor panels.

- (2) The material shall be non-vermin supporting and shall not rot nor corrode. The requirement of this program is to install a flooring material that will last the life of the car.
 - (3) Basic floor panels shall be Baultar Abrastop Foam or an approved equal product, unless otherwise specified.
 - (4) The Contractor shall explain, for Amtrak approval, how the design and installation of the floor and car interior will prevent water or other fluids commonly seen in the car, from passing through the flooring and entering into the car structure below.
- ii). Installation
- (1) The floor and its installation shall meet the following waterproofing requirements:
 - (a) No water can ever enter the space between the floor and the insulation of the sub-floor space
 - (b) The floor shall be waterproof
 - (c) The joint between the floor and the car sidewalls cannot admit water
 - (d) The joint between the floor and the side door & end door thresholds cannot admit water
 - (e) Joints between panels and flooring seams shall be sealed in a manner to last for the life of the car.
 - (f) Water that enters anywhere in the vestibule area, food stocking door area or baggage room loading doors has no path by which it can get under the floor in that area or main floor.
 - (g) Water that enters anywhere in the vestibule or blind end areas has no path by which it can get under the adjacent room floor pan (such as restrooms, shower, etc.)
 - (h) There shall be no "gutter areas" anywhere in the vestibule or entrance areas, so that the surface of the finish surface of the floor or flooring on top of it is never higher than the area surrounding it, other than entrance door thresholds. This is to prevent having places where water can collect and potentially seep under the flooring.
 - (i) Water that enters anywhere at the body end doors has no path by which it can get under the floor.
 - (2) In the dining car galley, the junction between the horizontal floor and the vertical walls shall have sanitary corners. Floor drains shall be provided at a minimum of two points along the length of the galley.

(3) LLEPM Tracks

- (a) Tracks for installation of LLEPM (low level emergency path marking) shall also be provided on the floor, in accordance with Chapter 13. To the extent possible, the same arrangement shall be used on all car types.

f). Bulkheads

- i). Bulkheads dividing the car shall be constructed for durability. All joints shall be sealed, using appropriate sealing materials. Fasteners shall not extend from the wall panels but countersunk to be flush with the wall panels.
- ii). The bulkhead shall meet the structural strength required in APTA RP-C&S-006-98.
- iii). Panels shall be of phenolic composite sandwich design and construction. Panels shall have a dense phenolic composite edge machined smooth and free of sharp edges and burrs. Like panels shall be identical. Edges and corners shall have generous radii. Finished surfaces shall be decorative laminate, Schneller G20002T or high pressure laminate. Amtrak shall reserve the right to choose material it deems appropriate for the application. Provision for textile wainscot panels or sections shall be included. Panels shall include stainless steel kick panels equal in height to the sidewall heater grills. Kick panels shall wrap the edges of the passage/ aisle side edge of the panel. Bulkheads shall be designed so that decorative surfaces can be changed at overhaul without damaging the substrate. Alternate panel construction will be considered where appropriate.
- iv). Sealed door pockets shall be provided on both ends of the car to accommodate the body end door leaf when it is open. Access from inside the car shall be provided to easily service the following:
 - (1) door operator and controls
 - (2) door umbilical cord
 - (3) connection between door operator & door leaf
 - (4) door track for adjustment.
- v). Hinged accessible panels shall be provided to service these items, but when closed, the gasketed panels shall seal the pocket from the car interior. Fasteners shall be captive quick-release, or a limited number of machine screws, engaging weld-nuts; sheet metal screws shall not be used. It shall not require removal of numerous screws to gain this access.
- vi). To keep the number of fasteners low, these service panels shall be kept as small as possible while still allowing access to the necessary items

requiring access. The gaskets shall be protected from crushing through the use of metal-to-metal stops incorporated around the mounting fastener holes.

g). Electric / Switch Locker

- i). The Switch and Electric Lockers shall be located in the B-end of the car, just inside the body end door. On the sleeper and bag/dorm, the switch locker adjoins the electric locker on the side, while on the diner this locker is to the left side of the body end door. The locker enclosure shall be fireproof or be lined with fire-blocking material. The substructure shall be robust to support the numerous heavy electrical panels, etc. located within the locker. The door and frame shall be robust due to frequent use and rough treatment. The electric locker door shall be secured with a coach key latch, while the switch locker is accessed with a pencil latch with door pull and labeled in compliance with Amtrak specifications # 696 & 697. When the door is opened, the locker service lights shall be illuminated by the action of a limit switch. The locker doors shall be hinged to open so as to not block the body end door opening into the car when open.
- ii). The passage side of the electric locker with the door provides a mounting for the following:
 - (1) B-end emergency fan switch.
 - (2) B-end body end door cutout switch.
 - (3) B-end conductors emergency brake valve (**Note:** exhaust of valve must not direct onto electrical equipment in the locker, so as to avoid blowing water onto it when valve is activated).
 - (4) PA unit (sleeper and bag/dorm only)
 - (5) Fire extinguisher enclosure
 - (6) Smoke Detector main display panel and controls, behind a transparent door, accessed with a coach key
 - (7) Waste system status
 - (8) System status indicator panel
- iii). The electric locker shall include a metal pocket or rack to hold the car defect report book, which is approximately 9" x 11" x 2" thick. Likewise, a metal surface shall be provided for the FDA inspection form, stickers, etc. The surface must be smooth to allow pasting up maintenance forms i.e. extermination.

h). Lockers

- i). General Features

- (1) Lockers of various types are located through the cars to provide storage and enclose equipment. Unless specified otherwise, all lockers shall be of panel construction with substructure as appropriate to support components. Panel construction shall be the same as bulkheads, when transverse walls serve as bulkheads. External longitudinal walls shall be of the same construction as the bulkhead walls except there will be no wainscoting. Door panels shall have the decorative laminate wrapped and secured over the edges or terminated with embedded trim extrusions. Alternatively, panels may be constructed of honeycomb or plymetal panels, subject to Amtrak approval. All edges and corners shall be rounded in a generous radius. The door shall be attached using a full length, heavy duty, stainless steel piano hinge. The direction of door swing shall be selected to avoid blocking the car passage when the door is open; likewise, to avoid other doors colliding with them as those close/ open.
 - (2) The door shall be secured closed with a pencil latch, J.L. Howard 2069, and escutcheon 2069-7. The door pull shall be J.L. Howard 2336. The keeper shall be wear resistant (not aluminum) and secured to the door frame on material that will not bend from usage. For lockers equipped with a coach key lock, this shall be J.L. Howard # 2921 / AMMPS # 24 180 50023, with escutcheon.
 - (3) Tapping pads or equal shall be provided where hardware is secured to the door or door frame, to ensure the attachment will remain tight for the life of the car. Sufficient adjustment shall be provided to compensate for manufacturing tolerances, so the latch/ lock bolts will engage properly with the keeper.
 - (4) Doors shall include resilient bumpers to cushion closing as well as to prevent rattling from train motion under all train operating conditions at all authorized speeds.
 - (5) Doors shall be labeled in accordance with Amtrak specification # 697.
- ii). PA Unit Locker
- (1) The PA unit, mounted within its enclosure, recessed into the wall, shall be located in the electric locker of Sleeper and Bag/ dorm cars and service area of the diner. A labeled, hinged cover, secured with a robust paddle latch shall cover the unit.
- i). Trash & Recycling Receptacles
- i). Trash and Recycling Receptacles shall be provided on each end of each car type in conspicuous locations so as to encourage passenger/crew use. They shall meet all FDA and NSF requirements for trash containers and their materials. Two separate openings and respective bins shall be provided for trash and recyclables unless otherwise approved by Amtrak. If possible, these should be side-by-side in a row. To the extent possible, these receptacles will be designed to accommodate the Amtrak standard trash container, per Amtrak drawing C-96-7591. The

receptacles shall be boldly labeled with an intuitive icon for type of trash, in accordance with Amtrak specification # 697. The inside of each trash receptacle door shall be permanently labeled with the Amtrak part number of the container required for that space. The locker shall include appropriate brackets and/or guides, etc. to properly index the trash containers with the openings, and as required, to keep them upright. These devices shall be rounded, etc. to protect staff handling the containers or servicing the end door from injury.

- ii). General area trash capacities should follow the same as listed in the Interiors chapter unless otherwise approved by Amtrak.
- iii). The locker enclosure shall conform to the requirements in this technical specification, with the additional requirement that the walls & door material be fireproof or be lined with fire-resistant material. The locker shall use as few joints as possible in fabrication; they shall be permanently sealed against moisture and vermin. The inside of the trash locker shall be easy to clean, with large radius sanitary corners and all joints sealed for good sanitation and to meet FDA requirements. Visible hardware and fasteners should be minimized to aid cleaning, reduce build-up of contaminants, and provide for pleasing aesthetics. Easy to clean trash guides shall be provided on the sides and back of the locker to prevent trash and liquids from getting between the container and locker wall. A trash guide will be provided on the inside of the locker door as well.
- iv). The lockers shall be equipped with a hinged self-closing door trash flap for inserting trash. This flap shall be as wide as possible. It shall be possible to open the trash flap by pushing against the vertical surface and further provide for opening without touching the vertical surface. (Amtrak will provide the design principle as used on other vehicles). If possible, the flap should be attached to the locker top surface rather than a door-within-a-door concept. Spring tension of a stainless steel spring should prevent the door from swinging/ banging as a result of train motion.
- v). The trash locker container access door shall be secured closed with a pencil lock.

31.7 Interior Module Design Requirements

a). Overview

- i). The sleeper and bag/ dorm car type interior shall be constructed primarily of modules, including but not necessarily limited to:
 - (1) Accessible bedroom with restroom/ shower
 - (2) Bedrooms with toilet/ shower and vanity
 - (3) Roomettes

- (4) Solo Suites
 - (5) Public shower
 - (6) Public restrooms
 - (7) Hall and Passage Ceilings
 - (8) Electric & Switch Locker
 - (9) Linen locker
 - (10) Misc. Lockers
 - ii). The concept is to preassemble the modules as much as possible off-car and bring a nearly complete assembly onto the car for installation by the Contractor, as opposed to erecting it inside the vehicle. The passenger car shell will be provided with large “plug door” openings on each side of the car, specifically to install these modules unless otherwise approved by Amtrak.
 - iii). The modules shall be installed in a prepared carbody: thermal insulation in place, floor installed, HVAC air ducts, wire ducts/ conduit, etc. installed. The modules may be installed complete or in sections as agreed upon with Amtrak.
 - iv). Amtrak has been using FRP modules in various forms since 1985 and as such has the most industry experience with successful and failed concepts in modular construction. Amtrak will freely share this experience with the Contractor and allow access to actual modules whenever possible. Amtrak also reserves the right to approve or disapprove any portion of modular design and construction.
- b). Concept
- i). The shell itself shall include:
 - (1) All 4 sides of the room
 - (2) Room ceiling
 - (3) Lockable Room door
 - (4) Hall/ passage side of the room
 - (5) Hall/ passage ceiling adjacent the room
 - (6) Floor pans if appropriate to the room
 - ii). Each module shall be supplied with all components, unless otherwise specified, to make it completely functional. It shall be supplied completely assembled to the extent possible. Heavy items, such as the

upper berth, can be installed later, as appropriate, however, shall be supplied as part of the module kit.

- iii). To the extent possible, piping, wiring to the room junction box and components shall be mounted to the module in advance of module installation. Wiring shall be brought to a central junction box in the module. Piping shall be FDA approved flexible hose with braided stainless steel reinforced casing incorporating machine applied female flare fittings JIC or other approved flare. The water system shall be self-draining as part of the freeze protection system. Modular construction should allow a uniform product than “stick-built” as well as easier manufacture as all surfaces are exposed while on the module OEM shop floor.
- iv). Care must be taken, however to not “bury forever” components that may require access or replacement after installation, such as wiring or piping.
- v). Module attachment points and other important interfaces, such as piping, shall be located by fixtures, both for module construction as well and module installation on the carbody.

c). Design Requirements

- i). One module OEM shall be used to provide all the modules. The modules shall meet the following requirements:
 - (1) FRA rules and regulations
 - (2) FDA rules and regulations
 - (3) ADA (for Accessible areas)
 - (4) APTA: SS-C & S -006-98 (Attachment Strength)
 - (5) Amtrak Specifications:
 - (a) 352 (Flame & Smoke)
 - (b) 696 (Equipment Identification)
 - (c) 697 (Signage)
 - (d) 1132 (Long Distance Bi-Level Fleet Replacement)
- ii). The room arrangement and design shall achieve the following goals:
 - (1) All features shall be ergonomically located and easy to use
 - (2) Features and their controls shall be obvious
 - (3) Interior and equipment shall be durable
 - (4) Easy to clean/ sanitize

- (5) Rooms shall be odor-free
- (6) Equipment shall require little maintenance and be easy to service
- iii). Maximum Size of Modules
 - (1) Unless otherwise noted, module shell structures shall be of a size that will allow it to pass thru the carbody plug door opening with sufficient clearance to allow it to be properly maneuvered into position in the prepared carbody. Rollers, special tools and fixtures used for handling and installation shall be furnished by the module supplier to Amtrak.
- iv). General Construction
 - (1) The modules shall be of a fiberglass or approved equal construction utilizing an approved fire retardant resin system. Modules for a given room type shall be identical and employ as few subassemblies as possible. There shall be no visible mounting fasteners, except as approved, when the assembly is completed. In addition, there shall be no visible fasteners showing, except where deemed necessary for service/maintenance and/or to assure the longevity and reliability of the product.
- v). Component Interchangeability
 - (1) The bedroom, roomette, and solo suite amenities, such as sleeper seats, upper berth, folding table, armrests, etc., shall be directly interchangeable with and similar to those of the Amtrak Long Distance Bi-Level Fleet Replacement except as otherwise specified.
- vi). Structural Design
 - (1) Each interior module shall act as a single integral assembly capable of transmitting all module loads into the car shell structure at all attachment interface points. Panels, inserts and furnishings as well as all electrical wiring and piping within the unit envelope shall be supported by the unit itself.
 - (2) Components shall mount to auxiliary structure fastened to the carbody or embedded tapping plates, or be embedded in the FRP, whichever is appropriate. All attachments are subject to review and approval Amtrak design review.
 - (3) All materials and joint design shall be selected to prevent galvanic corrosion.
- vii). Tolerances
 - (1) Overall, external dimensions of each module shall be maintained plus 0.000, minus 0.125 inches. Attachment fitting and fasteners that interface with the car shell shall be within ± 0.030 ". The plan for addressing cumulative module tolerance buildup, both within the

module and also within the carbody shall be part of the design review process.

viii). Floor Attachments and Upper Attachments

- (1) Units shall be bolted in place using rigid and damped mounting devices as appropriate; all hardware to be supplied with unit.
- (2) Module design shall allow for 1/8 inch (nominal) packing at points where vendor supplied parts interface with the carbody, to prevent rattle and squeaks. Packing (shims), by design, shall be limited to .25 inch thick. Attachment design is subject to Amtrak approval.

ix). Room Interiors

- (1) The rooms shall present a modern, pleasing, warmly lit space and be free of sharp edges.
- (2) The room shell shall be constructed primarily of approved FRP materials with a high gloss gel coat finish on surfaces exposed to the public. The radii or corners, of wall to ceiling and wall to floor panels inside the room modules shall be a nominal one (1) inch. Where appropriate for sanitation, inside corners may have a greater radius. Where appropriate to accommodate assembly or aesthetics, corners may be .12" radius or less provided that the gelcoat thickness can be maintained and the part is appropriately reinforced. Joints between major FRP sub assemblies shall be bolted flanged joints with appropriate bonding / sealing material used at the joint. Stainless steel bolts and elastic lock nuts shall be used to clamp the components together.
- (3) Acoustical insulation and isolation techniques shall be applied to module panels to attenuate sound transmission between rooms. The rooms shall be free of any rattles and squeaks under all train operating conditions at all authorized speeds on any FRA class of track.

x). Floor Sealing

- (1) Great care shall be taken in design, manufacture and installation of the rooms and equipment to ensure fluids do not seep or wick under the module's flooring and between the sub-flooring & walls and car structure, from routine use, cleaning, maintenance, leaks and overflows. All floors and pipe connections, etc., shall be sealed internally to prevent liquids from leaking into the car sub-floor and insulation. This is to avoid sanitation and odor problems and minimize potential for sub-floor corrosion. Sealing design is subject to Amtrak approval.

xi). Maintenance Accessibility

- (1) Easy accessibility shall be provided for all items that require periodic maintenance and/or may require replacement. Access doors or panels

shall be secured using approved captive fasteners or locks. It shall be possible to remove these parts without damage to the individual pieces or adjoining components. Likewise, it shall be possible to renew any replaceable room component, whether mounted internal or external to the module, without the need to disassemble (excepting service panels) or remove the module from the car.

- (2) Access the interior of the HVAC supply ducts in the car side wall shall be provided for periodic duct cleaning. This may require the wainscot panels to be removable. The method to provide this access is subject to Amtrak approval.
- (3) Waste and water system design shall incorporate features that allow for straightforward access to water lines, drains and waste lines for routine maintenance, including clearing clogs and cleaning. Access points should be strategically positioned to minimize disruption to surrounding components and facilitate quick resolution of issues.

xii). Interfaces with Other Car Systems

- (1) Proper operation of the room modules requires integration of the following equipment with the overall car systems:
 - (a) HVAC: Ventilation, exhaust fan, heat
 - (b) Lighting: normal, standby and emergency
 - (c) PA: PA system
 - (d) Water, waste & freeze protection

31.8 Sleeper Interior Design

a). Overview

- i). The function of the sleeping car is to provide comfortable, first class, daytime seating and night sleeping accommodations in individual rooms for one or two people, with roomettes, solo suites, bedrooms with toilet/shower and vanity and accessible bedroom with accessible restroom/shower. All rooms seat two passengers, in reclining sleeper seats adjacent an eye-level picture window, and a second window above provides extra light as well as night time viewing from the upper berth. The car also includes a public shower and two public restrooms, primarily for roomette and solo suite passengers. An attendant room identical in configuration to the roomettes, for the resident car attendant, is also provided.
- ii). The final interior dimensions and locations shall be developed during design review, with the aid of mockups.
- iii). The car rooms shall be of modular construction using common parts among all room types as much as possible.

iv). Sleeper Features

- (1) Vestibule
- (2) Trap door and folding steps
- (3) Collision post door
- (4) Side entrance door with hinged window
- (5) Powered body end door
- (6) Accessible bedroom (w room #)
- (7) Accessible bedroom restroom/ shower
- (8) Bedroom (w room #)
- (9) Bedroom toilet/ shower with vanity
- (10) Roomette (w room #)
- (11) Solo Suite (w room #)
- (12) Attendant room (w room #)
- (13) Public shower (w room #)
- (14) Public toilet (w room #)
- (15) Beverage station
- (16) Electric locker
- (17) Switch locker
- (18) Emergency tools
- (19) Fire extinguisher
- (20) Linen locker # 1
- (21) Trash receptacle(s)
- (22) PA unit
- (23) Consist signs (4)
- (24) Timetable holder
- (25) Attendant call annunciator panel
- (26) Emergency brake valve (2)

- (27) End door cutout switch (4)
- (28) Hand Grab
- (29) Door Latch
- (30) Trap Door Catch
- (31) Folding End Gate

b). Vestibule

- i). The final interior dimensions and locations shall be developed during design review, with the aid of mockups.
- ii). The vestibule functions to provide a pleasant experience for passengers when first entering the car from the outside as well as when passing between cars. This should be in contrast to the more traditional “all surfaces stainless steel” approach historically taken. The area provides access to the car from both low level, as well as high level platforms, employing the trap door and folding steps. Where not protected from impact from luggage and step boxes, etc, interior wall and ceiling surfaces should be non-stainless steel.
- iii). Opening/ closing of side entrance and collision post doors, as well as impact from the trap door and folding steps subjects the stops, hold-opens and latches to considerable impact loads. The materials to which these items are secured and the method of attachment shall be selected to endure the life of the car with little or no maintenance required.
- iv). The partition with the car interior shall be Phenolic panels faced with high pressure laminate and paint filled and sanded Rigidized stainless steel. The stainless steel shall extend from the floor to the height of the highest point of the horizontal grab handle or the trap door keeper, whichever is higher. Plymetal may be allowed if a construction method proving that no water can wick into the panel from any direction. Panels shall be constructed to allow recovering of the decorative laminate with a low-pressure laminate such as Schneller or 3M Dinoc in the future without removal or disassembly of the panels. The bulkhead dividing the vestibule from the car interior shall extend to the car roof and be airtight, isolating the attic above the vestibule from the rest of the car interior attic volume. This is to reduce hot/ cold air infusion from the vestibule into the larger ceiling volume.
- v). The car end sheet surface facing the vestibule shall be covered with high pressure laminate and Rigidized stainless steel the same as the opposite wall. Panels shall be constructed to allow recovering of the decorative laminate with a low-pressure laminate such as Schneller or 3M Dinoc in the future without removal or disassembly of the panels.

- vi). The ceiling shall be light weight honeycomb or phenolic, faced with high pressure laminate. An access hatch, with safety catch, shall be provided to access the vestibule "attic". The hatch shall be secured closed with T-handle drive ¼ turn vice-action draw-tite latches. Final drive for all latches will be determined during the design process but all will be common. Panels shall be constructed to allow recovering of the decorative laminate with a low-pressure laminate such as Schneller or 3M Dinoc in the future without removal or disassembly of the panels.
 - vii). Light fixtures shall be provided near each side entrance door to provide light not only to the vestibule itself:
 - (1) door threshold at high platform boarding and the platform area outside the door (for ADA)
 - (2) steps at low platform boarding and the platform area outside the door (for ADA)
 - (3) general vestibule lighting
 - (4) to charge the photo-luminescent signs
 - viii). A conductor signal button shall be provided in the ceiling near the opening of the diaphragm. The B-end body end door cutout switch shall be located on the upper right hand side of the end door frame.
 - ix). A water-resistant PA speaker shall be provided in the ceiling.
 - x). Two HVAC vents, to provide conditioned air to the vestibule, shall be provided in the bulkhead near the side door openings.
 - xi). Emergency operating instructions and labels shall be in accordance with Amtrak specifications # 696 and 697. The Contractor shall provide a drawing for Amtrak approval of the signage.
- c). Room Modules – General Design Requirements
- i). Sleeper & Bag Dorm Sleeping Rooms
 - (1) This section provides details of the accessible bedroom, bedrooms, roomettes, solo suites and attendant room's design requirements.
 - ii). Sidewalls
 - (1) Outside walls in passenger rooms will consist of the following, beginning at the floor level:
 - (a) Floor to heater grill transition cove
 - (b) Stainless steel floor heat grilles
 - (c) Side wall sleeper seat rail

- (d) Wainscoting panels
- (e) Slide-out tray table
- (f) Window masks
- (g) HVAC supply air diffuser
- (h) Ceiling
- (2) Floor to Heater Grille Cove
 - (a) Floor to heater grill transition coves will be provided for floor coverings to transition to the walls and provided an easily cleanable area. The design should also prevent debris, liquid spills and passenger misuse from entering unmaintainable cavities.
- (3) Floor heat grilles
 - (a) Perforated floor heat grilles, in accordance with Section 31.7, shall be provided over the left and right heater sections of the room floor heater installation of each passenger room. A matching blank center section shall be provided over the terminal area of the assembly.
 - (b) Like units shall be interchangeable. Grill corners shall be rounded shall be free of sharp edges. Joints between adjacent grilles shall be flush and in the same plane and remain that way for the life of the car. All heater elements shall be accessible without having to remove sleeper seats.
- (4) Side wall sleeper seat rail
 - (a) Side wall sleeper seat rails for mounting the bracket for sidewall end of sleeper seats are provided as part of the car structure.
- (5) Wainscoting panels
 - (a) Wainscoting shall be high pressure laminate. Panels shall be so designed as to allow for easy removal of the covering from the wall panels at overhaul without damage to the wall panels.
 - (b) Wainscoting panels may be contained in the overall window mask assembly.
- (6) Slide-out tray tables
 - (a) A slide-out tray table shall be provided adjacent the outside window, with heavy emphasis to reduce weight and improve maintainability. The method of securing the table to the car sidewall shall ensure the table can support without structural failure or permanent deflection, a downward force of 50 lbs

applied anywhere along the free end. Portable tables, described later in this section, shall be compatible with this table to provide a larger area, such as for in-room dining. Performance of this table shall be part of room FAI.

(7) Window masks

- (a) The outside wall surrounding the upper and lower windows shall be FRP or pressure formed thermoplastic faced.

(8) HVAC supply air diffusers

- (a) Two adjustable stainless steel or satin finished anodized or powder-coated aluminum Supply Air Diffusers shall be provided in the lower row of windowsills to distribute conditioned air to the room.
- (b) Each passenger/ crew room supply air diffuser shall be equipped with a sliding control to allow the room occupant to modulate the volume of conditioned air entering the room. Settings shall be retained against vibration so they do not slowly drift, whistle nor rattle. The controls shall not protrude to be a safety hazard.
- (c) The diffusers shall be easy to clean, without removal, for daily/ trip room cleaning, using a simple vacuum cleaner wand tool and shall avoid shapes that collect dust and dirt. For preventative maintenance, they shall be removable for thorough cleaning as well as providing access to clean the branch supply air ducting within the sidewall. Diffusers shall be identical so that any unit can be installed in any window sill opening without adjustment.

(9) Window shades

- (a) Adjustable window shades shall be provided that meets the requirements of Technical Specification #1132.

(10) Cove and Ceiling

- (a) The module shall extend from above the upper window, blending into the ceiling surface.

iii). Interior Walls

(1) Transverse room walls

- (a) Transverse room walls shall incorporate suitable structure to support items mounted from them, such as hardware for mounting upper berths, roomette seat headrest/ upper berth rests, upper berth grab bars, etc. The rooms and this structure shall be sufficiently rigid to provide the necessary alignment for smooth operation of the berths for the life of the car.

(2) Partition Walls

CONFIDENTIAL — DO NOT DISTRIBUTE

- (a) The corridor partition divides the passenger room from the aisle/hallway and incorporates the room access sliding door. The passenger room facing side of the partition shall match to room interior color, while the hallway side shall be faced with a combination of FRP and laminate per Section 31.11.
- (3) Room Sliding Entrance Doors and Latch
 - (a) A sliding pocket door with lockable latch shall be provided for each passenger room. The door shall be designed for low weight to provide ease of use but shall not compromise the stiffness and strength requirements for vibration attenuation and durability. The interior face shall be consistent in appearance with the room modules. The door itself and the partition door frame shall be of sufficient strength to not deflect, bend nor deteriorate from door slamming typical of normal car operation in the railroad environment.
 - (b) The door shall be suspended from an adjustable, self-cleaning, heavy duty overhead low friction track. The force to open or close the door shall not exceed 10 lbf, once the détent is overcome. The track rollers shall be sacrificial to the track for wear. The door will be stabilized at the threshold by an adjustable, self-cleaning guide at its leading edge only. A 0.50-0.75" gap shall be provided at the bottom of the door as a path for HVAC return air to exit the room.
 - (c) An approved détent shall be provided to keep the door in the open position during train motion under all train operating conditions at all authorized speeds on any FRA class of track. Both track and détent shall be able to operate over 5 years maintenance cycles without adjustments or maintenance required, however, both shall be easily accessible for adjustment if needed by opening the adjacent hallway ceiling access panel. The design life of the door track and complete door installation shall be at least 40 years. The following shall be possible with only the need to open the hallway ceiling panel outside the room; no disassembly of the room partition is allowed:
 - (i) Disengage the door from the door mechanism
 - (ii) Remove room door through door opening
 - (iii) Remove door track
 - (iv) Remove door détent (all pieces)

As part of room FAI, the above 4 bullet items shall be demonstrated.

- (d) A passenger room entrance door shall undergo endurance testing to verify the door installation is not subject to premature wear. This shall include:
 - (i) Simulated door installation: door, track, module structure supporting track, door frame with adjoining partition, door latch assembly, detent, etc.
 - (ii) 24,000 Open-close cycles with every tenth slammed
 - (iii) Every 100 cycles, latch/ unlatch the door
 - (iv) Measurement of change from initial setting at every 1500 cycles
 - (v) Measurement of force required to open/ close door every 1500 cycles
 - (vi) Mutually agreed upon pass/ fail criteria shall be determined for allowable wear in advance of starting the test.
- (e) The door and pocket walls shall be free from resonance, rattles and/ or banging in open, closed or closed & locked positions when the train is in motion under all train operating conditions at all authorized speeds on any FRA class of track. An approved flat spring or similar anti-rattle device shall be provided to keep the door from rattling. The gap between the door and the edges of the door pocket shall be sized to avoid pinch points. The door shall not rub the door pocket in any way that marks the door with horizontal lines or scratches, etc. Door pocket design shall discourage inadvertent use as a trash receptacle; it shall be possible to access the rear bottom of the pocket for cleaning or to retrieve objects trapped there.
- (f) The attachment of the latch and its keeper to the door and partition door frame respectively shall be sufficiently rigid so that it does not flex when the door closes, even if it is slammed; the intention is that this interface does not deteriorate over the life of the car. Likewise, the interior of the door and partition construction shall incorporate interior stiffening in the area where the latch is attached to the door, so that the fasteners securing it to the have a solid surface on which to clamp, rather than a somewhat resilient one. The latch system shall be able to operate over 5 years maintenance cycles without adjustments or maintenance required.
- (g) A latch, latch guard and keeper shall be provided on the inside of each door, to allow the passenger to secure the door when the room is occupied. It will require definite action to engage to avoid accidental room lockout. The latch, when engaged, shall keep the door in the fully closed position under all train operating conditions at all authorized speeds on any FRA class of track at

any permissible train speed. In an emergency, it shall be possible to disengage the latch from the hallway side with a screwdriver.

- (h) All room doors shall be lockable by the passenger with a master key that the crew maintains in the case of emergency or lock out.
 - (i) An instruction, in accordance with Amtrak specification # 697, located on the interior side of the door, shall provide latch operating instructions.
- (4) Overhead Luggage Storage
 - (a) The module shall extend over the hallway ceiling to provide a storage area for passenger luggage. In addition, the bedrooms shall provide luggage storage over the toilet/ shower room. The bottom surface of the storage areas shall be reinforced to support the weight (150 lbs over the area) and withstand the anticipated abrasive wear. A stainless steel restraining bar shall be provided around the periphery to retain luggage under all train operating conditions at all authorized speeds.
 - (b) Clearance between the ceiling and this bar shall be 12" minimum.
- (5) Electrical Junction Box
 - (a) At the top of the room adjacent to the hallway, each room shall be equipped with an electrical junction box, containing a series of terminal blocks to allow the interconnection of room module wiring with that of the car. Overhead wire ducts shall carry inter-module wiring as well as the feeds from the switch locker. The cover of the box shall make a dust-tight seal to the room interior and shall be secured with captive screws.
- (6) Clothes "Closet" – Accessible Bedroom & Bedrooms
 - (a) The room shall be equipped with a clothes closet, with piano hinged door equipped with a paddle latch. A clothes hanger rod shall be provided and the upper portion of the locker lined with carpet or similar sound damping material to prevent the hangers from rattling against the sides. The base of the locker shall have large radius sanitary corners for easy cleaning. The latch shall engage a keeper. The latch and keeper shall be secured to the closet wall and door employing serrated adjustments with fasteners engaging embedded tapping plates, so that they do not deflect or work loose over time or require adjustment.
- (7) Hanging Clothes Area – Roomettes
 - (a) Roomettes shall be equipped with a hanging area to accept garment bags or other items on hangers. The hanging rod shall

be substantially constructed and mounted as if it is to be used as a grab handle though it is not intended for that use. The hanging area shall include two (2) adjustable belt devices to restrain hanging items from swaying. No part of the hanging rod, belt or belt clamps shall pick or snag clothing.

(8) Air Circulation Fans

- (a) Variable speed, low noise ventilation fans shall be provided at the head of each sleeping berth. Stock 120Vac fans, nominal ~ 50cfm, such as those used for commercial electronic cabinet ventilation. The directional flow of air shall be controllable by the passenger. A guard shall be provided to prevent contact between passenger fingers, etc. and fan blades. Fan grilles shall be easily removable for cleaning with mild soap and water. The area immediately adjacent to the fans shall be covered with a material that can be easily cleaned. The fan and fan controls shall be clearly labeled.

(9) Lighting

- (a) Each room shall be equipped with several types of lighting fixtures to provide general as well as localized illumination.
- (b) A LED ceiling light will provide main lighting for the room as well as night (blue), emergency, and disaster lighting with LED technology. Gimble “eyeball” LED reading lights, each with a switch, are provided for each seat location as well as the upper berth. Those located in PSU have the reading light at the window end of the unit. A small area light is provided over each seat back for area lighting.
- (c) Passenger Service Units (PSU’s) are provided over the sleeper seats to provide a modular system for lighting, controls and accessories:

PSU # 1:	PSU # 2:
- Reading light with switch - Area light with switch - Ceiling light switch – main light (dimly illuminated for location in darkened room) - Ceiling light switch – night light - Attendant call switch - Wake-up buzzer - PA switch	- Reading light with switch - Area light with switch - Duplex 120VAC receptacle, flush mounted to allow small modular power supplies, such as for portable electronic equipment, to be fully plugged in without interference.

(10) Light Switch Panel

- (a) Room light switches shall be direct acting with the respective fixtures; there shall be no electronic interface, such as membrane switches.

- (b) The doorway switch panel shall be located on the room entrance door frame, controlling the main and night functions of the ceiling light.
- (c) The upper berth switch panel shall provide same functions as the doorway switch panel and be located at a site convenient to a passenger in the upper berth. In addition, an attendant call switch shall be provided.

(11) Portable Tables

- (a) Three (3) portable tables suitable for in-room dining or other activities shall be provided for use in sleeping accommodations. The tables shall be stored in the linen locker. The tables shall be durable, capable of withstanding rough handling of railroad service. They shall be of light weight composite construction, melamine surfaced with a composite edge machined smooth and free of sharp edges and burrs. The top shall have a ¼" raised perimeter to retain spilled liquids. The table shall be supported at window end by the tray table and by a folding leg at the other end. The table, so installed, shall be capable of supporting 250 pounds, evenly distributed, without permanent deformation or damage.
- (b) Demonstration of these tables in conjunction with the slide-out tables shall be part of room FAI.
- (c) Tables shall be identified on the bottom with the following information on a durable label, expected to last the life of the equipment:
 - (i) OEM (Supplier's) name and location
 - (ii) OEM part number
 - (iii) Amtrak part number (as applicable)
 - (iv) Date of manufacture
 - (v) Unit serial number
 - (vi) Revision/ mod level and date
 - (vii) Car number to which table was provided (minimum 1" high letters)

iv). Restroom / Toilet / Shower Room Features

- (1) This section provides details of the accessible bedroom and bedroom toilet/ shower, public shower and public restroom design requirements.
- (2) Room Pan

- (a) The floor pan of the module shall be FRP and shall form part of the interior restroom assembly. The purposes are to collect shower water and to prevent fluids from wicking beneath the restroom flooring, both for hygiene and also to prevent degradation of the sub-flooring materials. The room pan shall be installed over and attached to the sub-floor of the car. Attachment points shall be in the sides, rather than the bottom surface, and be watertight. The floor pan joint at the door opening shall be waterproof to the sub-floor.
 - (b) Floor penetrations shall be avoided when possible, but where required, sealed both to make the joint waterproof and also with an appropriate material to prevent flame propagation from under-floor flame sources. The floor shall to sloped toward the drain and avoid low spots where water might accumulate.
- (3) Component Mounting and Maintenance Doors
 - (a) All mounted items in the room shall be secured to the module structure through the use of fully embedded stainless steel tapping plates in the FRP. These are expected to last the life of the car without coming loose.
 - (b) Space shall be incorporated and mounting brackets be provided within the toilet room walls to mount components required to provide functions of the restroom, but not necessarily visible. Among these items (but not necessarily limited to) are:
 - (i) Toilet flush water cutout cock
 - (ii) Toilet air cutout cock
 - (iii) Faucet piping, sink trap and drain
 - (iv) Sink and shower water cutout cocks
 - (v) Shower control valves
 - (vi) Ogontz and manual drain valves
 - (c) Hinged FRP panels, secured closed with durable ¼ turn or pencil latches, shall be provided to provide access to this equipment. Anti-squeak techniques shall be employed to keep these panels from generating noise. Cutout out cocks and drain valves shall be easily accessible, without tools, for operation en route from inside the car.
 - (d) Labels, in accordance with Amtrak Specifications # 696 and 697 shall be provided to indicate to the crew the locations of the water, air and waste valves for each room.
- (4) Flooring

- (a) A skid-resistant floor covering in the form of a replaceable insert shall be used on the floor area. This floor covering shall be a Baultar or an Amtrak approved equivalent product. The flooring shall be bonded to the floor pan using an adhesive system that will last for at least eight years. The adhesive system should allow for removal of the existing flooring after eight years without damaging the FRP pan. The edges shall be sealed to form a watertight seal and seams shall be sealed and bonded according to the manufacturer's instructions.
- (5) Toilet Overflow Pan
 - (a) A stainless steel overflow pan shall be provided to contain flooding should the toilet outlet become blocked or system leak. The toilet bowl assembly shall be mounted on it. The pan shall be watertight with raised edges of ~2 inches height and have the attachment points exterior to the pan. The pan's exposed edges shall be folded for safety and to provide stiffness. The pan will be equipped with an overflow tube.
- (6) Toilet Shroud
 - (a) The restroom shall be equipped with a toilet stand (described below) and shroud. The shape of this housing shall locate the toilet seat ergonomically for ease of use and comfort. Sufficient foot room shall be provided. When seated, the user's legs shall not contact the shroud.
 - (b) The shroud shall be designed to accommodate Monogram brand vacuum toilet bowl assemblies. The toilet bowl shroud design shall be coordinated with that of the toilet bowl so that there is only a minimal gap between the bottom of the shroud and top of the bowl, so all waste goes into the toilet. In addition, clearance between the toilet stand assembly and the toilet shroud shall be 1" minimum throughout to provide for the clear, unrestricted movement of the moving parts of the toilet bowl, such as flush valve. This inch shall be added after taking into account manufacturing tolerances both of the toilet bowl, the shroud and the installation of the parts in the toilet room.
 - (c) The shroud shall be designed with sufficient strength to withstand, for the life of the car, the dynamic loads of persons seated on the toilet seat, impact load of the seat and lid slamming down and handling during shroud removal for toilet bowl servicing. The shroud shall not crack, shatter, or otherwise deteriorate during this period.
 - (d) The shroud design shall be coordinated with the toilet assembly so the toilet is easily accessible and removable for service and maintenance. The removable portion of the shroud shall be self-aligning and secured with captive spring-type fasteners, so as to be easily removed and installed. Flexing the shroud to install or

CONFIDENTIAL — DO NOT DISTRIBUTE

remove it is not acceptable. Shroud components of like type shall be interchangeable, so that no parts are car specific. It is desirable to have fasteners that do not require a tool to operate to facilitate removal & installation of the shroud. Ease of removal and installation of the toilet bowl assembly as well as the shroud for each type of installation shall be part of the restroom FAI.

(7) Vanity and Sink

- (a) A solid acrylic vanity, Wilsonart Gibraltar or equal, shall be provided, with a stainless steel or FRP sink insert. The arrangement shall allow an individual to place his face directly over the bowl in order to wash his face, brush teeth, etc; this is important in keeping the floor dry. The countertop shall have a raised 1/4" rolled marine anti-drip edge. The sink shall have a 1/2 gallon to 1 gallon capacity and be equipped with an overflow. The sink bowl shall be under-mounted, lipped to prevent splashing when the train is in motion. The underside of the sink shall be insulated on underside to prevent condensation. Gray water shall be discharged through a trapped drain to the ground. The sink shall be provided with a durable mechanically operated stopper, easily removed for cleaning, operated by a push-pull rod.
- (b) The faucet shall be commercial grade, spring-return type that allows adjusting the water temperature to the sink. Water flow from the faucet shall be directed into the sink and be of a rate to not splash the user. Selection of the faucet shall be discussed in design review.
- (c) All fixtures, dispensers and appliances shall be constructed in accordance with the requirements of the USPHS.

(8) Trash Receptacle (Vanity)

- (a) A trash receptacle, with shower water guard, shall be provided near the vanity. The stainless steel, hinged, self-closing trash flap shall be clearly labeled. It shall be as wide as possible. It shall be possible to open the trash flap by pushing against the vertical surface and further provide for opening without touching the flap surface. If possible, the flap should be attached to the locker top surface rather than a door-within-a-door concept. Spring tension of a stainless steel spring should prevent the door from swinging/ banging as a result of train motion. The opening shall be equipped with a small, easy to clean chute to direct the trash into the bag to keep to a minimum spillage around the container. The throat and can insert shall be sufficiently large to not clog easily from trash.
- (b) The access door to the trash storage container shall be hinged and secured with a pencil latch. A removable stainless steel

trash can insert, sized to accept standard Amtrak small plastic trash bags shall be provided.

- (c) The receptacle shall use as few joints as possible in fabrication; they shall be permanently sealed against moisture and vermin. The inside of the trash receptacle shall be easy to clean, with large radius sanitary corners and all joints sealed for good sanitation and to meet FDA requirements.
 - (d) Visible hardware and fasteners should be minimized to aid cleaning, reduce build-up of contaminants, and provide for pleasing aesthetics.
- (9) Adjustable Shower Head, Hose, and Water Controls
- (a) A commercial grade shower with hose-mounted wand and control valve shall be provided. Mounting shall allow the shower head height to be adjustable, from 40 inches to 80 inches above the floor, by a passenger. The passenger adjustable temperature control valve shall adjust and maintain the temperature of the water at the shower head. The control valve shall include anti-scald protection. A seated or standing passenger shall be able to conveniently control water flow. The shower control valve mounting and available slack in the water supply lines shall allow the valve to be easily removed/ replaced for servicing. If the shower head is allowed to hang free, it shall not fall onto the toilet seat and/ or into the toilet bowl.

v). Public Shower and Public Restroom Features

(1) Room Entrance Door & Lock

- (a) An outward opening hinged door with lock shall be provided for the public shower room as well as the public restrooms. The clear width door opening shall be a minimum of 19". The door shall be of lightweight construction, consistent with durability and consistent appearance with the shower module and be secured with a full-length stainless steel piano hinge. The door shall be free from resonance, rattles when in the closed position when the train is in motion at any permissible speed.
- (b) The door frame and attachment of the keeper shall be sufficiently rigid so that it does not flex when the door closes, even if it is slammed; the intention is that this interface does not deteriorate over the life of the car. Likewise, interior door construction shall incorporate interior stiffening in the area where the lock/ latch is attached to the door, so that the fasteners securing it to the leaf have a solid surface on which to clamp, rather than a somewhat resilient one.
- (c) The door latch, with a handle on both sides of the door, shall engage automatically when the door moves towards a closed

position, but the lock requires definite action to engage. The door shall remain in the fully closed position at any permissible train speed.

- (d) The lock shall be operable, in an emergency, from the outside with a standard Amtrak coach key. An instruction, in accordance with Amtrak specification # 697, located on the interior side of the door, shall provide lock operating instructions.
 - (e) A large easy to see Occupied/ Vacant sign shall be integrated into the door lock mechanism, as well as a switch to control an indicator lights.
 - (f) A grille in the door shall provide a path for ventilation air to enter the room, and flush odors before being exhausted to the car's exterior.
- (2) Room Occupied Indicators
- (a) Wide viewing angle amber LED indicator lights shall be provided both inside and outside the public shower and public restroom door to indicate that the room is occupied and the door locked. The interior indicator shall be located adjacent the door handle/ lock, so as to associate the locking of the room with lighting the light. The outside fixture shall be located about 60" above the floor, oriented to clearly indicate to passengers that the room is in use. The moisture-proof, over-travel type limit switch that controls the lights shall be located to be activated when the door lock is engaged. The switch mounting shall be such that it never needs to be adjusted to compensate for door/ lock tolerances. The switch and indicators shall be provided as part of the room module. The indicators shall be labeled "Occupied" in accordance with Amtrak Specification # 697.

vi). All Rooms

(1) Signage

- (a) Instructions and labels shall be mounted in conspicuous locations and shall be readable from anticipated passenger positions. All signage shall be in accordance with Amtrak spec 697 and 1132. The following are anticipated:
 - (i) Safety information card
 - (ii) Operation of lower berth
 - (iii) Operation of upper berth
 - (iv) Operation of shower
 - (v) Temperature controls/vents, etc.

- (vi) Lighting switches and other controls
- (vii) Electrical outlet - voltage and maximum wattage
- (viii) Locker functions
- (ix) Toilet flush/paper/soap, etc.
- (x) Door lock operation
- (xi) Window shade operation
- (xii) Emergency exit
- (xiii) Smoke detector alarm
- (xiv) Do not throw refuse into toilet
- (xv) Sink down
- (xvi) Trash
- (xvii) Shut off valves, etc
- (xviii) Attendant call
- (xix) Room fan
- (xx) Room numbers

d). Passage & Hallway

- i). The final interior dimensions and locations shall be developed during design review, with the aid of mockups.
- ii). Sidewalls
 - (1) The outside wall of the hallway past the accessible room and across from the bedrooms shall employ side wall heat and shall be similar to that in the bedrooms, though the ceiling is lower to be consistent with only a lower row of windows. The hallway and aisle ceiling height shall be uniform. The side wall shall consist of the following, beginning at floor level:
 - (a) Floor to heater grill transition cove
 - (b) Stainless steel floor heat grills
 - (c) Wainscoting panels
 - (d) Window masks
 - (e) HVAC diffuser

- (2) The hallway side of the partition dividing the hallway from the bedrooms and also the aisle from the roomettes, solo suite and public shower & restrooms shall consist of the following, beginning at the floor level:
 - (a) Stainless steel kick panel from Rigidized Metals or equal
 - (b) High pressure laminate and/or FRP
 - (c) Art work frames on transverse bulkheads at hallway offset
- (3) Most, if not all, of this partition shall be provided by the room module OEM, as part of the respective modules.
- (4) Hinged panels shall be provided as part of this partition wall to provide access to module piping.
- iii). Wheeled Mobility Device Guard Kick Plate and Corner Protection
 - (1) A 10" highly brushed stainless steel kick-plate/molding shall be located at the floor level of the passage from the vestibule to the accessible bedroom and door surfaces susceptible to come in contact with a wheeled mobility device.
 - (2) T-304L stainless steel angles with 2" radius corners shall be applied at outside corners of the hall/ aisle, to protect the FRP from damage, such as impact from luggage, etc.
- iv). Hallway Ceiling
 - (1) The ceiling level of the passage, hallway and aisle shall be constant height. Most, if not all, of the ceiling panels and supporting structure shall be provided by the room module OEM, as part of the adjacent modules. Ceiling panels shall be lightweight phenolic composite sandwich design or honeycomb construction. Ceiling panels shall be designed, constructed and installed to allow easy individual opening and closing for maintenance and repair of any components located above the ceiling, such as: body end door operators and track, HVAC air ducts, exhaust system, water heater, lighting fixtures, PA speakers, water piping, wiring, etc. Panels shall be hinged on the side, which provides the easiest access to overhead equipment when they are open.
 - (2) Hallway lighting shall be flush mounted fixtures mounted in the ceiling panels.
- v). Electric Locker
 - (1) The electric locker with adjoining switch locker is located just inside the body end door. The electric locker door shall be hinged on the left side, facing the locker, to avoid blocking the passage when open.
- vi). Linen Lockers

CONFIDENTIAL — DO NOT DISTRIBUTE

- (1) A Linen locker shall be provided with sufficient volume to store enough clean bedding, towels, etc. for the entire one-way trip as well as laundry bags for used linen and towels. Doors shall be secured with a pencil latch. Details of the lockers shall be developed during design review. Lockers shall be provided as follows:

- (a) B-end:

- (i) Linen locker above, trash receptacle below

- (2) A site to store the 3 Portable Tables shall also be provided, with padded tracks to support these tables during storage and prevent their rattling. Padding shall also protect the table edges from scratching and scuffing, etc.
 - (3) Linen lockers shall have a base cavity 36 inches high, measured from floor to bottom of the first shelf. The remaining space shall have shelves 18 inches apart. Shelves shall be adjustable in 2 inch increments from the lowest shelf to within 8 inches of the ceiling. Adjustments shall be made by mechanical forces if requested by onboard services. Locker bases shall have sanitary corners, with a radius, for easy cleaning. Interior linings and shelves shall have smooth, color impregnated, sanitary surfaces. When the locker door is opened, the locker service lights shall be illuminated by the action of a limit switch.

- vii). Trash Receptacles

- (1) A trash receptacles shall be provided at the B-end of the car, opposite the electric locker occupying the lower half of the volume. Facing inward, the right side wall shall be removable to access the accessible bedroom restroom piping, if required.

- viii). Miscellaneous Controls

- (1) At the A-end of the hallway, at or near ceiling level, the following shall be provided, all clearly labeled:
 - (a) Emergency fan switch
 - (b) A-end body end door cutout switch
 - (c) Conductor's emergency air brake valve
 - (d) Conductor signal pushbutton

- e). Accessible Bedroom

- i). Overview

- (1) The function of the Accessible Bedroom is to provide comfortable daytime seating and night sleeping accommodations for one or two people, with provisions for wheeled mobility device mobility in the

bedroom area as well as the restroom/ shower annex. The reclining sofa seat and occasional chair, as well as the wheeled mobility device parking site are adjacent the lower window. An upper level window provides extra light as well as night time viewing from the upper berth.

- (2) All upholstered components including seat cushions, mattresses and mattress pads shall be supplied by the Contractor.
- (3) The bedroom area and restroom/ shower shall be "Fully Accessible" to any "impaired" passenger as defined by the ADA. All controls, switches and valves shall be in accordance with ADA requirements.
- (4) The final room interior dimensions and locations shall be developed during design review, with the aid of mockups.
- (5) The room shall be of modular construction using common parts among all room types as much as possible.

ii). Accessible Bedroom Area Details

- (1) The accessible bedroom shall have the following features and amenities:
 - (a) Partition Wall & Room Entrance Door
 - (i) The corridor partition divides the bedroom from the hall and shall incorporate the hinged Room Entrance Door and equipped with a hold-open device at the top. The entrance door shall be hinged with a full length stainless steel "piano" hinge and shall provide a 32 inch "Clear Passage". It shall be equipped with an ADA compliant handle-type latch with sliding lock on the inside. The outside of the lock will be equipped with a removable plate that allows a coach key to be inserted into the lock to allow the crew to unlock the room in an emergency. The door shall incorporate a method of providing return air flow out of the room. A safety glass window, nominal 15-1/2" x 30-1/2" x 1/4" thick, shall be included in the hall partition to provide natural light and enhance the room spaciousness. The hall window shall be removable from either side through the use of a pry-out rubber zip strip as an emergency escape route should the door be jammed closed. This shall be demonstrated at room FAI.
 - (b) Wheeled Mobility Device Guard Kick-plate
 - (i) A 10" high brushed stainless steel Kick-plate/molding shall be located at the floor level of the wall and door surfaces susceptible to contact by a wheeled mobility device, inside the accessible bedroom and the restroom/ shower (vanity and toilet shroud).

- (c) Overhead Luggage Storage Space
 - (i) The bedroom module shall extend over the hallway ceiling to provide a 48" w x 19" d x 17" h storage area for passenger luggage.
- (d) Electrical Junction Box
 - (i) The Junction Box shall be located adjacent the overhead luggage storage area.
- (e) Retracting Coat Hooks
 - (i) Four flip-down Retracting Coat Hooks shall be provided on the partition wall, one on the back of the entrance door and one on the room side of the restroom door.
- (f) Sleeper Seats
 - (i) The Contractor shall install twin "sofa" reclining, Sleeper Seats. The seats shall be supported on both ends from a suitable bracket attached to the floor structure. Attachment shall meet requirements of APTA SS-C&S-016. The seat pedestal shall be kept as non-intrusive as possible to allow for maximum under-seat storage space. Seats shall be mounted so that they can be removed readily for maintenance and/or overhaul. Unobstructed luggage storage space of at least 9-1/2" x 22" x 17" shall be provided under each seat, more if possible, regardless of seat recline or seat/berth mode. When folded down, the seats become the lower room berth. A separate headrest, readily removable for cleaning or repair, shall be attached to the room cross partition above each seat and will remain in position when the berth is made up. The seat shall be subject to full design review and testing, in accordance with the seat specification.
- (g) Armrest with Cup Holder
 - (i) Armrests shall be provided on both sides of the slide-out tray table, each incorporating a cup holder recess.
- (h) Wheeled Mobility Device Parking Location
 - (i) A space is provided adjacent the window to allow an occupied wheeled mobility device to be parked.
- (i) Slide-out Tray Table
 - (i) A Slide-Out Tray Table shall be provided adjacent the outside window. Portable tables shall be compatible with

this table to provide a larger area, such as for in-room dining.

(j) Upper Berth

- (i) A hinged Upper Berth with safety restraint, in accordance with Amtrak specification # 358, shall be provided in the bedroom, hinged to the transverse wall. This berth shall be stored in the near-vertical position against the room wall and ceiling lining and hinged down for use. In the down position, the berth shall rest on the top of clothes closet at the end. Upper berth restraint straps, that engage with item # 33, shall be provided for passenger sleeping security. The upper berth ladder, lower berth mattress and all bedding for both berths shall be stored on the upper berth during daytime operation. The berth shall be subject to full design review and testing, in accordance with the berth specification.

(k) Upper Berth Convenience Pouch

- (i) A Convenience Pouch, shall be provided located conveniently for holding passenger personnel items at night.

(l) Upper Berth Ladder

- (i) The bedroom shall be provided with a portable upper berth ladder, in accordance with Amtrak drawing E-014-3033 H. The ladder will hook over the rim of the upper berth frame near the outside end of the room and rest on the floor to provide a secure method to enter/ exit the upper berth.
- (ii) A storage location for the upper berth ladder must be provided within the room.

(m) Upper Berth Grab Bar

- (i) An Upper Berth Grab Bar, minimum of 1-1/4" diameter and secured to the car/ module structure, shall be provided. This is to serve as a convenient grab point for steadying passengers entering/ exiting the upper berth on the ladder. Design of this function shall be part of the bedroom hard mockup and be a part of design review.

(n) Floor Heat

- (i) Room heat is provided by baseboard side wall heat, located below the windows.

(o) Room Heat Digital Thermostat

- (i) Room heat is controlled locally with the passenger-adjustable Room Heat Digital Thermostat, located on or adjacent the closet approximately 48" above the floor.
- (p) Supply Air Diffusers
 - (i) Conditioned air is delivered to the room via 2 Supply Air Diffusers, with adjustable air flow control and located on the window sill of the lower outside window.
- (q) Exhaust Grille
 - (i) Exhaust air is removed from the room via the Exhaust Air Grille, located in the restroom ceiling.
- (r) Air Circulation Fans
 - (i) Air Circulation Fans each with controls shall be provided at the head of each sleeping berth: lower berth, in closet; upper berth, on transverse room wall. The purpose is to stir room air and decrease the potential for temperature differential between upper and lower areas of the room, especially when the upper berth is down.
- (s) Passenger Service Units (PSU) #1
 - (i) A PSU is provided over the stationary headrest above each sleeper seat seatback. The PSU's shall be front serviceable. Both include a reading light with switch and an area light with switch. This (# 1) PSU also includes ceiling light control switches, the Attendant Call Switch and Wake-up Buzzer.
- (t) Passenger Service Units (PSU) #2
 - (i) This unit includes a duplex 120Vac receptacle instead of the switches.
- (u) Light Switch Panel – Doorway
 - (i) A small panel for ceiling light switches shall be provided just inside the room entry door. These switches shall be located and operable by impaired passengers.
- (v) Light Switch Panel – Upper Berth
 - (i) A second panel for ceiling light switches and an Attendant Call Switch shall be convenient to the occupant of the upper berth.
- (w) Ceiling Light Fixture

- (i) The fluorescent Ceiling Light Fixture functions as the primary light source for the room.
- (x) Upper Berth Reading Light
 - (i) A reading light with switch shall be provided for the upper berth occupant located to be convenient for night-time reading.
- (y) Wheeled Mobility Device Parking Location Reading Light and Attendant Call Button
 - (i) A reading light, mounted on the module outside wall above the wheeled mobility device parking position shall be provided for the wheeled mobility device occupant. The light switch and Attendant Call Button shall be located and operable by impaired passengers.
- (z) Mirror
 - (i) The entrance door shall have a full length "Lexan" Mirror mounted on the inside.
- (aa) PA Speaker
 - (i) A PA Speaker shall be provided in the room, mounted on the electrical junction box cover.
- (bb) Smoke Detector
 - (i) A Smoke Detector, with strobe light and sounder, shall be provided, located on the ceiling.
- (cc) Trash Receptacle
 - (i) A "flip out" Trash Receptacle shall be provided in the room, at an Amtrak approved location. The trash receptacle shall have a spring loaded hinged door and be clearly labeled.
- (dd) Armrest and Closet Wall
 - (i) An Armrest shall be provided on the closet side of the sleeper seat.
- (ee) Restraint Receivers
 - (i) Receivers for the upper berth restraint straps shall be located in the ceiling. They shall be attached to module structure for strength.
- (ff) Signage

- (i) Accessible bedroom operating instructions and labels shall be in accordance with Amtrak specifications # 696 and 697. The module OEM shall provide a drawing for Amtrak approval of the signage. Whenever possible, existing Amtrak signs shall be used.
- f). Accessible Bedroom Restroom / Shower
 - i). Overview
 - (1) The function of the Accessible Restroom/ Shower is to provide a private restroom and shower room to accessible bedroom passengers, wheeled mobility device accessible features.
 - (2) The restroom/ shower shall meet all minimum "Accessible" Toilet Room dimensions shown by 36CFR, Part 1192, "Intercity Rail Car (with accessible restroom)" as well as contain a 60" turning circle. All controls, switches, and amenities shall be readily accessible and operable by passengers with disabilities in accordance with ADA requirements.
 - (3) The final room interior dimensions and locations shall be developed during design review, with the aid of mockups.
 - (4) The room shall be of modular construction using common parts among all room types as much as possible.
 - ii). Accessible Restroom / Shower Details
 - (1) The restroom shall have the following features and amenities:
 - (a) Room Pan
 - (i) The floor pan of the module shall be FRP and shall form part of the interior restroom assembly. The floor slope from to the shower drain shall prevent standing water but not be so much as to create a problem for wheeled mobility device users.
 - (b) Shower Drain
 - (i) A linear slotted Drain shall be provided just inside the door to collect shower water. The adjacent threshold, of a contrasting color, shall be slightly raised to inhibit shower water from running into the bedroom and wetting the carpet. The drain grille and strainer shall be easily removable for cleaning. Fasteners, if required shall be captive. Shower water shall drain to the ground.
 - (c) Room Interior
 - (i) The shell shall include the floor, both interior and exterior walls and restroom ceiling as well as the door. The

CONFIDENTIAL — DO NOT DISTRIBUTE

restroom shell components shall be sized for passage through the car body plug door. Edges of the interior panel components should be interlocked to mitigate water penetration.

- (ii) Acoustical insulation shall be applied to panels inside the restroom modules to control sound propagation.
- (d) Component Mounting and Maintenance Doors
 - (i) Space shall be incorporated and mounting brackets be provided within the toilet room walls to mount components required to provide functions of the restroom, but not necessarily visible. Among these items (but not necessarily limited to) are:
 - 1. Toilet flush water cutout cock
 - 2. Toilet air cutout cock
 - 3. Faucet piping, sink trap and drain
 - 4. Sink and shower water cutout cocks
 - 5. Shower control valves
 - 6. Ogontz and manual drain valves
 - (ii) Hinged FRP panels shall be provided to provide access to this equipment. Cutout out cocks and drain valves shall be easily accessible, without tools, for operation en route from inside the car.
- (e) Flooring
 - (i) A skid-resistant floor covering in the form of a replaceable Baultar seamless insert shall be used on the floor area.
- (f) Restroom Door & Latch
 - (i) The outward opening restroom/shower room door shall be hinged with a full length stainless steel "piano" hinge and shall provide a 32 inch "Clear Passage". It shall be of lightweight construction, consistent with durability and consistent appearance with the restroom module. A door hold-open device, located at the bottom of the door, shall be provided to keep the door in the open position, during train motion at any permissible speed. This is to hold the door open when mobility impaired passengers enter or leave the room. The door shall be free from resonance, rattles when in the closed position when the train is in motion at any permissible speed. The force to open or close the door shall comply with the ADA.

- (ii) To keep the room carpet dry, a “water deflector” shall be provided on the inside of the door at the bottom to direct any water running down the door into the floor drain, rather than onto the threshold.
 - (iii) The door frame and attachment of the keeper shall be sufficiently rigid so that it does not flex when the door closes, even if it is slammed; the intention is that this interface does not deteriorate over the life of the car. Likewise, interior door construction shall incorporate interior stiffening in the area where the lock/ latch is attached to the door, so that the fasteners securing it to the leaf have a solid surface on which to clamp, rather than a somewhat resilient one.
 - (iv) The door latch, with a handle on both sides of the door, shall engage automatically when the door moves towards a closed position. The force required to unlatch the door shall not exceed 5 lbf. The door shall remain in the fully closed position at any permissible train speed.
 - (v) Operation and the free opening of the door shall be in accordance with ADA guidelines. The door shall be operable by a person using a wheeled mobility device or mobility aid as well as a person with limited dexterity. Operation of the door and latch shall not require tight grasping, pinching or twisting of the wrist. The latch shall be operable by a person with impaired mobility and/ or coordination.
 - (vi) A grille in the door shall provide a path for ventilation air to enter the room, and flush odors before being exhausted to car exterior.
- (g) Junction Box
- (i) An electrical junction box shall be provided to make the interface between module wiring and that of the car.
- (h) Toilet Out-of-Service Indicator
- (i) The restroom shall incorporate an indicator, provided by the toilet system OEM, which illuminates to indicate the toilet system is out of service. The indicator shall be located near the toilet flush button.
- (i) Grab Bars
- (i) Stainless steel grab bars with a non-slip finish in grasping areas in accordance with ADA guidelines shall be provided on both left and right sides of the restroom to allow passengers to steady themselves against train motion.

Bars shall be directly secured to car secondary structure or module structure.

- (j) Towel Ring / Coat Hook
 - (i) A stainless steel combination towel ring/ flip-down retracting coat hook shall be provided on the inside of the restroom door.
- (k) Toilet Overflow Pan
 - (i) A stainless steel overflow pan shall be provided to contain flooding should the toilet outlet become blocked or system leak.
- (l) Toilet Shroud
 - (i) The restroom shall be equipped with an elongated toilet bowl assembly (described below) and shroud. The shape of this housing shall locate the toilet seat ergonomically for ease of use and comfort. Sufficient foot room shall be provided. When seated, the user's legs shall not contact the shroud.
- (m) Toilet Seat and Lid
 - (i) A white soft close toilet seat with lid, meeting Amtrak specification # 352, shall be provided. The lid and seat shall be stable in the up position regardless to train motion, including braking, to prevent it from slamming down suddenly against the shroud.
- (n) Transfer Seat
 - (i) A folding transfer seat shall be provided to assist wheeled mobility device user transfer to the toilet seat. The seat shall fold against the side wall when not in use and shall be easily operable by a person in a wheeled mobility device or other mobility aid. The transfer seat, when extended, shall be designed to support a 300 lb load, with a safety factor of 3.
- (o) Toilet Bowl Assembly
 - (i) Each restroom shall be equipped with an elongated toilet bowl assembly encased in the toilet shroud described above.
- (p) Toilet Flush Button
 - (i) A clearly labeled flush button shall be provided on each side of the toilet; near the toilet, in an obvious and convenient location within reach of a person seated in a

CONFIDENTIAL — DO NOT DISTRIBUTE

wheeled mobility device or mobility aid. It shall be replaceable from inside the room.

- (q) Toilet Paper Dispenser
 - (i) An approved toilet paper dispenser, equipped with shower water guard shall be provided.
- (r) Attendant Call
 - (i) Waterproof attendant call switches (push-to-call), located and operable by impaired passenger, shall be provided in two places the room to allow summoning the car attendant.
- (s) Mirror and Light
 - (i) A tempered safety glass mirror(s) shall be provided above the vanity, with a minimum size of 20 x 30" viewing area. It shall be useable by a person standing as well as by a person seated in a wheeled mobility device or mobility aid. A second, tempered safety glass full length mirror shall also be provided. A water resistant light fixture shall be mounted over the toilet vanity mirror.
- (t) Ceiling Light
 - (i) A ceiling light shall be provided for general lighting.
- (u) Vanity and Sink
 - (i) A vanity shall be provided, with a stainless steel sink insert. The design of this area shall allow wheeled mobility devices to be drawn up to the counter, placing the vanity facilities within reach. Clearances below the vanity shall be in accordance with ADA guidelines.
 - (ii) The faucet shall be commercial grade, operable with one hand, to provide adjustable temperature water to the sink. The faucet shall meet ADA requirements.
- (v) Shelf
 - (i) A shelf with raised edges shall be provided above counter level for personal items.
- (w) Soap Dispenser
 - (i) A base for a liquid soap dispenser, which will accept a Celeste Industries liquid soap refill (Celeste #TR-BR10W/Amtrak), shall be installed on the top of the vanity near the sink.
- (x) 120VAC Receptacle

- (i) A duplex 120VAC 20A Ground Fault Circuit Interrupter (GFCI) duplex receptacle shall be located near the sink and mirror, with stainless steel cover plate.
- (y) Facial Tissue Dispenser
 - (i) A facial tissue dispenser with stainless steel cover and with shower water guard, shall be provided to hold a standard box of Amtrak tissues.
- (z) Adjustable Shower Head, Hose and Water Controls
 - (i) A commercial grade shower with hose-mounted wand and controls shall be provided. Shower control panel, controls and showerhead assembly shall be the same as those use in the bedroom showers on Superliner I remanufactured sleepers.
- (aa) Trash Receptacle (Vanity)
 - (i) A trash receptacle, with shower water guard, shall be provided near the vanity.
- (bb) Exhaust Grille
 - (i) An exhaust grille shall be provided in the ceiling, exhausting room air into the car exhaust duct
- (cc) PA Speaker
 - (i) A water resistant PA system speaker, with grille, mounted in the acoustical enclosure shall be installed in the ceiling of the restroom, mounted so it can be serviced from the front.
- (dd) Retracting Coat Hook
 - (i) A flip-down retracting coat hook shall be provided on the outside and inside of the restroom door.
- (ee) Light Switch Panel
 - (i) A light switch panel shall be provided just outside the entrance to the restroom/ shower, which incorporates the following light switches: main ceiling, ceiling night light, restroom mirror, restroom ceiling/ night lights. Switch functions shall be clearly labeled. This may be combined with the bedroom ceiling light, if desired.
- (ff) Signage
 - (i) Restroom/ shower operating instructions and labels shall be in accordance with Amtrak specifications # 696 and

697. The module OEM shall provide a drawing for Amtrak approval of the signage. Whenever possible, existing Amtrak signs shall be used. See Section 31.14.

g). Bedrooms

i). Overview

- (1) The function of the Bedroom is to provide comfortable daytime seating and night sleeping accommodations for one or two people, as well as toilet/ shower room. The reclining sofa seat and occasional chair are adjacent to the large lower window, and a second window above provides extra light as well as night time viewing from the upper berth.
- (2) All upholstered components including seat cushions, mattresses and mattress pads; shall be supplied by the Contractor. See mattress drawing A-87-7501, Amtrak Specification # 364; Amtrak parts: 24 195 30093 and 24 195 30085
- (3) The rooms shall be of modular construction, with left and right-hand versions, in accordance with Section 31.7, using common parts among all room types as much as possible. For further details of the lighting system.

ii). Bedroom Area Details

- (1) These bedrooms shall have the following features and amenities:
 - (a) Partition wall & room entrance door
 - (i) The corridor partition divides the bedroom from the hall and shall incorporate the room sliding entrance Door. A safety glass window, nominal 17 x 44" x 1/4" thick, shall be included in the door to provide natural light and enhance the room spaciousness. The door window shall be removable from either side, through the use of a pry-out rubber zip strip as an emergency escape route should the door be jammed closed.
 - (b) En-suiting door
 - (i) A sliding en-suiting door shall be provided to enable the two adjacent bedrooms to be converted into a single room. The door shall operate on an adjustable linear bearing track and be stabilized at the threshold with an adjustable self-cleaning guide. A security locks operable from both sides of the door with a standard Amtrak coach key shall be provided. Handles shall be located on both sides of the door for facilitate opening the door, and one on the exposed edge of the door to facilitate withdrawing it from the door pocket. Mechanism to secure the door in both open and closed positions shall be provided. In addition,

the door shall be prevented from rattling in either open or closed positions.

- (c) Overhead luggage storage space
 - (i) The bedroom module shall extend over the hallway ceiling to provide a 48" w X 19" d X 17" h carpeted storage area for passenger luggage. In addition, the top of the toilet/ shower modules shall be available for luggage (44" w X 30" d X 17" h).
- (d) Retracting coat hooks
 - (i) Two flip-down Retracting Coat Hooks shall be provided on the partition wall and an additional hook on the en-suite door. (Total of 4)
- (e) Sleeper seats
 - (i) The Contractor shall install twin "sofa" reclining, Sleeper Seats, conforming to Amtrak specification # 345. The seats shall be KSU-ASY-006519 and 006520 or approved equal. The seats shall be supported on both ends from a suitable bracket attached to the floor structure. Attachment shall meet requirements of APTA SS-C&S-016. The seat pedestal shall be kept as non-intrusive as possible to allow for maximum under-seat storage space. Seats shall be mounted so that they can be removed readily for maintenance and/ or overhaul. Unobstructed luggage storage space of at least 9-1/2" x 22" x 17" shall be provided under each seat, more if possible, regardless of seat recline or seat/ berth mode. When folded down, the seats become the lower room berth. A separate headrest, readily removable for cleaning or repair, shall be attached to the room cross partition above each seat and will remain in position when the berth is made up. The seat shall be subject to full design review and testing, in accordance with the seat specification.
- (f) Armrests with cup holder
 - (i) Armrests shall be provided on both sides of the slide-out tray table, each incorporating a cup holder recess.
- (g) Occasional Seat
 - (i) The outside wall of the room shall be equipped with a folding Occasional Seat, Amtrak part: 24 419 13333 in accordance with Amtrak specification # 720, facing the sofa.
- (h) Window shades and tracks

- (i) Upper and lower curtain tracks supporting pleated drapes shall be provided over both the upper and lower windows in the room. A single track and window shades will also be provided to cover the entrance door window. Provision will be included to keep the curtain open when desired.
- (i) Slide-out tray table
 - (i) A Slide-Out Tray Table shall be provided adjacent the outside window. Portable tables, as described in Section 31.8, shall be compatible with this table to provide a larger area, such as for in-room dining.
- (j) Upper berth
 - (i) A hinged-down Upper Berth with safety restraint, in accordance with Amtrak specification # 358, shall be provided in the bedroom, hinged to the transverse wall. This berth shall be stored in the near-vertical position against the room wall and ceiling lining and hinged down for use. In the down position, the berth shall rest on the top of clothes closet. Upper berth restraint straps, that engage with item # 33, shall be provided for passenger sleeping security. The upper berth ladder, lower berth mattress and all bedding for both berths shall be stored on the upper berth during daytime operation. The berth shall be subject to full design review and testing, in accordance with the berth specification.
- (k) Upper berth convenience pouch
 - (i) A Convenience Pouch shall be provided located conveniently for holding passenger personnel items at night.
- (l) Upper berth ladder
 - (i) The bedroom shall be provided with a portable upper berth ladder, in accordance with Amtrak drawing E-014-3033 H. The ladder will hook over the rim of the upper berth frame near the outside end of the room and rest on the floor to provide a secure method to enter/ exit the upper berth.
- (m) Upper berth grab bar
 - (i) An Upper Berth Grab Bar, minimum of 1-1/4" diameter and secured to the car/ module structure, shall be provided. This is to serve as a convenient grab point for steadying passengers entering/ exiting the upper berth on the ladder. Design of this function shall be part of the bedroom hard mockup and be a part of design review.

- (n) Floor heat
 - (i) Room heat is provided by baseboard side wall heat, located below the windows.
- (o) Room heat digital thermostat
 - (i) Room heat is controlled locally with the passenger-adjustable Digital room Heat Thermostat, located on or adjacent the closet approximately 48" above the floor.
- (p) Supply air diffusers
 - (i) Conditioned air is delivered to the room via 2 Supply Air Diffusers, with adjustable air flow control and located on the window sill of the lower outside window.
- (q) Exhaust grille
 - (i) Exhaust air is removed from the room via the Exhaust Air Grille, located near the center of the ceiling.
- (r) Air circulation fans
 - (i) Air Circulation Fans each with controls shall be provided at the head of each sleeping berth: lower berth, in closet; upper berth, on transverse room wall. The purpose is to stir room air and decrease the potential for temperature differential between upper and lower areas of the room, especially when the upper berth is down.
- (s) Passenger service units (PSU) # 1
 - (i) A PSU is provided over the stationary headrest above each sleeper seat seatback. The PSU's shall be front serviceable. Both include a reading light with switch and an area light with switch. This (# 1) PSU also includes ceiling light control switches, the Attendant Call Switch and Wake-up Buzzer.
- (t) Passenger service units (PSU) # 2
 - (i) This PSU includes a duplex 120VAC receptacle instead of the switches.
- (u) Light switch panel-doorway
 - (i) A small panel for ceiling light switches shall be provided just inside the room entry door.
- (v) Light switch panels-upper berth

- (i) A second panel for ceiling light switches and an Attendant Call Switch shall be convenient to the occupant of the upper berth.
- (w) Ceiling Light Fixture
 - (i) The fluorescent Ceiling Light Fixture functions as the primary light source for the room.
- (x) Upper berth reading light
 - (i) A reading light with switch shall be provided for the upper berth occupant located convenient for night-time reading.
- (y) Occasional chair reading light
 - (i) A reading light, mounted on the module outside wall above the seat is provided for the occasional chair occupant.
- (z) Mirror
 - (i) A full length laminated safety glass mirror shall be located on the on both sides of the en- suiting door.
- (aa) PA speaker
 - (i) A PA Speaker shall be provided in the room, mounted on the electrical junction box cover.
- (bb) Smoke detector
 - (i) A Smoke Detector shall be provided, located on the ceiling.
- (cc) Trash receptacle
 - (i) A trash receptacle shall be provided mounted to the inside of a cabinet door under the vanity. The receptacle shall be stainless steel, watertight and removable for cleaning.
- (dd) Armrest on Closet wall
 - (i) An Armrest shall be provided on the closet side of the sleeper seat.
- (ee) Restraint receivers
 - (i) Receivers for the upper berth restraint straps shall be located in the ceiling. They shall be attached to module structure for strength.
- (ff) Signage

- (i) Bedroom operating instructions and labels shall be in accordance with Amtrak specifications # 696 and 697. The module OEM shall provide a drawing for Amtrak approval of the signage.
 - (ii) Whenever possible, existing Amtrak signs shall be used.
- iii). Bedroom Toilet / Shower & Vanity
 - (1) Overview
 - (a) The function of the Bedroom Toilet/ Shower & Vanity is to provide a private toilet/ shower room as well as a vanity with sink to bedroom passengers.
 - (b) The final room interior dimensions and locations shall be developed during design review, with the aid of mockups.
 - (c) The rooms shall be of modular construction, with left and right-hand versions, in accordance with Section 31.7, using common parts among all room types as much as possible
 - (2) Toilet / Shower Details
 - (a) The toilet/ shower room shall have the following features and amenities:
 - (i) Room Pan
 - 1. The floor pan of the module shall be FRP and shall form part of the interior toilet/ shower assembly. A raised door threshold shall be provided to keep shower water in the toilet/ shower room.
 - (ii) Shower Drain
 - 1. A circular Drain shall be provided to collect shower water. The drain strainer shall be easily removable for cleaning. Fasteners, if required shall be captive. Shower water shall drain to the ground.
 - (iii) Room Interior
 - 1. The shell shall include the floor, both interior and exterior walls and room ceiling as well as the door. The room shell components shall be sized for passage through the car body end door.
 - 2. Acoustical insulation shall be applied to panels inside the toilet/ shower module to control sound propagation.

(iv) Luggage Storage

1. The top of the toilet/ shower modules shall incorporate a luggage storage space (44"w X 30"d x 17"h) with stainless steel restraint bar.

(v) Component Mounting and Maintenance Doors

1. Space shall be incorporated and mounting brackets be provided within the toilet room and/ or vanity walls to mount components required to provide functions of the toilet, shower and sink, but not necessarily visible. Among these items (but not necessarily limited to) are:
 - a. Toilet flush water cutout cock
 - b. Toilet air cutout cock
 - c. Shower water cutout cocks
 - d. Sink water cutout cocks
 - e. Shower control valves
 - f. Ogontz and manual drain valves
2. Hinged FRP panels shall be provided to provide access to this equipment. Cutout out cocks and drain valves shall be easily accessible, without tools, for operation en route from inside the car. This could be from the hall side of toilet/ shower room module.

(vi) Flooring

1. A skid-resistant floor covering in the form of a replaceable Baultar insert shall be used on the floor area.

(vii) Toilet/ Shower Room Door & Latch

1. The outward opening toilet/ shower room door shall be hinged with a full length stainless steel "piano" hinge. It shall be of lightweight construction, consistent with durability and consistent appearance with the toilet module. The door shall be free from resonance, rattles when in the closed position when the train is in motion at any permissible speed.
2. To keep the room carpet dry, a "water deflector" shall be provided on the inside of the door at the

bottom to direct any water running down the door into the floor drain, rather than onto the threshold.

3. The door frame and attachment of the keeper shall be sufficiently rigid so that it does not flex when the door closes, even if it is slammed; the intention is that this interface does not deteriorate over the life of the car. Likewise, interior door construction shall incorporate interior stiffening in the area where the lock/ latch is attached to the door, so that the fasteners securing it to the leaf have a solid surface on which to clamp, rather than a somewhat resilient one.
4. The door latch, with a handle on both sides of the door, shall engage automatically when the door moves towards a closed position. The door shall remain in the fully closed position at any permissible train speed.
5. A grille in the upper portion of the door shall provide a path for ventilation air to enter the room, and flush odors before being exhausted to car exterior.

(viii) Junction Box

1. An electrical junction box shall be provided to make the interface between module wiring for the shower and vanity and that of the car.

(ix) Grab Bars

1. Stainless steel grab bars shall be provided on one side of the toilet/ shower to allow passengers to steady themselves against train motion. Bars shall be directly secured to car secondary structure or module structure.

(x) Towel Ring / Coat Hook

1. A stainless steel combination towel ring/ flip-down retracting coat hook shall be provided on the inside of the toilet door.

(xi) Toilet overflow pan

1. A stainless steel overflow pan shall be provided to contain flooding should the toilet outlet become blocked or system leak.

(xii) Toilet shroud

1. The restroom shall be equipped with an elongated toilet bowl assembly (described below) and shroud. The shape of this housing shall locate the toilet seat ergonomically for ease of use and comfort.
2. Sufficient foot room shall be provided. When seated, the user's legs shall not contact the shroud.

(xiii) Toilet seat and lid

1. A white soft close toilet seat with lid, meeting Amtrak specification # 352, shall be provided. The lid and seat shall be stable in the up position regardless to train motion, including braking, to prevent it from slamming down suddenly against the shroud: AAMPS part # 24 419 41269.

(xiv) Toilet bowl assembly

1. Each restroom shall be equipped with an elongated toilet bowl assembly, encased in the toilet shroud described above.

(xv) Toilet flush button

1. A clearly labeled flush button, shall be provided on each side of the toilet; near the toilet, in an obvious and convenient location within reach of a person seated or standing. It shall be replaceable from inside the room.

(xvi) Toilet out of service indicator

1. The toilet room shall incorporate an indicator, provided by the toilet system OEM, which illuminates to indicate the toilet system is out of service. The indicator shall be located near the toilet flush button.

(xvii) Toilet paper dispenser

1. An approved toilet paper dispenser, equipped with shower water guard, Amtrak part: 24 411 41364 shall be provided.

(xviii) Attendant call

1. A waterproof attendant call switch, located and operable by a seated passenger, shall be

provided in the room to allow summoning the car attendant.

(xix) Ceiling light

1. A ceiling light shall be provided for general lighting.

(xx) Adjustable shower head, hose and water controls

1. A commercial grade shower with hose-mounted wand and controls shall be provided. The shower control panel assembly, valves and shower head components shall be the same as those used in Superliner I remanufacture program modules.

(xxi) Exhaust grille

1. An exhaust grille shall be provided in the ceiling, exhausting room air into the car exhaust duct.

(xxii) PA speaker

1. A water resistant PA system speaker, with grille, mounted in the acoustical enclosure shall be installed in the ceiling of the restroom, mounted so it can be serviced from the front.

(xxiii) Towel shelf

1. A solid surface shelf with raised edges, Wilsonart Gibraltar or equal, shall be provided in the rear of the shower room, high up to avoid shower spray.

(xxiv) Soap dish

1. A self-draining soap dish with lip shall be provided, convenient to a seated and standing passenger.

(xxv) Signage

1. Restroom/ shower operating instructions and labels shall be in accordance with Amtrak specifications # 696 and 697. The module OEM shall provide a drawing for Amtrak approval of the signage. Whenever possible, existing Amtrak signs shall be used. See 8.7.3 and 8.13.

(3) Bedroom Vanity with Sink Details

- (a) The vanity with sink shall have the following features and amenities:

CONFIDENTIAL — DO NOT DISTRIBUTE

(i) Vanity and Sink

1. A vanity shall be provided, with a stainless steel sink insert. The faucet shall be commercial grade and allow adjusting the water temperature to the sink.

(ii) Mirror and light

1. A tempered safety glass mirror(s) shall be provided above the vanity, with a minimum size of 20 x 30" viewing area. It shall be useable by a person standing as well as by a person seated on the deployed lower berth. A water resistant, fluorescent light fixture shall be mounted over the vanity mirror.

(iii) Soap dispenser

1. A base for a liquid soap dispenser, which will accept a Celeste Industries liquid soap refill (Celeste #TR-BR10W/Amtrak), shall be installed on the top of the vanity near the sink.

(iv) 120VAC receptacle

1. A duplex 120VAC 20A Ground Fault Circuit Interrupter (GFCI) duplex receptacle shall be located near the sink and mirror, with stainless steel cover plate.

(v) Facial tissue dispenser

1. A facial tissue dispenser for standard Amtrak tissues shall be provided in the upper cabinet

(vi) Trash receptacle (vanity)

1. A trash receptacle shall be provided mounted to the inside of a cabinet door under the vanity. The receptacle shall be stainless steel, watertight and removable for cleaning.

(vii) Storage cabinet

1. A storage cabinet, with shelves shall be provided in which to store: wash clothes, hand towels, shower soap, extra toilet paper, etc. The door(s) shall be secured with a paddle latch, for use by passengers.

(viii) Towel ring

1. A stainless steel towel ring shall be provided convenient to the sink.

(ix) Retracting coat hook

1. A flip-down retracting coat hook shall be provided on the outside of the toilet/ shower room door.

(x) Light switch panel

1. A light switch panel shall be provided near the entrance to the toilet/ shower, that incorporates the following light switches: vanity mirror, toilet ceiling/ toilet night lights. Switch functions shall be clearly labeled.

(xi) Component mounting and maintenance access

1. Space shall be incorporated and mounting brackets be provided within the vanity and/ or shower room walls to mount components required to provide functions of the toilet, shower and sink, but not necessarily visible. Among these items (but not necessarily limited to) are:
 - a. Toilet flush water cutout cock
 - b. Toilet air cutout cock
 - c. Shower water cutout cocks
 - d. Sink water cutout cocks
 - e. Shower control valves
 - f. Ogontz and manual drain valves
2. Hinged FRP panels shall be provided to provide access to this equipment. Cutout out cocks and drain valves shall be easily accessible, without tools, for operation en route from inside the car.

(xii) Signage

1. Restroom/ shower operating instructions and labels shall be in accordance with Amtrak specifications # 696 and 697. The module OEM shall provide a drawing for Amtrak approval of the signage. Whenever possible, existing Amtrak signs shall be used. See 8.7.3 and 8.13.

h). Roomettes

i). Overview

- (1) The function of the Roomette is to provide comfortable daytime seating and night sleeping accommodations for one or two people. The reclining facing seats are adjacent an eye-level picture window, and a second window above provides extra light as well as night time viewing from the upper berth.
- (2) All upholstered components including seat cushions, mattresses and mattress pads; shall be supplied by the Contractor. See mattress drawing A-87-7500 and 7496, Amtrak Specification # 364, AAMPS parts #: 24 195 30077 and 24 195 30106.
- (3) The final room interior dimensions and locations shall be developed during design review, with the aid of mockups.
- (4) The rooms shall be of modular construction, in accordance with Section 31.7, using common parts among all room types as much as possible. For further details of the lighting system,

ii). Roomette Details

- (1) The roomettes shall have the following features and amenities:
 - (a) Partition wall & room entrance door
 - (i) The corridor partition divides the roomette from the center passageway and incorporates the room sliding entrance Door. Safety glass windows, each $\frac{1}{4}$ " thick, nominal 17" x 44" in the door and 15- $\frac{1}{2}$ " x 30- $\frac{1}{2}$ " in the partition shall be included to provide natural light and enhance the room spaciousness. The door window shall be removable from either side through the use of a pry-out rubber zip strip as an emergency escape route should the door be jammed closed.
 - (b) Overhead luggage storage space
 - (i) The roomette module shall extend over the hallway ceiling to provide an 18"w x 36"d x 17"h carpeted storage area for passenger luggage. Roomettes on opposite sides of the passage shall nest in this area such that each room is allocated about $\frac{1}{2}$ the volume over the ceiling.
 - (c) Electrical junction box
 - (i) The Junction Box shall be located adjacent the overhead luggage storage area.
 - (d) Retracting coat hooks
 - (i) Two flip-down Retracting Coat Hooks shall be provided on the partition wall.

CONFIDENTIAL — DO NOT DISTRIBUTE

- (e) Sleeper seats
- (f) The Contractor shall install facing, reclining, Sleeper Seats, conforming to Amtrak specification # 345. The seats shall be KSU-ASY-003900 and 003912 or approved equal. The seats shall be supported from the side wall sleeper seat rail via a seat bracket on the outboard end and a suitable bracket attached to the floor structure on the inboard end. Attachment shall meet requirements of APTA SS-C&S-016. Seats shall be mounted so that they can be removed readily for maintenance and/ or overhaul. Unobstructed luggage storage space of at least 9- 1/2" x 22" x 17" shall be provided under each seat, more if possible, regardless of seat recline or seat/ berth mode. When folded down, the seats become the lower room berth. A separate headrest, readily removable for cleaning or repair, shall be attached to the room cross partition above each seat and will remain in position when the berth is made up. The seat shall be subject to full design review and testing, in accordance with the seat specification.
- (g) Armrests with cup holder
 - (i) Armrests shall be provided on both sides of the slide-out tray table, each incorporating a cup holder recess.
- (h) Window shades and tracks
 - (i) Curtain tracks supporting drapes shall be provided over both the upper and lower windows in the room. In a similar way, window shades will also be provided to cover the hall partition and entrance door windows.
- (i) Slide-out tray table
 - (i) A Slide-Out Tray Table shall be provided adjacent the outside window. Portable tables, as described in Section 31.8, shall be compatible with this table to provide a larger area, such as for in-room dining.
- (j) Upper berth
 - (i) A pull-down Upper Berth with Safety Restraint, in accordance with Amtrak specification # 358, shall be provided in the roomette. This berth shall be stored in the horizontal position against the ceiling lining and shall be pulled down along a wall-mounted, stainless steel track for use as the upper berth. Upper berth restraint straps, that engage with item # 35, shall be provided for passenger sleeping security. The ceiling brackets that receive the hooks from the safety restraint shall be attached to module structure for strength. The lower berth mattress and all bedding for both berths shall be stored on the upper berth

during daytime operation. The berth shall be subject to full design review and testing, in accordance with the berth specification.

- (k) Upper berth convenience pouch
 - (i) A Convenience Pouch shall be provided located conveniently for holding passenger personnel items at night.
- (l) Upper berth steps
 - (i) Built-in steps, part of the toilet shroud, shall be provided to allow passengers to enter/ exit the upper berth. The upper step is the surface on which the folding sink rests when open. Design of this function shall be part of the roomette hard mockup and be a part of design review.
- (m) Upper berth grab bar
 - (i) An Upper Berth Grab Bar, secured to module structure, shall be provided as a grab point for steadying passengers entering/ exiting the upper berth from the steps.
- (n) Floor heat
 - (i) Room heat is provided by baseboard side wall heat, located below the windows.
- (o) Room heat digital thermostat
 - (i) Room heat is controlled locally with the passenger-adjustable room Heat Digital Thermostat, located on or adjacent the closet approximately 48" above the floor.
- (p) Supply air diffusers
 - (i) Conditioned air is delivered to the room via 2 Supply Air Diffusers, with adjustable air flow control and located on the window sill of the lower outside window.
- (q) Exhaust grille
 - (i) Exhaust air is removed from the room via the Exhaust Air Grille, located at the top of the overhead luggage storage space.
- (r) Air circulation fans
 - (i) Air Circulation Fans each with controls shall be provided at the head of each sleeping berth, near the closet. The purpose is to stir room air and decrease the potential for

temperature differential between upper and lower areas of the room, especially when the upper berth is down.

- (s) Passenger service units (PSU) # 1
 - (i) A PSU is provided over the stationary headrest above each sleeper seat seatback. The PSU's shall be front serviceable. Both include a reading light with switch and an area light with switch. This (# 1) PSU includes also ceiling light control switches, the Attendant Call Switch and Wake-up Buzzer.
- (t) Passenger service units (PSU) # 2
 - (i) This unit includes a duplex 120VAC receptacle instead of the switches.
- (u) Light switch panel – doorway
 - (i) A small panel for ceiling light switches shall be provided just inside the room entry door.
- (v) Light switch panel – upper berth
 - (i) A second panel for ceiling light switches and an Attendant Call Switch shall be convenient to the occupant of the upper berth.
- (w) Ceiling light fixture
 - (i) The fluorescent Ceiling Light Fixture functions as the primary light source for the room.
- (x) Upper berth reading light
 - (i) In addition, a reading light with switch shall be provided for the upper berth occupant located to be convenient for night-time reading.
- (y) Mirror and overhead light
 - (i) A Lexan Mirror with overhead light shall be located above the sink. A surface mounted switch on the fixture housing shall allow the light to be controlled by the upper berth occupant.
- (z) Mirror light switch and 120VAC receptacle
 - (i) A second mirror light switch and a duplex 120VAC GFCI receptacle shall be located on a panel adjacent the sink, preferably located so as to keep it dry from splashes from the sink.

- (aa) PA speaker
 - (i) A PA Speaker shall be provided in the room, mounted on the electrical junction box cover.
- (bb) Smoke detector
 - (i) A Smoke Detector shall be provided, located on the ceiling.
- (cc) Trash receptacle
 - (i) A “flip out” Trash Receptacle shall be provided in the room, at an Amtrak approved location. The trash receptacle shall have a spring loaded hinged door and be clearly labeled.
- (dd) Folding sink with faucet will be an option
 - (i) A fold-down stainless steel sink with hot and cold water shall be located in the room. The sink shall have a 1/2 to 1 gallon capacity, be equipped with an overflow and shall be easily removable, without tools, for cleaning. The retractable pins on which the sink pivots shall engage stainless steel “keepers”, securely fastened to the recess housing, sandwiching the FRP so as to remain secure for the life of the car. The sink shall be lipped to prevent splashing from train motion. The faucet, providing independent control of hot and cold water, shall be mounted behind the sink in the sink alcove. Water flow from the faucet shall be directed into the sink and be of a rate to not splash the user. The sink is drained through a nominal 1-1/4” diameter drain by the user by closing it back into its alcove. When not in use, the sink shall be retained in the up position through the use of an approved ¼ turn tab-type latch, pressing against a metal area of the sink (not FRP). The latch shall be secured to the fiberglass module through the use of a tapping plate embedded in the FRP. An easy to clean, captive stainless steel screen shall be provided over the sink drain cavity behind/ below the sink to catch items that might be inadvertently left on the sink surface before closing and would otherwise be lost down the drain. Sinks shall be interchangeable among rooms, with no adjustments required.
 - (ii) The design of the sink hinge shall allow removal of the sink and its re-installation to be done in a maximum of one minute. The ability to do this, as well as interchangeability of 3 sinks shall be demonstrated in room FAI.
- (ee) Sink open indicator as an option with folding sink
 - (i) A red wide viewing angle LED “Sink Open” indicator light shall illuminate when the sink is open, as sensed by a limit

switch located in the sink alcove housing. This is to encourage the user to close the sink so an upper berth occupant does not step into the sink, when it is left open. The switch shall be accessible for replacement by removing the light control panel adjacent.

(ff) Towel ring/ coat hook

- (i) A stainless steel combination towel ring/ flip-down retracting coat hook shall be provided.

(gg) Facial tissue dispenser

- (i) A facial tissue dispenser with an FRP front shall be integrated into the space below the sink and arranged to keep tissues dry.

(hh) Restraint receivers

- (i) Receivers for the upper berth restraint straps shall be located in the ceiling. They shall be attached to module structure for strength.

(ii) Liquid soap dispenser & retainer

- (i) A base for a liquid soap dispenser which will accept a Celeste Industries liquid soap refill (Celeste # TR-BR10W/Amtrak) shall be installed shall be located adjacent the mirror.

(jj) Component mounting and maintenance doors

- (i) All mounted items in the room shall be secured to the module structure through the use of fully embedded stainless steel tapping plates in the FRP. These are expected to last the life of the car without coming loose.
- (ii) Space shall be incorporated and mounting brackets be provided within the room walls to mount components required to provide functions of the sink and toilet, but not necessarily visible. Among these items (but not necessarily limited to) are:
 - 1. Sink water cutout cocks
 - 2. Faucet piping, sink trap and drain
 - 3. Ogontz and manual drain valves
- (iii) Cutout out cocks and drain valves shall be easily accessible, without tools, for operation en route from inside the car. This could be from the hall side of the roomette.

(kk) Signage

- (i) Roomette operating instructions and labels shall be in accordance with Amtrak specifications # 696 and 697. The module OEM shall provide a drawing for Amtrak approval of the signage.
- (ii) Whenever possible, existing Amtrak signs shall be used. See 8.7.3 and 8.13.

i). Solo Suite

- i). The SoloSuite is a unique, single passenger compartment that provides enhanced comforts over the roomette with the following features.
 - (1) Seat to Berth Conversion
 - (2) A simple unlatch mechanism is required to convert the seat into a bed/berth.
 - (3) This should be positioned in a place that is easy for people to use and designed in a way so that people can understand its purpose.
 - (4) The latch should be free for jamming and free from any finger trap hazards.
 - (5) Conversion of seat to berth shall result in an entirely flat sleeping surface.
 - (6) The mattress surface should be integral to the back of the seat.
 - (7) A single seam between the bed surface is acceptable with a single thin topper will finish the bed surface.
 - (8) There shall be no movement in the berth structure under full loading conditions when the berth is deployed.
 - (9) A folding ottoman pad should complete the seat surface between bed and ottoman.
 - (10) The pad should be independently operated.
 - (11) Care should be taken in the design and activation to avoid accidental entrapment or mitigate injury through misuse.
 - (12) The folding ottoman pad and ottoman table leaf should create a space large enough for a passenger to stand and deploy and stow the bed while in the room with the door closed.
 - (13) Lower Berth Dimensions:
 - (a) There should be a minimum of 82" between the two opposite corners account for the tapering bed shape.

- (b) There should be a minimum of 22" between the inside surface of the footbox and any sidewall structure.
 - (c) There should be a minimum of 77" bed length.
 - (d) There should be a minimum of 34" bed width.
 - (e) Dimensions and usability will be subject to Amtrak approval at the mockup review.
- (14) Conversion between seat and berth configuration shall require 10 (ten) pounds force or less.
- ii). Opening Room Divider
 - (1) As the divider is deployed it must be done with a smooth and gliding motion, with little or no noise.
 - (2) The deployment of the divider should be easy to use and be able to be operate safely by passengers independently.
 - (3) There should be no finger traps or hazards.
 - (4) When the divider is in its closed position it must provide good sound insulation to the adjoining room and noise levels from the adjoining rooms shall be less than or equal to 65 dBA.
 - (5) When closed, the divider must be free from rattle and movement and be securely locked in place along all edges.
 - (6) There should be no light spill from the adjoining room.
 - (7) The divider shall be installed so that damage from pushing the divider off track and into an opposing SoloSuite is prevented.
- iii). Lighting
 - (1) General
 - (2) All lighting shall be dimmable, with a fixed color temperature to be determined during design review and mockups.
 - (a) Color temperature shall be determined per light fixture and may not be the same temperature for all fixtures within the compartment.
- iv). Lighting Types and Locations
 - (1) Lighting controls shall be analog switches.
 - (2) Wash Lights
 - (a) Wall Wash Lights

- (i) Wall wash lights for the aisle partition wall and the back wall behind the seat shall be provided along the length of each wall.
 - (b) Ceiling Wash Lights
 - (i) Ceiling wash lights shall run the length of the room along the window line.
 - (c) This light shall function to illuminate the ceiling. Divider Wash Lights
 - (i) Divider wash light shall run the length of the divider wall and illuminate the area where the divider is located and the table space below it.
- (3) LED Panel Spot Lights (White Lights)
 - (a) Two small circular LED light panels shall act as spot lights above the entry door.
 - (b) The frame for the spot lights shall be color matched to the ceiling.
- (4) Compartment Light
 - (a) Ottoman Lower Cubby and Footbox Lights
 - (i) Ottoman area lower cubby and footbox shall both be lit with indirect lighting and shall allow the entire cubby to act as indirect lighting for the room as well.
 - (b) Under Seat Lights
 - (i) Under Seat lights shall be provided as indirect lighting that spills out across the floor under the seat.
- (5) Reading Lights (White Lights)
 - (a) Lower Reading Lights
 - (i) Lower reading lights shall be provided at each seated position.
 - (ii) The light itself shall be adjustable so that the passenger can adjust the direction to position the light over their reading material.
 - (b) Reading Light Switches

- (i) Reading light switches should be located next to the reading light.
- v). Security
 - (1) Many items within the sleeper cabin area will need to be secured. Unique items for this sleeper cabin type are defined below.
 - (2) Divider Locking Mechanism
 - (a) The divider shall be able to be locked by the passenger occupying one of the SoloSuite compartments.
 - (b) The divider locking mechanism shall be tamper proof from the adjoining SoloSuite side and shall provide the passenger with confidence that their privacy and personal space will be maintained when they have locked their side of the divider.
 - (c) The divider lock shall have a clear indication of the locked or unlock status of the mechanism.
- j). Attendant Room
 - i). The function of the Attendant Room is to provide comfortable work base station with daytime seating and night sleeping accommodations for the car attendant. In addition, it includes indicator panels for the attendant call and smoke detection systems (see Chapters 13 and 25 for details).
 - ii). All upholstered components including seat cushions, mattresses and mattress pads; shall be supplied by the Contractor. See mattress drawing A-87-7500 and 7496, Amtrak Specification # 364, AAMPS parts # 24 195 30077 and 24 195 30106.
 - iii). The final room interior dimensions and locations shall be developed during design review, with the aid of mockups.
 - iv). The room shall be of modular construction, in accordance with Section 31.7, using common parts among all room types as much as possible.
 - v). The room shall have the following features and amenities:
 - (1) Identical to the Roomette, plus:
 - (2) Attendant call indicator panel
 - (3) Smoke detector indicator panel
 - (4) Signage
 - (5) Doorbell pushbutton
- k). Public Shower with Dressing Room

i). Overview

- (1) The function of the Public Shower with Dressing Room is to provide shower facilities for passengers of this car, primarily those accommodated in Roomettes and Solo Suites.
- (2) The final room interior dimensions and locations shall be developed during design review, with the aid of mockups.
- (3) The room shall be of modular construction, in accordance with Section 31.7. As many parts as possible should be used from Amtrak Public Shower Module part number 24 411 41114. Amtrak owns all tooling and engineering rights to these modules.

ii). Public Shower with Dressing Room Details

- (1) The room shall have the following features and amenities:
 - (a) The public shower room is divided into two areas; dressing area and shower stall.
 - (b) Room pan
 - (i) The floor pan of the module shall be FRP and shall form part of the interior shower/ dressing room assembly. A raised shower stall door threshold, of a contrasting color to the surrounding floor, shall be provided, to contain the shower water to the stall area. The floor pan joint at the dressing room door opening to the hallway shall be waterproof to the sub-floor.
 - (c) Shower Drain
 - (i) A round Drain shall be provided in the shower stall to collect shower water. Shower water shall drain to the ground. The drain strainer shall be easily removable for cleaning. Fasteners, if required shall be captive.
 - (d) Room interior
 - (i) The shell shall include the floor, both interior and exterior walls and room ceiling as well as the doors. The room shell components shall be sized for passage through the car body plug door.
 - (ii) Acoustical insulation shall be applied to panels inside the restroom modules to control sound propagation.
 - (e) Component mounting and maintenance doors
 - (i) Space shall be incorporated and mounting brackets be provided within the room walls to mount components required to provide functions of the shower, but not

necessarily visible. Among these items (but not necessarily limited to) are:

1. Shower water cutout cocks
 2. Shower control valves
 3. Ogontz and manual drain valves
- (ii) Hinged FRP panels shall be provided to provide access to the cutout cocks and drain valves. Cutout out cocks and drain valves shall be easily accessible, without tools, for operation en route from inside the car.
- (f) Overhead Towel & Supply Storage Space (over hallway)
- (i) Storage space for fresh towels and other shower supplies shall be provided overhead above hallway ceiling. The area shall be equipped with a shelf, ridigized steel doors with paddle locks and stainless steel piano hinges.
- (g) Junction box
- (i) An overhead electrical junction box shall be provided to make the interface between module wiring and that of the car.
- (h) Flooring
- (i) A skid-resistant floor covering in the form of a replaceable Baultar insert shall be used on the floor areas of the stall and dressing area.
- (i) Room entrance door & lock
- (i) An outward opening hinged door with lock shall be provided for the public shower room. The lock shall be the same as those used on Superliner I sleeper remanufacture program modules.
- (j) Room occupied indicators
- (i) Wide viewing angle amber LED indicator lights shall be provided both inside and outside the room door to indicate that the room is occupied and the door locked.
- (k) Attendant call
- (i) An attendant call switch shall be provided in the room to allow summoning the car attendant in an emergency. When activated, it shall cause the "Occupied" lights to flash and also interface with the car attendant call system.

- (l) Towel Ring/ Coat Hook
 - (i) A stainless steel combination towel ring/ flip-down retracting coat hook shall be provided on the inside of the dressing area, within easy reach of the shower stall door opening (room wall and entrance door).
- (m) Wall mounted towel holder
 - (i) A wall mounted formed wire towel holder of hotel quality shall be provided. The holder shall be stainless steel with a capacity of eight folded towels.
- (n) Coat hooks
 - (i) Coat hooks, Amtrak part: 24 441 41334 shall be provided on the room walls and/ or entrance door.
- (o) Dressing area seat
 - (i) A bench seat shall be provided in the dressing area, for use during undressing/ dressing. The shape of this base shall locate the seat ergonomically for ease of use and comfort. Sufficient foot room shall be provided. When seated, the user's legs shall not contact the base.
 - (ii) The seat and base shall be designed with sufficient strength to withstand, for the life of the car, the dynamic loads of seated persons. The seat and base shall not crack, shatter, or otherwise deteriorate during this period.
- (p) Shelf
 - (i) A shelf with raised edges shall be provided for placing personal items & toiletries during showering.
- (q) Towel & soap storage
 - (i) A basket, container or approved alternative shall be provided to hold fresh towels for passenger use. Likewise, a container holding small bars of soap for passengers shall be provided.
- (r) Grab bars
 - (i) Grab bars shall be provided in the dressing area and within the shower stall to allow passengers to steady themselves against train motion.
- (s) Shower stall door
 - (i) An outward opening, transparent shower stall door, of approved materials, shall be provided to isolate the shower

stall from the dressing area. Mounted using a full length stainless steel piano hinge, the door shall be secured closed with a definite action latch, operable from both sides. The door shall remain in the fully closed position at any permissible train speed. To keep the dressing area floor dry, a "water deflector" shall be provided on the inside of the door at the bottom to direct any water running down the door into the floor drain, rather than onto the threshold.

- (ii) The door frame and attachment of the keeper shall be sufficiently rigid so that it does not flex when the door closes, even if it is slammed; the intention is that this interface does not deteriorate over the life of the car. Likewise, interior door construction shall incorporate interior stiffening in the area where the lock/ latch is attached to the door, so that the fasteners securing it to the leaf have a solid surface on which to clamp, rather than a somewhat resilient one.
- (t) Shower seat
 - (i) The shower stall shall be equipped with a seat to allow a passenger to remain seated while showering.
- (u) Adjustable shower head, hose and water controls
 - (i) A commercial grade shower with hose-mounted wand and controls shall be provided. The control panel, controls and shower head assembly shall be the same as those used on Superliner I sleeper remanufacture program modules.
- (v) Soap dish
 - (i) A self-draining soap dish with lip shall be provided, convenient to a seated or standing passenger.
- (w) Soap dispenser
 - (i) A base for a liquid soap dispenser, which will accept a Celeste Industries liquid soap refill (Celeste #TR-BR10W/Amtrak), shall be provided in the shower stall.
- (x) Shower light
 - (i) A suitably grounded, waterproof fluorescent light fixture shall be provided in the shower stall.
- (y) Used towel bin
 - (i) A clearly labeled basket, bin or hanging laundry bag supported by stainless steel hooks shall be provided for passengers to discard used towels.

- (z) Trash receptacle (vanity)
 - (i) A trash receptacle shall be provided near the used towel bin.
- (aa) Mirror
 - (i) A tempered safety glass mirror shall be useable by a person either standing or seated.
- (bb) Mirror light
 - (i) A water resistant mirror light shall be provided for mirror and general dressing room lighting.
- (cc) 120VAC receptacle
 - (i) A duplex 120VAC 20A Ground Fault Circuit Interrupter (GFCI) duplex receptacle with stainless steel cover plate shall be located in the dressing area, to power a hair drier.
- (dd) Floor heater
 - (i) A stainless steel floor heater assembly shall be provided. Care shall be taken in locating the unit to keep it from getting wet from the shower and also that passenger legs are unlikely to contact the grille surface. In addition, care needs to be taken that heat given off by this unit does not have detrimental effects, such as close proximity to the trash container.
- (ee) Floor heat digital thermostat
 - (i) A fixed-setting digital thermostat shall be provided (approx.48" above floor).
- (ff) Exhaust grille
 - (i) An easily cleaned exhaust grille shall be provided near the ceiling, exhausting room air into the car exhaust duct.
- (gg) PA speaker
 - (i) A water resistant PA system speaker, with grille, mounted in the acoustical enclosure shall be installed in the ceiling of the dressing area, mounted so it can be serviced from the front.
- (hh) Privacy Window
 - (i) The upper window shall be a privacy window conforming to Amtrak drawing: D-00-8161-2

(ii) Signage

- (i) Shower and dressing area instructions and labels shall be in accordance with Amtrak specifications # 696 and 697. The module OEM shall provide a drawing for Amtrak approval of the signage. Whenever possible, existing Amtrak signs shall be used. See 8.7.3 and 8.13.

I). Public Restrooms

i). Overview

- (1) The function of the Public (Unisex) Restrooms is to provide toilet and sink facilities for passengers of this car, primarily those accommodated in Roomettes and Solo Suites.
- (2) The final room interior dimensions and locations shall be developed during design review, with the aid of mockups.
- (3) The rooms shall be of modular construction, in accordance with Section 31.7. As many parts as possible should be used from Amtrak Unisex Restroom Module part number 24 411 41111.
- (4) Amtrak owns all tooling and engineering rights to these modules.

ii). Public Restroom Details

- (1) The restroom shall have the following features and amenities:
 - (a) Room pan
 - (i) The floor pan of each module shall be FRP and shall form part of the interior restroom assembly.
 - (b) Room interior
 - (i) The shell shall include the floor, both interior and exterior walls and restroom ceiling as well as the door. The restroom shell components shall be sized for passage through car body plug door.
 - (ii) Acoustical insulation shall be applied to panels inside the restroom modules to control sound propagation.
 - (c) Component mounting and maintenance doors
 - (i) Space shall be incorporated and mounting brackets be provided within the toilet room walls to mount components required to provide functions of the restroom, but not necessarily visible. Among these items (but not necessarily limited to) are:

1. Toilet flush water cutout cock

2. Toilet air cutout cock
 3. Faucet piping, sink trap and drain
 4. Sink water cutout cocks
 5. Ogontz and manual drain valves
- (ii) Hinged FRP panels shall be provided to provide access to this equipment. Cutout out cocks and drain valves shall be easily accessible, without tools, for operation en route from inside the car.
- (d) Flooring
- (i) A skid-resistant floor covering in the form of a replaceable Baultar insert shall be used on the floor area.
- (e) Restroom door & lock
- (i) An outward opening hinged door with lock shall be provided for each restroom. The lock shall be the same as those used on Superliner I sleeper remanufacture program modules.
- (f) Junction box
- (i) An overhead electrical junction box shall be provided to make the interface between module wiring and that of the car.
- (g) Toilet occupied indicators
- (i) Wide viewing angle amber LED indicator lights shall be provided both inside and outside the toilet room door to indicate that the room is occupied and the door locked.
- (h) Attendant call
- (i) An attendant call switch shall be provided in the room to allow summoning the car attendant in an emergency. When activated, it shall cause the "Occupied" lights to flash and interface with the car attendant call system.
- (i) Toilet Out-of-Service indicator
- (i) The outside of the restroom shall incorporate an indicator, provided by the toilet system OEM, which illuminates to indicate the toilet system is out of service. The indicator shall be located near the "Occupied" indicator and be conspicuous to passengers.
- (j) Grab bars

- (i) Stainless steel grab bars shall be provided on one side of the restroom to allow passengers to steady themselves against train motion. Bars shall be directly secured to car secondary structure or module structure.
- (k) Retracting coat hooks
 - (i) Two flip-down retracting coat hooks shall be provided.
- (l) Toilet overflow pan
 - (i) A stainless steel overflow pan shall be provided to contain flooding should the toilet outlet become blocked or system leak. The toilet bowl assembly shall be mounted on it. The pan shall be watertight with raised edges of ~2 inches height and have the attachment points exterior to the pan. The pan's exposed edges shall be folded for safety and to provide stiffness. The pan will be equipped with an overflow tube.
- (m) Toilet shroud
 - (i) The restroom shall be equipped with a toilet bowl assembly (described below) and shroud. The shape of this housing shall locate the toilet seat ergonomically for ease of use and comfort.
 - (ii) Sufficient foot room shall be provided. When seated, the user's legs shall not contact the shroud.
- (n) Toilet seat and lid
 - (i) A white soft close toilet seat with lid, meeting Amtrak specification # 352, shall be provided. The lid and seat shall be stable in the up position regardless to train motion, including braking, to prevent it from slamming down suddenly against the shroud. Amtrak part 24 419 41269.
- (o) Toilet bowl assembly
 - (i) Each restroom shall be equipped with an elongated toilet bowl assembly, encased in the toilet shroud described above.
- (p) Toilet flush button
 - (i) A clearly labeled flush button, shall be provided near the toilet in an obvious and convenient location within reach of a seated person. It shall be replaceable from inside the room.
- (q) Toilet seat cover dispenser

- (i) A toilet seat cover dispenser, Amtrak part 24 651 34215 (GSM Products 65B-203-K0066), shall be provided.
- (r) Toilet paper dispenser
 - (i) A two-roll toilet paper dispenser Amtrak part 24 411 41240 shall be provided.
- (s) Mirror and light
 - (i) A tempered safety glass mirror(s) shall be provided above the vanity, with a minimum size of 20 x 30" viewing area. A water resistant, fluorescent light fixture shall be mounted over the toilet vanity mirror.
- (t) Ceiling light
 - (i) A ceiling light shall be provided for general lighting.
- (u) Vanity and Sink
 - (i) An FRP vanity shall be provided, with a stainless steel sink insert. The faucet shall be commercial grade and allow adjusting the water temperature to the sink.
- (v) Shelf
 - (i) A shelf with raised edges shall be provided above counter level for personal items.
- (w) Storage space
 - (i) A storage locker shall be provided to store additional restroom supplies (toilet paper, facial tissues, paper hand towels, toilet seat covers, and soap and trash bag liners) inside the restroom.
- (x) Soap dispenser
 - (i) A base for a liquid soap dispenser, which will accept a Celeste Industries liquid soap refill (Celeste #TR-BR10W/Amtrak), shall be installed on the top of the vanity near the sink.
- (y) 120VAC receptacle
 - (i) A duplex 120VAC 20A Ground Fault Circuit Interrupter (GFCI) duplex receptacle shall be located near the sink and mirror, with stainless steel cover plate.
- (z) Facial tissue dispenser

- (i) A facial tissue dispenser with stainless steel cover shall be provided: Rail Plan Int. part # 14741.
- (aa) Paper towel dispenser
 - (i) A paper towel dispenser Amtrak Part 24 411 41239 shall be provided.
- (bb) Trash receptacle (vanity)
 - (i) A trash receptacle with sink water guard shall be provided near the vanity. The flap shall have a clear opening of at least 4" x 8", as well as the throat into the container to avoid getting blocked easily.
- (cc) Exhaust Grille
 - (i) An easily cleaned exhaust grille shall be provided near the ceiling, exhausting room air into the car exhaust duct.
- (dd) Floor heater
 - (i) A stainless steel floor heater assembly shall be provided. Care shall be taken that heat given off by this unit does not have detrimental effects, such as close proximity to the trash container.
- (ee) Floor heat digital thermostat
 - (i) A fixed-setting digital thermostat shall be provided, located approximately 48" above the floor in a location where it will measure a representative room temperature (not dead air).
- (ff) PA speaker
 - (i) A standard PA system speaker, with grille, mounted in the acoustical enclosure shall be installed in the ceiling of each restroom, mounted so it can be serviced from the front.
- (gg) Baby Changing table
 - (i) A baby changing table shall be provided: Rail Plan Int. part # 14741; AMMPS # 24-411-41278.
- (hh) Signage
 - (i) Restroom operating instructions and labels shall be in accordance with Amtrak specifications # 696 and 697. The module OEM shall provide a drawing for Amtrak approval of the signage.
 - (ii) Whenever possible, existing Amtrak signs shall be used. See Section 31.8 and 31.144.

m). Beverage Station

i). Overview

- (1) The function of the beverage station is to provide passengers of this car with self-serve access to coffee, hot water, juices (typically orange and apple), ice and chilled water.
- (2) The final room layout shall be developed during design review, with the aid of mockups.
- (3) The station shall be of modular construction, designed to be easily removable as a unit, should the function of the beverage station change over the life of the car. Likewise, since the coffee maker is an item that evolves over time, the module design shall be such that this can easily be changed to other units without the need for major module alteration. The unit shall meet FDA Food Code 2005 requirements. To the extent possible, the module shall use components common to the rest of the car or Viewliner diner (such as light fixture, door latches, faucets, etc).
- (4) The beverage station shall include the following features:
 - (a) Stainless steel countertop and backsplash
 - (b) Stainless steel sink (insulated), with hot and cold faucets & drain
 - (c) Under-counter light fixture with switch
 - (d) 120VAC duplex GFCI receptacle
 - (e) Coffee maker (Brewmatic, Amtrak part: 36 580 03006 or approved equal)
 - (f) Coffee maker restraint (8/4/4 g loads)
 - (g) Hot, cold and coffee maker water shutoff and drain cocks
 - (h) Coffee maker drain line
 - (i) Ice Dispenser drawer unit with drain pan.
 - (j) Cup dispensers: cold & hot
 - (k) Overhead pad-lockable dry storage
 - (l) Insulated drawer for juices and water
 - (m) Trash receptacle
 - (n) Electrical junction box
 - (o) Access panel for replacing filter

- (p) Divided container for creamer, sweeteners, stirrers, tea, decaffeinated coffee and napkins.
 - (q) Floor pan
 - (r) Water dispenser
 - (s) Electrical receptacle for coffee maker
 - (t) Signage
- ii). Beverage Station Module Design Requirements
 - (1) Concept of Module
 - (a) The Beverage Station shall be essentially a self-contained unit that is bolted to the carbody. The module shall be of a size to allow it to fit through the body end door. The module shall be supplied complete with internal wiring and plumbing, ready for connecting to the corresponding car-side feed point. Module wiring and plumbing shall be installed on the module in such a way that does not prevent future access as may be needed for repairs.
 - (b) Stainless steel fasteners shall be used for the carbody attachments.
 - (2) Car Servicing Time
 - (a) The nature of long distance operations requires short turn-around times at terminals. The design of this station shall make it easy to stock/ restock a car quickly and repair in place or replace system components as quickly as possible.
 - (b) Appliance change out time (diagnose problem, remove defective unit, install replacement unit and to verify function of replacement unit) shall not exceed the following:
 - (i) Coffee Maker: 30 minutes
 - (ii) Water filter change out: 15 minutes.
 - (3) Structural Requirements:
 - (a) The Beverage Station shall meet the crashworthiness standards of APTA RP-C & S-006-98 as a Standard (not recommended practice). This includes:
 - (i) Module structure itself, when fully loaded with all supplies and the entire stock with ice.
 - (ii) Securement of coffee maker (completely filled with water) to counter.

- (iii) Securement of ice drawer and insulated juice/ water drawer with ice & stock against opening.
 - (b) The performance of the securement system of the module structure shall be verified in a test.
- (4) Materials
 - (a) Module primary structural materials shall be stainless steel and honeycomb panels faced with high pressure laminate. Panel thickness shall be selected on the basis of required strength determined by finite element analysis, durability, impact resistance, and minimum weight. The Counter top shall be formed from stainless steel finish #13.
 - (b) Sealing and construction of the units shall not permit liquids and moisture to harbor behind/ over/ under any of their surfaces. The countertop shall have a raised edge on all exposed faces and a cove on all edges adjacent walls/ bulkheads. The design should take great care to make it easy to clean; no pockets, cavities, square corners, etc where residue can collect.
 - (c) All food service equipment as well as all the associated equipment (in any state of loading of stock) shall not: rattle, vibrate, oil can, squeak or produce other objectionable noises under any car motion and at any operating speed.
 - (d) The entire beverage station shall have a floor pan to prevent any liquids from spills, failed plumbing or condensation from migrating into other parts of the car.
- iii). Equipment Details – General
 - (1) The counter space allocated for the Coffee Maker shall allow space around them so that if at a future date the appliance is replaced with a different model or style of similar capacity, there is reasonable space available. In other words, the module design shall not be such that only the original model of the appliance will fit in that space.
 - (2) All equipment and appliances, fully loaded, shall be restrained against accelerations of up to: 8g in the car longitudinal direction, 4g in the car lateral direction and 4g in the vertical direction with an approved restraint system.
 - (3) The mounting scheme for the Coffee Maker and any accessories shall be designed to be easily cleaned and sanitized after each day of use.
- iv). Beverage Station Lighting
 - (1) The beverage station shall be fitted with LED countertop light fixtures. Car lighting and module lighting shall coordinate in order to:

- (a) Provide functional light for the self-serve use
 - (b) Provide emergency light to the module area during HEP outages:
 - (c) To allow stocking
 - (d) Maintenance (to the extent possible)
 - (e) Provide lighting to allow thorough cleaning of the module area
 - (2) The lighting system shall meet all requirements of FDA Food Code 2005, as well as those of APTA RP-E-012-99.
 - (3) In addition, module countertop light levels shall be 10 foot-candles with HEP off.
 - (4) Module lighting shall be aesthetically pleasing. Its design shall be coordinated with that of the rest of the car. Light locations shall be located so they will not produce glare, nor shine into the face of standing passengers.
- v). Water System
 - (1) Water Distribution
 - (a) Pressurized potable water from the rail car supply tank will be provided via a filter (to remove contaminants) to the beverage station for distribution.
 - (b) A manual ball type drain valve(s) shall be provided to allow draining ALL of the galley piping, either for water system servicing or manual draining of the car in advance of storage, or in anticipation of freezing conditions.
 - (2) Freeze Protection
 - (a) An air temperature sensing automatic drain valve shall be provided to cause automatic draining of the galley water piping so avoid freeze damage, should the galley approach freezing temperatures. All these valves shall be labeled in accordance to Amtrak Specification # 696.
 - (3) Drains
 - (a) The station drain system shall meet FDA requirements. The drain pans and drain piping shall be designed for reliable operation (i.e., they don't get blocked easily), be easy to clean and unblock. The food service system shall be equipped with the following drains:
 - (i) Sink

1. Minimum drain line inside diameter shall be 1-1/2 inches; minimum bend radius of the drain line shall be 2.5 times the drain inside diameter. The drain line shall have a minimum downward slope angle of at least three degrees to avoid water traps.

(ii) Coffee Maker drain pan

1. The pan should avoid sharp corners and be easy to clean at the end of the trip. The drain shall be sized so it does not easily clog from coffee grounds and be easily cleaned.

(iii) Ice Dispenser

1. Piping shall segregate it from other drains, per FDA requirements

vi). Sink and Water Dispenser

- (1) A utility sink, primarily for servicing the coffee server, shall be provided as an integral part of the countertop. It shall be formed of deep-drawn 300-series stainless steel, with generously rounded corners. They shall incorporate an anti-splash lip and the bottom sloping to the FDA-compliant, 1- 1/2" I.P.S. trapped drain. The underside of the sink shall be insulated to prevent condensation. A screened drain shall be provided for each, with a maximum hole or mesh size of the screen 0.1 inch.
- (2) Hot and cold water shall be provided to the sink through an industrial grade, manually on-off, dual control mixing faucet. Water shall be supplied at the pressures and temperatures specified in Chapter 17 via accessible local shut off valves.
- (3) A water dispenser shall be provided to allow passengers to get water. It shall be located to avoid splashing, with cup overflow captured.
- (4) Faucets and controls materials shall represent best commercial design practice. Drain screens, lines, and fittings shall be easily cleanable, corrosion-resistant and odor-free.
- (5) Selection of the faucet shall be discussed in design review. All fixtures, dispensers, and appliances shall be constructed in accordance with the requirements of the USPHS.

vii). Ice Dispenser

- (1) A manually operated stainless steel ice dispenser shall be included in the Beverage Station. The Ice dispenser shall hold 10 pounds of crushed ice. The ice dispenser will consist of two primary elements: the dispenser / drawer unit and the drain tray. All moving parts of the

dispenser shall be self-latching to the station structure, and shall withstand normal car motion as well as 8/4/4 g acceleration without releasing, including the weight of the ice.

(2) Dispenser / Drawer Unit

- (a) The dispenser / drawer unit shall consist of the dispenser with ice bin mounted in a stainless steel drawer slide assembly, which is fastened to the Beverage Station. The dispenser with bin shall sit on the drawer slide unit and shall be immediately removable from the drawer slide assembly for cleaning, replacement or access to the drain tray below.
- (b) The dispenser with bin shall be stainless steel in the form of a hopper with a manually operated stainless steel auger in the bottom. The bottom of the auger housing shall be perforated to drain water into the drain tray below. The auger shall pass through the front face of the hopper in a tube structure than includes a delivery chute underneath. The auger shall have a knob to allow customers to turn the auger and dispense ice into a cup.
- (c) A drained pan shall be provided below the cup filling area to capture ice spillage as well as water.
- (d) The drawer front of the dispenser drawer unit shall include a recessed pull and pencil latch for access by the attendant. The exterior of the hopper unit shall be insulated to prevent condensation.

(3) Drain Tray

- (a) A stainless steel drain tray shall be provided under the full length of the Dispenser / Drawer unit. The tray will provide the FDA required air gap to prevent contamination of the ice. The tray will be divided by a vertical partition to separate the drained hopper portion from the dispenser chute area. The partition will not go to the bottom of the tray so that water may pass from the dispenser chute area into the area under the hopper. The area immediately under the dispenser chute shall have a removable perforated platform to hold a cup. The drain tray will have sanitary corners. The tray bottom shall be sloped to the rear so that water will not overflow the front of the tray during train operation. The tray shall be connected to a through- floor drain via a food grade flexible hose. The exterior of the tray shall be insulated to prevent condensation.

viii). Water / Juice Drawer

- (1) Below the Ice dispenser shall be located a beverage drawer for storing and dispensing bottles and cans of water and juice. Drawer shall be accessible by the public and include and be housed in an insulated

enclosure and completely sealed off from the rest of the beverage station.

(2) Drawer Enclosure

- (a) The drawer enclosure shall be constructed of stainless steel or FRP with sanitary inside corners. The enclosure shall include substantial structural mounting points and tapping plates for attaching latch keepers, drawer slides and any other required hardware. The structural mounting points shall last the lifetime of the car. The enclosure shall be insulated so that the temperature in the enclosure shall not go above the ambient temperature of the car.

(3) Beverage Drawer

- (a) The beverage drawer shall be configured to hold cans up to 12 ounces, bottles up to 20 ounces on at least 3 shelves and two standard paper quart cartons. The cans and bottles shall be stored on their sides on shelves that slope toward the drawer front with enough slope so that they do not roll during normal train operation. The two paper quart cartons shall be stored vertically against the inside of the drawer front. The drawer shelves shall be of perforated aluminum and shall include sides that are at least half as high as the diameter of the largest container. Shelves shall be spaced vertically so containers may be loaded and removed easily. All inside corners of the drawers shall be easily wiped. All corners and joints shall be configured for easy cleaning and designed to reduce the accumulation of debris and soiling. The drawer front shall include a refrigeration style seal that seals firmly against the face of the drawer enclosure. The drawer front shall be finished to match the rest of the beverage station and shall be securely attached to the drawer so that it will tolerate the dynamics of the fully loaded drawer during normal train motion.

(4) Latch

- (a) The drawer shall include a passive paddle type slam latch which engages a renewable keeper on the drawer enclosure. The latch shall be of stainless steel or nickel bronze construction and proven in railroad use. The latch and keeper shall engage so that in the maximum wear condition of the drawer slide system the latch will be sufficiently engaged to keep the drawer closed when exposed normal car motion as well as 8/4/4 g acceleration without releasing when fully loaded with 20 oz. bottles.

(5) Drawer Slides

- (a) The drawer slides shall be stainless steel and other non-corroding materials. The slides must be heavy duty and durable enough to serve for half of the car life when cycled 120 times per

CONFIDENTIAL — DO NOT DISTRIBUTE

day. The slides must be substantial enough to not permanently deflect when the fully loaded drawer is fully extended and the train entering emergency brake application. The slides shall be configured so that passengers are not exposed to lubricants, pinch points or points that might snag clothing or skin. The drawer to slide interface should be such that if the drawer must be removed for servicing or to retrieve an errant container, it can be unlatched and restored without the use of tools.

ix). Trash Receptacle

- (1) A Trash Receptacle shall be provided that meets all FDA and NSF requirements for trash containers and their materials. The locker and the bin it contains shall be constructed of fire resistant materials, meeting the requirements of Amtrak specification # 352. The openings for inserting trash and recyclables shall be as wide as possible and shall direct the trash into the respective bin to keep to a minimum spillage around the container. The flap covering the opening shall close by gravity and shall not open and close from car motion. The trash locker container access door shall be secured closed with a pencil lock. The locker shall use as few joints as possible in fabrication, shall be permanently sealed against moisture and vermin. All corners shall be of large radius to make the enclosure easy to clean.

x). Coffee Maker & Docking Site

- (1) A Brewmatic coffee maker, model # 1032659, with drained docking site shall be provided and secured to the countertop. Individual water filters, CUNY CFS 8576-S, using replacement cartridge CFS 8112-S, shall be provided and secured in the cabinet under the coffee maker.
- (2) The Coffee Maker, completely filled with water, shall be restrained against accelerations identified above. The mechanism for the coffee drawer and Coffee Server shall be captive and shall not interfere with the normal operation of the unit. The coffee maker-to-counter securement fasteners shall be easily accessible and allow the unit to be easily changed out for servicing. All securement methods shall not deteriorate in their ability to restrain the equipment over the life of the Beverage Station.
- (3) The Coffee Makers shall be installed in the station with sufficient free space between the unit and the station walls to permit circulation of cooling/ ventilation air, as needed for cooling as well as to avoid condensation in the area, in accordance with the manufacturer's recommendations.
- (4) A Drain Pan, piped to drain to the ground, shall be provided to catch cup overflow, drips from the faucet as well as to allow the unit to be drained for cleaning or servicing/ replacement.
- (5) The coffee maker shall be powered through its own circuit breaker and the case grounded to carbody.

- (6) A countertop water shutoff valve for the unit shall be provided, located upstream of the water filter.
- (7) Basic characteristics:
 - (a) Coffee Server Capacity: gallon
 - (b) 208 Vac, 15 amp service
 - (c) No-water protection for heater element
 - (d) Hot water faucet for tea, etc
 - (e) A manual drain cock to empty the brewer water tank
 - (f) Plug type: NEMA
 - (g) Galley receptacle: NEMA
 - (h) Water supply quick disconnect – coffee maker side
 - (i) Water supply quick disconnect – galley side
- xi). Label Kit
 - (1) Labels, conforming to Amtrak National Signage Manual, Spec # 697, shall be applied to the station that identifies the following. Whenever possible, existing Amtrak signs shall be used. See 8.13.
 - (a) 120Vac receptacle
 - (b) Trash container identification
 - (c) Self-Serve label
 - (d) Juice/ water label
 - (e) Instructions for the ice dispenser (arrow, etc)

31.9 Baggage / Dorm Interior Design

a). Overview

- i). The function of the baggage/ dormitory car is to provide comfortable, daytime seating and night sleeping accommodations in individual rooms for off-duty crew members; with roomettes and/or solo suites. The car also includes a public shower and two public restrooms. The baggage area provides checked baggage for passengers, stored in racks to better utilize car volume. For the most part, dorm portion of the car are the same as those of the sleeper.
- ii). The final interior dimensions and locations shall be developed during design review, with the aid of mockups.

- iii). The car rooms shall be of modular construction, in accordance with Section 31.7, using common parts among all room types as much as possible.
- iv). Baggage / Dormitory Features
 - (1) Vestibule
 - (2) Trap door and folding steps
 - (3) Collision post door
 - (4) Side entrance door with hinged window
 - (5) Powered body end door
 - (6) Baggage room access door via Dorm
 - (7) Baggage room collision post door
 - (8) Baggage room loading doors (with #)
 - (9) Baggage room ladder
 - (10) Baggage racks (with #)
 - (11) Roomette (w room #) and/or Solo Suite (w room #)
 - (12) Public shower (w room #)
 - (13) Public toilet (w room #)
 - (14) Not used
 - (15) Electric locker
 - (16) Switch locker
 - (17) Emergency tools
 - (18) Fire extinguisher
 - (19) Linen locker
 - (20) Trash receptacle(s)
 - (21) PA unit
 - (22) Consist sign (3)
 - (23) Timetable holder
 - (24) Not used

- (25) Emergency brake valve (2)
- (26) End door cutout switch (2)
- (27) Hand grab
- (28) Door latch
- (29) Trap door catch
- (30) Folding end gate
- b). Vestibule
 - i). Same as sleeper.
- c). Passages & Hallway
 - i). The final interior dimensions and locations shall be developed during design review, with the aid of mockups.
 - ii). The hallway shall include the following features:
 - (1) Sidewalls
 - (a) The hallway side of the partition dividing the hallway from the roomettes and public shower & restrooms shall be FRP and include the following, beginning at the floor level:
 - (i) Stainless steel kick panel from Rigidized Metals or equal
 - (ii) Heavy gauge high pressure laminate inserts.
 - (b) Most, if not all, of this partition shall be provided by the room module OEM, as part of the respective modules.
 - (c) Hinged panels shall be provided as part of this partition wall to provide access to module piping.
 - (d) Outside corners of FRP modules in hallways shall include powder coated stainless steel panels to protect them.
 - (2) Hallway ceiling
 - (a) The ceiling level of the hallway shall be constant height. Most, if not all, of the ceiling panels and supporting structure shall be provided by the room module OEM, as part of the adjacent modules. Ceiling panels shall be lightweight phenolic composite sandwich design or honeycomb construction, as described in Section 31.7. Ceiling panels shall be designed, constructed and installed to allow easy individual opening and closing for maintenance and repair of any components located above the ceiling, such as: body end door operator and track, HVAC air

ducts, exhaust system, water heater, lighting fixtures, PA speakers, water piping, wiring, etc. Panels shall be hinged on the side, which provides the easiest access to overhead equipment when they are open.

- (b) Hallway lighting shall be provided by flush mounted fixtures mounted in the ceiling panels.

(3) Electric locker

- (a) The electric locker with adjoining switch locker is located just inside the body end door and is described in Section 31.7.
- (b) The electric locker door shall be hinged on the left side, facing the locker, to avoid blocking the passage when open.

(4) Linen locker

- (a) A Linen locker, conforming to Section 31.7, shall be provided with sufficient volume to store enough clean bedding, towels, etc. for the entire one-way trip as well as laundry bags for used linen and towels. Doors shall be secured with a pencil latch. Details of the lockers shall be developed during design review. Lockers shall be provided as follows:
- (b) Linen lockers shall have a base cavity 36 inches high, measured from floor to bottom of the first shelf. The remaining space shall have shelves 18 inches apart. Shelves shall be adjustable in 2-inch increments from the lowest shelf to within 8 inches of the ceiling. Adjustments shall be made by mechanical forces if requested by onboard services. Locker bases shall have sanitary corners, with a radius, for easy cleaning. Interior linings and shelves shall have smooth, color impregnated, sanitary surfaces. When the locker door is opened, the locker service lights shall be illuminated by the action of a limit switch.

(5) Trash Receptacles

- (a) A trash receptacle, in accordance with Section 31.7, shall be provided at the B-end of the car, opposite the electric locker occupying the lower half of the volume. Facing inward, the right side wall shall be removable to access the accessible bedroom restroom piping, if required.

(6) Miscellaneous controls

- (a) At the A-end of the hallway, at or near ceiling level, the following shall be provided, all clearly labeled:
 - (i) Emergency fan switch

d). Roomettes

- i). Same as sleeper.
- e). Public Shower
 - i). Same as sleeper.
- f). Public Restroom
 - i). Same as sleeper.
- g). Baggage Room
 - i). A-end half of the Baggage/Dorm car shall be equipped with a baggage room for checked baggage, regular express pallets, heavy express pallets, checked bicycles depending on the mode of operation of the car.
 - ii). The room shall include the following features:
 - (1) Interior Arrangement & Doors
 - (a) Bulkheads dividing the baggage room from the dormitory compartment, in accordance with Section 31.7, shall be provided. Security shall be provided between the baggage room and the dormitory area through the use of a hinged, reinforced, locked door. Supported by a full length piano hinge, the door shall open into the baggage room and be secured with a rotating handle latch, with handles on both sides of the door. The latch shall incorporate a slide bolt lock operable from the baggage room side of the door and with a coach key lock from the dormitory side. The door shall be equipped with a self-latching catch to secure it in the open position. The catch shall include a foot-operated release. The dormitory side of the baggage room door shall be labeled in accordance with Amtrak specification # 697.
 - (b) Likewise, a lockable, hinged collision post door is provided at the blind end of the baggage room to access an adjacent car.
 - (c) Wayside access to the baggage room shall be provided by twin hinged side loading doors (equipped with a ladder for access from low-level platforms) located near the center of the baggage area on both sides of the car. The doors shall be equipped with windows in the upper half of the door leaves.
 - (d) The baggage area between the side loading door and dormitory area shall be designed to function in two modes to handle checked baggage and bicycles.
 - (i) Any or all 3 luggage racks are lowered: handle checked baggage and bicycle racks shall not infringe into the baggage space.

- (ii) All 3 luggage racks are stowed: bicycle racks are exposed and swing out, intermingling with the stowed luggage racks, allowing the bay to be used to secure bicycles.
 - (e) Robust bulkheads, incorporating flush-mounted heaters, shall be provided adjacent the side loading doors on both sides of the aisle towards the dormitory end only. Bulkheads shall be built to withstand frequent impact with luggage and other cargo to serve as ends for the luggage bays and to provide structural support for the racks.
 - (f) The baggage area between the side loading door and A-end of the car shall be designed to function in three modes to handle regular and heavy express pallets, checked baggage and bicycles.
 - (i) Any or all 3 luggage racks are lowered: handle checked baggage and bicycle racks shall not infringe into the baggage space.
 - (ii) All 3 luggage racks are stowed: bicycle racks are exposed and swing out, intermingling with the stowed shelves, allowing the bay to be used to hang bicycles.
 - (iii) Any or all 3 luggage racks are stowed: handle regular and express pallets.
 - (g) Bulkheads shall not be provided on either side of the aisle of this baggage area. In order to prevent baggage shifting during operation, cargo nets shall be incorporated into the weather resistant jacket. Cargo nets shall be suitable for railroad operation and designed such that they shall not tangle or interweave in spite of regular stowing or lowering of shelves.
 - (h) The room shall be insulated, sidewalls, roof and under the floor. Car interior walls, end sheets and ceiling shall be covered with a sound-absorbent lining, painted gloss white to improve visibility in the room.
- (2) Baggage Room Heat
- (a) The heating system in the baggage room shall consist of only side-wall type floor heat along the outside walls of the car, similar to that in the passenger areas, supplemented with flush mounted heaters in the face of the bulkheads adjacent the side loading doors.
 - (b) The sidewall heat installation shall be located above the raised floor of the luggage areas, to keep the heaters dry. In addition, robust stainless steel guards, secured with captive mounting hardware to durable attachment points, shall be provided over both the grilles at the bottom and side wall air vents to protect

against impact from luggage/ cargo, as well as preventing obstacles from blocking air flow into the grille air opening.

- (c) The bulkhead heater shall be provided to warm the door area. Robust stainless steel guards, secured with captive mounting hardware to durable attachment points, shall be provided to protect these heaters from impacts.
 - (d) Due to the wet nature of baggage car interiors, heater wiring shall be routed from above to prevent water from entering any conduits, etc, and causing grounds or other electrical faults.
 - (e) A digital thermostat, protected from cargo impact with a suitable guard, shall be located near the center of the A-end half of the baggage room ~ 60" above the floor to control the baggage room heat.
- (3) Lighting
- (a) Ceiling mounted lighting, in accordance with Chapter 13, shall be provided along both side of the central aisle to illuminate the car and allow crew to easily read cargo and luggage labels, and safely handle them. In addition, fixtures shall be provided just inside the side loading doors to illuminate that area as well as the adjacent station platform, whether high or low.
 - (b) Two PA speakers shall be mounted in the room on the ceiling, as well as two smoke detectors and an alarm.
 - (c) A 120Vac 20Amp duplex receptacle shall be provided on one side of the room just inside the bulkhead separating it from the dormitory area.
- (4) Folding Luggage and Bicycle Racks
- (a) The final interior dimensions and locations shall be developed during design review, with the aid of mockups.
 - (b) The baggage room shall be divided into 8 bays that run along the car sidewalls, 4 on each side of the central aisle running the length of the room. Each bay shall be equipped with 3 tiers of folding, tubular luggage racks. The racks shall pivot at the inner walls to allow them to be stowed to accommodate varying sizes of luggage/cargo. The load-bearing surface shall be inclined upward at an angle of 3° to 4°. Steel cables enclosed in weather-resistant jacket shall provide for each folding shelf as secondary support. The lowest rack is provided to keep baggage off the floor, protecting it from water, etc. on the room floor. Dividers are included between the bays to compartmentalize cargo so it does not shift.

- (c) Luggage racks and supporting structure shall be made of stainless steel transversal tubing, with a raised edge for luggage retention. The racks shall have sufficient strength to support a load of 250 pounds midway between adjacent supports with a deflection not to exceed 1/4 inch and without permanent deformation. This shall be demonstrated at FAI. Two passive 1/4 turn latches shall be provided to stow each of the racks in the raised position. The luggage racks shall be easily moveable with one hand to stow or deploy. Rack design and shelf dimensions shall provide the flexibility of having:
 - (i) all luggage racks lowered for luggage handling.
 - (ii) any rack lowered for luggage handling.
 - (iii) all the luggage racks stowed.
 - (iv) enable bicycles to be secured when all luggage racks are stowed.
 - (v) racks of different bays function independently.
- (d) Rutland Industries, Mini-Mum model # MMW2XMHV or Amtrak approved equivalent for securing bicycle racks shall be provided along the inner walls folding out as needed to support a bicycle hung on it. An instruction placard shall be provided on the wall adjacent these racks, giving instructions for proper rack use.
- (e) Due to anticipated harsh environment exposure, rough handling of luggage/cargo, the luggage racks, bicycle racks and associated support structure and mounting hardware shall be robust and corrosion-resistant. They shall be simple in design, operation and maintenance without the need for springs, dampers, etc. Likewise, the baggage room walls, bulkheads and cargo nets shall be designed for durability in handling heavy luggage and various sizes of bicycles.
- (f) All exposed fasteners in the area shall be countersunk or flush mount types to preclude any damage to passengers' luggage. All edges and corners shall be rounded with generous radii. Bump strips shall be incorporated along the sides of each of the spaces to avoid scuffing the wall finish or the luggage.
- (g) The entire baggage room installation of racks shall be designed, manufactured and installed to prevent rattles, etc, resulting from car movement at any speed.
- (h) The fully loaded luggage racks and bicycle rack, mounting hardware and associated structure shall meet the strength requirements per APTA SS-C&S-034- 98 for equipment support as well as RP-C&S-006-98 for attachment strength.

- (i) Design of the luggage bays and bicycle racks shall be subject to design review.

31.10 Diner Interior Design

a). Overview

- i). Dining service is an integral part of the long-distance train experience. As such, the Dining Car must attract passengers and encourage repeat trips by train. In addition, the car should attract customers to encourage food/ beverage sales to enhance cost recovery of providing food service. The function of the dining car is to provide first class, full service restaurant meals in comfortable seating adjacent to eye-level picture windows, with a second window above providing extra light as well as night time viewing. Seating allows for passengers to remain together in small groups or join strangers for an opportunity become acquainted during a meal together. ADA seating is provided at the A-end of the car.
- ii). While the car is expected to operate primarily for 3 meal times during each day (breakfast, lunch and dinner), as demand requires, it may be available to passengers for up to twenty hours per day.
- iii). The car shall seat at least 42 patrons and shall be able to serve up to 150 meals per normal meal periods of breakfast, lunch and dinner.
- iv). The Contractor shall work closely with the Amtrak Engineering, Industrial Design Team and the Food and Beverage group to develop the Dining Car design.
- v). The car interior shall be of modular construction, in accordance with Section 31.7, using common parts among all car types as much as possible. The car interior lining shall be designed to keep to a minimum the overall number of components, both to ease initial assembly, and later expedite car overhaul. For example, large panels are preferred over several small ones for a given area, provided the parts are not so large as to be unmanageable to handle. Likewise, design shall keep the number of unique parts as well as those, which must be trimmed for fit to a minimum.
- vi). The final interior dimensions and locations shall be developed during design review, with the aid of mockups.
- vii). A full scale functional mockup of the car shall be developed and tested using actual cooking appliances, real food and “customers” to verify and refine the car functional design, reviewing such issues as dining room seating floor plan, service area location and arrangement, galley functions, simulated customer billing, etc—essentially everything that happens in an actual car in revenue operation.
- viii). Diner Features
 - (1) Powered body end doors

- (2) Food stocking doors
- (3) Food stocking door ladder
- (4) Dining room
- (5) ADA seat
- (6) Point of Sale
- (7) Service area
- (8) Galley
- (9) Electric locker
- (10) Switch locker
- (11) Galley electric locker
- (12) Emergency tools
- (13) Fire extinguisher
- (14) Linen locker
- (15) Trash receptacle(s)
- (16) PA unit
- (17) Emergency brake valve (2)
- (18) End door cutout switch (4)

b). Dining Room

- i). The final interior dimensions and locations shall be developed during design review, with the aid of mockups.
- ii). Dining Room Features
 - (1) Dining booth seating with tables
 - (2) Sconce lighting
 - (3) Ceiling lighting
- iii). The dining room shall include the following features:
 - (1) Interior Details
 - (a) Further details of most of the following items are found in Section 31.7.

(2) Sidewall Heat

- (a) Essentially the entire length of the seating area of the dining room, as well as outside wall of the hallway, shall be equipped with sidewall heat, as described in Section 31.7.

(3) Side Walls

- (a) Dining room side walls shall consist of the following, beginning at the floor level:
 - (i) Floor to heater grill transition cove
 - (ii) Stainless steel floor heat grilles
 - (iii) Side wall seat tracks
 - (iv) Wainscoting panels
 - (v) 120 volt outlet strip
 - (vi) Side wall able track
 - (vii) Window masks
 - (viii) HVAC supply air diffuser
 - (ix) Window shades & tracks
 - (x) Cove ceiling
 - (xi) Ceiling lighting
 - (xii) Central ceiling
- (b) Floor to Heater Grille Cove
 - (i) Floor to heater grill transition coves will be provided for floor coverings to transition to the walls and provided an easily cleanable area.
- (c) Floor heat grilles
 - (i) Heater grill length should correspond approximately to heater element length. A minimum number of unique grill and dummy grill lengths shall be used. Like units shall be interchangeable. Heater elements shall be accessible without having to remove booths/ seats, etc. except as approved by the Engineer.
- (d) Side wall seat tracks

- (i) Structural tracks for mounting the sidewall end of passenger seats and tables are provided as part of the car structure.
- (e) Wainscoting panels
 - (i) Wainscoting shall be high pressure laminate, substrate TBD, or metal panels with Tedlar covering. Panels shall be so designed as to allow for easy removal of the covering from the wall panels at overhaul without damage to the wall panels. Wainscoting panels may be contained in the overall window mask assembly.
- (f) 120-volt outlet strip
 - (i) Convenience outlets utilizing Wiremold 2400 # AL2400B series raceway and duplex 120 VAC receptacles shall be located between the window mask and wainscoting. The Wiremold base shall be integrated into the surrounding surfaces. A duplex receptacle shall be installed on each side of each table, located such that the table or seat does not interfere with access to the outlet. A "120 Volts" label, in accordance with Amtrak Spec. # 697, shall be installed on the Wiremold cover at each outlet location, ½ inch from outlet, between the outlet and the seat facing the outlet. The raceway shall be securely attached to the carbody structure so it does not work loose from the numerous insertions/ extractions of 120VAC plugs, for the life of the car.
- (g) Table track
 - (i) Side wall table tracks for mounting the sidewall end of the dining tables are provided as part of the car structure..
- (h) Window masks
 - (i) The outside wall surrounding the upper and lower windows shall be FRP faced per Section 31.7.
- (i) HVAC supply air diffusers
 - (i) Two stainless steel or satin finished anodized aluminum Supply Air Diffusers shall be provided in the lower row of window sills to distribute conditioned air to the dining room, per Section 31.7.
- (j) Cove ceiling
 - (i) The cove panels should extend from the top of the window mask to the ceiling light fixtures or central ceiling panels. Panel construction and installation shall allow for removal

and recovering of the surface covering at overhaul without damage to the cove panel or surrounding components.

- (ii) Panels should be of metallic, FRP, honeycomb or phenolic/foam core construction with decorative surfaces of Schneller G20002T or GT Form or high pressure laminate as appropriate. Alternative equivalents will be considered.
- (k) Dining Room Central Ceiling
 - (i) Panels shall be lightweight phenolic composite sandwich design or honeycomb construction, in accordance with Section 31.7**Error! Reference source not found..**
 - (ii) The ceiling height should be managed to maximize the upper windows but shall be low enough and so arranged to prevent a cavernous affect. Secondary suspended panels may incorporate indirect light fixtures. Center ceiling panels shall project from the A-end entry way area up to the service area. Ceiling levels may change to accommodate mechanical, electrical and HVAC requirements, with the approval of the Engineer.
- (l) Bulkheads
 - (i) Bulkheads shall be provided in accordance with Section 31.7**Error! Reference source not found..**
 - (ii) “Snap” frames for artwork, posters or menus, at least 18 x 24”, shall be provided on the 4 bulkheads facing the dining room: both sides of the car on the A-end.
 - (iii) Adjacent to or above the body end door on the A-end of the car, the following shall be provided, all clearly labeled:
 - 1. Emergency fan switch
 - 2. Body end door cutout switch
 - 3. Conductor’s emergency air brake valve
 - 4. Conductor’s signal button
- (m) Dining Room Lighting
 - (i) During meal periods, lighting shall provide the ambience of a fine restaurant. During non-meal times, brighter lighting may be required for car setup and cleaning. Lighting will be provided by a combination of indirect ceiling/cove lighting, table lights, wall sconces and aisle lighting.

- (ii) Dining room lighting shall provide lighting for two primary purposes:
- (iii) Light shall be provided for passenger activities:
 - 1. Safe passage within the car (either to be seated, or passing through)
 - 2. Reading the menu
 - 3. Be presented with food in appealing way, including good color rendition and intensity
 - 4. Dining
 - 5. If possible, prevent glare/ reflections on the windows so it is possible to look out at night
 - 6. Conduct money/ credit card transactions
- (iv) Light shall also be provided for crew activities:
 - 1. Safe passage within the car (either for serving passengers, or passing through)
 - 2. Setting the table
 - 3. Clearing away finished items during the meal
 - 4. Clearing table after passenger leaves
 - 5. General car cleaning and sanitation (meet FDA)
 - 6. Shop maintenance
- (v) In addition to the above needs, emergency lighting and lighting for charging the LLEPM in the aisle shall be provided. wDining Room Arrangement and Operation
- (vi) The dining room shall consist of an arrangement of transverse tables on both sides of a center aisle with booth type seating. The A-end of the car shall provide ADA accessible seating.
- (vii) Successful operation of the dining car as a high quality restaurant with only a small crew requires the smooth and efficient movement of waiters within the car, both to service passengers as well as prepare tables for the next serving. Since the car has only a single, narrow aisle, it can become congested during peak meal times. Accordingly, the table arrangement, location and design of service areas must be carefully coordinated to achieve the following goals:

1. Use space efficiently to provide maximum seating capacity
 2. Make car “easy to work” by designing in efficient work flow path by waiters to keep the number of trips to/ from galley and service areas to a minimum
 3. Prevent use of passenger tables as staging areas by good design of service areas, to make them convenient
 4. Arrange service areas to keep aisle congestion to a minimum
- (viii) A good car layout is essential to serve a large number of passengers’ quality meals in a reasonable time period and not tire the crew unnecessarily nor require awkward movements.
- (n) Overview Dining Room Booths
- (i) All seats shall be indexed to the windows, to provide an unobstructed view for all passengers. In addition, seats shall be designed and sited to provide comfortable leg and foot space for seated 95 percentile male/ 5 percentile female body size individuals. The path followed to access the seating shall be free of obstacles and avoid awkward motions to enter/ exit the seats. In addition, seating bases shall not inhibit access to the floor heat grilles, which shall be removable without disturbing the seating. Seats and their installation shall be designed to prevent harborage.
 - (ii) Seats shall be secured to the carbody via floor and side wall mounted seat tracks. The seating and mounting to the carbody shall meet the requirements of APTA SS-C & S 016-98 as well as smoke/ flame of Amtrak specification # 352.
- (o) Booth Seat Requirements
- (i) The booth shell primary structure shall be constructed of steel or FRP. The exposed fiberglass shall have either a laminate or high-gloss gel finish. The primary structure shall be clad with panels of upholstered or laminated surfaces. Seating structural components shall be designed to withstand normal passenger use for the life of the car. Booth seats shall meet the performance requirements of Amtrak Specification # 347.
 - (ii) Seat cushions and backs shall be upholstered in vinyl, woven fabric or leather; and be constructed in accordance

with Amtrak Specification # 665. The seat bottom cushion shall be secured to the booth frame with a U-channel in the back and using a heavy-duty hook and loop arrangement in the front. Likewise, the seat back shall be secured to the booth frame with a U-channel on the top and using a heavy-duty hook and loop arrangement at the bottom. The seat back cushion shall be mounted flush to the seat bottom cushion without a gap to ensure a secure attachment and ease of cleaning. Cushions shall be attached to the primary seat structure so that they retain their proper shape and are easily removable for repair, cleaning or replacement. Cushion assemblies shall be attached so that they will not detach in an accident.

- (iii) Seats shall be designed so that at overhaul, all cushions and decorative treatments can be renewed without removing the seat from the car.
 - (iv) Removal of a back and bottom cushion and their installation with a replacement shall be possible in less than two minutes total for the process, including engagement of all attachments. A demonstration of this for each unique booth configuration shall be included in the booth FAI.
- (p) Dining Table Requirements
- (i) The table top edges facing the passengers shall be constructed using current Crash Energy Management technology that is intended to reduce injury potential through the use of shock- absorbing crushable elements within the table top. The table and its attachments shall be strong enough to contain facing passengers such that passengers facing rearward during an accident are not injured by the collapsing table or the passenger(s) on the other side of the table. A review of this technology shall be part of the design review process for the tables. The table top shall have a melamine laminate top surface and composite edge machined smooth and free of sharp edges and burrs. The top shall have a 1/4" raised perimeter to retain spilled liquids.
 - (ii) The table shall be attached to the carbody via the wall table track and the floor seat track on the aisle end. The stainless steel hollow table leg shall be round, with a minimum 2" outside diameter. Mounting hole locations and tolerances on both the table as well as the leg shall be consistent so any leg can be used with any table with no modifications required; likewise for the mounting to the seat track.

- (iii) The table and its mounting shall comply with APTA SS-C & S-016-98.
- (q) ADA Accessible Seating
 - (i) The A-end of the car shall be provided with ADA accessible seating, which requires a 32 inch "Clear Passage" through the following:
 - 1. Diaphragm passage
 - 2. Body end door
 - 3. Path from door opening to accessible seating area
 - (ii) The A-end of the Dining Room shall include a seating area to accommodate a passenger using a wheeled mobility device. The accessible space shall be configured to allow the passenger to approach the seating area and transfer to a seat or, if they wish, remain in their wheel chair to dine. The seat in this space shall be designed to store flat against the bulkhead when not used. The seat shall also be configured so that when in use it is positioned at a normal distance from the table so it is comfortable for handicapped as well as ambulatory individuals.
 - (iii) The table shall be cantilevered from the wall via the side wall table track and side wall seat tracks. The performance requirements, construction techniques and appearance of the ADA seating as well as the table shall be consistent with that of the rest of the car. Seating at the "Accessible" end of the table shall "flip-up" to permit the wheel chair to be parked. The arrangement should be similar to the accessible lounge tables in the Superliner II.
 - (iv) The accessible area shall not simply comply with the ADA but will provide space that is universally accessible and shall not compromise the dignity of the person using it, including an unobstructed view from a window.
 - (v) A space for storing a standard folding wheeled mobility device shall be provided adjacent to the accessible seating area.
 - (vi) A 10" high brushed stainless steel kick-plate/ molding shall be located at the floor level of the wall and any other surfaces susceptible to come in contact with a wheeled mobility device along the Accessible path from the body end door to and including the accessible booth area.
- (r) Seat and table tracks

- (i) Seat and table tracks shall be provided, in the floor and side walls, on both sides of the full length of the dining room. These shall be used to secure booths, tables, etc. and allow the car floor plan to be modified in the future should there be the need. Tracks shall be stainless steel Unistrut tracks. The tracks and their securement to the carbody together with the attached equipment shall meet all the requirements of APTA-SS-C&S-016-98.
 - (ii) Tracks shall be provided as follows:
 - 1. Floor track: Two rows of seat tracks, located along car aisle; anchors aisle end of booth seats and tables, etc. The floor seat tracks shall be spaced consistently. Stainless steel hat sections applied directly on top of the transverse cross bearers shall support the seat track, with the tracks fastened directly to this car structure. The hat sections shall divide the floor panel arrangement into three longitudinal sections. The seat tracks shall be spaced uniformly within each car and also car-to-car so that flooring does not need to be cut to fit an individual car. Spacing shall control tolerance build-up. The seat tracks shall be placed so that the top of the track is flush with the top of the floor panels. Track installation should be coordinated with LLEPM.
 - 2. Side wall seat track: located just above floor heater grilles; supports wall end of booth seats and tables, etc. If desired, the bottom edge of the track may include a slot to retain the top of the floor heater grilles. Arrangement of the seat mounting shall not impede servicing the side wall heat system grilles.
 - 3. Side wall table track: located just below lower edge of window mask; supports dining room tables. Installation shall coordinate with 120Vac outlet strip.
 - (iii) Flush fitting Tee filler strips or equivalent shall be provided in areas where these tracks would be otherwise exposed.
- (s) Emergency Tools
 - (i) A lighted, full emergency tool locker is incorporated into the car, the location will be approved at design review.
- c). Passages & Hallway

- i). The final interior dimensions and locations shall be developed during design review, with the aid of mockups.
- ii). The hallway shall include the following features:
 - (1) Sidewalls
 - (a) The outside wall of the hallway past the galley shall employ side wall heat and shall be similar to that in the dining room, though the ceiling is lower and there is only lower row of windows provided. The side wall shall consist of the following, beginning at floor level:
 - (i) Floor to heater grill transition cove
 - (ii) Stainless steel floor heat grills
 - (iii) Wainscoting panels
 - (iv) Window masks (similar to dining room)
 - (v) HVAC diffuser
 - (b) The passenger side of the wall dividing the hallway from the galley shall consist of the following, beginning at the floor level:
 - (i) Stainless steel kick panel from Rigidized Metals or equal
 - (ii) High pressure laminate, substrate may be of honeycomb or phenolic panels
 - (iii) Decorative light fixtures
 - (iv) Art work frames (see Section 31.14)
 - (2) Hallway ceiling
 - (a) The ceiling level of the entrance area at the B-end, along the hall passing the Service Area and Stocking Door areas shall remain constant until reaching the dining room, where it will become higher due to the upper row of windows.
 - (b) Panels shall be lightweight phenolic composite sandwich design or honeycomb construction, as described in Section 31.7. **Error! Reference source not found.** Ceiling panels shall be designed, constructed and installed to allow easy individual opening and closing for maintenance and repair of any components located above the ceiling, such as: A-end body end door operator and track, HVAC air ducts, galley exhaust system, water heater, lighting fixtures, PA speakers, water piping, wiring, etc. Panels shall be hinged on the side, which provides the easiest access to overhead equipment when they are open.

- (c) Hallway lighting shall be provided by flush mounted fixtures mounted in the ceiling panels.
 - (3) Electric locker
 - (a) The diner electric locker is located just inside the body B-end door and is described in Section 31.7 **Error! Reference source not found..**
 - (4) Switch locker
 - (a) Because the galley prevents locating the switch locker adjacent, the diner switch locker is located across the passage from the electric locker. The door shall be hinged on the right side, facing the locker, to avoid blocking the passage when open.
 - (5) Galley switch locker
 - (a) The galley switch locker should be located, recessed into the wall dividing hallway from galley. The door shall open ~180° to near flat against the wall, so as to not block hallway passage when open.
- d). Service Area
- i). The Service Area shall be located outside the galley adjacent to the left side loading door and will serve as a point for managing the dining room and galley. It shall incorporate the PA unit and Point of Sale system (POS) and associated support equipment (UPS, etc), lockable cash drawer. Occasional storage as needed by the staff is also provided.
 - ii). The final arrangement dimensions and locations shall be developed during design review, with the aid of mockups.
 - iii). The Service Area should be constructed of Nomex honeycomb panels and faced with high pressure laminate. The construction and finish shall coordinate with the rest of the Diner interior at the direction of Amtrak. It shall incorporate a stainless steel countertop 36" above floor.
 - iv). The service area shall consist of a floor to ceiling cabinet module divided into an upper closed cabinet, an alcove/counter area for the POS and an under cabinet for occasional storage by staff. The upper cabinet shall have one or two hinged doors with continuous piano hinges and pencil latch and padlock able feature. The alcove/counter area shall feature a stainless steel counter with mounting provisions for the POS. LED light fixtures with integral switch shall be provided above the counter under the upper cabinet to illuminate the counter to an appropriate level for reading and operating the POS system. The back wall of the alcove shall include a twin duplex 120Vac receptacles, labeled "Point of Sale" and powered from the food service circuit breaker panel POS circuit breaker. The under cabinet shall include one adjustable shelf and one or two hinged doors with continuous hinges, paddle latches and padlock

able feature. The lower portion of the doors shall have a kick plate treatment to the same height as the heater grill in the hallway.

- v). The upper cabinet shall be divided into two sections, with the right side provided for storage and accessed with a paddle latch. The left side of the upper cabinet shall enclose the PA Unit, accessed by opening the hinged door secured by a paddle latch. The PA unit is provided in the Service Area to allow the service attendant to advertise dining service as well as provide other service information.
- vi). To verify the station functions as intended in an operating dining car environment, a functioning mockup shall be tested in real or simulated service, including operation of the Point-of-Sale.

e). Loading Door Area

- i). The final interior dimensions and locations shall be developed during design review, with the aid of mockups.
- ii). The stocking door area shall include the following features:
 - (1) Durability
 - (a) The area around the stocking doors will be subject to considerable abuse from impact with food carts and galley supplies during the stocking and stripping processes. Accordingly, the areas immediately surrounding them shall be constructed robustly and of tough materials which can tolerate these impacts for the life of the car without sustaining serious blemishes. Likewise, the stocking doors are heavy and the associated stops and hold-open latches shall be designed to withstand this type of service for the life of the car. The approach to be taken to achieve these requirements shall be part of the diner design review process.
 - (2) Lighting
 - (a) Lighting for the stocking doors shall be recessed LED type fixtures, designed and located to illuminate not only the area inside the car, but also to shine outward onto the station/ shop platform to facilitate the stocking/ stripping process at the beginning and end of the trip.

f). Galley Interior

- i). Overview
 - (1) The Contractor shall work closely with the galley OEM to coordinate the design and installation of the galley to the carbody to ensure there is clear understanding of the responsibilities at the interfaces. It shall remain the builder's responsibility to ensure the following interior design issues are successfully coordinated.

ii). Galley floors

- (1) The galley floor shall be of stainless steel and shall extend from the car outside wall to the galley- hallway wall and join smoothly with the main structural flooring of the car where they meet. It shall meet the requirements of Section 31.7**Error! Reference source not found..** In design review, the use of Baultar material for the galley floor shall be reviewed. The junction between the horizontal floor and the vertical walls shall have sanitary corners. The floor shall slope from the sides to the lateral center of the galley, where a gutter will be incorporated. Drains to the ground shall be provided at a minimum of 5 points along the length of the gutter and ends. The floor design shall be seamless to prevent water intrusion. The floor shall be designed to prevent the accumulation of water on its surface where it could make the floor slippery, such as from condensation from chillers and chilled carts. The floor design shall prevent water pooling and water spilling out of the galley area during dynamic car movement. The contractor shall include a test to check this during pilot car testing.
- (2) The floor sheet shall be sufficiently thick or underside of the floor sheets shall include sufficient stainless steel stiffening ribs, so as to prevent "oil canning". The galley floor system may not include aluminum, plywood, plymetal, steel, corten, honeycomb, plastic or any hydroscopic material susceptible to long-term damage from water, soap, detergents, cleaning agents (both acid and base). The Contractor shall present, for review and approval, designs for the floor galley floor system that exhibit how the car's basic structural components, particularly the bolster and sills, will be protected from contamination corrosion from water and other galley chemicals including chlorine based products.
- (3) The floor of the galley shall include removable elastomeric flooring that will allow water to drain and improve the comfort of personnel that must stand for long periods of time. The material selected shall allow the food stocking carts to be easily moved within the car so as to not hinder stocking/ stripping or cart movements during the trip. Likewise, the flooring must not be damaged from the concentrated "point" loads of the food cart casters, which employ wheels of small diameter. The approach to this shall be subject to design review and Amtrak approval.

iii). Galley walls

- (1) The interior surface of the galley walls shall be lined with stainless steel to prevent the passage of vermin into the car's insulated side walls.
- (2) The thermal insulation contained in the car walls, floor and the underside of the roof, shall be enclosed to prevent exposure to fluids and grease. This includes preventing wicking action into floor or side walls.

- (3) The framing of the hallway partition shall be stainless steel. The galley side shall be of stainless steel. The walls may be of honeycomb or phenolic panels.
- iv). Counters and backsplashes
 - (1) All counter surfaces and back splashes shall be stainless steel and finished according to the FDA and recommended practices of the NSF. All inside corners shall be sanitary corners.
- v). Galley Ceilings
 - (1) Galley ceiling shall be lightweight honeycomb or phenolic panels faced with high pressure laminate and balanced on the blind side and otherwise conforming to Section 31.7. Panels shall be hinged to provide overhead access. The ceiling height should be a minimum of 84 inches.
- vi). Lighting
 - (1) Recessed flush mounted fluorescent fixtures shall be employed to provide general lighting to the galley.
- vii). HVAC diffusers
 - (1) Stainless steel or satin finished anodized aluminum linear air diffusers shall be used along the galley ceiling to distribute conditioned air. A flush, continuous, double slot diffuser shall run along each side of each ceiling distribution duct. Supply air diffusers shall be integrated into the surrounding surfaces. Diffusers shall be designed to be easily adjusted to set car air balance without having to drop ceiling panels, nor removing any parts. The diffusers shall be easy to clean, without removal, using a simple vacuum cleaner wand tool and shall avoid shapes that collect dust and dirt. They shall be rigidly attached to the car structure. Diffusers shall direct air flow so as to not create drafts on galley occupants. It shall be possible to drop ceiling panels without having to disturb supply air diffusers (screws, etc.).
 - (2) In addition to the damper used to adjust car air balance, the diffusers in the galley ceiling shall also include several air flow adjustment diverters/ dampers, provided so galley staff can limit airflow where desired. Settings shall be retained against vibration so they do not slowly drift, whistle nor rattle. The controls shall not protrude to be a safety hazard.

31.11 Interior Surface Materials and Colors

- a). Overview
 - i). Interior material color and surface materials will be made available to the Contractor within 90 days of NTP.

- b). Sleeper
 - i). To be supplied 90 days after NTP.
- c). Bag / Dorm
 - i). To be supplied 90 days after NTP.
- d). Diner
 - i). To be supplied 90 days after NTP.

31.12 Floor Coverings

- a). Floor Coverings – General
 - i). The car floor shall be equipped with a combination of carpeting and composite flooring to provide an aesthetically pleasing and safe environment for the passenger. Safety shall be foremost in the design, as well as installation, of all materials. Carpeting is used not only for aesthetics, but also as a sound absorbent. All floor coverings shall be new. The integration of the base floor material, carpeting and shower/ restroom inserts shall be the subject of design review.
 - ii). Care shall be taken to ensure smooth transitions between flooring, carpeting as well as restroom entrances, seat tracks, etc, to avoid tripping hazards. Generally, clamping thresholds should be used at these joints, and longitudinal carpet-retaining tracks used to secure carpeting. Carpet- retaining track locations shall be coordinated with those of LLEPM tracks to ensure a smooth transition. Joints in the floor beneath the floor covering shall be smooth, so as that there is no transmit bumps, ridges and other irregularities through to the finished surface of the covering.
 - iii). The Contractor shall provide an adhesive system suitable for railcar applications and be unaffected by the inherent flexing of vehicle interior color panels and temperature swings during train operation. The adhesive shall not degrade the flammability, smoke emissions and toxicity characteristics of the carpet, composite flooring or car substrate.
 - iv). The composite flooring, floor coverings and their adhesive systems shall be able to withstand a wide variety of periodic and specialized stain removal cleaning typical for a passenger rail vehicle without any stretching, puckering, rippling, fraying, pulling up, or other adverse effect to the surface appearance or function. Cleaning may occur daily, and at least every 90 days using a carpet cleaning machine, hot water, and caustic or acid chemicals. Daily specialized spot cleaning will take place using chemical cleaners, scrubbing with brushes, and application of gum remover.

- v). The base floor and floor coverings shall be installed in accordance with the best practices of the industry and OEM instructions. Floor coverings, their trim and the installation of these materials shall result in a smooth and flat floor covering for the life of the floor covering. Coverings shall be removable at end-of-life with no damage to the underlying floor panels.
- vi). The carpet vendor shall provide detailed recommended cleaning instructions, for the Contractor to include in the maintenance manual sets.
- vii). To the extent possible, floor coverings for each site shall have the same dimensions among all cars, or among like cars at a minimum, so materials can be cut to size outside of the car and be installed with minimal on-car trimming.
- viii). The contractor shall present at design review a seaming plan for all flooring for approval.

Table 31-1 – Flooring Materials

Flooring Material	Car Type	Locations Used
Carpet	All (Except baggage area)	Sleeper & dorm rooms
		Diner dining room
		Hallways
Composite Flooring	All	Entrance area just inside body end doors, both ends
		Inside closets, lockers, trash lockers
	Sleeper	Folding trap & steps (material to be determined)
		Vestibule
		Accessible restroom/ shower
		Bedroom toilet/shower
		Under sleeper seats, all rooms
		Public shower, shower itself
		Public restroom
		Area in front of beverage station
	Baggage/dorm	Folding trap & steps (material to be determined)
		Vestibule
		Under sleeper seats, all rooms

		Public shower, shower itself
		Public restroom
		Area in front of beverage station
	Diner	Stocking door areas
		Service area
San-Eze rubber mat	Diner	Galley

b). Carpeting and Securement

i). Carpet

- (1) Heavy-duty commercial carpet, Mohawk or equivalent, shall be provided in passenger seating areas. Carpet shall be designed for modular replacement. All areas of common design shall use template cut carpets. Linear carpets such as those used for aisles, shall likewise be of identical sizes within car types. Roomette and Solo Suite carpets shall be replaceable in 15 minutes each. Bedroom and ADA room carpets shall be replaceable in 20 minutes. Sleeping car and Dining car aisle carpets shall be replaceable in 30 minutes.

ii). Carpet Securement

- (1) Generally, the aisle and hall carpet shall be mechanically secured or an alternative method proposed by the contractor to the floor using longitudinal carpet-retaining tracks along both sides of the center aisle and also along the outside edges of the car in the sleeper car hallway. A cove shall be provided where the carpet meets the longitudinal wall for ease of cleaning. Clamping thresholds shall be used at transitions to rubber or composite flooring and metal moldings, as required, such as at bulkheads.
- (2) The carpet-retaining tracks along the aisle may be incorporated in the (Section 31.12) tracks for LLEPM (Chapter 13). The spacing between the carpet-retaining tracks, moldings, etc shall be identical on all cars so that carpeting does not need to be trimmed to fit a specific car.
- (3) If carpet must be glued into place at certain locations, these require Amtrak approval.

c). Baultar Flooring

- i). Baultar flooring shall be provided throughout the cars. Amtrak may specify up to three colors of this flooring.
- ii). Basic Flooring Panels shall be constructed in one piece including a Foam Composite Core with an integrated Covering, composed of hard aggregates embedded in an Epoxy Matrix. Flooring used in restrooms,

showers and other similar applications shall be bonded to the room floor pan using an adhesive system that will last for at least eight years. The adhesive system should allow for removal of the existing flooring after eight years without damaging the FRP pan.

- iii). The number of seams shall be kept to a minimum. All seams shall be “cold welded”, or otherwise sealed and bonded according to the manufacturer’s recommended practice. The joint between the wall lining and the floor covering shall be sealed to prevent harborage, accumulation of debris, or incursion of water and cleaning fluids.
- iv). The floor covering shall have an integral cove of liberal radius for easy cleaning, and shall extend from 2" to 6" up the wall. Where flooring meets vertical walls, it shall be “flash coved” and include sanitary corners to ease cleaning and prevent collection of debris.
- v). Transition strips shall be provided between hard flooring, carpeted areas and restroom and shower room floors. Transitions between flooring types shall produce level changes in flooring surfaces less than ¼”.

d). Baggage Room Floor

- i). Baggage room of the Baggage/Dorm Car by its nature of use is subject to extreme loading conditions, wear, exposure to severe weather conditions, salt, water, acidic fluids, etc. Floor material for the baggage room shall need to be tolerant to the wear and tear that it will be subject to during the life of the car such that it requires minimal maintenance and overhaul, yet not compromise the safety and aesthetic synchrony with the rest of the car.
- ii). Floor panels shall be phenolic composite covered with Nora Rubber Flooring, Norament Grano, hammered finish, appropriately sized to meet the functional requirements in Section 8 and Section 4.5.13 & 14, except as identified herein. The floor covering shall be a skid-resistant type such that it provides a safe working environment for the crew and maintenance personnel during normal and severe weather conditions, salt, fluids, etc.
- iii). Other floor construction systems shall be considered which meet the functional requirements of the Specification. In no case shall any material or construction system that inherently rots or otherwise corrodes or readily degrades in the railroad environment be allowed. Combining of dissimilar metals or reactive materials shall not be allowed.
- iv). Material and devices shall be added, where appropriate, to ensure the continued integrity of the floor, and augmenting local durability and slip resistance, such as at thresholds, transitions and areas subject to repeated strikes.
 - 0.0625-inch maximum allowable deflection when an uniformly distributed load of 200 pounds with a load factor of 4 is applied over a

simply supported panel of area of 36 x 24 inches. There shall be no permanent deformation or fracture. Contractor is required to conduct the test and submit results for Amtrak approval.

- 0.0625-inch maximum allowable deflection when a uniformly distributed load of 200 pounds with a load factor of 4 is applied over an area of 0.25 x 0.25 inches on a simply supported panel of area of 36 x 24 inches. There shall be no permanent deformation or fracture. Contractor is required to conduct the test and submit results for Amtrak approval.
- 0.1-inch maximum allowable deflections when above loading conditions are cyclically applied 10^6 times on a simply supported panel of area of 36 x 24 inches. There shall be no permanent deformation or fracture. Contractor is required to conduct the test and submit results for Amtrak approval.

e). Diner Galley Flooring

- i). The galley floor shall be equipped with removable elastomeric flooring, "San-Eze" black rubber mat flooring, 7/8" thick, with drain holes, or approved equivalent. This will rest on the galley stainless steel floor. The mat is to improve the comfort of personnel that must stand for long periods of time. The San-Eze flooring will sit in a drained stainless steel pan that extends from the B-end near the handwash sink to the A-end near the side loading door. The pan will be rectangular so that the San-Eze material can easily be cut to size. The area between the side loading doors shall be Baultar Abrastop the same as the material in the hallway. The area from the B-end of the San-Eze pan will be Baultar Abrastop as in the hallway.
- ii). The arrangement of the stainless steel floor and the junction with the Baultar composite flooring shall be such that when the San-Eze mat is in place the two surfaces are level to each other. The San-Eze or equivalent mat shall be configured to allow easy movement of loaded carts into their docking points.

31.13 Window Shades and Tracks

- a). Adjustable window shades, riding on a track or pulley system, shall be provided for all passenger seating area windows in all car types.
- b). Window Shades
 - i). Window Shades shall be installed as described within the respective car type sections. The same window shades shall be used for all locations of like type:
 - (1) Upper windows
 - (2) Lower windows
 - (3) Sleeper room door window

(4) Sleeper room partition window

31.14 Signage and Labels

- a). Interior and exterior signage shall be provided which conforms to Amtrak National Onboard Signage Guidelines, as defined in Amtrak specifications # 696 and 697. Likewise, emergency signage shall be provided that complies with APTA SS-PS-002-98 and SS-PS-004-99. Where photo-luminescent materials are used, the relationship between signage and associated car lighting shall be coordinated to ensure they are properly charged.
- b). Wherever possible, existing Amtrak signs shall be used. Where new sign designs are required, the Contractor shall develop artwork in accordance with the Amtrak Onboard Signage Guidelines, for Amtrak approval. The Contractor shall provide a signage application drawing for Amtrak approval identifying all signs and labels used on each car type, including text, as well as dimensioned mounting locations.
- c). All interior signage instructions shall be in English and incorporate standard international icons where available. Where practical and appropriate, signage shall incorporate Grade 2 Braille and/or raised lettering to accommodate visually impaired passengers.
- d). Car numbers shall be displayed at both ends of each car inside on body end doors. Cars names shall be displayed on both inside and outside of the body end doors on both ends on sleeper cars.
- e). "Snap" picture frames, 18" x 24", in accordance with Amtrak Drawing D-014-3067, shall be provided on bulkheads and on hallway walls in the following locations for artwork, posters or menus:
 - i). Bulkheads at ends of the dining room of the diner car, both sides of car
 - ii). Hallway past galley on diner car
 - iii). Hallway past accessible and bedroom A & B (?) of the sleeper car
 - iv). Transverse bulkheads near beverage station, where hallway offsets, sleeper car
- f). The frame shall be attached with hidden threaded fasteners, engaging tapping plates or weld-nuts.

31.15 Passenger Information Racks

- a). A 2-pocket type Passenger Timetable and Pamphlet holders, in compliance with Amtrak Specification # 352, shall be provided as follows:
 - i). on sleeper: near B-end body end door, inside door
 - ii). on diner: Location to be determined during design review

* End of Chapter 31 *

Amtrak Single Level Fleet Replacement

Technical Specification

32. Cab Car and Train Controls

Revision 0

<RESERVED FOR FUTURE USE>

Table Of Contents

32.1	Overview	32-2
32.2	Cab Arrangement.....	32-2
32.3	Cab Windows	32-5
32.4	Emergency Egress/Ingress	32-6
32.5	Cab Enclosure.....	32-6
32.6	Cab Door.....	32-8
32.7	Windshield Wiper	32-9
32.8	Sun Visor.....	32-10
32.9	Mirror	32-10
32.10	Engineer's Seat.....	32-11
32.11	Horn	32-12
32.12	Bell	32-13
32.13	Miscellaneous Cab Items	32-14
32.14	Cab Controls	32-15
32.15	Electrical Circuits.....	32-24
32.16	Heating, Ventilation and Air Conditioning.....	32-28
32.17	Cab Lighting	32-28
32.18	Alert and Event Recorder System.....	32-30
32.19	Radio System.....	32-34
32.20	Locomotive Digital Video Recorder System.....	32-35
32.21	Train Communication and Data System	32-35
32.22	Cab Controls Testing	32-35
32.23	Production Tests	32-38

Table of Figures

Figure 32-1: Engineer's Minimum Clear Viewing Distance from the Seated Position	32-4

32.1 Overview

- a). This chapter describes the design and functionality of the optional cab car to be included in this procurement, including control equipment, instruments and gauges for systems necessary for the safe and efficient operation of rail cars from the Engineer's cab, and ancillary equipment for crew comfort and safety.
- b). The Cab Car F-End shall include streamlined styling for reduced wind resistance to reduce fuel consumption and enhance locomotive performance at high speeds when the consist is operated in push mode. An end door, if provided for egress, must not detract from the end of train strength and safeguards for train crew protection from accidents at highway grade crossings.
- c). Space behind the operating cab shall be physically separated by a door and used for revenue seating of coach class seats in a 2x2 configuration, with an accessible seating location and accessible restroom with a 60 inch turning circle identical to the High Capacity Coach Car. The materials and workmanship shall comply with Chapter 19.

32.2 Cab Arrangement

- a). This chapter provides details regarding the Engineer's operating cab while the passenger seating area shall closely resemble the seating arrangement provided for the High-Capacity Coach Car.
- b). The Engineer's cab compartment shall conform to FRA requirements and be sized for three crew members (Engineer, Assistant and extra observer), using two fixed seats and a jump seat, at the F-end. This cab compartment shall extend the full carbody width.
- c). The Engineer shall be located on the right side of the cab in the direction of travel, with the Assistant on the left side of the cab. It is of great importance that the cab compartment be designed to provide maximum comfort and alertness for the Engineer and Assistant for long periods of duty, as well as have the highest level of durability, reliability and maintainability.
- d). The cab area shall be laid out so as to be neat and orderly in appearance, with all apparatus designed and arranged in a manner that will not cause confusion to the Engineer.
- e). The layout shall maximize the use of available space and shall employ sound ergonomic and industrial design principles in its development yet designed to be rugged and easily maintained.
- f). The more critical displays as identified herein shall meet human machine interface standards.
 - i). The displays shall be located adjacent to the windshield, in the Engineer's plane of normal forward vision, for ease of viewing.
- g). Utility shall not be sacrificed to aesthetics, although a pleasing and comfortable environment for the Engineer shall be a design objective.
- h). Controls shall be arranged so that those which are most often used, or are of

CONFIDENTIAL — DO NOT DISTRIBUTE

critical importance, are the most convenient to the Engineer, and others shall be located such that the hazard of misuse is minimized.

- i). The cab arrangement shall be in compliance with the Tier I cab requirements of 49 CFR Part 238. All cab designs, materials and workmanship shall comply with the requirements of the appropriate chapters of this Specification and shall be submitted to Amtrak for approval during the design review process. A cab mock-up shall be constructed for review and approval by Amtrak in the same fashion as the requirements in Chapter 3.
- j). Adequate space shall be provided on the cab console for maintenance personnel to place a standard laptop computer (10 in. by 15 in.) for operation during vehicle tests.
- k). The Engineer's cab shall be isolated from passenger access, and shall be configured, including its door and locking provisions, to be in compliance with all applicable security guidelines. The cab shall be configured so that it may be closed off and locked when not in use.
- l). The cab compartment linings shall be highly durable, scuff and scratch resistant materials, such as fiberglass reinforced plastic or melamine covered with Tedlar composite laminate or other Amtrak approved materials.
- m). Modular console construction shall be used, with quick-opening captive black-finished stainless-steel fasteners used for attachment of console panels.
- n). All interior panels shall be designed with large radius corners [0.5 in. (12.7 mm) minimum] and smooth transitions to facilitate cleaning and prevent injuries. The number of exposed fasteners, seams and moldings shall be minimized.
- o). The control panels facing a seated Engineer shall be provided with a dull black finish to eliminate glare.
- p). Exposed fasteners used to retain components shall be captive and have a black anodized finish to match the surrounding area.
- q). The cab shall be arranged and finished to minimize injury to the Engineer and Assistant in the event of an accident or collision, and shall be free of sharp edges, protruding objects, safety hazards and floor obstructions as required by Military Standard MIL- STD-1472, latest revision. Areas in which newspapers and other debris can accumulate are not permitted.
- r). Cab equipment and controls shall be mounted in modules and/or panels to be easily replaceable from the front or top of the installed position.
- s). Electrical control panels shall have all wiring for the panel electrical devices terminate in an approved keyed quick-disconnect interface to the carbody wiring, so as to permit ease of panel removal.
- t). All pressure switches and sensors, and all pneumatic cutout cocks, shall be arranged for ease of complete crew and/or maintenance access. Innovative methods to facilitate cab equipment servicing and troubleshooting shall be proposed, such as mounting equipment panels using hinges and hold-open

hydraulic pistons for access to electrical terminations.

- u). All modules and panels, however, shall be designed for rapid complete removal from the car.
- v). Pneumatic devices shall be fed from a non- kinking hose to permit ready panel removal and have in-line connections for removal, arranged to prevent incorrect connections of adjacent hoses. As it is expected over the life of the cars that future regulations will mandate additional controls and indicators be added to the cab consoles, the Contractor as an aspect of its design must provide adequate spare room on all panels for future additions. Ergonomic control layout, maintainability access and provisions for future additions shall be key aspects of the cab design review and the cab mock-up.
- w). All annunciator lights and shall have a self-test feature or separate test switch to verify operation.
- x). All indicator lights and controls shall be either permanently engraved white paint filled identification signs on a flat epoxy powder coat black background, switch label inserts protected by a clear durable plastic cover, panels protected by a clear Tedlar overlay, or other approved techniques with equal permanence.
- y). The Engineer's minimum clear viewing distance from the seated position shall be no more than 30 ft (9.15 m) to the top of rail as shown in Figure 16-1, which may also be achieved by a camera and an additional display, subject to Amtrak's approval.

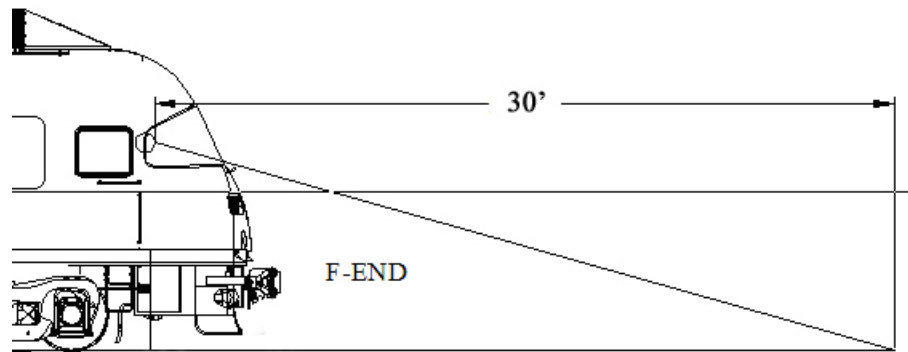


Figure 32-1: Engineer's Minimum Clear Viewing Distance from the Seated Position

- z). The cab layout shall also be arranged so as to provide the Engineer with an effective field of view to the right and left of the direction of travel. Obstructions to the field of view caused by required collision and corner post structural members shall be minimized.
 - i). The arrangement of the cab shall be under the direction of the Contractor's Industrial Designer, who shall verify all human factors data.
 - ii). The Contractor shall submit for design review and Amtrak approval a series of general arrangement diagrams of the interior of the Engineer's cab compartment.

- iii). Cab arrangement shall meet all necessary compliance to accommodate a 5th percentile female and a 95th percentile male.
- iv). They shall include the location of all features and appointments, as well as general arrangement diagrams of the Engineer's control consoles, Assistant's work station, and jump seat illustrating the location of all features, appointments, controls, switches, gauges, meters and indicators.
- aa). Fields of view, legroom provisions and ranges of arm movement for a seated Engineer and Assistant of the specified percentile range shall be included.
 - i). The review period for these initial cab and controls arrangement drawings shall permit internal review by Amtrak personnel.
 - ii). The final console arrangement shall be submitted for approval during drawing and design review and at cab mock-up reviews.
- bb). The entire cab area shall be properly heated, ventilated and cooled, be draft-free, and insulated against noise and thermal loss.
- cc). The cab compartment arrangement and all controls shall be approved in detail by Amtrak during design review.

32.3 Cab Windows

- a). Windshield
 - i). Two FRA Type I windshields consisting of triple-laminated high impact untinted glass shall be provided at the Engineer's Cab of the cab car for the Engineer and Assistant positions.
 - ii). The windshield dimensions shall permit a maximum field of view for a seated Engineer.
 - iii). The design and installation of the windshield shall minimize external glare as well as reflections from inside the car. When the car is operated at night or in tunnels, no reflections shall be visible in the windshield.
 - iv). The windshields shall be installed in an anodized aluminum frame. Mounting shall be designed to prevent the glazing from being pushed into the car interior and shall be arranged for replacement from outside the car.
 - v). The windshields shall be electrically heated using cab switch control.
 - vi). A two part "Emergency" handle shall be provided for both cab end windshields to allow for removal of the windshields from inside of the car in the event of an emergency. The design of the glazing rubber shall also allow removal of the windshields from the outside of the car by emergency responders. Identification and removal instructions shall be provided.
- b). Sliding Side Window
 - i). Each side of the Engineer's Cab in the cab car shall have a sliding side window for Engineer and Assistant use. The sash shall be designed to permit

an Engineer to easily lean out, when either seated or standing, and be able to view a station platform or the wayside in either direction. An alternate design hinged side window may be proposed for review and approval.

- ii). The minimum clear opening shall be 16" wide by 18.4" high. Locks and keepers shall not encroach into this opening.
- iii). The sash shall use FRA Type II untinted window glazing, installed in the frame with elastomer sections to form a watertight seal. Easy reglazing of the sash shall be a required design feature.
- iv). The sliding portion of the sash shall be designed to slide freely in either direction
- v). The sash shall be secured by a rugged latch assembly of an approved design, easily reached by a seated Operator.
- vi). The sash design shall be such to allow the sliding portion to maintain any derived opening during normal operating conditions.
- vii). Positive latching in the closed position is required as well as positive retention in any of the designated open positions.
- viii). All window functions shall require less than 5 lbf to operate.
- ix). The latch handle shall be designed and positioned to provide the best ergonomic condition for closing, locking, latching and opening movements.

32.4 Emergency Egress/Ingress

- a). A means for emergency egress or ingress of the cab shall be incorporated into the design of the Engineer's cab.
- b). The Contractor shall design the layout incorporating provisions for the cab occupants to exit in an emergency via normal exit doors and another Amtrak approved alternative method.
 - i). Exit pathways must be considered in the design by not locating other cab equipment in the exit pathway(s).
 - ii). Emergency lighting shall comply with AAR and APTA standards for Cab Cars, The provisions shall also incorporate a means for outside emergency personnel to enter the cab area.
- c). Provisions shall also be incorporated in the design of the cab area for emergency exit or ingress and an emergency evacuation ladder or another Amtrak approved alternative method from the cab to the track level at the end of the train, for situations when there is no side access to the cars.
- d). There shall be one roof hatch emergency access point located in the Engineer's Cab area. The designs shall comply with 49 CFR Part 238.123 requirements.

32.5 Cab Enclosure

- a). The cab shall be completely enclosed and shall contain an Engineer's control console located below the windshield, a right and left side vertical panel on either side of the windshield, an overhead panel located above the windshield and a circuit breaker panel in an approved location.
- b). To the Engineer's and Assistant's rear shall be a transverse partition extending across the full carbody width, incorporating a door, centered transversely, and exiting to the passenger area.
 - i). This partition wall shall completely separate the passenger area from the cab enclosure. The cab will be arranged as to allow the Engineer visibility to observe the far left side of the track such as at grade crossings.
- c). Cab layout, materials and coatings shall be used to make the view through the windshield as distortion and glare free as possible.
- d). The carbody, adjacent roof, end and sidewalls shall be fully sound insulated throughout the cab to achieve the lowest possible cab interior ambient noise level of less than 80 dBA.
- e). All cab components shall be evaluated individually for their noise contribution such as windows, cab seats, doors, lighting fixtures and hardware.
 - i). Air ducts shall be baffled as required to control wind noises and to attenuate exterior noises.
 - ii). Use of components that cause noise, vibration or oil canning will not be acceptable. If noise from vibration is caused by any part of the vehicle equipment, the Contractor shall modify and revise the design to eliminate this condition.
 - iii). Under all normal conditions of operation, vibration of interior components such as partitions, walls, doors, ceiling panels, light fixtures, etc., shall not be visible nor audible.
- f). Design and styling shall seek to improve safety, ergonomics and ease of operation. Engineer's right and Assistant's left side operable windows and shall incorporate an exterior rain deflection gutter.
- g). The cab partitions shall be securely mounted to run from floor to ceiling and be of adequate structural integrity to withstand all normal or extraordinary loading from passenger contact, such as from vandalism.
 - i). Each partition, when mounted, shall withstand a horizontal load of 330 lbs. (149.82 kg) applied at any location without permanent deformation. The exterior face shall match the styling of the car interior, and the interior face shall match the Engineer compartment styling.
- h). Incorporated into the rear wall of the cab in an approved, easily accessed location, shall be lockers for the Engineer's and Assistant's personal effects.
 - i). These lockers shall be solidly constructed and lined with stainless steel or similar finishes and have a hinged door.

- ii). The door shall have a compression latch with an integrated padlock hole.
- iii). The doors shall be mounted with a stainless-steel piano hinge and have an external face treatment matching the cab decorative effect. The minimum inside dimensions shall be 22.7 in. wide by 20 in. high by 21 in. deep (576 mm wide by 511 mm high by 555 mm deep), unless otherwise approved by Amtrak. An open doorstop shall be provided.
- iv). A second, smaller storage locker shall also be located on the rear wall, without a hasp.
 - (1) It shall contain an intermediate shelf, and be used for storage of crew individual portion water bottles, crew kit, paper towels, etc.
- i). All interior appurtenances and surfaces shall not create glare in the interior glazing and control console. If there is not space for locked lockers in the cab, it can be installed in the optional crew space or in a location immediately adjacent to the cab as proposed by the Contractor and approved by Amtrak.
- j). A rugged fold-down jump seat for a third crew member shall be installed at an appropriate location in the cab.

32.6 Cab Door

- a). The center-rear of the Engineer's cab shall have a fully hinged door which shall swing outward, toward the passenger area. The door design, hardware and location shall facilitate rapid Engineer evacuation in the event of an emergency. The door operation shall require less than 10 lbf to operate.
- b). The cab door shall contain an emergency removable panel at the bottom of the door. The door shall be of hollow stainless-steel or painted aluminum unless otherwise approved by Amtrak.
- c). Each door shall be provided with adequate stainless-steel reinforcements for the attachment of all hardware. The door shall be bound on all four edges by welding, rolled seams, or a combination.
- d). The cab door shall be hung on a continuous, full length, stainless steel self-closing hinges having a stainless-steel hinge pin, located at the outboard edge of the door. When closed, the door shall bear against a neoprene elastomer cushioned door stop across the top and both sides. The cab door shall be of sufficiently rigid and strong construction to withstand, when mounted and closed, a horizontal load of 330 lbf (1,468 N) applied at any point without permanent deformation.
- e). The door shall not rattle or squeak in any position and shall be sealed when closed to provide a highly soundproof barrier.
- f). The cab door shall have a window in its upper portion of the door frame.
- g). The clear viewing area shall be approximately maximized in both lower and upper portion, but not less than 30 in. (762 mm) vertically by 8 in. (203.2 mm) horizontally so that the crew members, whether seated or standing can look back into the passenger area.

- h). The window material shall be a minimum of 0.25 in. (6.35 mm) thick mar-resistant polycarbonate or other approved material.
 - i). The window shall be glazed in a neoprene rubber section and mounted to the door using a two-piece frame (inner and outer) aluminum extrusion or by the silicon rubber sealing profile so that it provides security and can only be replaced from the inside of the cab.
 - ii). The exterior face shall either have no exposed fasteners or fasteners with tamperproof heads.
 - iii). An opaque roller curtain or similar approved arrangement shall be provided on the inner face to permit an Engineer to block any light transmission through the door window into the cab.
- i). Unless a dedicated HVAC system is provided to the cab car, a sight-tight, louvered, heavy-duty, nonadjustable stainless steel or anodized aluminum air grille shall be located in the lower part of the cab door for ventilation.
- i). The size of the grille shall be approximately 7 in. (177.8 mm) vertically by 9 in. (228.6 mm) horizontally and located on the centerline of the door, at least 12 in. (304.8 mm) above the floor.
- j). The cab door shall have an approved snap-type lock, which shall hold the door closed and can only be opened from the passenger area side by a standard coach key.
 - i). The design of the lock case on the aisle side shall have a security cover plate to preclude any unauthorized entry into the cab by forcing the latch head back.
 - ii). A large horizontal push-type panic bar handle shall be provided on the cab side of the door to facilitate rapid unlatching and exit without the use of the key.
 - iii). The door lock mechanism shall be easy to access for repair or replacement.
- k). The cab door shall have a center aisle ceiling mounted recessed metallic latch, which will hold the door in the open position when desired. An elastomer bumper shall cushion the door when fully opened.

32.7 Windshield Wiper

- a). An Amtrak approved, heavy-duty, automatic electric windshield wiper powered by the low voltage power system shall be installed at the top of the Engineer's and Assistant's windshield at each cab.
- b). The wiper motor shall be brushless, be thermally protected against stall conditions, have Radio Frequency Interference (RFI) suppression, and shall be easily accessed and removable from inside the end of the car, using quick disconnect fittings.
- c). A heavy-duty transit quality tubular low wind lift pantograph wiper arm shall be used, with all visible parts having a black finish.

CONFIDENTIAL — DO NOT DISTRIBUTE

- i). A curved-glass type black finished heavy-duty wiper blade with a replaceable rubber element sufficiently, long to wipe at least 80% of the glass, shall be used, mounted with a saddle type connector.
- d). The system shall operate successfully in rain or snow at all vehicle speeds.
- e). Windshield wiper control knobs shall be located on the Engineer's side.
- f). The windshield wiper shall have an off position, two fixed delays of 3.8 sec (from Off to Int) and 6.7 sec (from Slow to Int), and either a variable speed of approximately 30 to 90 cycles per minute or two fixed speeds.
- g). The wipers shall automatically move to the park position (edge of the windshield opposite of the camera location) when turned off.
- h). The wiper mechanisms shall operate smoothly without hesitation throughout its cycle under all conditions, including clearing rain and snow at vehicle speeds up to 125 mph (201.1 km).
 - i). Wiper operating mechanisms and drive units shall be accessible for repair and replacement.
 - ii). The operating mechanisms shall be enclosed.
- i). An Amtrak approved, service proven electrically operated windshield washer, with fan-type pattern spraying nozzles mounted on each windshield wiper arm, shall be provided.
 - i). The washer system shall effectively cover the entire portion of the windshield within the sweep range of the wiper.
 - ii). A windshield washer reservoir using corrosion-resistant materials and fittings, of minimum 5 gallon (18.93 L) capacity shall be mounted under the car.
 - iii). The design shall allow refilling without the need for step ladders or tools.

32.8 Sun Visor

- a). An Amtrak approved, adjustable sun visor shall be installed in each cab for the Engineer and Assistant which meets flammability smoke and toxicity emission requirements.
- b). Roller blinds are acceptable for cab window sun visors. Blinds must have the ability to stop/stay fixed in every intermediate position and allowed to raise upwards when required using a spring-operated mechanism which winds the blind up. A similar visor will be provided for the Assistant as well as visors mounted for windows on the left and right side of the cab.
- c). The sun visor construction shall be consistent with 49 CFR Part 238.103. The design and placement shall be approved by Amtrak.

32.9 Mirror

- a). On both sides of the cab at the forward edge of the side window, shall be an

exterior locomotive style combination adjustable windshield wing and mirror.

- b). It shall contain an integral vertical tilt mirror and be arranged to swing flat against the carbody.
- c). The mirror mounting, and support shall be designed so that when overloaded the mirror will break away without damage, scuffing or deformation of the carbody.
- d). Final location and arrangement of all mirrors shall be approved by Amtrak and determined at the front-end mock-up.

32.10 Engineer's Seat

- a). Each cab shall be equipped with heavy-duty, high-back style Engineer and Assistant locomotive seats, each supported on a center pedestal designed to provide satisfactory comfort and proper access to cab controls with good visibility.
- b). The cab seats shall be mounted symmetrically about the longitudinal centerline of the car, between the collision and corner posts in order to optimize viewing and ergonomic interaction with the car controls.
- c). They shall also be even with each other and accommodate the clear view distance defined in Chapter 16.2. There will be a minimum of 0.5 in. (12.7 mm) clearance from the back wall when in the rearmost position.
- d). The seat design shall take into account the limited amount of space available in the cab, and also the possible standing of the Engineer/Assistant to look out of the side cab window.
- e). The seat assembly shall incorporate failsafe operating features and adjustment methodology to prevent sudden seat failures during the life of the car to avoid Engineer/Assistant injuries.
 - i). All mounting hardware to the cab floor shall be stainless steel.
 - ii). The seat frame shall be of tubular steel construction designed for hard usage. The seat bottom and back cushions shall be properly contoured to provide adequate lumbar, back, side and thigh support, and shall be constructed from foam material meeting the requirements of Chapter 19.
 - iii). The Contractor shall make every reasonable effort to minimize the number of unique parts (especially adjustment mechanisms and knobs) used in its construction and installation. No seat component shall be removable without tools.
- f). All strength, performance, and other criteria defined within this Chapter shall be considered minimums.
 - i). The seat and its attachment shall comply with the requirements of 49 CFR Part 238.233 (FRA Tier I vehicle).
 - ii). In addition, the seat shall comply with the requirements of APTA Standard PR-CS-S-011-99 but may be supplied without a rotation feature. Where conflicts exist, the most restrictive shall apply.

- g). The seat assembly shall meet the smoke and flammability requirements of Chapters 2 and 19.
- h). Heavy-duty transportation grade upholstery having an approved color shall be used. All seams shall have high mechanical strength, and bottom cushion transverse seams in the area of the top front corner are to be avoided.
- i). The details and colors of the seat design shall be reviewed and approved by Amtrak.
 - ii). The Contractor shall consider utilizing darker colors in areas that tend to accumulate dirt and stains, such as the head rests and the armrest caps.
- i). As part of the design review efforts, the Contractor shall present an ergonomic analysis and report of the seating system. One sample seat shall be submitted by the Contractor for approval by Amtrak prior to testing. [CDRL 32-01]
- j). The seat suspension shall have a scissor mechanism with a pendulum design to eliminate lateral wobble and shall use service-proven bearings at all moving points.
 - i). A protective bellows shall encase the suspension system mechanism.
 - ii). The seat back height shall be coordinated with the cab arrangement.
 - iii). The seat back shall have an infinitely adjustable mechanical lumbar support and a back shell to protect the rear cab wall from damage.
 - iv). There shall be no sharp edges or surfaces which could cause injury.
- k). The seats shall contain mechanical components only and shall provide simple, smooth adjustments while an Engineer is seated.
- l). The seats shall have a minimum of 6 in. (152.4 mm) fore/aft adjustment [9 in. (228.6 mm) being desirable if the cab arrangement permits] with roller bearing slides each having locking mechanisms.
- m). The seat height adjustment range shall be a minimum of 5 in. (127 mm) and shall not allow the seat to free fall.
- n). The seat bottom cushion shall have a range of 8° of tilt, and the back cushion shall have a range of 8° of tilt past the vertical, if cab arrangement permits.
- o). Recliner mechanisms shall be double gear with a tooth and sprocket on both sides of the seat. Adjustment devices using simple notched cam plates with flat sides for setting heights or pitch are prohibited.
- p). A wall or partition-mounted folding Observer's seat shall be provided in the cab area. It shall be padded and upholstered similar to the Engineer's seat and shall be approved by Amtrak.

32.11 Horn

- a). A roof mounted heated pneumatic horn, Nathan/Airchime model K-5LA, with bell

frequencies of 311, 370, 415, 494 and 622 Hz, with all bells facing outward, shall be installed on the roof at the Cab car F-end.

- b). Each horn bell shall be provided with the manufacturer's stainless steel conical debris/snow filter to prevent accumulation and packing of debris and snow in the bell mouth. The method of debris and snow deflection shall be subject to the approval of Amtrak.
- c). To reduce vibrations transmitted into the carbody, the horn shall be mounted on a 0.25 in. (6.4 mm) thick elastomer mounting pad.
 - i). The horn mounting location on the car roof shall take into account airflow patterns and snow accumulations, in both the leading and trailing modes, to minimize snow and ice accumulation.
- d). The horn shall be operated by a modulating horn valve with cushioned lever located on the right side of both the Engineer's and Assistant's center cab console.
 - i). The valve shall be a Graham-White Manufacturing Company model 353 series or approved equivalent manual metering horn valve with a vertical padded handle orientation, with prior successful use in this application, and a high cycle life.
- e). In addition, a foot pedal activated switch shall be located on the floor beneath the Engineer's center cab console which shall automatically produce a standard grade crossing warning signal sequence (long - long - short - long), with adjustable timing settings.
 - i). The switch function shall be inoperative below 3 mph. Pressing the switch again during the automatic horn sequence shall instantly cancel the remainder of the sequence and silence the horn.
 - ii). The foot pedal switch shall be finished in a contrasting color.
- f). The air supply to the valves shall be on Horn manifold cutouts inside the control cabinet.
 - i). All control valves and supply piping shall be sized to handle the required air flow, so that there is no delay in the buildup to full horn volume when activated.
- g). The horn as installed shall comply with the requirements of 49 CFR Part 229.129. A restriction choke shall be installed in the base of the horn as required to prevent excessive sound level. Activation of the horn as sensed by an appropriately located pressure switch shall cause the auxiliary light control in Chapter 32.6.1 to operate as approved by Amtrak.
- h). All valves, switches and controls shall be completely accessible for maintenance. Details of the horn installation shall be approved by Amtrak.

32.12 Bell

- a). An electronic bell shall be located under the Cab car near the F-end. Its mounting location shall minimize the accumulation of snow and ice in either travel direction.

CONFIDENTIAL — DO NOT DISTRIBUTE

- b). A momentary contact two position (On/Off) yellow push button control switch shall be located on the left side of the Engineer's console.
- c). The method of actuation shall be approved by Amtrak. Activation of the bell shall cause the auxiliary light control in Chapter 32.6.1 to operate as approved by Amtrak. All switches and controls shall be completely accessible for maintenance. Details of the bell installation shall be approved by Amtrak.

32.13 Miscellaneous Cab Items

- a). The following shall be provided in each cab and require approval by Amtrak, exceptions for standardized cab subject to Amtrak approval:
 - i). A Cab Signal/ACSES/I-ETMS and provisions for ITCS and IITS for the Engineer, and I-ETMS display screens for the Assistant.
 - ii). White reading lights using LEDs for both Engineer and Assistant, with individual switch controls.
 - iii). Alerter system and reset switch.
 - iv). A ceiling air diffuser, a floor heater element and a forced air heater or radiant heat system as approved by Amtrak.
 - v). A Conductor communications signal system pushbutton and alarm shall be located in the cab, along with a crew intercom speaker with integral volume control which cannot be muted.
 - vi). The cab windshield shall be heated electrically with a clear film.
 - vii). A permanent car number identification plate shall be applied to the console in a prominent location near the speedometer.
 - viii). Three flush, heavy-duty, spring loaded coat hooks with integral rubber bumper shall be located on the rear partition.
 - ix). One 8.5 in. by 11 in. (216.9 mm by 279.4 mm) "blue form" inspection card frame with transparent cover, conforming to FRA document size requirements, shall be located on the inside face of the rear partition electric circuit breaker locker door, as directed by Amtrak and in accordance with 49 CFR Part 229.23(d).
 - x). An 8.5 in. by 11 in. (216.9 mm by 279.4 mm) "air slip" inspection form holder for a daily inspection form shall be located on the rear partition wall near the cab door.
 - xi). Clipboard-type spring loaded holders shall be installed with clear areas sufficient to hold 8.5 in. by 11 in. (216.9 mm by 279.4 mm) bulletin orders shall be located within easy reach of the Engineer and Assistant. Spring loaded holders shall be replaceable.
 - xii). A cup holder to retain a large coffee cup or soft drink container shall be mounted on the side wall below the side window sliding sash and forward of the Engineer's seat. It shall be a rugged design with a bottom drain hole,

designed for ease of cleaning. A similar cup holder will be provided for the Assistant.

- xiii). One 120VAC grounded duplex GFI-protected receptacle, protected for 20 amps service, and a 74VDC receptacle, shall be located in the lower cab wall.
- xiv). Flat writing surfaces sufficiently large to hold 8.5 in. by 11 in. (216.9 mm by 279.4 mm) paper shall be located directly in front of the Engineer and Assistant, at the base of the windshield, in order to permit the Engineer or Assistant to write Track Warrants and Form D papers. These surfaces shall also be sufficiently large to allow a (10 in. by 15 in.) laptop computer to be used by maintenance personnel.
- xv). For train crew use during backing movements, a two-position key switch operated by a standard coach key shall be included in the cab console in an approved location, for use by the Conductor and train crew in a trailing cab of the train. When this switch is turned 90 degrees to the right, it shall activate the controls for the headlights, cab ceiling lights and cab gauges and the communications system (radio, public address and crew intercom). The key shall be captive in the on position.
- xvi). For train crew use during backing movements, a conductor's emergency brake valve shall be provided in an approved location. It may be located immediately outside the cab door.
- xvii). A flag holder and a fireproof closed metal container for fuses shall be provided in accordance with 49 CFR Part 229.119(f).
- xviii). A small trash container, approximately 18 in. by 12 in. by 6 in. (457.2 mm by 304.8 mm by 152.4 mm) in size shall be provided that uses a standard-sized trash liner.
- xix). Exterior FRA marker lights at end of the car, with the lights at the cab end controlled by a switch on the cab console.
- xx). Appliances, fully loaded, shall be restrained against accelerations of up to: 8g in the car longitudinal direction, 4g in the car lateral direction and 4g in the vertical direction with an approved restraint system.

32.14 Cab Controls

- a). Arrangement of Controls
 - i). The Engineer's cab shall feature a desk-type, primary control console centered below the Engineer's windshield, with an additional vertical instrument and control panel located to the Engineer's right by the cab corner, and to the left.
 - ii). The layout of the cab shall be coordinated with Amtrak, shall be incorporated into the cab mock-up and shall be subject to review and final approval by Amtrak.
 - iii). Consoles and panels shall be neat in appearance, with all equipment, indicators, devices and controls arranged in an orderly manner.

CONFIDENTIAL — DO NOT DISTRIBUTE

- iv). The console and panels shall be constructed of a stain, burn and corrosion-resistant, integrally colored, non-glare material as approved by Amtrak.
- v). The console cabinet color and design shall match the adjacent cab lining scheme.
 - (1) Indicator and annunciator lights shall be positioned centrally to the Engineer's forward line of sight, arranged so they do not cause reflections in the Engineer's windshield, shaded against direct sunlight and readily visible under all ambient light conditions, and provided with intensity adjustment capability.
 - (2) The cab console shall be illuminated for day and night operation without causing reflections on the windshield.
- vi). The console lighting shall be located so as to properly illuminate all switches and gauges necessary for train operation and shall be LED dimmer controlled.
- vii). The consoles shall be designed and shaped in such a manner to permit the Engineer or Assistant to open and lean out of the cab side windows to inspect the train.
 - (1) The center console shall extend to the bottom of the windshield (no dead areas in cab to collect debris and dirt).
- viii). The arrangement of controls to satisfy the ergonomics of a wide range of Engineer physical sizes (from the 95-percentile male to the 5-percentile female) shall be given particular attention by the Contractor.
- ix). The speedometer, cab signal aspect display unit, I-ETMS CDU, car number sign and air pressure gauges shall be positioned from the horizontal to 15 degree downward range of a 50th percentile adult male Engineer's eye position.
- x). The Contractor shall also provide provisions for the ITCS CLD, IITS indicators and ECP display.
- xi). Locomotive traction power shall be controlled by the Engineer by means of a master controller, positioned for ease of operation by the left hand, which shall contain a reverser control handle and a controller handle for power level selection. It is desired that the master controller shall generally be patterned after the ACS-64 locomotive units now in use on Amtrak.
- xii). The cab console must provide sufficient space for reverser handle movement. Braking shall be controlled by the Engineer by means of a brake controller, located for ease of operation by the right hand. Between the two controllers shall be a flat area suitable for use as a writing surface by the Engineer.
- xiii). The cab master controller key shall be used by the Engineer to activate the cab electrical controls and propulsion system master controller.
- xiv). The vertical instrument and control panels flanking the windshield shall be arranged to be angled toward the Engineer, so that critical displays are

located at a 90° angle to the Engineer's field of view. All indicators and annunciator lights shall be LEDs, which shall have a lamp test feature.

- xv). All operating controls displays, and all indicators shall be positioned within the Engineer's normal reach and normal line-of-sight when seated.
 - (1) Controls or indicators, associated with a specific side of the train, shall be positioned on the associated side of the console or indicator panel. Cab Signal/ACSES ADU, IETMS CDU and provisions for future ITCS CLD and an ECP display will require a HMI study. [CDRL 32-02]
- xvi). All displays, switches, controls and indicators on the control console or adjacent panels shall be rugged, high-quality devices suitable for rail vehicle application and readily available from commercial sources.
 - (1) A minimum number of different types of devices shall be used, and individual functional designations shall not be marked on the device.
 - (2) Designations shall be permanently attached to or engraved on the console. Multi-position controls shall have all positions identified. Adhesive bonded tags shall not be permitted.
 - (3) All device types shall be subject to approval by Amtrak.
 - (4) See Table 32-1 at the end of this Chapter for control locations. Note that the Switch Type/Colors in the table are representative, acceptable parts; the Contractor may propose using equivalent parts or locations subject to Amtrak approval.

b). Center Console

- i). The center console located in front of the Engineer and Assistant at the bottom of the windshield shall be generally arranged as a flat desk sloped downward toward the user.
- ii). All control devices shall be logically installed to provide an integrated appearance. Mounting hardware and all interface connections for the propulsion and braking controllers shall provide ease of access for maintenance or removal. The console shall be designed so that liquid spilled on the surface will not damage or interfere with operation of components, apparatus or wiring. Its finish shall be easily cleaned with a soap and water solution.
- iii). The Engineer's side center desktop console shall contain the following, generally from left to right:
 - (1) Bell ringer pushbutton switch (On/Off)
 - (2) Master controller
 - (3) Sanding switch/push button
 - (4) Writing space for train orders

- (5) Headlight control switch
 - (6) Cab Signal/ACSES, acknowledge pushbutton and ITCS and IITS provisions
 - (7) Horn control valve lever
 - (8) Reading light/cab lighting rocker switches and dimmers
 - (9) Brake controller with integral display screen
 - (10) Auxiliary light control switch
 - (11) Windshield wiper control
- c). Other Controls, Switches and Gages
- i). The following controls, switches and gages shall be positioned at appropriate locations in proximity to the Engineer to provide optimum access to the Engineer, with minimal hindrance to visibility.
 - (1) Potential areas include the vertical control panel on the right and the upper panel. Alternate arrangements for a standardized cab may be proposed, subject to Amtrak approval.
 - (2) Fault display panel
 - (3) Conductor communicating signal pushbutton switch
 - (4) Fault reset switch
 - (5) Gauge LED dimmer control
 - (6) Heated windshield switch
 - (7) Cab HVAC control
 - (8) Car number plate (at optimum viewing location)
 - (9) Two duplex air gauges (at optimum viewing location). Digital representation of air gauges can be proposed for review and Amtrak approval.
 - (10) main reservoir/equalizing reservoir
 - (11) brake pipe/brake cylinder
 - (12) Radio and communications control
 - (13) Emergency engine shutdown pushbutton
 - (14) Locomotive alarm bell silence pushbutton switch (bell inside panel)
 - (15) Main circuit breaker (electric) toggle switch

- (16) Pantograph Control
 - (17) Bulletin order clipboard
 - (18) Cab signal departure test panel
 - (19) Cab signal cutout and bypass switches
 - (20) Cab signal train type selector switch
 - (21) Indicator LED and annunciator panel
 - (22) Alerter acknowledgement button, yellow
 - (23) Alerter panel
 - (24) Speedometer
 - (25) Non-cab signal territory mode switch
 - (26) Marker light switch
 - (27) Headlight/auxiliary light status indicators (centered)
 - (28) Locomotive dynamic brake/wheel slide warning buzzer
 - (29) Locomotive alarm bell pushbutton switch (bell inside panel)
 - ii). The following switches are to be sealed in the normal (down) position using a secure plastic tie seal method. A 0.1015 in. (2.5781 mm) (No. 38 drill) diameter hole shall be provided in each switch toggle and in an adjacent sealing wire standoff for each switch:
 - (1) Propulsion/doors interlock bypass switch
 - (2) Propulsion/ADA interlock bypass switch
 - (3) Cab Signal, ACSES, I-ETMS, ITCS and IITS cut out switches
 - (4) Spare switch location
 - (5) Train control bypass
 - (6) Alerter
 - iii). Ideally, a vertical control panel to the left of the Engineer shall be avoided to provide improved visibility.
 - iv). The area above the windshield shall be used for infrequently used devices, if required.
- d). Desktop Console – Assistant’s Side

- i). The Assistant's desktop console will contain the following equipment and controls with deviations approved by Amtrak through the design review process:
 - (1) Bell pushbutton (On/Off)
 - (2) Modulating horn valve with cushioned lever
 - (3) Conductor's Emergency brake valve
 - (4) Track warrant holder with spring clip
- e). Other Controls, Switches and Gages – Assistant's Side
 - i). The Assistant's side will contain the following equipment and controls with deviations approved by Amtrak through the design review process:
 - (1) Radio handset, control panel and handset storage cradle
 - (2) Radio keypad
 - (3) Car number plate
 - (4) Reading light switch
 - (5) Ceiling light switch
 - (6) Speedometer
 - (7) Cab reading light dimmer
 - (8) Cab Signal/ACSES display units, and provisions for I-ETMS, ITCS and IITS display units
- f). Lower Cab
 - i). The area under the console and above the floor shall be clear of all piping and obstructions to provide room for the Crew members' feet and legs.
 - ii). A raised platform, approximately 6 to 8 in. (152.4 to 203.2 mm) above the floor, shall be provided in front of the cab seat.
 - iii). An approved full-width footrest, e.g., stainless steel tubular bars for both the Engineer and Assistant, at least 9 in. (228.6 mm) long shall be provided.
 - iv). Foot switches specified by Amtrak shall be installed on the Engineer's side.
 - v). A properly identified and recessed horn system pneumatic cutout cock and associated pressure switches (if provided) shall be located below the center console or similar location where it can be easily reached by the Engineer.
- g). Master Controller
 - i). The propulsion commands for the train shall be produced by manipulation of a compact, all electric master controller provided in each cab. Activation of the

master controller and the cab controls shall be accomplished by use of the reverser handle.

- ii). The proper ergonomics of the design and operation of the master controller is of great importance and shall be approved by Amtrak.
- iii). The master controller shall directly produce trainline command signals through the actuation of heavy-duty cam switches.
- iv). The camshaft shall be directly driven by a single handle to control all operations of the propulsion system.
- v). A mechanically interlocked reverser activated by the reverser handle driving a smaller camshaft shall select the direction of motion.
- vi). The master controller handle axis of rotation shall be horizontal, with an ergonomically comfortable arc travel.
 - (1) The controller shall be rugged and designed for the railroad or transit cab environment.
 - (2) Rubbing surfaces shall be enclosed to exclude dust and dirt. Internal components shall, as much as possible, consist of parts common to the propulsion system of other recently produced cars, and where not possible shall be of an equal quality level.
- vii). The master controller top plate shall be removable without any disassembly of the controller mechanism other than handle and knob removal.
- viii). An alternate master controller may be proposed for a standardized cab, subject to Amtrak approval.
- ix). The master controller shall have a coast position, which shall be closest to the Engineer, and eight power positions (power level 1-8).
 - (1) Each position shall have a medium detent tactile indicator sufficient for the Engineer to sense that the controller contacts are fully closed. The coast position shall have a more noticeable detent that is readily detectable.
- x). The controller top shall have approved raised and painted markings to easily identify each position. Power shall be applied by moving the handle forward away from the Engineer. The master controller handle shall not have a deadman feature.
- xi). The Contractor may provide a cruise control feature, subject to Amtrak approval. The design interface between the master controller and brake controller/system shall prohibit any braking application when the master controller is in propulsion notches 1-8.
- xii). The reverser and main controller handle shall be interlocked mechanically as described below.
 - (1) The main controller handle shall be permanently attached.

- (2) It shall be possible to move the reverser handle only with the master controller handle in the coast position. With the reverser handle in the neutral position or in the off position, the master controller handle shall be mechanically immobilized in the coast position.
 - xiii). The mechanical interlocking mechanism shall be robust and require no lubrication, cleaning or maintenance other than at the major overhaul periods for the rest of the car equipment.
 - xiv). The electrical connections between the controller and the car wiring shall be by means of electrical connectors per Chapter 19.
 - xv). The controller shall be bolted to the cab. The bolts shall have open access, and the entire controller shall be easily removed and replaced for maintenance purposes. The details of the controller shall be approved by Amtrak.
- h). Control Functions
- i). The reverser handle interface of the master controller shall have four positions, out, reverse, neutral and forward, and shall control other cab equipment (other than the cab air brake system) to produce the following functions.
 - (1) In the out position, the cab shall have all cab operating systems de-energized other than the train control systems.
 - (2) In neutral all operating systems other than propulsion control shall be powered, and the master controller handle shall remain mechanically locked.
 - (3) In forward and in reverse all systems shall be operable. The reverser handle shall be removable in the out positions. The cab air brake system shall be controlled by the brake handle controller, per Chapter 9.
 - ii). Circuits needed to establish the controlling cab and provide the interface with all the other car systems, such as doors, annunciators, etc., shall be carefully designed for safety, reliability and simplicity. Since such circuits can contain single-point failure locations that are capable of incapacitating a cab or a train, the Contractor shall treat them as a subsystem worthy of special attention and include consistency check diagnostics. In evolving its designs, the Contractor shall treat the need to operate from other than the lead cab of the train as potentially hazardous and as a solution of last resort. The Contractor shall prepare a document which contains four items for Amtrak's approval during design review [CDRL 32-03]:
 - (1) An analysis of potential failures, their operational importance and how they will be annunciated to Amtrak.
 - (2) Explanation of how each of the identified failures can be overcome by the train crew, i.e., what provisions have been incorporated in the design for reestablishing train operability.

- (3) Explanation of how the recommended troubleshooting procedures, test equipment supplied, and features of the basic circuit design will direct the attention of maintenance personnel to the point of failure.
 - (4) A Preliminary Hazard Analysis (PHA) and Failure Mode and Effects Analysis (FMEA) to confirm that no hazardous failure modes exist.
 - iii). Alternate arrangements for a standardized cab may be proposed, subject to Amtrak approval.
- i). Audible Alarms
 - i). All required audible alarms and signals shall be electronic and shall be provided in the cab, located so as to be clearly audible to the Engineer and Assistant under conditions of loud ambient noise, and be readily accessible for maintenance.
 - ii). Audible signals requiring different actions shall have different sounds as specified below. Audible signals shall be no louder than necessary to be clearly audible in the cab under worst case conditions such as passing another train in a tunnel. The final audio levels shall be determined during acceptance testing.
 - iii). Provisions shall be provided to announce a digital verbal one-time message to the Engineer and Assistant at the beginning of each of the below audible alarms. This functionality shall be non-vital and not integrated in any manner with the system being announced. There shall be a volume control settable by the Engineer for these messages. The minimum db setting is to be determined by Amtrak.
 - (1) IITS alert - 4.5 KHz continuous tone
 - (2) Cab Signal - TBD at Design Review
 - (3) ACSES - TBD
 - (4) I-ETMS - TBD
 - (5) ITCS - TBD
 - (6) Engine Fire activation alarm - 2.9 KHz intermittent fast pulse tone
 - (7) Conductor communicating signal (Buzzer) 4.5 KHz continuous tone
 - (8) Wheel slip/brake warning (Sonalert) 1.9 KHz continuous tone
 - (9) Alerter audible alarm (yelp) - TBD
 - (10) Overspeed Alarm - TBD
- j). Indicator Lights
 - i). The indicator lights shall be provided in the left and right-side panels the approved locations and groupings.

- ii). Each indicator shall be backlit with the specified color when illuminated.
 - (1) It shall be possible to change the indicator color at a later date if required.
- iii). Activation of each indicator must be clearly discerned by the Engineer even under conditions of bright sunlight or other ambient illumination.
- iv). Each indicator shall be a long-life LED. Note that some cab signal system indicators will be contained in the alerter display unit.

Light Group	Condition	Indicator Light Color
Operating Status Indicator	MU Control (power on)	Green
	PCS Open	White
	Sanding (Cab Car)	White
	Wheel Slip / Slide (Cab Car)	White
	Wheel Slip / Slide (Locomotive)	White
	Dynamic Brake Warning	Red
	Trailing Fault Alarm	Red
	Overspeed	Red
Safety Equipment Status Indicator	ATS Overspeed/Penalty	Red
	ATS Cut-Out	Amber
	Alerter Cut-Out	Red
	Suppression	Amber
	No Motion	Blue
	Spare	Red
Cab Car Status Indicator	Heated Windshield On	Amber
	HEP On	Blue
	HEP Off	Red
	Battery Charge Fail	Red
	Spare	Red
	Spare	Amber
Train Status Indicator	Brakes Applied	Amber
	Brakes Released	Green
	Car Doors Closed	Green
	Car Hot Journal Alarm	Red
	Handbrake Applied	Blue

32.15 Electrical Circuits

- a). Cab Switch Panels
 - i). Low voltage cab setup switches, circuit breakers, etc. shall be mounted on a panel on the upper console in the cab or an approved equivalent location,

accessible to the seated Engineer, in a location approved by Amtrak. All devices will be clearly labeled by name and position.

- ii). Switches shall be provided, at a minimum, for the following with deviations as approved by the customer through design reviews:

(1) Circuit Breakers

- (a) Locomotive control
- (b) Heated windshield
- (c) Auxiliary lights
- (d) Number signs
- (e) Voice Radio
- (f) Indicator and gauge lights
- (g) I-ETMS
- (h) I-ETMS Data Radio
- (i) Cab Signal/ACSES
- (j) ACSES Data Radio
- (k) ITCS
- (l) IITS
- (m) Event recorder (load side connected to battery)
- (n) Alerter (load side connected to battery)
- (o) Low voltage DC receptacle
- (p) Headlights
- (q) MU 13T
- (r) Aux Cab Heater (low voltage DC)
- (s) ECP Brake system
- (t) Spare

(2) Switches

- (a) Engine run
- (b) Engine shut down button
- (c) Generator field

- (d) Door interlock bypass switch (sealed)
 - (e) Headlight
 - (f) Marker Light
 - (g) Pantograph Up/Down
 - (h) MCB Open
 - (i) Cab Light
 - (j) Order Light
 - (k) Aux Cab Heat
 - (l) Number Lights
 - (m) Step Lights
 - (n) Territory Switch Cab/Non-Cab
 - (o) ITCS Territory
 - (p) Train Control Territory Selector
 - (q) Windshield Wiper/Washer
- (3) HVAC Controls
 - (a) Low Heat
 - (b) High Heat
 - (c) Fan Low
 - (d) Fan High
 - (e) Low Cool
 - (f) High Cool
- (4) Cut-Out Switches
 - (a) Dynamic Brake
 - (b) Alerter
- b). Propulsion (MU) Control Circuits
 - i). Trainline Requirements
 - (1) Cab Cars will be used to control a locomotive used to propel the train in Push mode.

- ii). Trainline circuit protection
 - (1) A two pole, 20-amp circuit breaker shall be provided between the number 13 (positive control) and number 4 (negative control) MU control trainlines.
 - (a) This circuit breaker shall protect the cab equipment from faults in the MU trainline system and shall be used to provide an on/off switch function to activate or deactivate the cab.
 - (b) A green MU control power indicator light shall be provided on the load side of this circuit breaker, to provide the Engineer an indication that MU trainline power is available from the locomotive.
 - (c) Alternative circuit arrangements may be approved by the customer after design review.
- c). Power Knockout functions
 - i). Power knockout (PKO) to disable locomotive propulsion shall occur in response to emergency or penalty brake applications in the Cab car.
 - ii). The MU propulsion control system shall remove traction power by de-energizing MU Control trainlines 6 (GF), 15 (AV), 12 (BV), 7 (CV) and 3 (DV), and illuminate the "PCS Open" indication on the cab console. Operation of this interface will be subject to design review.
 - iii). To restore locomotive traction from an emergency brake application after PKO occurs, the Engineer must be required to perform the following actions:
 - (1) Place brake handle in emergency brake position;
 - (2) Wait for brake system timeout from the application of emergency brakes;
 - (3) Place throttle handle in coast;
 - (4) Move brake handle to release position; and
 - (5) Move throttle handle to a power position.
 - iv). To restore locomotive traction from a penalty brake application after PKO occurs, the Engineer must be required to perform the following actions:
 - (1) Place brake handle in suppression position;
 - (2) Place throttle handle in coast;
 - (3) Perform actions that satisfy the system that initiated penalty (i.e., acknowledge alerter)
 - (4) Move brake handle to release position; and

(5) Move throttle handle to a power position.

d). Digital Trainline (OPTION)

- i). If the ETB option is exercised, the Contractor shall also provide a digital trainline.
- ii). Digital trainline shall provide redundancy and other non-critical functions such as passenger information displays, announcements, video, computer networking, system monitoring and data logging.

32.16 Heating, Ventilation and Air Conditioning

a). Climate Control

- i). The cab shall be provided with a quiet, forced air supply of conditioned air from the car's main HVAC system (or separate cab HVAC system, at Amtrak's request), along with a separate cab heater system. See Chapter 10 for additional details.
- ii). Full climate control with air supply through an individual fully adjustable ceiling diffuser shall be provided.
- iii). The local cab heater shall be controlled independently of the HVAC unit using the car battery, with an adjustable digital thermostat control. Care shall be taken to avoid all drafts. The Cab HVAC system shall provide sufficient heat automatically when 480 Volts Head End Power is available to keep the cab temperature similar to the passenger car interior.

b). Air Distribution

- i). The cab shall have durable individually adjustable diffusers for the Engineer and Assistant with manual direction and volume, infinite adjustment between maximum and minimum air volume and direction.
- ii). The diffusers shall not create drafts on the Engineer's or Assistant's back or neck.
 - (1) The diffusers shall not allow complete blockage of the cab air.
 - (2) The volume of conditioned air delivered to the cab through each diffuser shall not exceed 30 cubic feet per minute (cfm) (0.85 m³/min) when the diffuser is in a minimum position and shall be a minimum of 175 cfm (4.96 m³/min) when the diffuser is fully opened.
 - (3) Other arrangements meeting the intent of this specification may be proposed for approval.

32.17 Cab Lighting

a). Headlights and Auxiliary Lights

- i). Two LED headlights located at the upper center of the carbody, and two LED auxiliary lights located approximately at the bottom of the end sheet, one

toward each outboard edge, shall be provided at the F-end of Cab Car using approved fixtures, located such that they produce a triangular lighting appearance.

- ii). The lights shall be suitable located to prevent damage when the F-end of the Cab car is coupled to other equipment (including another Cab car) and operated under all track conditions identified in PRIIA Specification 305-912.
- iii). The fixtures shall comply with the requirements of 49 CFR Parts 229.125 and 229.133. All exterior lighting shall be powered from the low voltage power supply. All lamps shall be designed for ease of replacement from the car interior by access hatches, unless otherwise approved by Amtrak.
- iv). All lighting fixtures shall be weather tight, of stainless steel construction and hardware. Fixtures shall be designed to avoid snow and ice buildup and preclude snagging of car washer brushes.
- v). Headlight and auxiliary light lenses shall contain thermostat-controlled heating elements to protect against frosting, or be recessed behind heated cover heaters.
- vi). Materials surrounding and facing the headlights and auxiliary lights, including a coupled car, shall be capable of withstanding the heat caused by leaving these lights on bright indefinitely on a clear summer day with maximum ambient temperature.
- vii). The headlight and auxiliary lights shall comply with 49 CFR Part 229.125 and AAR standard for LED headlights.
 - (1) The maximum color temperature shall be 3200K and dim shall be 2600K unless otherwise approved by Amtrak during Design Review.
- viii). Failure of a single lamp shall not cause the other lamps to be subjected to increased voltage. Rated lamp life shall be a minimum of 50,000 hours.
- ix). The headlight and auxiliary light fixtures shall be easily adjustable for horizontal and vertical alignment and shall be provided with a locking device. Bezel design shall assure correct rotational alignment. The design and location of the light fixtures shall be approved by Amtrak.
- x). The headlights shall be under the control of an easily-reached Engineer's cab console mounted four position switch (off, bright ditch, bright, dim).
 - (1) The headlight switch in the bright position shall automatically turn off the ditch lights. In auto flash position, the auxiliary lights will flash in accordance with 49 CFR Part 229.133.
 - (2) In all three operating modes the sounding of the horn or activation of the bell, as detected by a pressure switch downstream of the horn or bell control switch, shall cause the auxiliary lights to immediately flash alternately until the bell is silenced
 - (3) . A set of four green indicator LEDs telltales in an approved arrangement shall be provided in the cab above the windshield to

CONFIDENTIAL — DO NOT DISTRIBUTE

indicate the functional status of each headlight and auxiliary light bulb (on steady, flashing, etc.).

- (4) An approved momentary contact switch shall be provided to permit the Engineer to dim the auxiliary lights for an adjustable time period, initially set for 20 seconds, to avoid blinding an oncoming train Engineer.

xi). All cab switches shall be clearly identified with permanent labels.

b). Interior Cab Lighting

- i). For general area illumination, the cab area shall have at least two white lens light fixtures, suitably placed in the ceiling to illuminate the Engineer's console, Assistant's console and the general cab area and avoid glare on the windshield.
- ii). LED light fixtures shall be used.
 - (1) These lights shall be controlled by a rotary dimmer control switch.
 - (2) The minimum lighting intensity provided by the white ceiling lights shall be 15 foot-candles on both the floor and the console.
- iii). For reading purposes, 5 additional lights shall be located in the console as approved by Amtrak during design review process.
 - (1) The reading lights shall be controlled by a rotary dimmer control switch. These lights shall not reflect onto the windshield or interfere with outside observation during night operation and shall be capable of location adjustment by the Engineer/Assistant.
- iv). All lights shall be powered by the battery circuit. All light fixtures shall be dust tight, designed for ease of relamping. The type and location of the lights shall be approved by Amtrak.
- v). The duplex air pressure gauges and the speedometer illumination shall be dimmable.

c). Road Number Signs

- i). Two illuminated back lighted road number signs shall be provided at the F-end of the Cab car, arranged to be easily visible from the wayside. Signs shall be located on each side of the car as near to the cab end as possible and shall be located on the front cab F-end at an approved location.
- ii). Each number sign shall have five (5) digits. The digits in the number signs shall be at least 5 in. (127mm) high.
- iii). The design and location shall be approved by Amtrak.

32.18 Alerter and Event Recorder System

a). Alerter System

- i). The Engineer's activities shall be monitored over a specified time period as listed in 49 CFR Part 229.
 - (1) If the Engineer is inactive during this time period and no system reset is generated, the alerter system display shall issue a combination pulsing audible/visual alarm for a specified time interval.
 - (2) Continued lack of Engineer activity shall result in a continuous audio alarm, a continuous visual alarm and a penalty brake application with power knockout.
 - ii). It shall be possible to perform a self-test of the system with the car stationary. If the alerter system fails, the Engineer shall be able to cutout the system through the use of a sealed switch or sealed cutout cock. Activation of the alerter cutout shall provide an indication on the cab console indicator.
- b). Event Recorder
- i). The event recorder system location shall be approved by Amtrak.
 - ii). The event recorder shall be Wi-Tronix Violet.
 - (1) The line side of the event recorder circuit breaker shall be connected to the Cab Car battery.
 - (2) Event recorder data shall be downloadable via a standard laptop computer, remote memory card download ports or wirelessly. The event recorder shall be easily identified following an accident.
 - iii). Amtrak shall approve the actual channels of data to be recorded during design reviews.
 - iv). The event recorder shall be crash hardened and be in full compliance with 49 CFR Part 229.135.
 - v). Reasonably secure and tamper resistant means that the system shall have data retention during extended loss of power to the system, provide physical protection during vehicle catastrophic occurrences, be flame resistant and contain constraints against accidental or deliberate data erasure or overwriting. Incorporating data streams from the following systems: I-ETMS, ACSES, ITCS, IITS/ATS, ECP and Inward/Outward Cameras, shall be discussed during the design review process.
- c). Positive Train Control (PTC)
- i). Amtrak requires several different types of Positive Train Control (PTC) systems, including a Siemens Advanced Civil Speed Enforcement System (ACSES), Wabtec Interoperable Electronic Train Management System (I-ETMS) and Alstom Incremental Train Communication System (ITCS).
 - ii). Each Cab car shall be designed to be equipped with these three Positive Train Control (PTC) systems. Each PTC system shall conform to all applicable Amtrak, AAR, APTA, and FRA Standards and Code of Federal Regulations (49 CFR), and be fully functional and interoperable with the host

railroads where Amtrak trains operates. An additional CDU (I-ETMS display screen) shall also be provided for the Assistant.

- iii). The speedometer shall include an overspeed function, with 83 mph setting for 79 mph territory.
 - (1) Overspeed shall be provided for operations above 79 mph if the PTC system is disabled.
 - (2) Should the car with the active cab exceed the allowed speed, the overspeed indicator will flash, and after a time delay of 3-5 seconds, a penalty brake application will occur, with power knockout.
- iv). To recover brake control, the brake controlled must be brought to suppression position and the train brought down below overspeed. After the PCS light goes out, the brakes can then be released. It is not necessary to stop the train. Overspeed will be dormant when the brake valve is cutout.
 - (1) It shall be possible to do a self-test on the overspeed when the car is stationary. Adjustment for wheel size shall be done easily.
- d). Cab Signal/ACSES
 - i). The Contractor shall provide a fully tested, Amtrak approved, Siemens combined Advanced Civil Speed Enforcement System (ACSES) and Nine (9) Aspect Cab Signal System that complies with 49 CFR Part 236 subpart I and H.
 - ii). The Cab Signal/ACSES system shall comply with Amtrak's latest hardware and software revisions.
 - iii). The Contractor shall provide and install Sinclair Excalibur 216–218 MHz, Verizon LTE Cellular, and GPS Antennas and Polyphaser RRF-ACE-220-NFF (217-219MHz) Narrowband Filter.
 - iv). Amtrak will provide the Contractor a fully operation Mobile Communication Package consisting of a data radio, router and protocol converter. The functionality of the Contractor's prototype Cab Signal and ACSES systems shall be validated.
 - v). The Contractor shall host design reviews with Amtrak during the design and installation of this system.
- e). I-ETMS
 - i). The Contractor shall provide a fully interoperable Wabtec Electronic Train Management System (I-ETMS) and all ancillary equipment including two (2) Polyphaser RRF-ITC-219-NFF (219.5-222MHz) Narrowband Filters.
 - ii). This system shall be tested using the Wabtec Validation Test Procedure prior to delivery to Amtrak. Amtrak will supply the I-ETMS TMC Slot 10 software image, MeteorComm 220 MHz Data Radio, AT&T and Verizon Cellular Modems.

- iii). The Contractor shall host design reviews with Amtrak during the design and installation of this system.
- f). ITCS and IITS/ATS Provisions
 - i). Provisions shall be made in the design of the cab to allow full equipment space for installation of an Alstom Incremental Train Control System (ITCS) including the location and mounting of equipment and Engineer/Assistant displays.
 - ii). Provisions shall be made for conduits, switches, antenna, active speed sensors and other required items as required.
 - iii). The ITCS and IITS/ATS Systems must be tested to the extent practical with the associated OEM supplied hardware and software.
 - iv). The ITCS shall also contain an inline Polyphaser RRF-ATC-220-NFF (217-219MHz) Narrowband Filter. The Contractor shall supply Amtrak validation test reports prior to removing the hardware for shipment. [CDRL 32-04]
- g). Data Collection
 - i). Train operating parameters along with train control data shall also be provided to a Crash Hardened Event Recorder (CHER) in accordance with 49 CFR 229.135 and 236. Minimum scan rate occurs as a result of a change in any train operating parameter or any train control system event.
 - ii). Data retained shall cover a period of at least 48 hours in normal railroad operation. Recorded data will be capable of conveniently being downloaded on demand to a compatible computer, memory device or wirelessly.
- h). Data Retrieving
 - i). Event recorder download capability shall be available at any time, including when the train is not in motion. Train operating data shall also be retrievable to monitor operational performance.
 - ii). Downloaded data shall be in compliance with 49CFR229.135 and approved by Amtrak. The format of downloaded data shall also in compliance with 49CFR229.135 and approved by Amtrak.
- i). Delivering
 - i). Prior to the delivery of the first cab car, the Contractor shall deliver to Amtrak one complete set of the event recorder diagnostic software with license as agreed per service contract to Amtrak to use the software, required for retrieving and manipulating the recorder data, all proper download connection cables and memory devices. Instructions for using the software will be provided.
 - ii). The software packages shall incorporate all methods to download data.
 - iii). All deliverables shall comply with the Materials and Workmanship requirements of Chapter 19 and shall be updated as required until the

expiration of the warranty period. Any further costs or restrictions associated with this software to Amtrak are subject to agreements and service contracts between the Contractor and customer.

j). Speed Signal

- i). The Contractor shall provide dedicated active speed signals for the speedometer, alerter, event recorder, cab signal/ACSES system I-ETMS, and ITCS systems as required for each individual system. Speed sensors shall be electrically isolated.
- ii). The design of the speed sensor and associated wiring shall minimize the vulnerability of damage from wayside debris and be reviewed during the design process.

32.19 Radio System

- a). The Cab car shall be equipped with a Clean Cab 160 MHz VHF voice radio that is independent of the train's passenger communications systems.
- b). The voice radio shall consist of a single transmitter/receiver (T/R) including operation controls and a handset.
- c). The radio shall be flush mounted in an approved location on the Engineer side of the cab.
- d). The radio mounting shall be arranged to facilitate easy removal and replacement. The radio handset shall also be easily accessible to the assistant in a seated position or a second handset shall be provided. It is critical that the radio be located for ease of single hand operation by the Engineer. This shall be verified during design review and in the cab mock-up.
- e). All wiring, connector plugs, and mounting systems shall be compatible with the Clean cab locomotive radios currently used by Amtrak.
- f). The radio shall be manufactured specifically for installation on a locomotive and shall comply with all pertinent AAR specifications and recommendations for locomotive voice radio in effect at the time of delivery.
- g). The electrical power input of the Clean cab radio shall also be circuit breaker protected. The line side of the circuit breaker shall be connected to the car battery.
- h). The mountings shall provide adequate access for servicing in compliance with AAR Specification 12-10, Figures 122-2 and 122-3. Sufficient cable slack shall be provided for ease of servicing or replacement. The Clean cab radio shall be mounted in the console panel in a way that allow easy replacement without removal of unrelated parts such as through slide-out or other methods approved by the customer.
- i). A 160 MHz inline bandpass filter shall be installed to prevent RF interference with other systems. All equipment must meet or exceed the standards of the Electronic Industries Association and the rules and regulations of the Federal Communications Commission in addition to those specified herein.

- j). The radio system components and design shall be approved by Amtrak.
- k). Antennas
 - i). A low-profile voice, ACSES, I-ETMS, ITCS, Cellular, Wi-Fi, GPS and Violet antennas shall be installed on the roof. None of these antennas shall be shared.
 - ii). The coaxial cable from radio antennas shall be routed to the connected to radio transceiver through an inline, wideband and narrowband filters. Orientation of the antennas on the roof shall minimize damage from mechanical carwash brushes and maximize signal strength.
 - iii). The antenna shall be designed for severe environmental conditions. The antenna and coaxial cabling shall be approved by Amtrak.
 - iv). The voice and PTC antennas ground planes shall meet the suppliers' installation requirements including the recommended ground plane.
- l). Voice Radio Backup Power Supply
 - i). The cab voice radio system shall be powered from the low voltage power supply with automatic backup by the battery in the event of power loss and shall have sufficient capacity to meet all peak power requirements.

32.20 Locomotive Digital Video Recorder System

- a). Inward/Outward Facing Camera Systems
 - i). The inward/outward facing camera systems shall be a Wi-Tronix Violet.
 - ii). There shall be a minimum of four (4) cab cameras to record the engineer's face, conductors face, console switches and the right-of-way forward facing camera.
 - iii). There shall be two (2) sideview cameras, one on each side for the engineer and conductor sides.

32.21 Train Communication and Data System

- a). The onboard train communication and data system shall communicate wirelessly with Amtrak's Wi-Tronix Communication and Data System sever. This interfere shall support at a minimum the following systems:
 - i). Event Recorder
 - ii). Cameras
 - iii). Ride Quality
 - iv). GPS Coordinates

32.22 Cab Controls Testing

- a). Proof of Design Tests
 - i). Train control, event recorder, train data system and video camera
 - (1) The train control system, event recorder, forward-facing camera, train data system and associated components in the cab car shall be subjected to qualification tests to verify that they comply with the requirements.
 - (2) As a minimum, these tests shall include complete functional tests before and after the equipment is subjected to the simulated environmental conditions such as appropriate extremes of temperature, vibration and shock. Tests shall also confirm resistance to interference limits as specified.
 - (3) Equipment so tested shall conform to the manufacturing drawings.
 - b). Operation of Positive Train Control (PTC)
 - i). Where cab signal and/or positive train control is provided, the Contractor shall develop proof-of-design test procedures that validate all systemic, operational and programming designs, functions and requirements for the Positive Train Control (PTC) system, including component performance, integrity of system architecture, data collection and retention functions, and train status evaluation. These procedures shall be developed in accordance with system requirements as established by the system manufacturer, the FRA and railroads, and shall include evaluation and verification of compliance with requirements for:
 - (1) Accurate determination of train location, speed, direction of travel and status of all operating systems;
 - (2) Communication to wayside signal systems and railroad data centers;
 - (3) System monitoring of train performance;
 - (4) Display of graphic data as received from the railroad;
 - (5) Initiation of service or penalty brake applications and locomotive PKO functions;
 - (6) Interface between the PTC system and on-board systems, including event recorders, train
 - (7) monitoring systems and others;
 - (8) Data recording, security and download requirements; and
 - (9) Compliance with all applicable regulations, standards and system requirements.
 - ii). Additional railroad-specific data transfer and uploading to the system may occur after the cars have been delivered to Amtrak if necessary. The PTC system as designed and installed shall be subject to review and approval by

Amtrak, the FRA, Amtrak and representatives of the host railroads over which the cars will operate

- c). Cab audio alarm levels performance
 - i). The audio level of all cab alarms: loco failure, wheelslip/brake warning, alerter, overspeed, PTC and conductor signal shall be tested to verify suitable loudness.
- d). Event recorder (FRA) performance
 - i). Tests shall verify proper operation of the entire integrated system hardware and software. They shall show correct interpretation of each input, including combinations (such as throttle) through the use of the verifier function on a laptop. Resolution, set point and calibration of all analogue inputs shall be shown at zero, midscale and maximum values, which will include applying pneumatic pressure to those inputs by manipulating the brake system. All modes of downloading shall be demonstrated.
 - ii). After downloading, graphic and tabular readings shall be compared in detail to verify all channels show activity consistent with the test code and that graphic and tabular values of analogue functions match: speed, brake pipe, brake cylinder pressures at zero, full scale and mid-scale values.
 - iii). Operation of self-test and health monitoring functions shall be demonstrated. A disk of the download, labeled for car number and date, shall be provided for each car.
- e). Event recorder-video performance
 - i). Tests shall verify operation of the entire integrated system hardware and software. They shall show correct interpretation of each input. Video focus and resolution, and other inputs shall be demonstrated.
 - ii). All modes of downloading shall be demonstrated. Software demonstration shall include validation of inputs and their calibration as a "real time" display as well as data analysis software playback. Operation of self-test and health monitoring functions shall be demonstrated.
- f). Horn and bell performance
 - i). The horn shall be tested to verify compliance with FRA 49 CFR Part 229 loudness requirement. The bell shall be tested to measure loudness and proper continued operation.
- g). Engineer's Seats
 - i). The seat and its attachment shall be tested to verify compliance with 49 CFR Part 238.233 (FRA Tier I vehicle).
 - ii). The seat shall be tested to verify compliance with APTA Standard PR-CS-S-011-99
- h). Emergency Egress/Ingress

- i). Emergency Exit Windows Egress shall be tested to verify compliance with 49 CFR .238.113 and 49 CFR 238.121.
- ii). Emergency Rescue Ingress shall be tested to verify compliance with 49 CFR 238.114 for windows and windshield.

32.23 Production Tests

- a). Alerter Performance
 - i). Tests shall verify proper timing, operation of each input and output, including at various simulated vehicle speeds. They shall demonstrate all modes of operation, including self test.
- b). Speedometer/overspeed performance
 - i). Tests shall verify all modes of operation, including self-test. Each input and output shall be demonstrated.
 - ii). Calibration at zero, mid-scale and maximum speed shall be shown. Calibration and action at each overspeed set point shall be verified.
- c). Event recorder performance
 - i). Tests shall verify operation of the entire integrated system hardware and software according to 49 CFR 229.135.
 - ii). They shall show correct interpretation of each input, including combinations (such as throttle).
 - iii). Resolution, set point and calibration of all analogue inputs shall be shown at zero, midscale and maximum values, which will include applying pneumatic pressure to those inputs. All modes of downloading shall be demonstrated.
 - iv). Software demonstration shall include validation of inputs and their calibration as a "real time" display as well as data analysis software playback, both graphic and tabular. Comparison of the graphic and tabular values must be included. Operation of self-test and health monitoring functions shall be demonstrated.
- d). Locomotive Digital Video Recorder performance
 - i). Tests shall verify operation of the entire integrated system hardware and software according to 49 CFR 229.136.
 - ii). They shall show correct interpretation of each input. Video focus and resolution, and other inputs shall be demonstrated. All modes of downloading shall be demonstrated.
 - iii). Software demonstration shall include validation of inputs and their calibration as a "real time" display as well as data analysis software playback. Operation of self-test and health monitoring functions shall be demonstrated.
- e). Positive train control system

- i). Where provided, perform a test of the cab signal/PTC system in accordance with manufacturer and railroad requirements.
 - ii). Tests shall verify all modes of operation, including self-test. Each input and output shall be demonstrated. Calibration of pickup and drop out of each parameter of the carrier shall be demonstrated. Interaction with the brake system to produce a penalty brake application, with associated PCS shall be demonstrated, along with the inability to suppress it. Overspeed, failure to acknowledge and overspeed with failure to acknowledge shall all be demonstrated. Permanent suppression shall be demonstrated. Diagnostics and data-logger shall be demonstrated.
- f). Locomotive and air brake control
- i). Tests shall verify performance of the integrated system of cab controls, including traction and braking.
 - ii). They shall include complete demonstration of all interface signals between the brake equipment and other vehicle equipment. All inputs and outputs shall be exercised. Calibration and resolution of all analog signals at zero, midrange and maximum values shall be demonstrated.
- g). Brake control operation
- i). Note: All compressed air which is connected to the car or its air components shall meet the air quality requirements of APTA Standard PR-M-S-011-99.
 - (1) Calibration of air pressure gauges shall be verified, and values recorded
 - (2) Verify operation of each mode of operation shall be demonstrated, in accordance with OEM
 - (3) brake supplier test code, including but not limited to:
 - (4) Passenger mode, Freight mode (if equipped), Trail, Test
 - (5) Parking brake, including effect of cutting out automatic brake and penalty brake
 - (6) Calibration of brake valve settings of release, min, suppression, full service and emergency
 - (7) measured on brake pipe and brake cylinder. Values shall be recorded.
 - (8) Penalty application; non-suppressible and suppressible
 - (9) Emergency application; local and remote (all sites on car and remote in consist)
 - (10) PCS function
 - (11) Operation of pressure switches

- h). Cab indicator operation
 - i). The test shall verify proper operation of all indicator lights and audio alarms.
- i). MU and COMM trainline function operation
 - i). The test shall verify the correct transmit/receive function, including controls, indicators and alarms of each trainline wire. Interaction of PCS/PCR shall also be included.
 - ii). Windshield wipers operation
 - iii). The test shall verify proper operation of each wiper unit, including: smooth movement, sweep over the required area of the windshield, speed control, parking position, noise and freedom from air leaks. Also test proper operation of washer.
- j). Defroster/heated windshield operation
 - i). Proper function of the defroster and heated windshield, their controls and indicators shall be verified.
- k). Horn and bell operation
 - i). The test shall verify proper operation of devices and all controls, including automatic sequencer and speed input to it.
- l). Cab and radio tests
 - i). Each cab radio shall be tested and adjusted to meet all technical parameters, and the proper certificates supplied in the vehicle history book. Additionally, the antenna shall be verified for conformance with its specified radiation pattern.
- m). Headlight and crossing light tests
 - i). The headlights and crossing lights on each cab/baggage car shall be tested and adjusted in accordance with 49 CFR Part 229.125 for proper illumination, orientation, aim and operation.

* End of Chapter 32 *